



County of Sonoma
Permit & Resource Management Department

Revised Subsequent Mitigated Negative Declaration

Sonoma County Permit and Resource Management Department
2550 Ventura Avenue, Santa Rosa, CA 95403
(707) 565-1900 FAX (707) 565-1103

Publication Date:	July 27, 2020
Public Review Period Closes:	August 27, 2020
State Clearinghouse:	2007022038
Permit Sonoma File Number:	PLP05-0009
Prepared by:	Blake Hillegas
Phone:	(707) 565-1392

Project Name: VJB Vineyard and Cellars

Project Applicant: Henry Belmonte, VJB Vineyard and Cellars

Project Address: 60 and 75 Shaw Avenue (formerly 9125 Highway 12), Kenwood

File No.: PLP05-0009

APN: 050-275-028 (primary) and -052 (proposed off-site parking)

General Plan: Limited Commercial

Zoning Designation: C1 (Neighborhood Commercial), SR (Scenic Resource)

Project Planner: Blake Hillegas, Project Planner

Decision Body: Board of Zoning Adjustments

Lead Agency: County of Sonoma, Permit and Resource Management Department

Prior MND: SCH No. 2007022038, adopted October 9, 2007
Draft Subsequent MND, dated January 13, 2020

Introduction:

The Sonoma County Permit and Resource Management Department ("Permit Sonoma") prepared this Revised Subsequent Mitigated Negative Declaration ("revised SMND" or "SMND") and revised Subsequent Initial Study in accordance with the California Environmental Quality Act (CEQA, Public Resources Code §§ 21000 et seq.) and the CEQA Guidelines (Cal. Code Regs., title 14, §§ 15000 et seq.). The proposed project is modifications to an existing use permit for the VJB tasting room and marketplace project that was originally approved by the Sonoma County Board of Supervisors on October 7, 2007. Permit Sonoma has determined that the Mitigated Negative Declaration adopted for the project by the Board of Supervisors in October 2007 retains some informational value, and in accordance with CEQA's subsequent review requirements this revised SMND accordingly focuses on screening for and analyzing new and potentially significant impacts caused by the currently proposed changes to the existing project.

This revised SMND/Initial Study is being recirculated to make corrections, provide additional and clarifying

information, and provide additional analysis and new or modified mitigation measures in the Hydrology/Water Quality, Transportation, and Tribal Cultural Resources sections. The SMND circulated in January 2020 was never adopted, and there has not yet been a public hearing on the modified project.

Project History:

In 2007, the Board of Supervisors adopted a Mitigated Negative Declaration (the “2007 MND”) and approved use permit PLP05-0009 (the “2007 use permit”) for 9125 Highway 12 (APN 050-275-028), now 60 Shaw Avenue, in Kenwood. The 2007 MND studied and the 2007 use permit approved construction and operation of an approximately 5,542 square foot commercial facility with the following major components:

- 750 square foot wine tasting room;
- 750 square foot “to-go” deli and retail food market serving prepared foods for off-site or on-site consumption;
- 1,500 square foot upstairs office space;
- 400 square foot storage area;
- 342 square foot utility space/restroom area;
- 1,800 square foot case good storage building
- Conversion of an existing residence on the site to a 1,087 square foot bed and breakfast inn;
- Outdoor picnic patio and picnic area

The approved patio/picnic area was approved for on-site food and wine consumption and the approved site plans showed four picnic tables in the picnic area. No commercial kitchen was permitted and food service was limited to prepackaged food and prepared deli food for consumption in the patio picnic area. Up to fifteen 100-person special events were permitted per year with catered food, but only after construction of a left-turn lane on Highway 12. No wine production was permitted to occur on site.

Several mitigation measures were identified in the 2007 MND to mitigate the traffic impacts of the project. These mitigation measures were agreed to by the applicant and adopted as conditions of approval of the 2007 use permit, including a requirement that before the applicant engages in special events or extends operating hours, it must construct a left turn lane pocket on Highway 12 to allow northbound vehicles to safely turn onto Shaw Avenue, and a requirement that the applicant dedicate right of way to accommodate widening of Shaw Avenue and install a right turn lane.

As noted, the 2007 use permit approved up to 15 special events per year with up to 100 guests per event, and expansion of hours of operation from the approved 10:00am to 4:00 pm to 8:00am to 5:00pm for the market, 11:00am to 5:00pm for the wine tasting room, and up to 10:00pm for special events, but only after construction of a left-turn lane onto Shaw Avenue from Highway 12.

Existing Facilities: The constructed facilities vary slightly from the approved square footages in the 2007 use permit for several reasons: minor deviation in square footage occurred through the routine issuance of building/construction permits and were authorized under administrative discretion afforded to the Permit Sonoma director; a 400-foot storage area was converted to a caterer’s kitchen under Building Permit BLD09-2123; the bed and breakfast inn was converted to additional retail space under Building Permit BLD12-4669; and a 275 foot commercial kitchen on the patio (not clearly disclosed on building plans) was installed in violation of the 2007 use permit, which expressly did not permit a commercial kitchen, via Building Permit BLD11-4212. Currently existing facilities and activities on the site include the following:

- 833 square foot wine tasting room;
- 781 square foot retail market;
- 400 square foot indoor commercial kitchen;
- 342 square foot storage and restrooms area;
- 275 square foot commercial kitchen and patio bar;
- 1,615 square foot 2nd story open room;
- 1,087 square foot shop and clothing store (former bed and breakfast inn);

- 1,800 square foot case goods storage building; and
- 3,705 square foot outdoor patio dining area.

The total square footage of existing commercial building space is 7,133 sq. ft.

The outdoor patio currently includes a dining area with restaurant service and 144 table seats. The site contains 34 parking spaces (21 paved and 13 unpaved) where the approved 2007 site plans required 54 on-site spaces. Two-way vehicular access to the parking lot is provided from Shaw Avenue. Additional vehicle egress has been allowed via the existing driveway on Maple Avenue through an administrative approval. The site also contains an approximately 0.6-acre demonstration vineyard and two in-ground septic systems with a total 900-gallon capacity. As is discussed in this SMND, the commercial project approved by the 2007 use permit was constructed and is in operation. The left-turn lane was never constructed and the scale of the commercial activity has exceeded the scope of the previously studied and approved project.

Project Description:

The applicant is seeking to modify the 2007 use permit and associated conditions and mitigation measures as follows:

1. Authorize a restaurant with 144 seats within a 3,125 square foot portion of an existing patio, including the following associated modifications:
 - a. authorize daily use of the existing commercial kitchen, pizza oven and barbeque;
 - b. install a new 1,500 gallon septic system; and
 - c. construct a 53 space off-site parking lot at 75 Shaw Avenue.
2. Remove the existing mitigation measure and correlating use permit conditions that require installing a northbound left-turn lane on Highway 12 due to the following project modifications:
 - a. eliminate the option to expand hours of operation from 10AM–4PM to 8AM–5PM; and
 - b. eliminate the approved option to host up to 15, 100-person special events up to 10PM annually.
3. Modify the mitigation measures and correlating use permit conditions requiring dedication of a right turn lane on Shaw Avenue and substituting elimination of on-street parking and restriping Shaw Avenue to include a right turn lane within the existing right-of-way;
4. Prohibit on-street parking on both sides of Shaw Avenue from Highway 12 to Clyde Avenue; and
5. Authorize the Maple Avenue driveway for commercial egress.

In addition, the applicant has proposed and agreed to a condition of approval requiring it to widen the shoulder on the north side of Highway 12 for 100 feet on each side of the intersection with Shaw Avenue (for a total of 200 feet) to improve intersection safety.

No changes to the existing buildings or current permitted hours of operation (10:00am to 4:00pm) are proposed.

Baseline for CEQA Analysis

Pursuant to CEQA Guidelines section 15125, the baseline for the evaluation of environmental impacts is the existing condition when the environmental analysis begins. The baseline for analysis in this Subsequent IS/MND is the existing activities described above, and not the activities approved under the 2007 use permit. Judicial opinions have consistently interpreted Guideline 15125(a) to mean that the baseline for CEQA analysis is the existing conditions, “even if the current condition includes unauthorized and even environmentally harmful conditions that never received, and, as a result of being incorporated into the baseline, may never receive environmental review.” (*Center for Biological Diversity v. Department of Fish & Wildlife* (2015) 234 Cal.App.4th 214, 249.)

Therefore, this document addresses the potential impacts generated by the proposed physical changes to existing conditions, which include:

- 1) constructing an outdoor parking lot at 75 Shaw Avenue;
- 2) installing a new 1,500 gallon septic system;

- 3) eliminating the existing left-turn lane mitigation measure based on project reductions associated with eliminating the option for expanded hours and 15 annual events;
- 4) removing on-street parking on a portion of Shaw Avenue; and
- 5) modifying a mitigation requiring a dedication of right of way and installation of a right turn lane to substitute creating a right turn lane by eliminating on-street parking and restriping Shaw Avenue.

Because the commercial kitchen and restaurant activities are already in operation, the associated impacts from these uses cannot be analyzed as generating potential significant impacts under CEQA (as described below).

The 2007 MND included a mitigation measure requiring construction of a left turn lane on Highway 12. This mitigation measure was modified by the Board of Supervisors as part of its approval and, as required by CEQA, was incorporated into the conditions of approval for the project. This mitigation measure may not be modified or deleted unless there is substantial evidence to show that the mitigation is no longer needed or another mitigation measure would be equally or more effective. Similarly, the mitigation requirement for a dedicated right turn lane cannot be modified or deleted unless there is substantial evidence that the mitigation measure is no longer necessary or another mitigation measure would be equally or more effective.

CEQA Standard for Subsequent MND

CEQA Guidelines Sections 15162 through 15164 set forth the criteria for determining the required environmental documentation when there is a previously adopted negative declaration covering a project for which subsequent discretionary review is required. Permit Sonoma prepared this revised SMND to the previously adopted 2007 MND. This SMND is governed by CEQA Guidelines §15162(a), which provides that where a negative declaration has been adopted for a project, no subsequent EIR or negative declaration “shall be prepared for that project unless the lead agency determines, on the basis of substantial evidence in light of the whole record, one or more of the following:

- (1) Substantial changes are proposed in the project which will require major revision of the previous EIR or negative declaration due to the involvement of new significant environmental effects or a substantial increase in the severity of previously identified significant effects; or
- (2) Substantial changes occur with respect to the circumstances under which the project is undertaken which will require major revisions of the previous EIR or negative declaration due to the involvement of new significant environmental effects or a substantial increase in the severity of previously identified significant effects; or
- (3) New information of substantial importance, which was not known and could not have been known with the exercise of reasonable diligence at the time the previous EIR was certified as complete or the negative declaration was adopted, shows any of the following:
 - a) The project will have one or more significant effects not discussed in the previous EIR or negative declaration;
 - b) Significant effects previously examined will be substantially more severe than shown in the previous EIR;
 - c) Mitigation measures or alternatives previously found not to be feasible would in fact be feasible, and would substantially reduce one or more significant effects of the project, but the project proponents decline to adopt the mitigation measure or alternative; or
 - d) Mitigation measures or alternatives which are considerably different from those analyzed in the previous EIR would substantially reduce one or more significant effects on the environment, but the project proponents decline to adopt the mitigation measure or alternative.”

Section 15162(b) provides that if a subsequent EIR is not required under section 15162(a), then “the lead agency shall determine whether to prepare a subsequent negative declaration, an addendum, or no further documentation.”

This revised SMND does not “re-open” the previously adopted 2007 MND. Instead, as required by CEQA, this revised SMND examines the difference in impacts that would result from the current request for modification of the 2007 use permit, compared to those of the project analyzed under the 2007 MND and taking into account the existing conditions on the project site. The SMND evaluates whether the County’s approval of the proposed modifications to the 2007 use permit trigger the need for a subsequent EIR under CEQA Guideline Section 15162(a), as described above. This SMND examines whether approval would result in a new significant environmental effect or a substantial increase in the severity of a previously identified significant effect due to:

- (1) Substantial changes proposed in the project;
- (2) Substantial changes that would occur with respect to the circumstances under which the project is undertaken; or
- (3) New information of substantial importance, which was not known and could not have been known with the exercise of reasonable diligence at the time the 2007 MND was adopted.

As is more fully explained below, Permit Sonoma has reviewed the information regarding the current proposal to modify the 2007 use permit, and determined that a subsequent EIR is not required and that this SMND to the previously-adopted MND is appropriate. The current project proposal, as described in the Subsequent Initial Study, will result in few changes to the physical environment and does not amount to substantial change to the previously studied project; there is no substantial change in the circumstances of the project; and there is no new information that could not have been known with the exercise of reasonable diligence that will result in a new significant environmental effect or a substantial increase in the severity of a previously identified significant effect. While the existing conditions that form the baseline for CEQA analysis are not identical to the project analyzed in the 2007 MND, Permit Sonoma has determined that the 2007 MND remains relevant to analysis of the current proposed project and retains informational value.

Environmental Factors Potentially Affected: As identified in the attached Initial Study, the proposed project identifies potentially significant impacts and includes new or modified mitigation measures in topic areas of Tribal Cultural Resources, Hydrology and Water Quality, and Noise that would reduce potential impacts to a less than significant level. The project also includes modified mitigation measures substituting the elimination of on-street parking on Shaw Avenue and restriping to accommodate a right turn lane in lieu of dedicating land for and creating a separate right turn lane, and modified mitigation and mitigation monitoring provisions regarding construction of a left turn lane on Highway 12 to reflect elimination of the authorization for special events and extended hours from the use permit.

Other Public Agencies whose approval is required for the project:

- ☒ Army Corps of Engineers/404 Permit
- ☒ Regional Water Quality Control Board
- ☐ California Department of Fish and Game 1600 Permit
- ☐ California Coastal Commission
- ☐ Department of Emergency Services Hazardous Materials Plan
- ☒ Caltrans Encroachment Permit
- ☐ State Lands Commission
- ☐ US Fish and Wildlife Consultation
- ☐ NOAA Fisheries Consultation
- ☐ State Water Resources Control Board

Environmental Finding:

Based upon the information contained in the revised Subsequent Initial Study, there will be no significant environmental effect resulting from this project provided that the identified mitigation measures are implemented as conditions of approval and incorporated into the project. The environmental impacts reviewed are limited to only those new impacts resulting from changes to the project or changes in circumstances. This SMND has been completed in compliance with the California Environmental Quality Act (CEQA) and state and local CEQA guidelines. The applicant must agree in writing to incorporate the identified mitigation measures before the MND may be adopted.

Location of Prior MND: Available for review upon request. Contact Blake.Hillegas@sonoma-county.org or (707) 565-1392 for an electronic copy.

Revised Subsequent Initial Study: Attached

Other Attachments: Addendum to Updated Traffic Impact Study, July 20, 2020; Updated Traffic Study by W-Trans, July 2019; Updated Caltrans Comment Letter, October 2019; Consultant Peer Review Letter, January 2019; Noise Study by Illingworth and Rodkin Inc., Dimensions 4 Septic and Water Use Letter, August 2019; Dimensions 4 Septic and Wastewater analysis Letter November 2019; Well and Septic Letter on Septic capacity June 2020; Septic Design Flow Rates; and Site Plan by BKF Engineers.

Blake Hillegas
Preparer

July 2020
Date

INITIAL STUDY CHECKLIST

FILE #:

PLP05-0009


PLANNER: Blake Hillegas

DESCRIPTION OF PROJECT:

The project description is detailed in the introduction to this revised Subsequent Initial Study and proposed SMND.

Site Characteristics:

The site contains 7,133 square feet of commercial building space and wine storage facilities as noted in the project description in the introduction to this revised Subsequent Initial Study and proposed SMND.

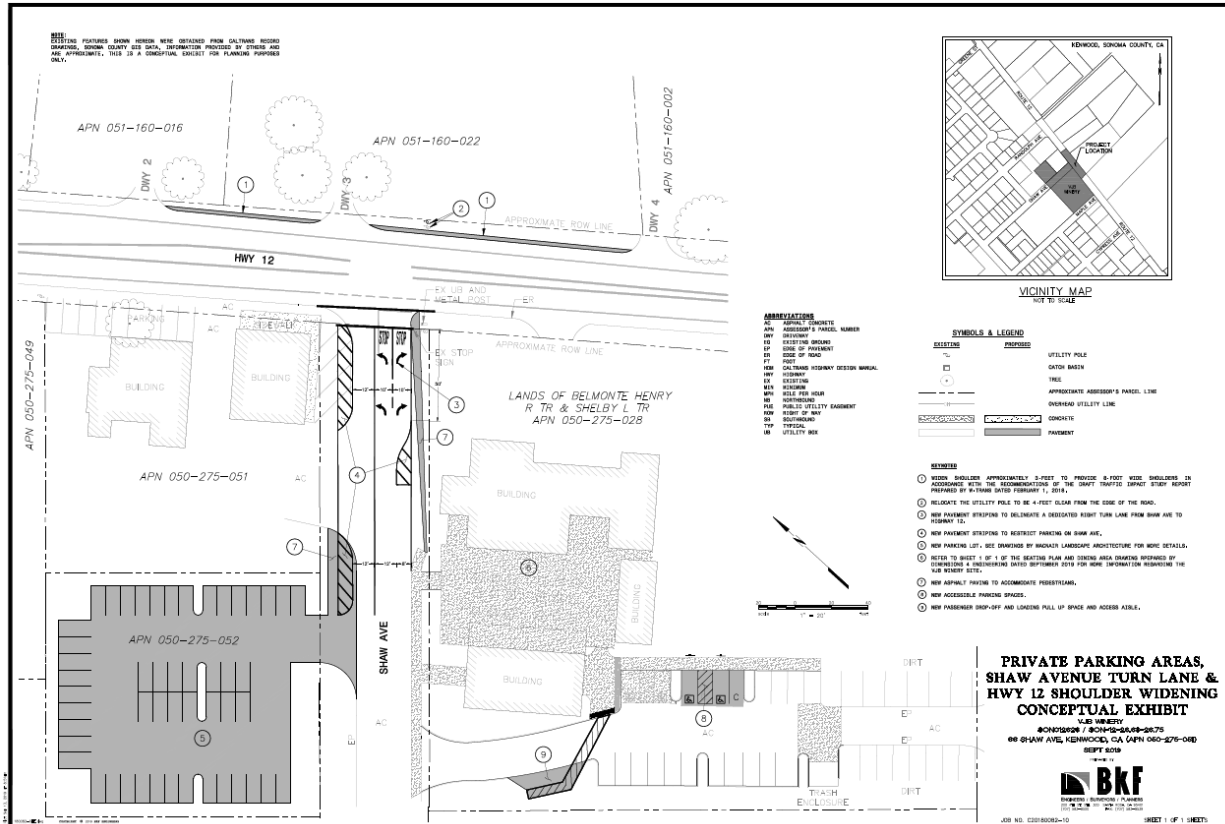

SURROUNDING LAND USES AND SETTING: The surrounding area is characterized by retail commercial uses fronting Highway 12 with single-family residential neighborhoods off the highway. Land uses in the vicinity of the project include:

North: Commercial
South: Residential and commercial
West: Shaw Park
East: Commercial

ENVIRONMENTAL FACTORS POTENTIALLY AFFECTED:

The environmental factors checked below would be potentially affected by this project, which is a subsequent activity under the Mitigated Negative Declaration adopted by the Board of Supervisors in 2007 (the "2007 MND"). The purpose of the following checklist is to make an initial determination of whether these are new or substantially more severe impacts relative to those disclosed in the 2007 MND.

<input type="checkbox"/> Aesthetics	<input type="checkbox"/> Agricultural & Forest Resources	<input type="checkbox"/> Air Quality
<input type="checkbox"/> Biological Resources	<input type="checkbox"/> Cultural Resources	<input type="checkbox"/> Energy
<input type="checkbox"/> Geology/Soils	<input type="checkbox"/> Greenhouse Gas Emission	<input type="checkbox"/> Hazards & Hazardous Materials
<input checked="" type="checkbox"/> Hydrology/Water Quality	<input type="checkbox"/> Land Use and Planning	<input type="checkbox"/> Mineral Resources
<input checked="" type="checkbox"/> Noise	<input type="checkbox"/> Population/Housing	<input type="checkbox"/> Public Services
<input type="checkbox"/> Recreation	<input checked="" type="checkbox"/> Transportation	<input checked="" type="checkbox"/> Tribal Cultural Resources
<input type="checkbox"/> Utilities/Service Systems	<input type="checkbox"/> Wildfire	<input type="checkbox"/> Mandatory Findings of Significance

DETERMINATION

The project (modifying use permit PLP05-0009) has been evaluated pursuant to the provisions of CEQA Guidelines sections 15162-15164 to determine whether a subsequent EIR or mitigated negative declaration, a supplemental EIR, or an addendum to the prior mitigated negative declaration is required. The analysis compares the impacts identified in the 2007 MND with those expected to result from the subsequent activity to determine whether the activity would result in any new or substantially more severe significant effect. No subsequent or supplemental document is necessary if the impacts of the subsequent activity do not exceed those identified in the 2007 MND.

On the basis of this Initial Study, although the proposed project could have a significant effect on the environment, there will not be a significant effect in this case because revisions in the project have been made by or agreed to by the project proponent. A SUBSEQUENT MITIGATED NEGATIVE DECLARATION will be prepared.

EVALUATION OF IMPACTS

The checklist below is taken from Appendix G of the State CEQA Guidelines. For each item, one of four responses is given:

- **No Impact:** The modifications to the project would not have the impact described. The project may have a beneficial effect, but there is no potential for the project to create or add increment to the impact described.
- **Less Than Significant Impact:** The modifications to the project would have the impact described, but the impact would not be significant. Mitigation is not required, although the project applicant may choose to modify the project to avoid the impacts.
- **Potentially Significant Unless Mitigated:** The modifications to the project would have the impact described, and the impact could be significant. One or more mitigation measures have been identified that will reduce the impact to a less than significant level.
- **Potentially Significant Impact:** The modifications to the project would have the impact described, and the impact could be significant. The impact cannot be reduced to less than significant by incorporating mitigation measures. An environmental impact report must be prepared for this project.

Each question was answered by evaluating the project as proposed, that is, without considering the effect of any added mitigation measures. The Initial Study includes a discussion of the potential impacts and identifies mitigation measures to substantially reduce those impacts to a level of insignificance where feasible. The project remains subject to all applicable mitigation measures from the 2007 MND, except as specified in this document. The key question for impacts analysis is not whether the proposed project will have a significant impact on the environment, but instead whether it will have a new or substantially more severe impact as compared to the conclusions in the 2007 MND. All references and sources used in this Initial Study are listed in the Reference section at the end of this report and are incorporated herein by reference.

Before this SMND may be adopted and the project approved, the Project Applicant must agree to accept all mitigation measures listed in this Initial Study as conditions of approval for the proposed project, and to obtain all necessary permits, notify all contractors, agents and employees involved in project implementation and any new owners should the property be transferred to ensure compliance with the mitigation measures.

1. AESTHETICS

	Potentially Significant Impact	Less Than Significant with Mitigation	Less than Significant Impact	No Impact
Except as provided in Public Resources Code Section 21099, would the modifications to the project:				
a) Have a substantial adverse effect on a scenic vista?	_____	_____	<u> X </u>	
b) Substantially damage scenic resources, including, but not limited to, trees, rock outcroppings, and historic buildings within a state scenic highway?	_____	_____	_____	<u> X </u>
c) In non-urbanized areas, substantially degrade the existing visual character or quality of public views of the site and its surroundings? (Public views are those that are experienced from publicly accessible vantage point). If the project is in an urbanized area, would the project conflict with applicable zoning and other regulations governing scenic quality?	_____	_____	<u> X </u>	
d) Create a new source of substantial light or glare which would adversely affect day or nighttime views in the area?	_____	_____	<u> X </u>	

1.a. Less Than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would cause a substantial adverse effect on a scenic vista. The 2007 MND determined that implementation of the approved project would not result in any significant adverse aesthetic impacts. Construction of the new septic system would result in the removal and replanting of some of the existing grape vines, however vines next to the building and highway would remain. The new parking lot at 75 Shaw Avenue is located behind existing commercial buildings and will include landscaping along the Shaw Avenue frontage. The proposed modifications to Shaw Avenue to provide a right turn lane will result in similar or less visual impact as it will not require physical expansion of the roadway. As such the project modifications would not substantially degrade the visual character or public views of the site and its surroundings. Public views to Hood Mountain would not be adversely impacted by the project as no new buildings are proposed. Therefore prior mitigation requiring Design Review committee approval of the final plans is no longer warranted. The project is outside of the Santa Rosa Urban Service Area. The existing tasting room, market and food service buildings are part of the existing physical condition. For information purposes, the existing structures are set back 55 feet from Highway 12, which is designated as a County scenic corridor. This complies with Ordinance 1810, which prescribes a setback equal to 20% of the lot depth or 55 feet. Highway 12 is also designated as a state scenic highway at this location, which requires that new development be compatible with the scenic character of the roadway. The existing buildings and proposed site improvements are compatible with the character of the Highway 12 corridor in Kenwood.

1.b. No Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is

undertaken that will substantially damage scenic resources in a state scenic highway. The project will have no effect on trees, rock outcroppings, historic buildings or other scenic resources in a state scenic highway.

1.c Less Than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would substantially degrade existing visual character or quality of public views of the site and its surroundings. As noted above, no change is proposed to the existing structures on the site. The design and scale of the existing buildings will not change with the use permit modifications and are compatible with other commercial buildings in the area. As previously noted, replacement of the septic system and the addition of a new parking lot at 75 Shaw Avenue will not substantially degrade the character of the neighborhood or public views from the scenic corridor. No lighting of the new parking lot is proposed. Installation of the Shaw Avenue right turn lane as proposed will not result in substantial changes in the visual character of the area compared to the existing project. Pedestrian access from the patio area to Shaw Avenue is an existing condition. Therefore, the 2007 MND mitigation measure requiring design review committee approval of the original project is no longer relevant to the project. Administrative Design Review approval of the project modifications is required in conjunction with the review of the modified use permit.

1.d Less Than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would create a new source of substantial light or glare that would adversely affect day or nighttime views in the area. The project modifications do not involve new lighting. No new lighting is proposed as the new parking lot would only be used during day time hours. The 2007 Mitigated Negative Declaration required mitigation measure for potential lighting impacts, which have been implemented.

2. AGRICULTURE RESOURCES

	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
Would the modifications to the project:				
a) Convert Prime Farmland, Unique Farmland, or Farmland of Statewide Importance (Farmland), as shown on the maps prepared pursuant to the Farmland Mapping and Monitoring Program of the California Resources Agency, to non-agricultural use?	_____	_____	_____	<u> X </u>
b) Conflict with existing zoning for agricultural use, or a Williamson Act contract?	_____	_____	_____	<u> X </u>
c) Conflict with existing zoning for or cause rezoning of, forest land, timber land, or timberland zoned Timberland Production?	_____	_____	_____	<u> X </u>
d) Result in the loss of forest land or the conversion of forest land to non-forest use?	_____	_____	_____	<u> X </u>
e) Involve other changes in the existing environment which, due to their location or nature, could result in conversion of Farmland to non-agricultural use?	_____	_____	_____	<u> X </u>

2.a. through 2.e. No Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would have impacts to agricultural resources. Since the 2007 MND was adopted, there are no changes in the project or changes in circumstances under which the project is undertaken that would result in conversion of prime farmland to non-agricultural use. According to the Sonoma County Important Farmlands Map-2000, the project sites are designated as urban land, so there will be no impact to farmlands. Furthermore the property is not zoned for agricultural use, and is not in a Williamson Act contract. The project would not impact forest or timberland or result in the conversion or loss of forest land because disturbance is on previously developed areas. The project does not involve other changes in the environment that could result in conversion of farmland to non-agricultural use. Therefore no impacts will occur to agricultural resources.

3. AIR QUALITY

	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
Would the modifications to the project:				
a) Conflict with or obstruct implementation of the applicable air quality plan?	_____	_____	<u> X </u>	
b) Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is non-attainment under an applicable federal or state ambient air quality standard?	_____	_____	<u> X </u>	
c) Expose sensitive receptors to substantial pollutant concentrations?	_____	_____	<u> X </u>	
d) Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people?	_____	_____	<u> X </u>	

3.a. Less Than Significant Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would conflict with an air quality plan. The project is within the jurisdiction of the Bay Area Air Quality Management District (BAAQMD). The Bay Area District does not meet federal or state standards for ozone precursors, and has adopted an Ozone Attainment Plan and a Clean Air Plan describing steps that will be taken to bring air quality in the district into compliance with federal and state Clean Air Acts' ozone standards. The plans deal primarily with emissions of ozone precursors (nitrogen oxides and volatile organic compounds (hydrocarbons)). Due to existing baseline conditions, the only potential air quality impacts would be from construction and operation of a new septic system, parking lot and road improvements. Construction and operation of these facilities will not conflict with the District's air quality plans to reduce emissions because use of the parking lot would not generate substantial new traffic over baseline conditions and dust control mitigation would continue to apply as noted below. The provision of bike parking and dedication of land along Highway 12 to accommodate a future segment of the Sonoma Valley Trail would facilitate a multi modal transportation system in the area and help reduce vehicle miles traveled and associated air emissions from automobiles.

3.b. Less Than Significant Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would result in a cumulatively considerable net increase of any criteria pollutant

for which the region is in non-attainment status. The BAAQMD is a non-attainment area for ozone precursors and PM₁₀ (fine particulate matter). As noted above air quality impacts associated with the modified project would be primarily related to any new construction since the restaurant activity and associated traffic emissions are already occurring. The Mitigated Negative Declaration adopted for the currently approved project incorporated dust control mitigation which would apply and be adequate to mitigate impacts associated with project modifications.

3.c. Less Than Significant Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in exposure of sensitive receptors to substantial pollutant concentrations. Sensitive receptors are facilities or locations where people may be particularly sensitive to air pollutants such as children, the elderly or people with illnesses. These uses include schools, playgrounds, hospitals, convalescent facilities and residential areas. Shaw Park is located directly to the south of the project sites. The proposed use permit modifications would not result in a substantial increase in emissions. There will be no significant, long term adverse impacts from the project. Short term dust emissions will be controlled by the implementation of best management dust control measures as noted above.

3.d. Less Than Significant. The existing food service operation results in food smells but does not result in substantial adverse odors. Food waste and trash are required to be disposed of in a timely manner in accordance with health regulations.

4. BIOLOGICAL RESOURCES

Would the modifications to the project:

	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
a) Have a substantial adverse effect, either directly or through habitat modifications, on any species identified as a candidate, sensitive, or special status species in local or regional plans, policies, or regulations, or by the California Department of Fish and Game or U.S. Fish and Wildlife Service?	_____	_____	_____	<u> X </u>
b) Have a substantial adverse effect on any riparian habitat or other sensitive natural community identified in local or regional plans, policies, regulations or by the California Department of Fish and Game or U.S. Fish and Wildlife Service?	_____	_____	<u> X </u>	
c) Have a substantial adverse effect on state or federally protected wetlands (including, but not limited to, marsh, vernal pool, coastal, etc.) through direct removal, filling, hydrological interruption, or other means?	_____	_____	<u> X </u>	
d) Interfere substantially with the movement of any native resident or migratory fish or wildlife species or with established native resident or migratory wildlife corridors, or impede the use of native				

wildlife nursery sites?	_____	_____	_____	<u> X </u>
e) Conflict with any local policies or ordinances protecting biological resources, such as tree preservation policy or ordinance?	_____	_____	_____	X
f) Conflict with the provisions of an adopted Habitat Conservation Plan, Natural Community Conservation Plan, or other approved local, regional, or state Habitat conservation plan?	_____	_____	_____	<u> X </u>

4.a. No Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in a substantial adverse effect on special status species. The California Department of Fish and Game Natural Diversity Database (CNDDB) indicates certain special status plant species that may be present in the Kenwood area. However, the location of such species is either adjacent to the Kenwood Marsh or in hillside areas. The VJB retail property is fully developed with buildings, parking, and landscaping including vineyard. Installation of the new parking lot and a new septic system would not disrupt any native vegetation. The proposed off-site parking lot site was previously developed with a single family residential dwelling, which has been demolished. The off-site parking lot has been cleared of all vegetation, except landscaping along Shaw Avenue, and new perimeter fencing has been installed. A minor drainage swale extends along the frontage and would be modified to accommodate new parking lot access and drainage. The drainage swale does not contain any sensitive habitat. The parking lot improvements are required to comply with County Low Impact Development standards of the County Grading and Drainage ordinance.

The Highway 12 shoulder widening proposed as a condition of approval could result in the undergrounding of existing drainage ditches. While visual inspection of the ditches was negative for potential sensitive species, the ditches may qualify as wetlands, subject to state or federal jurisdiction. The project is conditioned to comply with State and Federal Clean Water Act section 401 and 404 permitting requirements, which require the mitigation of potential wetland impacts as applicable.

4.b. Less Than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in a substantial adverse effect on any riparian habitat or other sensitive natural community. The areas of septic installation, parking lot site, and areas of proposed road improvements are not within any designated riparian habitat or other sensitive natural community as designated by the General Plan or the CNDDB. Potential low quality wetlands, consisting of existing linear drainage features, located along the north side of Highway 12 could be impacted by the required widening of the Highway 12 shoulder for 100 feet on each side of Shaw Avenue. These features may be subject to State and Federal regulatory requirements and may potentially necessitate Section 401 and 404 permitting from the Regional Water Quality Control Board and/or US Army Corps of Engineers. While compliance with already applicable regulatory requirements is not required as a CEQA mitigation, the project includes a condition of approval that requires the applicant to obtain state and federal resource agency Clean Water Act section 401 and 404 permit approvals, as applicable, prior to the disturbance of any potential wetlands. Resource agency approval would ensure that as conditioned, any potential project impacts to potential low quality wetlands would comply with regulatory requirements.

4.c. Less than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in impacts to protected wetlands. See 4.b. above for a discussion regarding potential wetland impacts.

4.d. No Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now interfere substantially with the movement of any native fish or wildlife species or with established native migratory wildlife corridors, or impede the use of native wildlife nursery sites. Migratory wildlife corridors generally include riparian areas and connected open space areas adjacent to urban centers. The project would not remove vegetation or place barriers in fish or wildlife migration corridors. Inspection of the drainage ditches along Highway 12 by Permit Sonoma staff were negative for sensitive fish and wildlife species.

4.e. No impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now conflict with any local policy or ordinance protecting sensitive biological resources. No sensitive biological resources would be impacted by the project.

4.f. No Impact. Habitat conservation plans and natural community conservation plans are site-specific plans to address take of listed species of plants and animals. The proposed septic area, parking lot site, and areas of proposed road improvements are not located in an area subject to a habitat conservation plan or natural community conservation plan.

5. CULTURAL RESOURCES

	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
Would the modifications to the project:				
a) Cause a substantial adverse change in the significance of a historical resource pursuant to § 15064.5?	_____	_____	<u> X </u>	
b) Cause a substantial adverse change in the significance of an archaeological resource pursuant to § 15064.5?	_____	_____	<u> X </u>	
c) Disturb any human remains, including those interred outside of formal cemeteries?	_____	_____	<u> X </u>	

5.a and 5.b. Less than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would result in a new significant environmental effect or a substantial increase in the severity of a previously identified significant effect related to historical or archaeological resources. A cultural resources study was prepared for the 2007 MND by Thompson and Origer (2005). The study determined that there are no documented resources on the existing site. The vacant site proposed for parking at 75 Shaw Avenue and road improvements could disturb soil and result in potential discovery of historical cultural resources as noted by the Graton Tribe Mitigation Measures for potential discovery were included in the Mitigated Negative Declaration adopted for the currently approved project and would continue to apply and adequately mitigate potential impacts associated with the proposed project modifications. For discussion of potential impacts to Tribal Cultural Resources, see Section 18, Tribal Cultural Resources.

5c. Less Than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now cause a disturbance of any human remains. No burial sites are known in the vicinity of the project. In the event that human remains are unearthed during construction, state law

requires that the County Coroner be contacted in accordance with Section 7050.5 of the State Health and Safety Code to investigate the nature and circumstances of the discovery. At the time of discovery, work in the immediate vicinity would cease until the Coroner permitted work to proceed. If the remains were determined to be Native American interment, the Coroner will follow the procedure outlined in CEQA Guidelines Section 15065.5(e).

6. ENERGY

Would the modifications to the project:	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
a) Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation?			<u>X</u>	
b) Conflict with or obstruct a state or local plan for renewable energy or energy efficiency?			<u>X</u>	

6.a and 6.b. Less Than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would result in a potentially significant impact due to wasteful, inefficient or unnecessary consumption of energy during construction or operation, or conflict with or obstruct any state or local plan for renewable or efficient energy use. Because of the limited scope of work involved and minimal site disturbance within existing disturbed areas, the modified project will not result in wasteful, inefficient, or unnecessary consumption of energy resources, nor would they obstruct state or local plans to encourage energy efficiency.

7. GEOLOGY AND SOILS

Would the modifications to the project:	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
a) Directly or indirectly cause substantial adverse effects, including the risk of loss, injury, or death involving:				
i) Rupture of a known earthquake fault, as delineated on the most recent Alquist-Priolo Earthquake Fault Zoning Map issued by the State Geologist for the area or based on other substantial evidence of a known fault? Refer to Division of Mines and Geology Special Publication 42.	_____	_____	_____	<u>X</u>

ii) Strong seismic ground shaking?	_____	_____	<u> X </u>	
iii) Seismic-related ground failure, including liquefaction?	_____	_____	<u> X </u>	
iv) Landslides?	_____	_____	_____	<u> X </u>
b) Result in substantial soil erosion or the loss of topsoil?	_____	_____	<u> X </u>	
c) Be located on a geologic unit or soil that is unstable, or that would become unstable as a result of the project, and potentially result in on- or off-site landslide, lateral spreading, subsidence, liquefaction or collapse?	_____	_____	<u> X </u>	
d) Be located on expansive soil, as defined in Table 18-1-B of the Uniform Building Code (1994), creating substantial direct or indirect risks to life or property?	_____	_____	<u> X </u>	
e) Have soils incapable of adequately supporting the use of septic tanks or alternative waste water disposal systems where sewers are not available for the disposal of waste water?	_____	_____	<u> X </u>	
f) Directly or indirectly destroy a unique paleontological resource or site or unique geologic feature?				<u> X </u>

7.a.i. No Impact. The site is not located within an Alquist Priolo Earthquake Fault zone, and there are no other known active or potentially active faults on the property.

7.a.ii Less Than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would directly or indirectly cause potential adverse effects involving strong seismic ground shaking. This item was reviewed within the existing adopted Mitigated Negative Declaration for use permit PLP05-0009 and Mitigation Measures were adopted to implement adopted construction standards. The project does not include new habitable structures and the design of the septic system, parking lot, and road improvements would be subject to structural design and compaction requirements to ensure that the improvements do not pose a safety risk associated with seismic activity.

7.a.iii. Less Than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would directly or indirectly cause potential adverse effects involving seismic-related ground failure. Liquefaction was analyzed in the adopted Mitigated Negative Declaration. The property has the potential to experience liquefaction and settlement during a seismic event. However, the

proposed septic system, parking lot, and road improvements must comply with county and state building and construction design standards, that ensure that the improvements do not create undue risk associated with potential ground failure.

7.a.iv. No Impact. The project site is not located in a landslide prone area as shown on Geology for Planning in Sonoma County Special Report 120 Slope Stability.

7.b. Less Than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would result in substantial soil erosion or loss of topsoil. The project would include minor grading, cuts and fills associated with septic, parking and roadway improvements. Compliance with standard septic, grading, and encroachment permit requirements will ensure potential grading and erosion impacts are minimized to less than significant.

7.c. Less than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in new significant impacts related to location on unstable soils or potentially result in landslide or other hazards listed. As described in item 7.a.ii. above, no mitigation is required.

7.d. Less than Significant Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in a potentially significant impact related to risk to life or property due to expansive soils. The area is known to contain potential expansive soils. No new habitable structures are proposed. Compliance with standard design and compaction requirements will minimize risk of property loss, therefore the impacts are less than significant as conditioned.

7.e. Less than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in soils incapable of supporting the proposed expanded on-site septic system. The project site is not in an area served by public sewer. Preliminary documentation provided by the applicant and reviewed by the Permit Sonoma Project Review Health Specialist indicates that the soils on site would support a new septic system and the required expansion area. Conditions of Approval require that septic permit approval be obtained for a new 1,500 gallon septic system proposed by the applicant.

7.f. No Impact. The site does not contain unique geological features. The project modifications involve minor excavation, therefore, would not result in impacts to paleontological resources.

8. GREENHOUSE GAS EMISSIONS:

Would the modifications to the project:

- a) Generate greenhouse gas emissions, either directly or indirectly, that may have a significant impact on the environment?

_____ X _____

- b) Conflict with an applicable plan, policy or regulation adopted for the purpose of reducing the emissions of greenhouse gases?

_____ X _____

8.a. Less than Significant. Compared with existing conditions and the analysis in the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in greenhouse gas ("GHG") emissions that would have a new or substantially more severe significant impact on the environment. The proposed project modifications would not generate substantial new emissions beyond baseline conditions because the wine tasting, food service, and Tommy Bahamas retail uses are in operation. Formalizing use of the proposed parking lot to support these uses would not substantially increase greenhouse gas emissions or increase vehicle miles traveled. For background, the BAAQMD screening criteria for a high turnover restaurant is 33 ksf for criteria pollutants and 7 ksf for GHG emissions. The existing tasting and food service aspects of the proposed use consist of 6,309 sq. ft.).

Furthermore, the project conditions encourage sustainability by requiring bicycle parking, incorporating shade trees within the new parking lot, enforcing water efficient landscape regulations, and requiring dedication of land for a regional trail.

8.b. Less than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in conflicts with an applicable plan, policy or regulation adopted for the purposes of reducing GHG emissions. The County does not have an adopted Climate Action Plan but has established General Plan GHG reduction goals. The project, by implementing current county codes and incorporating bicycle parking, shading in the new parking lot, water efficient landscaping, and land for a future regional trail would be consistent with plans, policies, and regulations adopted for the purpose of reducing greenhouse gas emissions.

9. HAZARDS AND HAZARDOUS MATERIALS

Would the modifications to the project:	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
a) Create a significant hazard to the public or the environment through the routine transport, use, or disposal of hazardous materials?	_____	_____	_____	_____ X
b) Create a significant hazard to the public or the environment through reasonably foreseeable upset and accident conditions involving the release of hazardous materials into the environment?	_____	_____	_____	_____ X
c) Emit hazardous emissions or handle hazardous or acutely hazardous materials,				

substances, or waste within one-quarter mile of an existing or proposed school?	_____	_____	_____	<u> X </u>
d) Be located on a site which is included on a list of hazardous materials sites compiled pursuant to Government Code Section 65962.5 and, as a result, would it create a significant hazard to the public or the environment?	_____	_____	_____	<u> X </u>
e) For a project located within an airport land use plan or, where such a plan has not been adopted, within two miles of a public airport or public use airport, would the project result in a safety hazard or excessive noise for people residing or working in the project area?	_____	_____	_____	<u> X </u>
f) Impair implementation of or physically interfere with an adopted emergency response plan or emergency evacuation plan?	_____	_____	_____	<u> X </u>
g) Expose people or structures, either directly or indirectly, to a significant risk of loss, injury or death involving wildland fires?	_____	_____	<u> X </u>	_____

9a. No impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in any significant hazard through the routine transport, use, or disposal of hazardous materials. As analyzed in the adopted Mitigated Negative Declaration for the approved use permit PLP05-0009, Mitigation was adopted for the handling of hazardous materials during building construction. The project modifications do not include building construction and would not introduce new activity involving the use or handling of hazardous materials. Therefore, the modified project would have no impact.

9b. through 9f. No Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in any of the listed impacts. Similar to the originally approved project, the modified project would not release or emit hazardous materials, involve a listed hazardous materials site, or impair implementation of evacuation plans. The project sites are not contained on the lists compiled pursuant to Section 65962.5 of the Government Code.

9g. Less Than Significant Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would result in new exposure of people or structures, directly or indirectly, to a significant risk of loss, injury or death due to wildfires. While the site is located within a high fire hazard

severity zone and is near the footprint of the 2017 wildfires, the project does not involve introduction of additional persons or uses. The addition of a new parking lot, septic system, and road improvements, would not increase exposure of people or structures to wildland fire risk. As analyzed in the Mitigated Negative Declaration for the currently approved use permit PLP05-0009, exposure to risks associated with the project and wildland fires are less than significant because the Kenwood Fire Department is located on the adjacent block to the project, public water is available at the site, and the site has immediate access to Highway 12 for emergency evacuation.

10. HYDROLOGY AND WATER QUALITY

Would the modifications to the project:	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
a) Violate any water quality standards or waste discharge requirements or otherwise substantially degrade surface or ground water quality?	_____	<u> X </u>	_____	
b) Substantially decrease groundwater supplies or interfere substantially with groundwater recharge such that the project may impede sustainable groundwater management of the basin?	_____	_____	<u> X </u>	
c) Substantially alter the existing drainage pattern of the site or area, including through the alteration of the course of a stream or river, in a manner which would:				
i) result in substantial erosion or siltation on- or off-site;	_____	_____	<u> X </u>	
ii) substantially increase the rate or amount of surface runoff in a manner that would result in flooding on- or off-site;	_____	_____	<u> X </u>	
iii) create or contribute runoff water which would exceed the capacity of existing or planned storm drainage systems or provide substantial additional sources of polluted runoff; or	_____	_____	<u> X </u>	
iv) impede or redirect flood flows?	_____	_____	_____	<u> X </u>
d) In flood hazards, tsunامي, or seiche zones, risk release of pollutants?	_____	_____	_____	<u> X </u>

- e) Conflict with or obstruct implementation
of a water quality control plan or sustainable
groundwater management plan? _____

X

10a. Less than Significant with Mitigation. The new septic system, parking lot and roadway work could disturb over an acre of land. Accordingly, it would be subject to the National Pollution Discharge Elimination System (NPDES) requirements. The 2007 Mitigated Negative Declaration includes a Mitigation Measure requiring compliance with the NPDES requirements. This Mitigation Measure was incorporated as a condition of approval of the 2007 project that continues to apply to the currently proposed project modifications and is adequate to mitigate impacts.

In addition, the project must comply with state and local water quality requirements related to septic design capacity. The existing project is served by two existing septic systems with a total capacity of 900 gallons. While there has been no evidence of septic failure, the existing septic systems do not meet the design criteria to handle the loads produced by the restaurant use. Therefore, the applicant is proposing to install a new 1,500 gallon system with pre-treatment and a grease interceptor to replace the existing systems and better accommodate the food service operation. Utilizing methodology allowed in Section 4.5, C. (comparison information) of the County's On-site Wastewater Treatment (OWTS) Manual, the capacity of the proposed new septic system is designed to handle the proposed peak projected customer loads of approximately 313 persons per peak day. This translates to no more than 104 table seats, assuming seat turnover three times per day within permitted operating hours of 10am to 4pm. A proposed condition of approval would limit the project to 104 table seats for the entire project, which assuming three seatings per day equates to approximately 313 users per day. The following mitigation measures are required to ensure compliance with septic regulations and protect water quality.

The project is also subject to state and local water quality requirements implemented through the County's Grading and Storm water ordinance (Municipal Code Chapter 11, Ord. 6219). See 10c. below for further discussion of potential storm water impacts.

Mitigation Measure Hydro-1

The maximum daily number of combined wine tasters and meals served shall not exceed 313 persons per day, to comply with the design capacity of the proposed 1,500 gallon septic system. By the 10th day of each month, the applicant shall submit to Permit Sonoma daily customer service counts for the previous calendar month, for wine tasters and meals served. The applicant shall also provide in its monthly report septic flow monitoring data and other information requested by the Well and Septic Division to verify that the use is operating within the design capacity of the system and in conformance with the Use Permit.

Mitigation Monitoring:

The Well and Septic Division shall review the information submitted monthly by the applicant, including pertinent customer counts, septic flow and water use data and any other information required to verify compliance with the septic design capacity.

- a. Should data show that the use is exceeding the design capacity of the system by more than a de minimis amount, Permit Sonoma will notify the applicant that the intensity of use shall be curtailed accordingly. If the applicant does not demonstrate compliance within 30 days of such notification, the Director shall initiate appropriate Code Enforcement activity. If the applicant fails to take all appropriate refer the project***

to the BZA for enforcement, which may include proceedings for revocation or modification of the Use Permit.

b. If the applicant does not timely submit monthly reports as required by Hydro-1, the Director will initiate appropriate Code Enforcement activity. If the applicant fails to submit required monthly reports for three or more months in any 12-month period, the Director will refer the project to the BZA for a hearing on enforcement, which may include proceedings for modification of the Use Permit.

10b and e. Less than Significant Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in substantially decreased groundwater supplies, substantial interference with groundwater recharge that would impede sustainable groundwater management in the basin, or conflict with or obstruct implementation of a water quality control plan or sustainable groundwater management plan. Similar to the currently approved project, which relies on municipal water, the modified project would not adversely impact local ground water supplies or interfere with the sustainability of the ground water basin. No operational changes are proposed to the existing approved project that would substantially modify the water usage of the project. The proposed new parking lot would be paved and would include landscape features to capture runoff and partially retain storm water. Septic areas would continue to allow groundwater infiltration. Similarly, Highway 12 shoulder widening improvements are limited in scope and would not substantially impact ground water infiltration.

10c i-iv. Less than Significant Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in any of these potential impacts. While not in a flood plain, the Kenwood community has experienced localized flooding during large magnitude storm periods. The 2007 MND fully analyzed impacts to water quality and drainage capacity within these CEQA checklist items and identified mitigation for addressing alteration of drainage patterns and potential flooding and erosion. These mitigation measures continue to apply, and along with compliance with standard grading and engineering conditions will ensure that the impacts associated with project modifications will be less than significant. The project does not involve other changes in the environment that could result in substantial degradation of water quality. The County's grading and storm water regulations requires that a drainage report and plans be prepared by a civil engineer to address drainage capacity and potential flooding and erosion. Regulations also require that these measures be implemented to minimize post construction storm water quantity/quality.

10d. No Impact. The project site is not located within a designated flood hazard area, and is not in an area subject to seiche or tsunami.

10e. Less than Significant. The project modifications would not conflict with or obstruct implementation of a water quality control plan or sustainable groundwater management plan in that water use would not increase substantially and compliance with grading and erosion control requirements is required.

11. LAND USE AND PLANNING

Potentially
Significant
Impact

Less than
Significant
with
Mitigation

Less than
Significant
Impact

No
Impact

Would the modifications to the project:

- a) Physically divide an established community? _____ X
- b) Cause a significant environmental impact due to a conflict with any land use plan, policy, or regulation adopted for the purpose of avoiding or mitigating an environmental effect? _____ X

11a. No Impact Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in physical division of an established community. The project would not divide a community because it is located within an established community.

11b. Less Than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in a potentially significant impact due to conflict with any land use plan, policy, or regulation adopted for the purpose of avoiding or mitigating an environmental effect. The project site is designated LC (Limited Commercial) on the Sonoma County General Plan Land Use map and zoned C1 (Neighborhood Commercial). The purpose of the General Plan Limited Commercial land use category is to accommodate retail sales and services for the daily self-sufficiency of local communities in keeping with their character. The various existing uses serve the town of Kenwood and the greater community. The proposed changes in use require a modification to the use permit.

Over the past several years, the use has created parking and circulation issues in the area at peak periods due to inadequate on-site parking and overflow on-street parking on a narrow neighborhood street near the intersection of Highway 12. The project seeks to address parking and circulation issues by eliminating parking on both sides of Shaw Avenue near Highway 12, providing a new 53-space parking lot at 75 Shaw Avenue, and eliminating 15 events that were previously approved and granted within use permit PLP05-0009. The new parking lot at 75 Shaw Avenue (APN 050-275-052), shall provide the required number of spaces, consistent with the County Zoning Code, for the existing and proposed use of the property. Restaurants serving alcohol are permissible in the C1 District, therefore an ancillary parking lot serving such uses are also permissible under existing Zoning.

The range and scale of the permitted uses is expressed by the Sonoma Valley Planning Area Policy LU-20i:

LU-20i: Use the "Limited Commercial" and "Limited Commercial - Traffic Sensitive" categories for commercial lands in communities with urban services, including Boyes Hot Springs/El Verano/Agua Caliente, Glen Ellen and Kenwood. Require that new uses meet the following criteria:

- 1. The size, scale, and intensity of the use is consistent and compatible with the character of the local community.**

Staff response: The existing commercial and winery facilities, and off-site parking lot are similar in size to other non-residential buildings and parking lots in the commercial area of Kenwood. The nearby Kenwood retail plaza, includes a variety of neighborhood serving retail uses, including a restaurant and several tasting rooms, with similar scale to the facilities on the site. The current intensity of the unpermitted restaurant use does not comply with the design capacity of

the proposed 1,500 gallon septic system; mitigation measure Hydro-1 and Hydro-2 require that the project is scaled down to the capacity of the proposed 1,500 gallon septic system. Furthermore, the intensity of the food service activity has resulted in parking issues because the approved parking facilities (providing 30 designated and 24 overflow valet spaces on-site) were not fully constructed (the site currently provides 34 parking spaces: the valet overflow parking was not developed and 2 parking spaces adjacent to Maple Avenue are behind gate doors that render them inaccessible during daily operation of the facility). The lack of code complying parking has resulted in overflow on-street parking on Shaw Avenue, a narrow neighborhood street. Currently, the width of the travel lanes on Shaw Avenue are compromised when parking occurs on both sides of the street. A new commercial parking lot at 75 Shaw Avenue and removing on-street parking on both sides of Shaw Avenue near Highway 12 will improve circulation and address code compliance. In addition, restrictions on on-street parking, and the required provision of turn lanes on highway 12 and Shaw Avenue will improve circulation and safety.

2. Capacities of public services are adequate to accommodate the use and maintain an acceptable level of service.

Staff response: Kenwood is served by Kenwood Village Water Company, an independent regulated water system, and individual properties are served by on-site septic systems. The Kenwood Water Company would continue to serve the existing operation. The existing 900 gallon on-site septic systems capacity is not designed to accommodate the extent of the proposed food service with 144 seats. The existing system was designed to serve seven employees and 25 daily customers plus occasional catered events with up to 100 people. The existing system was designed assuming 15 gpd for seven employee (105 gallons) and five gpd per person attending a catered event (500 gallons). While there have been no reports of septic failure, the design capacity of the existing septic system is substantially undersized for the proposed use. The project includes expanding the septic capacity to 1,500 gallons to accommodate the food service operation. The number of wine tasters and meals served is necessarily limited to 313 customers a day by the capacity of the septic design based on the County's On-site Waste Treatment System regulations (OWTS Manual). The OWTS Manual requires that septic design covers peak use, therefore the 1,500-gallon system could accommodate a peak use of 313 customers and 16 employees a day. These limited are derived from the following standards and septic monitoring data: each employee generates a septic demand of 15 gpd per person totaling 240 gpd. Wine tasting customers (153) are assigned flows of 3 gallons per person and the customers partaking in food services (160) is 5 gallons per person. Total flows for both wine tasting and food services is 1259 gallons per day.

Design and siting are compatible with the scenic qualities and local area development guidelines of the local area.

Staff response: The project will not create new structures that add new aesthetic impacts not previously analyzed in the adopted 2007 Mitigated Negative Declaration for use permit PLP05-0009. The proposed highway and septic improvements will not adversely affect the scenic qualities of the area and the new parking lot at 75 Shaw Avenue is behind existing commercial buildings, therefore the project design and siting are compatible with the scenic qualities of the area.

3. Siting of structures is compatible with planned infrastructure improvements such as roadway widening and under grounding of public utilities.

Staff response: The existing buildings are approximately 55 feet from the property line on Highway 12 and approximately 8 feet from the planned improvements on Shaw Avenue. Installation of the new parking lot, septic system, and road improvement will not conflict with other Planned infrastructure improvements.

12. MINERAL RESOURCES

Would the modifications to the Project:

	Potentially Significant	Less than Significant Impact	Less than Significant with Mitigation	No Impact
a) Result in the loss of availability of a known mineral resource that would be of value to the region and the residents of the state?	_____	_____	_____	<u> X </u>
b) Result in the loss of availability of a locally-important mineral resource recovery site delineated on a local general plan, specific plan or other land use plan?	_____	_____	_____	<u> X </u>

12a. and 12b. No Impact. There are no known mineral resources on the project site and the County has not designated the site as a mineral resource.

13. NOISE

	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
Would the modifications to the project result in:				
a) Generation of a substantial temporary or permanent increase in ambient noise levels in the vicinity of the project in excess of standards established in the local general plan or noise ordinance, or applicable standards of other agencies?	_____	<u> X </u>	_____	
b) Generation of excessive groundborne vibration or groundborne noise levels?	_____	_____	<u> X </u>	
c) For a project located within the vicinity of a private airstrip or an airport land use plan or, where such plan has not been adopted, within two miles of a public airport or public use airport, would the project expose people residing or working in the project area to excessive noise levels?	_____	_____	_____	<u> X </u>

13a. Less Than Significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in Use permit PLP05-0009 included noise mitigations that included building a solid wall adjacent to the approved outdoor picnic area and installing HVAC equipment meeting noise standards. These noise mitigations were implemented with the currently approved project. The outdoor restaurant activity is an existing condition and cannot be further analyzed due to baseline conditions. However, the noise associated with the restaurant activity is similar to an outdoor event.

The current use permit also includes noise mitigation for construction noise. This mitigation remains applicable to this project and will be implemented in the modified conditions of approval.

The project includes removing the option to operate extended hours from 8AM to 5PM, therefore the facility will continue to operate from 10AM to 4PM. The construction and use of the new parking lot at 75 Shaw Avenue during these operating hours could result in potential daytime noise impacts to two existing residences on adjoining properties to the north and west. The closest residence is 15 feet from the west side of the parking lot and is owned by the applicant. The other residence is 100 feet from the parking lot. An existing 6-foot tall corrugated metal fence with wood lattice top separates the proposed commercial parking lot from the adjacent residential uses.

A Noise and Vibration Assessment was conducted for the proposed commercial parking lot by Illingworth & Rodkin, Inc., (May 31, 2019). The noise study concluded that the existing fence as designed would provide an acoustical barrier that reduces noise impacts to 57 dBA at residential receivers, which is less than significant and in compliance with the General Plan Noise standard of 60 decibels. This conclusion is based on the approved fence design which is specified to include, a ½" wood panel covered by two corrugated metal panels. Inspection of the constructed fence revealed that the ½" wood panel is not provided. Therefore, Mitigation Measure Noise 1 has been included to require an upgrade to the existing fence to meet the design standard used in the noise study.

Mitigation Measure Noise 1:

Prior to issuance of a grading or encroachment permit for installation of the parking lot at 75 Shaw Avenue the existing fence shall be modified to address the structural specifications of the project noise analysis, including ½ thick plywood covered by two sheets of metal siding without crack or gaps in the face. The project noise consultant shall submit a letter confirming compliance with this requirement.

Mitigation Monitoring: ***Permit Sonoma will inspect the fence prior to permit issuance to verify it meets the above specifications.***

13b. Less Than Significant Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in generation of excessive groundborne vibration or noise levels. The project includes minor excavation but does not include construction activities that may generate substantial ground borne vibration and noise. With installation of the acoustical fence as required as mitigation under 13a, increases in noise would be less than significant.

13c. No Impact. The site is not within a designated airport land use plan and there are no private airstrips within the vicinity of the project.

14. POPULATION AND HOUSING

	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
Would the modifications to the project:				
a) Induce substantial unplanned population growth in an area, either directly (for example, by proposing new homes and businesses) or indirectly (for example, through extension of roads or other infrastructure)?	_____	_____	_____	<u> X </u>
b) Displace substantial numbers of existing people or housing necessitating the construction of replacement housing elsewhere?	_____	_____	_____	<u> X </u>

14a. No Impact Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in any potential to induce substantial unplanned population growth. The project would not include construction of new homes or businesses or substantial new infrastructure and therefore would not induce substantial population growth. Workforce in lieu housing fees will be collected for the proposed project per County ordinances if applicable.

14b. No Impact The project would not displace any existing housing.

15. PUBLIC SERVICES

	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
a) Would the modifications to the project result in substantial adverse physical impacts associated with the provision of new or physically altered governmental facilities, need for new or physically altered governmental facilities, the construction of which could cause significant environmental impacts, in order to maintain acceptable service ratios, response times or other performance objectives for any of the public services:				
Fire protection?	_____	_____	_____	<u> X </u>
Police protection?	_____	_____	_____	<u> X </u>
Schools?	_____	_____	_____	<u> X </u>
Parks?	_____	_____	_____	<u> X </u>
Other public facilities?	_____	_____	_____	<u> X </u>

15a. No Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in substantial adverse impacts associated with provision of the identified government facilities and services. As discussed throughout, no expansion of the existing facilities is proposed and no increase in daily visitors is expected. The VJB facility was constructed to comply with Fire Safe Standards, including fire access, and protection methods such as water supply, sprinklers in buildings, alarm systems, extinguishers, vegetation management, hazardous materials management and management of flammable or combustible liquids and gases. A hydrant has been installed at the southwest corner of the VJB commercial site. The new parking lot has been designed to meet fire access requirements. The Sonoma County Sheriff and the California Highway Patrol will continue to provide law enforcement in the area. Development fees to offset potential impacts to schools were paid with building construction and are not required for installation of the parking lot, septic system, and road improvements. Park development impact fees are not required on commercial projects.

16. RECREATION

	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
a) Would the modifications to the project increase the use of existing neighborhood and regional parks or other recreational facilities such that substantial physical deterioration of the facility would occur or be accelerated?	_____	_____	_____	<u>X</u>
b) Does the modified project include recreational facilities or require the construction or expansion of recreational facilities which might have an adverse physical effect on the environment?	_____	_____	<u>X</u>	

16a. No Impact The proposed project would not involve activities that would cause or accelerate substantial physical deterioration of parks or recreational facilities.

16b. Less Than Significant Impact Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now directly result in construction or expansion of recreational facilities which might have an adverse physical effect on the environment. The proposed project does not involve construction of recreational facilities, though an offer of dedication of a trail easement for future construction of a regional trail is required.

17. TRANSPORTATION

Would the modifications to the project:

	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
a) Conflict with a program, plan, ordinance, or policy addressing the circulation system, including transit, roadway, bicycle and pedestrian facilities?	_____	_____	<u> X </u>	_____
b) Conflict with or be inconsistent with CEQA Guidelines 15064.3 subdivision (b)?	_____	_____	<u> X </u>	_____
c) Substantially increase hazards due to a geometric design feature (e.g., sharp curves or dangerous intersections) or incompatible uses (e.g., farm equipment)?	_____	_____	<u> X </u>	_____
d) Result in inadequate emergency access?	_____	_____	_____	<u> X </u>

17a. Less than Significant: Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now result in potentially significant conflicts with a program, plan, ordinance or policy addressing the circulation system. This SMND addresses the applicant's proposal to eliminate the options to hold up to 15 annual special events at 100 guests and expand operating hours and accordingly to remove or modify mitigation measure Traffic – 1 from the 2007 MND and correlating mitigation monitoring. As amended by the Board of Supervisors, the measures are incorporated into the project via its conditions of approval.

As approved by the Board of Supervisors in 2007, the applicant was authorized to hold up to fifteen 100-person events per year and expand operating hours to 8 am to 5pm for the market and up to 10pm for events. To mitigate the traffic impacts of these activities, the 2007 MND included mitigation measure Traffic-1 requiring the applicant to construct a left turn lane on Highway 12. However, as adopted by the Board of Supervisors and reflected in the conditions of approval, Traffic-1 included a provision that “the left hand turn lane for northbound Highway 12 traffic at the intersection of Shaw Avenue is deferred” in accordance with a mitigation monitoring measure providing that the applicant could not hold events or expand hours until after the left turn lane was constructed. (See Conditions of Approval 41(c) and (e), 58, and 59.) The left turn lane improvements have not been installed on Highway 12. The applicant proposes to eliminate its authorization to hold special events and expand operating hours. Accordingly, mitigation measure Traffic-1 and its associated mitigation monitoring provision are modified in this SMND.

This SMND/IS also addresses the applicant's proposal to substitute an alternate method of providing a right turn lane from Shaw Avenue to Highway 12 from what is required by mitigation measure Traffic-2 in the 2007 MND. Traffic-2 requires the applicant to dedicate right of way and install a right turn lane on Shaw Avenue. The applicant proposes that what the previous mitigation achieved through dedicating a right turn lane can be achieved by creating a right turn lane within the existing right of way. This would be achieved by removing on-street parking on both sides of Shaw Avenue and restriping. The Department of Transportation supports this request and the 2007 mitigation measure Traffic-2 is revised as provided in Section 17c below. There are no new or additional adverse impacts caused by the proposed project that trigger the need for modification to the right turn lane mitigation measure; the change is proposed by the applicant merely as an alternate method of achieving the same end.

The following information is provided for informational and background purposes only. The original traffic analysis prepared by WTrans (2006) estimated trip generation at an average of 74 new daily weekday trips and 80 new daily weekend trips, including nine trips during the weekday AM peak hour and 14 during the PM peak hour. Special events for 100 attendees generated an average of 170 new daily weekend trips and 164 new daily weekday trips, including up to 54 trips during the PM peak hour. The study noted that a northbound left turn-lane from Highway 12 onto Shaw Avenue was warranted due to traffic counts on Highway 12. The traffic study anticipated special events would add up to 27 additional left turn movements where there were seven without the project. Payment of a fair share mitigation fee was not acceptable because no other funding or plans existed to complete the turn lane.

Updated focused traffic studies were provided for the project, with updates from 2014 through 2019. The studies were peer reviewed and took into account the proposal to eliminate 15 approved annual events and the potential to expand operating hours. The initial peer review requested a more accurate characterization of the use and requested AM peak and Saturday peak hour analysis. The July 2019 traffic study responded to these data needs and was reviewed by the County Department of Transportation and Public Works and by Caltrans.

The July 2019 traffic study draws the following conclusions:

- Current counts indicate 25 trips during the morning peak hour, 36 trips during the evening peak hour, and 64 trips during the weekend peak hour. The study indicates the use resulted in 25 westbound left turn movements on SR 12 at Shaw Avenue during the weekend midday peak.
- Intersection LOS at Shaw and SR 12 is expected to operate acceptably with future volumes except for the northbound Shaw Avenue approach (LOS E). However, because the project increases delay less than 5 seconds, the impact is considered less than significant.
- With operating hours limited to no later than 4:00PM, the study recommends that the Highway 12 left turn lane is unnecessary and that the highway shoulder should be widened instead to provide space for a vehicle to pass a westbound vehicle turning left at Shaw Avenue.
- Warrants are currently met for a left turn lane on SR 12 at Shaw Avenue due to existing highway volumes. The collision history at the intersection does not indicate a safety issue that needs to be addressed by installing a left-turn lane. The traffic study recommends eliminating the requirement for a left turn lane at Shaw Avenue and shoulder widening instead. The study notes physical construction constraints such as right-of-way, utility poles, and drainage facilities in the area.
- Parking should be eliminated on both sides of Shaw Avenue at Highway 12 to provide adequate width to accommodate a right turn lane through restriping, rather than creating a dedicated right turn lane.
- While the project will result in pedestrians crossing Shaw Avenue to access the off-site parking lot, a mid-block crosswalk is unnecessary due to the low traffic volume and speed on Shaw Avenue.
- Site lines at all three parking lot driveways are adequate.
- Providing 18 bicycle parking spaces is recommended.
- The overall LOS at the local intersections of Highway 12/Shaw Avenue and Highway 12/Maple Avenue will not fall below acceptable LOS D standard under existing plus project and future plus project scenarios.

For the purposes of this CEQA analysis, existing traffic conditions, including the site as it is currently operated, are the baseline for analysis. The assessment of environmental impacts in this revised Subsequent Initial Study are limited to any additional potential impacts moving forward. While the traffic

study notes additional traffic generation for the restaurant use compared to the project as approved in 2007, an actual increase in traffic would not occur as the restaurant use is an existing condition. Therefore, the project would not result in new significant or potentially significant impacts in this topic area.

DTPW agrees with the applicant's proposal to install a right turn lane on Shaw Avenue through elimination of on-street parking and restriping, and is requiring that the applicant submit a formal request to remove parking from Shaw Avenue. The proposed substitution of a new mitigation measure for Traffic-2 from the 2007 MND is equally effective mitigation and will ensure that the project does not substantially increase hazards due to geometric design, but will instead improve turning movements and circulation in the neighborhood.

The revised mitigation measure for the Shaw Avenue improvements is included below. Because removal of on-street parking requires adoption of an ordinance by the Board of Supervisors and this mitigation measure will therefore not be effective and enforceable unless or until the Board of Supervisors adopts the necessary ordinance eliminating on-street parking on the specified portion of Shaw Avenue, this mitigation measure provides that the project approval (modification of the 2007 use permit) will not be effective until the parking ordinance is adopted and effective.

To address General Plan policies encouraging alternative modes of transportation and the project's demand for pedestrian and bicycle facilities, 18 bicycle parking spaces are required and Regional Parks is requiring the applicant to dedicate an easement along the Highway 12 frontage to accommodate a future regional pedestrian/bicycle trail.

Parking Analysis

A total of 54 parking spaces were initially required to accommodate the various approved uses, including special events. Approved parking included 20 paved parking spaces, 17 unpaved parking spaces, and 17 unpaved tandem/valet parking spaces. The seventeen valet parking spaces were not provided and the site is developed with 21 paved parking spaces and 13 unpaved parking spaces. Existing parking does not meet the Zoning Code parking requirements for the existing outdoor restaurant with approximately 144 seats occupying 3,125 square feet of patio dining area.

The applicant proposes to construct a new 53 space parking lot on an adjacent ½ acre site located across the street at 75 Shaw Avenue to accommodate up to 3,125 square feet of patio dining food service with 144 seats. The applicant has also included table restaurant seating areas within 850 square feet of the case good storage building and within 1,425 square feet upstairs of the market. A total of 87 parking spaces would be provided, including the proposed site plan for the VJB property that shows 34 on-site parking spaces. The parking demand for the existing/proposed patio dining area of up to 3,125 square feet, in combination with other existing permitted uses, requires 78 parking spaces. Parking is not sufficient for the expanded seating areas upstairs of the market and within the case good storage building.

As recommended by staff, the table below summarizes the parking demand and supply based on the proposal, minus the expanded seating areas upstairs of the market and inside the case good storage building. Note that staff is also recommending a condition of approval that would limit the number of seats in the overall project to 104 to address restaurant seating turnover and septic capacity. (See Section 10.)

<u>Proposed Use</u>	<u>Area</u>	<u>Parking Ratio</u>	<u>Spaces Required</u>
Office	1,615 sq. ft.	1 per 250 sq. ft.	6
Retail and Tasting Room	3,718 sq. ft.	1 per 200 sq. ft.	19
Case goods	1,800 sq. ft.	1 per 2000 sq. ft.	1
Restaurant, 144 seats	3,125 sq. ft. (144 seats)	1 per 60 sq. ft. dining	52
Total Required, Proposal	N/A	N/A	78
Total Spaces Provided	N/A	N/A	Onsite: 34
			Off-site: 53
			Total: 87

With the construction of a new 53 space parking lot at 75 Shaw Avenue and a total parking count of 87 parking spaces, 3,125 square feet of restaurant dining area with 144 seats could be permitted if septic capacity could be resolved. A proposed condition of approval limits the number of seats in the entire project to 104 based on the modified project's proposed septic capacity.

17b. Less Than Significant Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would result in a potentially significant conflict or inconsistency with Guidelines section 15064.3(b). Current conditions, which include the restaurant operations, are the baseline for CEQA purposes, and consistent with CEQA Guidelines 15064.3 subdivision (b), the project would not increase Vehicles Miles Traveled over existing conditions.

17c. Less than significant. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would result in substantially increased hazards due to a geometric design feature or incompatible use. As discussed in section 17a, the proposed project includes an alternate method of achieving the right turn lane required by the 2007 MND, namely elimination of on-street parking and restriping of Shaw Avenue instead of dedication of right of way to create new roadway space to accommodate a right turn lane. While not required as mitigation, a proposed condition of approval requiring shoulder widening for 100 feet on each side of Shaw Avenue on the north side of Highway 12 would not increase hazards due to a geometric design feature or incompatible uses; it would potentially improve intersection safety. As noted above, DTPW supports modification of the prior mitigation measure requiring a dedicated right turn lane on Shaw Avenue, by requiring a right turn lane within the existing right of way through adjustments to on-street parking and restriping. With the existing and revised mitigation measures the project modifications would improve circulation and not result in design hazards.

Because achieving the removal of on-street parking on Shaw Avenue requires the Board of Supervisors to adopt an ordinance designating the no parking areas, and that ordinance process has not been initiated, this substituted mitigation measure is not adequate mitigation until it is adopted by the Board. The following mitigation measures are substituted for Traffic-2 in the 2007 MND:

Mitigation Measure Transportation 1:

Within 30 days of permit approval, the Applicant shall submit a request for parking restrictions along Shaw Avenue and Maple Avenue to the Department of Transportation and Public Works (DTPW) and shall pay the fees to process the request before the Board of Supervisors. If the Board approves the request, the applicant shall pay for County installation of all signs that are required resulting from the request following adoption of the ordinance authorizing the changed conditions. The parking restrictions shall include restricting parking along the northerly side of Shaw Avenue for the entire block from SR 12 to Clyde Avenue, and the south side of Shaw Avenue and north side of Maple Avenue along the Applicant's frontage.

Mitigation Monitoring:

Permit Sonoma will verify that the applicant submits a timely request for parking restrictions as required by mitigation measure Transportation 1, and will take immediate enforcement action if the applicant fails to timely take any action required by MM Transportation-1.

Mitigation Measure Transportation 2:

Within 30 days of the Board of Supervisors approval of no parking, the Applicant shall apply for an encroachment permit, and within 30 days of issuance the permit the Applicant shall restripe and sign Shaw Avenue in accordance with the following, as well as striping required associated with the crosswalk noted later in the conditions:

- a. Refresh the existing "stop" legend and limit line at the intersection of Shaw Avenue and SR 12.

- b. Refresh the existing centerline stripe on Shaw Avenue a minimum length of 45' from the limit line.
- c. Stripe an edge line on the northwesterly corner of Shaw Avenue to line up with the edge line shown on SR 12 providing a satisfactory turning radius (satisfactory to the Department of Transportation and Public Works) at the intersection. The edge line shall be striped for the length of the Shaw Avenue frontage of APN 050-275-051 (the parcel on the northwesterly corner of the SR 12/Shaw Avenue intersection) and maximize lane widths as much as feasible.
- d. Black out or otherwise eliminate any parking pavement markings on the northerly side of Shaw Avenue from SR 12 to Clyde Avenue.
- e. Black out or otherwise eliminate any parking pavement markings on the Shaw Avenue frontage of APN 050-275-028 (the subject parcel) within 35' of the intersection of SR 12. This will eliminate one (1) marked parking space along the project frontage.

Mitigation Monitoring:

Permit Sonoma will verify that the application and time frames for execution of this condition as noted above are met and installation of the parking restrictions are accomplished as required or report lack of compliance to Code Enforcement.

Mitigation Measure Transportation 3

Approval of this project shall not be effective until the Board of Supervisors adopts an ordinance removing on-street parking from the specified portions of Shaw Avenue and the ordinance is in effect.

Mitigation Monitoring:

Permit Sonoma will monitor the project to ensure that the applicant is diligently pursuing its application for Board of Supervisors approval of a parking restriction ordinance. If said ordinance is denied by the Board of Supervisors, or is not approved by the Board of Supervisors within eight months of the date of approval of the modified use permit, the Director will refer the project to the BZA for enforcement.

17d. No impact. The existing EVA on Maple Avenue would not be jeopardized by allowing customers to continue to use it for egress. The new parking lot has been reviewed by County Fire and DTPW and no concerns have been expressed.

18. TRIBAL CULTURAL RESOURCES:

Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
--------------------------------------	--	------------------------------------	--------------

- a) Would the modifications to the project cause a substantial adverse change in the significance of a tribal cultural resource, defined in Public Resources Code section 21074 as either a site, feature, place, cultural landscape that is geographically defined in terms of the size and scope of the landscape, sacred place, or object with cultural value to a

California native American tribe, and that is:

- i) Listed or eligible for listing in the California Register of Historical Resources, or in a local register of historical resources as defined in Public Resources Code section 5030.1(k), or

X

- ii) A resource determined by the lead agency. In its discretion and supported by substantial evidence, to be significant pursuant to criteria set forth in subdivision (c) of Public Resources Code § 5024.1. In applying the criteria set forth in subdivision (c) of Public Resource Code § 5024.1, the lead agency shall consider the significance of the resource to a California Native American tribe.

X

18.a.i and a.ii. Less Than Significant With Mitigation. A cultural resources study was prepared for the existing VJB Market Place and Tasting Room by Thompson and Origer (2005). No archaeological or tribal cultural resources were discovered on the site. The modified project, which includes construction of a parking lot on a commercial site that was formerly developed with a single family residence, development of a new 1500-gallon septic system, and Highway 12 roadway improvements.

The modified project was referred to the Northwest Information Center, which did not recommend further study due to limited land disturbance. However, it recommended conditions of approval to address the potential discovery of cultural resources. The Mitigated Negative Declaration adopted for the currently approved project included a Mitigation Measure to address potential discovery during project construction. The added condition of approval recommended by the Northwest Information Center is not necessary because this mitigation measure still applies and is adequate to cover the proposed project modifications. In response to an AB 52 notice and invitation, the Graton Rancheria requested that a tribal monitor be present during excavation due to the potential discovery of cultural resources in the area. Therefore, the following mitigation measure is required:

Mitigation Measure Tribal CULT-1:

Prior to any earth moving activity at 75 Shaw Avenue or associated with excavation for road improvements the Project Applicant shall retain a tribal monitor and/or qualified principal archaeological investigator to oversee the cultural resources-related mitigation efforts. The principal investigator shall meet professional qualifications in the discipline of archaeology as defined in the Secretary of Interior's Standards and have demonstrated the ability to work cooperatively with the Tribe by honoring the Tribe's values and protection measures. The principal Investigator may monitor the tribal cultural resources-related mitigation efforts or he may employ an archaeological monitor who will work under the supervision of the principal investigator. The archaeological monitor shall monitor the following:

- 1) An initial pre-construction meeting with the grading contractor to review the definition of tribal cultural resources;**
- 2) Review of all land disturbance and earth removal; and**
- 3) Review and signoff of completed areas.**

Mitigation Monitoring:

Prior to issuance of a grading permit for 75 Shaw Avenue and road excavation, the applicant shall provide evidence of a signed contract with a qualified tribal monitor.

19. UTILITIES AND SERVICE SYSTEMS

Would the modifications to the project:

	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
a) Require or result in the relocation or construction of new or expanded water, wastewater treatment or storm water drainage, electric power, natural gas, or telecommunications facilities, the construction or relocation of which could causes significant environmental effects?	_____	_____	<u> X </u>	
b) Have sufficient water supplies available to serve the project and reasonably foreseeable future development during normal, dry and multiple dry years?	_____	_____	<u> X </u>	
c) Result in a determination by the waste water treatment provider, which serves or may serve the project that it has adequate capacity to serve the project's projected demand in addition to the provider's existing commitments?	_____	_____	_____	<u> X </u>
d) Generate solid waste in excess of state or local standards, or in excess of the capacity of local infrastructure, or otherwise impair the attainment of solid waste reduction goals?	_____	_____	<u> X </u>	
e) Comply with federal, state, and local management and reduction statutes and regulations related to solid waste?	_____	_____	<u> X </u>	

19a. Less Than Significant Project modifications would not result in any new significant construction impacts related to the installation of water, wastewater treatment or storm water drainage, electric power, natural gas, or telecommunications facilities.

19b. Less Than Significant The Kenwood Water Company will continue to serve the use and did not identify any capacity issues.

19c. No Impact The existing project is not served by a municipal waste water provider, but relies on an on-site septic system. A new septic system is proposed to serve the modified project as discussed under Hydrology and Water Quality.

19d. and e. Less than Significant Sonoma County has adequate permitted landfill capacity to serve the proposed project and the modified project is required to comply with all federal, state, and local regulations, including solid waste reduction statutes.

20. WILDFIRE

	Potentially Significant Impact	Less than Significant with Mitigation	Less than Significant Impact	No Impact
If located in or near state responsibility areas or lands classified as very high fire severity zones, would the modifications to the project:				
a) Substantially impair an adopted emergency response plan or emergency evacuation plan?	_____	_____	<u> X </u>	_____
b) Due to slope, prevailing winds, and other factors, exacerbate wildfire risks, and thereby expose project occupants to, pollutant concentrations from a wildfire or the uncontrolled spread of a wildfire?	_____	_____	<u> X </u>	_____
c) Require the installation or maintenance of associated infrastructure (such as roads, fuel breaks, emergency water sources, power lines or other utilities) that may exacerbate fire risk of that may result in temporary or ongoing impacts to the environment?	_____	_____	<u> X </u>	_____
d) Expose people or structures to significant risks, including downslope or downstream flooding or landslides, as a result of runoff, post-fire slope instability, or drainage changes?	_____	_____	<u> X </u>	_____

20. a. b. and c and d. Less than Significant Impact. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the proposed project or changes in circumstances under which the project is undertaken that would now cause any of these significant impacts. The site is located within a high fire area as designated by the General Plan. The new parking lot and septic system and continued operation of the use will not substantially impair existing evacuation routes. Required road improvements would incrementally improve circulation and evacuation. Otherwise, the project will not increase post wildfire flooding, landslides, slope stability or drainage flows when considering potential for future fire events.

21. MANDATORY FINDINGS OF SIGNIFICANCE

- | | Yes | No |
|---|-------|--------|
| a) Do the modifications to the project have the potential to substantially degrade the quality of the environment, substantially reduce the habitat of a fish or wildlife species, cause a fish or wildlife population to drop below self-sustaining levels, threaten to eliminate a plant or animal community, substantially reduce the number or restrict the range of a rare or endangered plant or animal or eliminate important examples of the major periods of California history or prehistory? | _____ | _____X |
| b) Do the modifications to the project have impacts that are individually limited, but cumulatively considerable? ("Cumulatively considerable" means that the incremental effects of a project are considerable when viewed in connection with the effects of past projects, the effects of other current projects, and the effects of probable future projects)? | _____ | _____X |
| c) Do modifications to the project have environmental effects which will cause substantial adverse effects on human beings, either directly or indirectly? | _____ | _____X |

21a. No. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the project or changes in circumstances under which the project is undertaken that would substantially degrade the quality of the environment, substantially reduce the habitat of fish or wildlife species, cause a fish or wildlife population to drop below self-sustaining levels, threaten to eliminate a plant or animal community, substantially reduce the number or restrict the range of a rare or endangered plant or animal, or eliminate important examples of the major periods of California history or prehistory. The previously approved project is already in operation and the proposed project involves very limited physical changes to the environment, and mitigation is incorporated to mitigate any potential impacts to a less than significant level.

21b. No. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the project or changes in circumstances under which the project is undertaken that would now cause cumulatively considerable impacts in connection with the effects of past projects or the effects of other current projects. No project impacts have been found to be cumulatively considerable when considering other projects, existing baseline conditions, and the proposed physical changes associated with the project.

21c. No. Compared with existing conditions and the project analyzed by the 2007 MND, there are no changes in the project or changes in circumstances under which the project is undertaken that would cause direct or indirect substantial adverse effects on human beings. Mitigation is incorporated to reduce any potential impacts to tribal cultural resources, noise, water quality, and transportation. Revised mitigation for circulation improvements on Shaw Avenue have been found to be equally effective.

References

1. California Natural Diversity Data Base.
2. Project Referrals from Responsible Agencies.
3. California Environmental Quality Act (CEQA).
4. Full record of previous hearings on project in file.
5. Correspondence received on project.
6. Sonoma County CEQA Implementing Ordinance.
7. PRMD staff evaluation based on review of the project site, project application and project.
8. PRMD staff evaluation of impact based on past experience with construction projects.
9. Sonoma County General Plan and Environmental Impact Report, Sonoma County. Board of Supervisors; 2008 and as amended.
10. California Department of Transportation.
11. Assessor's Parcel Maps.
12. BAAQMD (Bay Area Air Quality Management District) *CEQA Guidelines* and thresholds of Significance.
13. Sonoma County Zoning Ordinance (as amended); 2020.
14. *Alquist-Priolo Special Studies Zones*; State of California Division of Mines and Geology; 1983.
15. *Seismic Shaking and Tsunami Plates 1A and 1B, Geology for Planning in Sonoma County Special Report 120*, California Division of Mines and Geology; 1980.
16. *Slope Stability Plates 2A and 2B, Geology for Planning in Sonoma County Special Report 120*, California Division of Mines and Geology; 1980.
17. *Sonoma County Grading Ordinance*; 2018.
18. California Regional Water Quality Control Board <http://geotracker.swrcb.ca.gov/>.
19. *Flood Insurance Rate Maps*, Federal Emergency Management Agency.
20. County of Sonoma Guidelines for Traffic Studies; 2017.
21. Addendum to Updated Traffic Impact Study, July 20, 2020
22. Updated Traffic Study by W-Trans dated July 2019.
23. Updated Caltrans Comment Letter, October 2019
24. Consultant Peer Review Letter, January 2019
25. Sonoma County Transportation Authority.
26. *Sonoma County Bikeways Plan*, Sonoma County Department of Transportation and Public Works; 2010.
27. Noise Study by Ilingworth and Rodkin dated May 2019.
26. Cultural Resources Study by Tom Origer and Associates, Inc., dated May 12, 2005.
27. Drainage Report by Dimensions 4 Engineering dated June 6, 2007.
28. August 8, 2019 Dimensions 4 Engineering Inc. letter on water usage/septic design.
29. October 14, 2019 Dimensions 4 Engineering Inc. letter septic and wastewater analysis.
30. Well and Septic Letter on Septic capacity June 2020; and Site Plan by BKF Engineers.
31. Table 11.1 Flow Rates from Sonoma County OWTS Manual

DEPARTMENT OF TRANSPORTATION

DISTRICT 4

OFFICE OF TRANSIT AND COMMUNITY PLANNING

P.O. BOX 23660, MS-10D

OAKLAND, CA 94623-0660

PHONE (510) 286-5528

www.dot.ca.gov

Making Conservation
a California Way of Life.

October 18, 2019

GTS# 04-SON-2016-00413

GTS ID: 270

PM: SON-12-26.68

Blake Hillegas, Project Planner
Sonoma County
2550 Ventura Avenue
Santa Rosa, CA 95403

VJB Vineyard and Cellars – Transportation Impact Study

Dear Blake Hillegas:

Thank you for including the California Department of Transportation (Caltrans) in the environmental review process for the VJB Vineyard and Cellars project. We are committed to ensuring that impacts to the State's multimodal transportation system and to our natural environment are identified and mitigated to support a safe, sustainable, integrated and efficient transportation system. The following comments are based on our review of the July 2019 Transportation Impact Study.

Project Understanding

VJB Vineyards and Cellars requests a modification to an existing Use Permit to acknowledge the outdoor seating area and outdoor kitchen (BBQ), the installation of a right-hand turn lane through the re-striping of a portion of Shaw Avenue, the widening of the shoulder along State Route (SR)-12 across from the property frontage, the opening of Maple Avenue for egress only, the reduction of off-site parking along Shaw Avenue, the addition of an off-site parking lot at 75 Shaw Avenue, 15 special events with 100 guests each, restriction of the hours of operations to 10 am to 4 pm, and the modification to conditions, as appropriate, to reflect changes in the project, which have occurred over time and by request. The proposed project is adjacent to SR-12.

Design

The feasibility of widening the shoulder on either side of Shaw Avenue (west of SR-12) should be investigated in the subsequent environmental document.

Construction-Related Impacts

Potential impacts to SR 12 from project-related temporary access points should be analyzed. Mitigation for significant impacts due to construction and noise should be identified. Project work that requires movement of oversized or excessive load vehicles on state roadways requires a transportation permit that is issued by Caltrans. To apply, visit: <https://dot.ca.gov/programs/traffic-operations/transportation-permits>.

Lead Agency

As the Lead Agency, Sonoma County is responsible for all project mitigation, including any needed improvements to SR-12. The project's fair share contribution, financing, scheduling, implementation responsibilities and lead agency monitoring should be fully discussed for all proposed mitigation measures.

Encroachment Permit

Please be advised that any work or traffic control that encroaches onto SR-12 requires an encroachment permit that is issued by Caltrans. To obtain an encroachment permit, a completed encroachment permit application, environmental documentation, and six (6) sets of plans clearly indicating the State ROW, and six (6) copies of signed and stamped traffic control plans must be submitted to: Office of Encroachment Permits, California DOT, District 4, P.O. Box 23660, Oakland, CA 94623-0660. To download the permit application and obtain more information, visit <https://dot.ca.gov/programs/traffic-operations/ep/applications/>

Thank you again for including Caltrans in the environmental review process. Should you have any questions regarding this letter, please contact Michael McHenry at 510-286-5562 or michael.mchenry@dot.ca.gov.

Sincerely,



MARK LEONG
District Branch Chief
Local Development - Intergovernmental Review



ANALYSIS
PLANNING
SURVEYING
ENGINEERING

2952 Mendocino Avenue, Suite C
Santa Rosa, California 95403

(Office) 707-578-3433
(Fax) 707-526-3433

August 8, 2019

County of Sonoma
Department of Permit and Resource Management
2550 Ventura Avenue
Santa Rosa, Ca 95403

Subject: Septic System and Water Usage Observations

Worksite: VJB Vineyard & Cellars
60 Shaw Ave., Kenwood, CA
APN 050-275-028

Henry and Vittorio,

Per your request, Dimensions 4 Engineering has reviewed the water usage based on water meter readings from the Kenwood Water Company. We have compared the water usage to the proposed 1500 gallons per day capacity of the new subsurface drip system. Our finding and conclusions are as follows:

The property and facilities are currently being served by two septic systems with a total capacity of 840 gallons per day. The previous water meter usage report showed a peak monthly usage of 3577 gallons between the periods of April 2012 and January 2014.

The proposed subsurface drip system will have a capacity of 1500 gallons per day, an increase in capacity of 79% over the existing systems. An updated report for the time period of January 2018 to June 2019 shows a peak usage of 4039 gallons occurring in July 2018 with an average of 3045 gallons per month. Using the peak value, flows average out to approximately 950 gallons per week or 135 gallons per day. Taking a conservative approach by assuming all the flow is concentrated over the weekend days (Fri, Sat, and Sun) still only equates to approximately 320 gallons per day.

Using this extremely conservative approach, VJB Vineyard & Cellars will only be using 22% of their total septic capacity daily. In addition, this peak value only accounts for 38% of the currently existing 840 gallons septic capacity. Interpolating the peak monthly flow of 4039 gallons over 30 days results in an average daily flow of 135 gallons, less than 10% of the new proposed septic system.

The proposed subsurface drip system will consist of three main tank components; main septic tank, grease trap, and an Orenco AX-MAX75 pretreatment unit. The proposed 5000 gallon septic tank alone will be able to hold over 3 days of the maximum calculated 1500 gallons per day flow. This provides VJB Vineyard and Cellars ample time to address any septic issues that may arise during operations without posing as an environmental hazard to its surroundings.


Customers partake mainly in wine tasting with an option to order food items from a limited menu. Due to the pre-prepped nature of the food served from their facilities and the usage of disposable utensils, we believe a 5 gallons per day per customers ordering food is more than adequate for septic usage calculations. Looking through sales records and receipts on their busiest days of the season (early September) we concluded that less than half the guests order prepared food. The rest of the guests are there strictly for wine tasting which is calculated at 3 gallons per day. With a peak employee count of 16 calculated at 15 gallons per day (240 gallons total), 1260 gallons remain for customer use. With assumptions of 160 guests ordering food (800 gallons) and 153 guests strictly wine tasting (460 gallons), we conservatively calculated that the facilities will be able to serve a total of 313 guests per day.

The business hours for VJB are from 10AM -4PM daily, for a total of 6 hours per day. We can interpolate the daily guest capacity of 313 guests to approximately 52 guests per hour over the 6 hour window. The 87 parking spaces in the proposed parking expansion and existing parking lot is fully capable of providing parking spaces for guests at any given time. Assuming 2 guests to a car, the 87 spaces should provide enough parking spaces for 174 guests at any given time to account for any potential surges during peak hours.

The proposed septic upgrades should be more than adequate to handle current loads and operations with enough capacity to absorb any additional loads and demands should it be necessary in the future.

Sincerely,

DIMENSIONS 4 ENGINEERING, INC.

By: 
Seung Jun Park (Ted), RCE 89409



cc: File



ANALYSIS
PLANNING
SURVEYING
ENGINEERING

2952 Mendocino Avenue, Suite C
Santa Rosa, California 95403

(Office) 707-578-3433
(Fax) 707-526-3433

LETTER OF TRANSMITTAL

To: PRMD Well & Septic

Date: 11/4/19 Job No. 7734.2

Attn: Darla Pimlott

Re: 60 Shaw Ave, Kenwood

We are sending you the following items

- | | | | |
|---|--------------------------------------|---|--|
| <input type="checkbox"/> Prints | <input type="checkbox"/> Attached | <input type="checkbox"/> Under separate cover | <input type="checkbox"/> Receipt |
| <input type="checkbox"/> Reproductibles | <input type="checkbox"/> Originals | <input type="checkbox"/> Calculations | <input type="checkbox"/> Permit applications |
| <input type="checkbox"/> Copy of letter | <input type="checkbox"/> Fee Payment | <input checked="" type="checkbox"/> Report | |

COPIES	DATE	PAGES	DESCRIPTION
1		1	Septic System and Wastewater Analysis Letter

These are transmitted as checked below:

- | | | | |
|---|---|---|---|
| <input type="checkbox"/> For approval | <input type="checkbox"/> Signature | <input type="checkbox"/> Recording | <input type="checkbox"/> Distribution |
| <input type="checkbox"/> For your use | <input type="checkbox"/> For your records | <input type="checkbox"/> Replacement | <input type="checkbox"/> Returned for corrections |
| <input type="checkbox"/> For processing | <input type="checkbox"/> For review and comment | <input type="checkbox"/> For bids due _____ | |
| <input type="checkbox"/> As requested | | | |

Hello Darla,

Please find attached the septic system and wastewater analysis letter as requested. We would like to schedule a meeting with you to discuss solutions to keep the project moving forward.

Thank you,

COPY TO: File

SIGNED: Seung (Ted) Park



ANALYSIS
PLANNING
SURVEYING
ENGINEERING

2952 Mendocino Avenue, Suite C
Santa Rosa, California 95403

(Office) 707-578-3433
(Fax) 707-526-3433

October 14, 2019

County of Sonoma
Department of Permit and Resource Management
2550 Ventura Avenue
Santa Rosa, CA 95403

Subject: Septic System and Wastewater Analysis

Worksite: VJB Vineyard & Cellars
60 Shaw Ave., Kenwood, CA
APN 050-275-028

Darla,

Per request, we are providing you a report regarding the proposed commercial 1500 septic system for VJB Vineyard & Cellars under SEP17-0427.

Please find attached the following documents for reference.

1. Septic System and Water Usage observations dated August 8, 2019.
2. Copy of email from Blake Hillegas and Becky Ver Meer.
3. Table 11.1 from Section 11 of the Sonoma County OWTS manual.
4. Section 11.4: Flow Equalization of the Sonoma County OWTS manual.

Our report dated 8/8/19 summarizes historical data and current usage for the facilities at 60 Shaw Ave. We concluded that the proposed 1500 gal. drip system will adequately accommodate 313 guests per day using the 3 to 5 gallons per day per guest. We are proposing to increase the existing septic capacity by 79% by utilizing all the area available for septic on site. Furthermore, the system will have an Orenco AX-MAX75 pretreatment system that will not only significantly improve quality of the outflow but be more easily monitored as well. With the proposal of removing events and confining business hours from 9AM-4PM, the proposed system should far exceed the performance of the 2 systems currently serving the facilities.

As we previously mentioned in the meeting on 9/17/19, a 5 gallon per guest amount to account for food was a number agreed to by both parties. James Johnson, REHS, originally proposed and agreed that a 5 gallons per day amount per guest would be more than enough to account for guests consuming food on the property. We have attached an email from Becky Ver Meer dated 6/8/17 showing that she also used the 5 gallons per guest calculations to determine the capacity for guests consuming food. This project has been

going on for quite some time and for PRMD to suddenly change and increase an agreed upon flow value by 160% near the permitting stage puts an unrealistic expectation on the owners and project. As you can see by our latest septic drawings on hold by planning, we are utilizing every area possible while maintaining appropriate setbacks per Sonoma County septic regulations.

Customers partake mainly in wine tasting with an option to order food items from a limited menu. Due to the pre-prepped nature of the food served from their facilities and the usage of disposable utensils, we believe a 5 gallons per day per customers ordering food is more than adequate for septic usage calculations. Looking through sales records and receipts on their busiest days of the season (early September) we concluded that less than half the guests order prepared food. The rest of the guests are there for wine tasting which is calculated at 3 gallons per day. With a peak employee count of 16 calculated at 15 gallons per day (240 gallons total), 1260 gallons remain for customer use. With assumptions of 160 guests ordering food (800 gallons) and 153 guests strictly wine tasting (460 gallons), we conservatively calculated that the facilities will be able to serve a total of 313 guests per day.

VJB is foremost a winery/wine tasting facility and not a restaurant. Table 11.1 shows Becky's calculation of 13 gallons per guest stemming from a "restaurant" with wasteflow calculations beginning with a meal served. An average patron at VJB does not come for meals but rather for wine tasting with food as a secondary option. For example, a bar can serve burgers and a burger joint serve beer, but to say those two are the same would be an error. Customers come to VJB to taste wine and might order food. Food can range from something as simple as a bag of chips to charcuterie and pizza, but to say every customer should be calculated at 13 gallons would be irresponsible. Guest receipts on a busy summer weekend showed that, on average, less than half of customers ordered any type of food. Using an extremely conservative approach as shown on our report dated 8/8/19, current water usage puts water usage at approximately 1 gallon per guest.

The "worst case scenario", peak usage was brought up multiple times during the meeting at PRMD on 9/17/19. We do understand that there can be heavier than usual traffic with more people ordering food than a typical day. Section 11.4: Flow Equalization of the OWTS manual touches on this topic and the operations at VJB seem very applicable to this method of calculation. VJB sees a sharp increase in traffic on Friday-Sunday, with traffic peaking on the 2 weekend days. This number drops significantly on the weekdays and is regular and predictable. The 5,000 gallon septic tank along with the 2,500 gallon grease trap has enough capacity to hold close to 5 days' worth of maximum daily flow. With the dispersal area designed for the full 1500 gallons per day, the advanced pretreatment system can dose on a time and/or demand basis to account for any surges during peak hours.


Lastly, Section 11.1 states that a "Commercial OWTS that **EXCEED** the 1500-gallons per day flow criteria of this section are subject to the requirements of section 14, or section 11.5. As we are not proposing to exceed the 1500 gallon flow, VJB should be exempt from having to file any application with the San Francisco Bay Regional Water Quality Control Board.

As shown on our 8/8/19 report, we are proposing a 313 guest capacity with 16 employees under the proposed 1500 gallon septic system. As our calculations were done in a conservative manner, we believe the proposed system will have no issues processing the septic loads required for all operations at VJB Vineyard & Cellars, 60 Shaw Ave.

Sincerely,

DIMENSIONS 4 ENGINEERING, INC.

By:

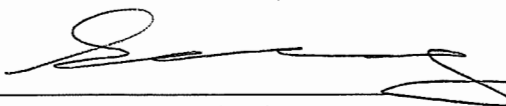
Seung Jun Park (Ted), RCE 89409



cc: File
Henry Belmonte

VJB VINEYARDS WINERY & TASTING ROOM PARKING LOT ADDITION NOISE AND VIBRATION ASSESSMENT

Kenwood, Sonoma County, California

May 31, 2019

Prepared for:

**Gwyn Bauer
Jean Kapolchok & Associates
843 2nd Street
Santa Rosa, CA 95404**

Prepared by:

Fred M. Svinth INCE, Assoc. AIA

ILLINGWORTH & RODKIN, INC.
//// Acoustics • Air Quality ///

**429 E. Cotati Avenue
Cotati, CA 94931
(707) 794-0400**

Project: 19-075

TABLE OF CONTENTS

INTRODUCTION	1
PROJECT DESCRIPTION.....	1
NOISE ANALYSIS STUDY AREA.....	1
EXISTING NOISE ENVIRONMENT	1
REGULATORY CRITERIA	3
NOISE IMPACT ANALYSIS	4
NOISE IMPACT ASSESSMENT	4
MITIGATION MEASURES	7
CEQA INITIAL STUDY CHECKLIST QUESTIONS	8
SUMMARY/CONCLUSIONS	8

INTRODUCTION

This report summarizes the evaluation of noise and vibration levels attributable to construction activities and project operations due a proposed parking lot for VJB Vineyards Winery and Tasting Room located on a currently vacant lot at 75 Shaw Avenue with respect to the regulatory criteria established by the Sonoma County General Plan and the Sonoma County Guidelines for the Preparation of Noise Analysis. The report first describes the project, study area, and existing noise levels in the project vicinity. The report then summarizes the applicable regulatory criteria used in the assessment of project-generated noise and vibration levels. Standard best management practices are recommended to reduce temporary construction noise levels to less-than-significant levels. With the incorporation of mitigation measures, construction vibration and project operational noise levels would not be expected to result in significant impacts upon nearby residential land uses. A brief discussion of the fundamentals of environmental noise and groundborne vibration is presented in Appendix A for those unfamiliar with acoustical terms or concepts.

PROJECT DESCRIPTION

The project proposes to convert a vacant lot at 75 Shaw Avenue, which is currently used as an informal parking area, to a fully improved 53 space parking lot for tasting room guests and employees.

NOISE ANALYSIS STUDY AREA

The project site is a vacant flat parcel developed. The site is bordered by a single-family residential and a commercial use to the north, a single-family residential use to the west, Shaw Avenue and the VJB Vineyards Winery and Tasting Room to the south and a commercial use to the east. A review of the site plan and surrounding uses indicates that the residential uses to the north and west are the only noise sensitive uses adjacent to the proposed site improvements. Figure 1, in Appendix B, shows the site plan of the proposed project, adjacent land uses and receptor locations, and noise monitoring locations selected during the noise survey.

EXISTING NOISE ENVIRONMENT

Ambient noise levels were measured by *Illingworth & Rodkin, Inc.* between 2pm on Friday, April 19th and Tuesday, April 23rd, 2019. Noise measurements were made with Larson Davis Model 820 Integrating Sound Level Meters (SLM) set at “slow” response. The sound level meters were equipped with G.R.A.S. Type 40AQ ½-inch random incidence microphone and fitted with windscreens. The sound level meters were calibrated prior to the noise measurements using a Larson Davis Model CAL200 acoustical calibrator. The response of the systems were checked after each measurement session and was always found to be within 0.1 dBA. No calibration adjustments were made to the measured sound levels. At the completion of the monitoring event, the measured interval noise level data were obtained from the SLM using the Larson Davis SLM utility software program. Weather conditions during the measurement period were generally good for noise monitoring.

The first long-term sound level measurement (see LT-1 in Figure 1) was made on the western property line shared with the single-family residential lot to the west and identified as Residence 1 in Figure 1. The monitoring equipment was installed on the existing property line fence at a height of approximately 8 feet above grade. Noise levels measured at this site primarily resulted from existing parking uses, adjacent residential sounds and roadway noise from Shaw Avenue and the more distant Hwy 12 traffic. The hourly trend in noise levels at this location, including the energy equivalent noise level (L_{eq}), maximum (L_{max}), minimum (L_{min}), and the noise levels

exceeded 2,8,25, and 50 percent of the time (indicated as L₂, L₈, L₂₅, and L₅₀) are shown on Chart 1 (see Appendix B).

A review of Chart 1 shows that the average weekday noise levels at LT-1 ranged from 47 to 66 dBA L_{eq} during the day, and 40 to 55 dBA L_{eq} at night, and average weekend noise levels ranged from 48 to 58 dBA L_{eq} during the day and 38 to 49 dBA L_{eq} at night. The calculated average day/night noise level (L_{dn}) at this location was 57 dBA for weekdays and 53 dBA for weekends. The average, maximum, minimum levels measured for the daytime and nighttime periods for the entire LT-1 measurement along with the corresponding Sonoma County Table NE-2 Noise Standards are shown in Table 1.

Table 1: Comparison of Noise Measurements Results and Sonoma County Noise Standards at Property line of Residence 1

Type of Level		Noise Level, dBA			
		L ₅₀	L ₂₅	L ₈	L ₂
Daytime Levels	NE-2 Noise Standard	50	55	60	65
	Measured Ambient Level ¹	48	51	53	55
	<i>Measured Range (Max/Min)</i>	<i>44/54</i>	<i>48/56</i>	<i>51/59</i>	<i>53/63</i>
Nighttime Levels	NE-2 Noise Standard	45	50	55	60
	Measured Ambient Level ¹	38	41	47	51
	<i>Measured Range (Max/Min)</i>	<i>33/54</i>	<i>35/56</i>	<i>40/58</i>	<i>47/59</i>

¹ Calculated based on an average of the four quietest L_{eq} hours in each measured 24-hour period

The second long-term sound level measurement (see LT-2 in Figure 1) was made on the northern property line of the project site shared with the single-family residential lot to the north and identified as Residence 2 in Figure 1. The monitoring equipment was installed on the existing property line fence at a height of approximately 8 feet above grade. Noise levels measured at this site primarily resulted from adjacent residential sounds and roadway noise from distant Shaw Avenue, Randolph Avenue and Hwy 12 traffic. Chart 2 in Appendix B, shows the hourly trend in noise levels at this site, including the energy equivalent noise level (L_{eq}), maximum (L_{max}), minimum (L_{min}), and the noise levels exceeded 2,8,25, and 50 percent of the time (indicated as L₂, L₈, L₂₅, and L₅₀).

A review of Chart 2 indicates that the average weekday noise levels at LT-2 ranged from 43 to 67 dBA L_{eq} during the day and 36 to 52 dBA L_{eq} at night, and average weekend noise levels ranged from 47 to 54 dBA L_{eq} during the day and 39 to 48 dBA L_{eq} at night. The calculated average day/night noise level (L_{dn}) at this location was 55 dBA for weekdays and 51 dBA for weekends. The average, maximum, minimum levels measured for the daytime and nighttime periods for the entire LT-2 measurement along with the corresponding Sonoma County Table NE-2 Noise Standards are shown in Table 2.

Table 2: Comparison of Noise Measurements Results and Sonoma County Noise Standards at Property line of Residence 2

Type of Level		Noise Level, dBA			
		L ₅₀	L ₂₅	L ₈	L ₂
Daytime Levels	NE-2 Noise Standard	50	55	60	65
	Measured Ambient Level ¹	47	49	51	54
	<i>Measured Range (Max/Min)</i>	<i>43/53</i>	<i>47/55</i>	<i>50/57</i>	<i>51/60</i>
Nighttime Levels	NE-2 Noise Standard	45	50	55	60
	Measured Ambient Level ¹	39	42	46	50
	<i>Measured Range (Max/Min)</i>	<i>37/52</i>	<i>38/55</i>	<i>41/56</i>	<i>46/58</i>

¹ Calculated based on an average of the four quietest L_{eq} hours in each measured 24-hour period

REGULATORY CRITERIA

Goals, objectives, and policies designed to protect noise-sensitive uses from exposure to excessive noise are set forth in the Noise Element of the Sonoma County General Plan 2020. The primary goal of the Noise Element is to, “Protect people from the adverse effects of exposure to excessive noise and to achieve an environment in which people and land uses function without impairment from noise.” Objectives and policies of the Noise Element that are applicable in the assessment of the proposed project are as follows:

Objective NE-1.3: Protect the present noise environment and prevent intrusion of new noise sources which would substantially alter the noise environment.

Objective NE-1.4: Mitigate noise from recreational and visitor serving uses.

Policy NE-1c: Control non-transportation related noise from new projects. The total noise level resulting from new sources shall not exceed the standards in Table NE-2 (Table 3 of this report) of the recommended revised policies as measured at the exterior property line of any adjacent noise sensitive land use. Limit exceptions to the following:

- (1) If the ambient noise level exceeds the standard in Table NE-2, adjust the standard to equal the ambient level, up to a maximum of 5 dBA above the standard, provided that no measurable increase (i.e. +/- 1.5 dBA) shall be allowed.
- (2) Reduce the applicable standards in Table NE-2 by 5 dBA for simple tone noises, noises consisting primarily of speech or music, or for recurring impulsive noises, such as pile drivers and dog barking at kennels.
- (3) Reduce the applicable standards in Table NE-2 by 5 decibels if the proposed use exceeds the ambient level by 10 or more decibels.
- (4) For short-term noise sources, which are permitted to operate no more than six days per year, such as concerts or race events, the allowable noise exposures shown in Table NE-2 may be increased by 5 dB. These events shall be subject to a noise management plan including provisions for maximum noise level limits, noise monitoring, complaint response and allowable hours of operation. The plan shall address potential cumulative noise impacts from all events in the area.
- (5) Noise levels may be measured at the location of the outdoor activity area of the noise sensitive land use, instead of at the exterior property line of the adjacent noise sensitive use where:
 - (a) The property on which the noise sensitive use is located has already been substantially developed pursuant to its existing zoning, and
 - (b) There is available open land on these noise sensitive lands for noise attenuation. This exception may not be used for vacant properties, which are zoned to allow noise sensitive uses.

This exception may not be used on vacant properties which are zoned to allow noise sensitive uses.

TABLE NE-2: Maximum Allowable Exterior Noise Exposures for Non-Transportation Noise Sources

Hourly Noise Metric ¹ , dBA	Daytime (7 a.m. to 10 p.m.)	Nighttime (10 p.m. to 7 a.m.)
L ₅₀ (30 minutes in any hour)	50	45
L ₂₅ (15 minutes in any hour)	55	50
L ₀₈ (5 minutes in any hour)	60	55
L ₀₂ (1 minute in any hour)	65	60

¹ The sound level exceeded n% of the time in any hour. For example, the L₅₀ is the value exceeded 50% of the time or 30 minutes in any hour; this is the median noise level. The L₀₂ is the sound level exceeded 1 minute in any hour.

It is clear for the footnote of Table NE-2 that the applicable noise standard is based on the “*sound level exceeded n% of the time in any hour*”, such that the L₅₀ is the value exceeded 50% of the time or 30 minutes in any hour or more, the L₂₅ is the value exceeded 25% of the time or 15 minutes in any hour or more, L₀₈ is the value exceeded 8% of the time or 5 minutes in any hour or more, and the L₀₂ is the value exceeded 2% of the time or 1 minute in any hour or more.

NOISE IMPACT ANALYSIS

Noise generated by the proposed use permit update was assessed against the Table NE-2 guidelines presented in the County’s Noise Element. The guidelines establish daytime and nighttime noise limits for noise events of varying durations. The primary daytime noise sources associated with the project are expected to be winery mechanical equipment, bottling, maintenance, and forklift operations, and crush related activities. No additional tasting room visitation or special events are requested so the project would have no impact on nighttime noise levels or the typical daily trip generation of the tasting room.

Estimating the expected noise produced by, and impacts from, the proposed changes to the existing use permit at adjacent noise sensitive uses requires three elements; the first is an assessment of what noise producing operations are likely to occur, the second is typical noise source levels for those operations, and the third is to determine the temporal nature of the operations.

I. Identification of Noise Producing operations/uses

Parking lot activities at the proposed 53 stall lot may result in off-site noise level increases. Automobile and light vehicle traffic on site would occur during the daytime hours and noise produced is expected to include the sounds of vehicles accessing parking areas, engine starts, door slams. These noises typically range from a maximum of 53 dBA to 63 dBA at 50 feet.

III. Propagation of sound

The final step in estimating the project noise levels is assessing the propagation of sound to the sensitive receptors. To do this, it is necessary to assume some rate of sound attenuation between the operations and receiver locations. The most dominant physical effect is due to the spreading out of sound waves with distance. Noise from moving vehicular noise sources in the parking typically attenuate at 3 dB per doubling of distance from the source, while noise from fixed sources such as parked cars people talking in the parking area can be considered to attenuate at a rate of 6 per doubling of distance from the source. Other effects can modify these fall-off rates such as partial shielding from buildings or topography, atmospheric attenuation of sound, and meteorological effects. These effects almost always reduce the noise in addition to that due to sound divergence. As most of these effects will vary with time due to changing environmental conditions, it is most conservative to assume only attenuation due to divergence for outdoor activities, realizing that the actual noise level will be at or, most likely, below those predicted using these assumptions at any one time.

NOISE IMPACT ASSESSMENT

The proposed Parking lot would include 53 parking spaces and may result in increased noise levels at the residential uses adjacent to the lot. The project does not request any changes in facility structures, mechanical equipment, tasting room visitation or the number, size or type of special events, therefore changes to any of these aspects of the VJB operations are not included in this impact assessment.

Impact 1: Parking Lot Activities

The proposed 53 stall parking area is a vacant flat unimproved (open dirt and field grass) lot in which some informal vehicular parking currently occurs with a 6-foot high solid fence at the

northern, western and eastern perimeters. This fence is built with galvanized sheet metal siding on both sides of a layer of 1/2" plywood, and upon inspection appears to be built without cracks or gaps in the face or large or continuous gaps at the base. Based on the used two layers of Galvanized steel siding (typical surface weight of 0.8 lb./ft²), and single layer of 1/2" plywood (typical surface weight of 1.4 lb./ft²), this wall has a surface weight of 3.0 lbs. per sq. ft. and will meet the solidity and mass requirements to act as a noise barrier.

The parking lot would only be used during daytime hours and is proposed primarily for employee parking, though some overflow visitor use may also occur. Considering the intended use of the parking area and the presence of other parking opposite Shaw Avenue and immediately adjacent to the winery and tasting room buildings, the typical cumulative duration of maximum noise from intermittent parking lot noise is anticipated to be less than five minutes in any hour, and fall in the 5 minutes per hour or L₀₂ NE-2 daytime category of 65 dBA (see Table NE-2, above). However, during events or on busy weekends, when the main lot is full and visitor parking occurs in the newly proposed lot, maximum noise from parking lot activities may occur more frequently at more than 5 minutes per hour but less than 15 minutes per hour and fall in the L₀₈ NE-2 daytime category of 60 dBA.

Based on a review of the project site plan and distance information obtained via Google Earth, 19 of the 53 proposed parking stalls, would be immediately adjacent to residential property lines, with the closet portion of the spaces approximately 6 feet and the center of the spaces approximately 14.5 feet from the property lines of Residences 1 and 2. Using the maximum source levels discussed in the Typical Noise Source Level section above, a 6-dB sound increase for each halving of the distance, and the calculated barrier loss of the currently installed 6 foot high property line fence, parking lot noise could produce L₀₈ levels of up to 57 dBA at the property line of Residence 1. Table 3, below, presents and summarizes the assessment of this intermittent parking lot noise versus County Noise Standards.

Table 3: Increased Parking Lot Activities

	L₀₈ (Noise Level Exceeded 15 Minutes or more in any Hour), dBA	
	Residence 1 Property Line	Residence 2 Property Line
Unadjusted Table NE-2 Daytime Limit	60	60
Daytime Ambient Noise Levels	53	51
New Parking Lot Noise at Receiver	57	57
Operations Exceed Ambient by 10 dBA?	No	No
NE-2 Adjustment	0	0
Adjusted Table NE-2 Daytime Limit	60	60
New Parking Lot Noise Exceeds NE-2?	No	No

As shown in Table 3, parking lot noise is not expected to result in noise levels on the residential side of the adjacent residential property lines that would exceed the adjusted daytime L₀₈ noise limit.

Impact 2: Construction Noise

Noise impacts resulting from grading, paving and site improvements of the new parking area depends on the noise generated by various pieces of construction equipment, the timing and duration of noise-generating activities, the distance between construction noise sources and noise-sensitive receptors, the shielding provided by the existing property line noise barriers, and ambient noise levels. Construction noise impacts primarily result when construction activities occur during noise-sensitive times of the day (early morning, evening, or nighttime hours), when construction

occurs in areas immediately adjoining noise-sensitive land uses, or when construction durations last over extended periods of time.

Each construction phase would include a different mix of equipment operating. The highest noise level expected during parking lot construction would be site grading and excavation activities as these phases often require the simultaneous use of multiple pieces of heavy equipment, such as dozers, excavators, scrapers, and loaders. Lower noise levels result from construction activities when less heavy equipment is required to complete the tasks.

Typical construction noise levels at a distance of 50 feet are shown in Table 4. Table 4 illustrates the average noise level range by typical construction phase type.

TABLE 4: Typical Ranges of Noise Levels at 50 Feet from Construction Sites (dBA L_{eq})

	Public Works, Roads & Highways, Sewers, and Trenches	
	I	II
Ground Clearing	84	84
Excavation	88	78
Foundations	88	88

I - All pertinent equipment present at site.

II - Minimum required equipment present at site.

Source: United States Environmental Protection Agency, 1973, Legal Compilation on Noise, Vol. 1, p. 2-104.

Parking lot and site improvements are expected to be completed during one building season¹ within the allowable hours of 8:00 am and 5:00 pm. Extreme noise generating construction methods, such as impact pile driving, are not expected or proposed. Given the small project area, multiple pieces of heavy construction equipment are also not anticipated.

The nearest residential property would be located between 20 and 175 feet from areas of the site that would undergo major construction activities. Considering these distances and the noise attenuation resulting from the existing property line noise barrier, construction noise levels would be anticipated to range from 86 to 90 dBA L_{eq} at the closest residential property (20 feet) during busy construction periods and would drop off at a rate of about 6 dBA per doubling of distance between the noise source and the receptor. Construction noise levels would range from 61 to 71 dBA L_{eq} at 175 feet opposite the property line noise barrier.

Standard best management practices would be implemented to limit construction hours to daytime periods only, reduce construction noise levels emanating from the site, and minimize disruption and annoyance at adjacent noise sensitive uses:

- Limit construction to between the hours of 8:00 am to 5:00 pm.
- Limit work to non-motorized equipment on Sundays and holidays.
- Locate construction staging areas as far as practical from nearby sensitive receptors.
- Locate stationary noise-generating equipment, such as air compressors or portable power generators, as far as practical from nearby sensitive receptors.
- Equip all internal combustion engine-driven equipment with intake and exhaust mufflers that are in good condition and appropriate for the equipment. Air compressors and pneumatic equipment should be equipped with mufflers, and impact tools should be equipped with shrouds or shields.
- Prohibit all unnecessary idling of internal combustion engines.

¹ One building season is typically defined as an approximately 8-month period between the cessation of the rainy season in the Spring and the start of a subsequent rainy season the next Fall.

Impact 4: Construction Vibration

The construction of the project may generate perceptible vibration at the adjacent residential land uses when heavy equipment is used near the perimeter of the project site. Vibration-producing activities would occur when heavy equipment is used to during site preparation work, grading and excavation, trenching, and paving. Foundation construction techniques involving impact or vibratory pile driving, which can cause excessive vibration, are not anticipated as part of the project.

There are no applicable Federal, state, or local quantitatively defined regulations relating to vibration resulting from construction activities. Based on the thresholds provided by Caltrans, a vibration limit of 0.3 in/sec PPV would minimize damage at buildings of normal conventional construction. A significant impact would occur if buildings adjacent to the proposed construction site were exposed to vibration levels in excess of 0.3 in/sec PPV. The closest portion of the structure of Residence 1 would be about 100 feet and the closest portion of Residence 2 would be about 40 feet from the closest proposed site improvements.

Project construction activities, such as drilling, the use of jackhammers, rock drills and other high-power or vibratory tools, and rolling stock equipment (tracked vehicles, compactors, etc.), may generate substantial vibration in the immediate vicinity of the activities, but the vibration levels would be expected to attenuate with distance from the source. Table 5 presents typical vibration levels that could be expected from construction equipment at distances of 40 feet.

A review of this table indicates that vibration levels at Residence 1 due to construction activities would reach 0.004 to 0.104 in/sec PPV with work near the property line. Considering these results, vibration levels may at times be perceptible to occupants within Residence 1, however, project construction activity would not have the potentially result in any cosmetic damage to the nearest residential building. By use of administrative controls, such as notifying neighbors of scheduled construction activities and scheduling construction activities with the highest potential to produce perceptible vibration during hours with the least potential to affect the nearby residence, perceptible vibration can be kept to a minimum.

TABLE 5: Vibration Source Levels for Construction Equipment

Equipment	PPV at 40 ft. (in/sec)
Vibratory Roller	0.104
Large bulldozer	0.044
Loaded trucks	0.038
Caisson drilling	0.044
Small bulldozer	0.004

Source: Transit Noise and Vibration Impact Assessment Manual, Federal Transit Administration, Office of Planning and Environment, U.S. Department of Transportation, September 2018, as modified by Illingworth & Rodkin, Inc., May 2019.

Impact 5: Cumulative Noise Environment

There are no other known noise-generating projects proposed in the site vicinity. Operational noise levels from other potential projects would not add to noise levels produced by operations at the project site.

MITIGATION MEASURES

None Needed with the current property line noise barrier fence in place.

CEQA INITIAL STUDY CHECKLIST QUESTIONS

The California Environmental Quality Act (CEQA) includes qualitative guidelines for determining the significance of environmental noise impacts. The CEQA Initial Study checklist questions are listed below:

- (a) Generation of a substantial temporary or permanent increase in ambient noise levels in the vicinity of the project in excess of standards established in the local general plan or noise ordinance, or applicable standards of other agencies;

*The primary noise sources associated with the project are parking lot and on-site vehicle circulation. The currently installed six-foot noise barrier on the property lines shared with adjacent uses will reduce noise levels to a degree which would comply with the Sonoma County limits. **Less-than-Significant Impact with Mitigation.***

*Construction would be conducted within allowable hours and would occur over a period of less than one-year. Pile driving is not anticipated as a method of construction. With implementation of standard best management practices this would be a **Less-than-Significant Impact.***

- (b) Generation of excessive groundborne vibration or groundborne noise levels;

*Construction would not result in groundborne vibration levels which the 0.3 in/sec PPV vibration limit recommended by the California Department of Transportation at any adjacent residential structures. This is a **Less-than-Significant Impact.***

- (c) For a project located within the vicinity of a private airstrip or an airport land use plan or where such a plan has not been adopted within two miles of a public airport or public use airport, if the project would expose people residing or working in the project area to excessive noise levels.

*The project is not located within 2 miles of the private airstrip or an airport. This is a **Less-than-Significant Impact.***

SUMMARY/CONCLUSIONS

Based on the above findings, noise associated with project operations would be reduced to levels below the Sonoma County noise standards residential properties in the site vicinity with the currently installed six-foot noise barrier on the property lines shared with adjacent uses. Temporary construction noise would be reduced by the implementation of standard best management practices.

Appendix A: Fundamentals of Noise and Vibration

Fundamentals of Environmental Noise

Noise may be defined as unwanted sound. Noise is usually objectionable because it is disturbing or annoying. The objectionable nature of sound could be caused by its *pitch* or its *loudness*. *Pitch* is the height or depth of a tone or sound, depending on the relative rapidity (*frequency*) of the vibrations by which it is produced. Higher pitched signals sound louder to humans than sounds with a lower pitch. *Loudness* is intensity of sound waves combined with the reception characteristics of the ear. Intensity may be compared with the height of an ocean wave in that it is a measure of the amplitude of the sound wave.

In addition to the concepts of pitch and loudness, there are several noise measurement scales which are used to describe noise in a particular location. A *decibel (dB)* is a unit of measurement which indicates the relative amplitude of a sound. The zero on the decibel scale is based on the lowest sound level that the healthy, unimpaired human ear can detect. Sound levels in decibels are calculated on a logarithmic basis. An increase of 10 decibels represents a ten-fold increase in acoustic energy, while 20 decibels is 100 times more intense, 30 decibels is 1,000 times more intense, etc. There is a relationship between the subjective noisiness or loudness of a sound and its intensity. Each 10 decibel increase in sound level is perceived as approximately a doubling of loudness over a fairly wide range of intensities. Technical terms are defined in Table A1.

There are several methods of characterizing sound. The most common in California is the *A-weighted sound level (dBA)*. This scale gives greater weight to the frequencies of sound to which the human ear is most sensitive. Representative outdoor and indoor noise levels in units of dBA are shown in Table A2. Because sound levels can vary markedly over a short period of time, a method for describing either the average character of the sound or the statistical behavior of the variations must be utilized. Most commonly, environmental sounds are described in terms of an average level that has the same acoustical energy as the summation of all the time-varying events. This *energy-equivalent sound/noise descriptor* is called *L_{eq}*. The most common averaging period is hourly, but *L_{eq}* can describe any series of noise events of arbitrary duration.

The scientific instrument used to measure noise is the *sound level meter*. Sound level meters can accurately measure environmental noise levels to within about plus or minus 1 dBA. Various computer models are used to predict environmental noise levels from sources, such as roadways and airports. The accuracy of the predicted models depends upon the distance the receptor is from the noise source. Close to the noise source, the models are accurate to within about plus or minus 1 to 2 dBA.

Since the sensitivity to noise increases during the evening and at night -- because excessive noise interferes with the ability to sleep -- 24-hour descriptors have been developed that incorporate artificial noise penalties added to quiet-time noise events. The *Community Noise Equivalent Level (CNEL)* is a measure of the cumulative noise exposure in a community, with a 5 dB penalty added to evening (7:00 pm - 10:00 pm) and a 10 dB addition to nocturnal (10:00 pm - 7:00 am) noise levels. The *Day/Night Average Sound Level (L_{dn})* is essentially the same as CNEL, with the exception that the evening time period is dropped and all occurrences during this three-hour period are grouped into the daytime period.

Effects of Noise

Sleep and Speech Interference

The thresholds for speech interference indoors are about 45 dBA if the noise is steady and above 55 dBA if the noise is fluctuating. Outdoors the thresholds are about 15 dBA higher. Steady noises of sufficient intensity (above 35 dBA) and fluctuating noise levels above about 45 dBA have been shown to affect sleep. Interior residential standards for multi-family dwellings are set by the State of California at 45 dBA L_{dn} . Typically, the highest steady traffic noise level during the daytime is about equal to the L_{dn} and nighttime levels are 10 dBA lower. The standard is designed for sleep and speech protection and most jurisdictions apply the same criterion for all residential uses. Typical structural attenuation is 12 to 17 dBA with open windows. With closed windows in good condition, the noise attenuation factor is around 20 dBA for an older structure and 25 dBA for a newer dwelling. Sleep and speech interference is therefore possible when exterior noise levels are about 57 to 62 dBA L_{dn} with open windows and 65 to 70 dBA L_{dn} with standard construction if the windows are closed.

Annoyance

Attitude surveys are used for measuring the annoyance felt in a community for noises intruding into homes or affecting outdoor activity areas. In these surveys, it was determined that the causes for annoyance include interference with speech, radio and television, house vibrations, and interference with sleep and rest. The L_{dn} as a measure of noise has been found to provide a valid correlation of noise level and the percentage of people annoyed. People have been asked to judge the annoyance caused by aircraft noise and ground transportation noise. There continues to be disagreement about the relative annoyance of these different sources. When measuring the percentage of the population highly annoyed, the threshold for ground vehicle noise is about 50 dBA L_{dn} . At a L_{dn} of about 60 dBA, approximately 12 percent of the population is highly annoyed. When the L_{dn} increases to 70 dBA, the percentage of the population highly annoyed increases to about 25 to 30 percent of the population. There is, therefore, an increase of about 2 percent per dBA between a L_{dn} of 60 to 70 dBA. Between a L_{dn} of 70 to 80 dBA, each decibel increase, increases by about 3 percent, the percentage of the population highly annoyed. People appear to respond more adversely to aircraft noise. When the L_{dn} is 60 dBA, approximately 30 to 35 percent of the population is believed to be highly annoyed.

TABLE A1 Definition of Acoustical Terms Used in this Report

Term	Definition
Decibel, dB	A unit describing, the amplitude of sound, equal to 20 times the logarithm to the base 10 of the ratio of the pressure of the sound measured to the reference pressure. The reference pressure for air is 20 micro Pascals.
Sound Pressure Level	Sound pressure is the sound force per unit area, usually expressed in micro Pascals (or 20 micro Newtons per square meter), where 1 Pascal is the pressure resulting from a force of 1 Newton exerted over an area of 1 square meter. The sound pressure level is expressed in decibels as 20 times the logarithm to the base 10 of the ratio between the pressures exerted by the sound to a reference sound pressure (e. g., 20 micro Pascals). Sound pressure level is the quantity that is directly measured by a sound level meter.
Frequency, Hz	The number of complete pressure fluctuations per second above and below atmospheric pressure. Normal human hearing is between 20 Hz and 20,000 Hz. Infrasonic sound are below 20 Hz and Ultrasonic sounds are above 20,000 Hz.
A-Weighted Sound Level, dBA	The sound pressure level in decibels as measured on a sound level meter using the A-weighting filter network. The A-weighting filter de-emphasizes the very low and very high frequency components of the sound in a manner similar to the frequency response of the human ear and correlates well with subjective reactions to noise.
Equivalent Noise Level, L_{eq}	The average A-weighted noise level during the measurement period.
L_{max} , L_{min}	The maximum and minimum A-weighted noise level during the measurement period.
L_{01} , L_{10} , L_{50} , L_{90}	The A-weighted noise levels that are exceeded 1%, 10%, 50%, and 90% of the time during the measurement period.
Day/Night Noise Level, L_{dn} or DNL	The average A-weighted noise level during a 24-hour day, obtained after addition of 10 decibels to levels measured in the night between 10:00 pm and 7:00 am.
Community Noise Equivalent Level, CNEL	The average A-weighted noise level during a 24-hour day, obtained after addition of 5 decibels in the evening from 7:00 pm to 10:00 pm and after addition of 10 decibels to sound levels measured in the night between 10:00 pm and 7:00 am.
Ambient Noise Level	The composite of noise from all sources near and far. The normal or existing level of environmental noise at a given location.
Intrusive	That noise which intrudes over and above the existing ambient noise at a given location. The relative intrusiveness of a sound depends upon its amplitude, duration, frequency, and time of occurrence and tonal or informational content as well as the prevailing ambient noise level.

Source: Handbook of Acoustical Measurements and Noise Control, Harris, 1998.

TABLE A2 Typical Noise Levels in the Environment

Common Outdoor Activities	Noise Level (dBA)	Common Indoor Activities
	110 dBA	Rock band
Jet fly-over at 1,000 feet		
	100 dBA	
Gas lawn mower at 3 feet		
	90 dBA	
Diesel truck at 50 feet at 50 mph		Food blender at 3 feet
	80 dBA	Garbage disposal at 3 feet
Noisy urban area, daytime		
Gas lawn mower, 100 feet	70 dBA	Vacuum cleaner at 10 feet
Commercial area		Normal speech at 3 feet
Heavy traffic at 300 feet	60 dBA	
		Large business office
Quiet urban daytime	50 dBA	Dishwasher in next room
Quiet urban nighttime	40 dBA	Theater, large conference room
Quiet suburban nighttime		
	30 dBA	Library
Quiet rural nighttime		Bedroom at night, concert hall (background)
	20 dBA	
		Broadcast/recording studio
	10 dBA	
	0 dBA	

Source: Technical Noise Supplement (TeNS), California Department of Transportation, September 2013.

Fundamentals of Groundborne Vibration

Ground vibration consists of rapidly fluctuating motions or waves with an average motion of zero. Several different methods are typically used to quantify vibration amplitude. One method is the Peak Particle Velocity (PPV). The PPV is defined as the maximum instantaneous positive or negative peak of the vibration wave. In this report, a PPV descriptor with units of mm/sec or in/sec is used to evaluate construction generated vibration for building damage and human complaints. Table A3 displays the reactions of people and the effects on buildings that continuous vibration levels produce. The guidelines in Table A3 represent syntheses of vibration criteria for human response and potential damage to buildings resulting from construction vibration.

Construction activities can cause vibration that varies in intensity depending on several factors. The use of pile driving and vibratory compaction equipment typically generates the highest construction related groundborne vibration levels. Because of the impulsive nature of such activities, the use of the PPV descriptor has been routinely used to measure and assess groundborne vibration and almost exclusively to assess the potential of vibration to induce structural damage and the degree of annoyance for humans.

The two primary concerns with construction-induced vibration, the potential to damage a structure and the potential to interfere with the enjoyment of life, are evaluated against different vibration limits. Human perception to vibration varies with the individual and is a function of physical setting and the type of vibration. Persons exposed to elevated ambient vibration levels, such as people in an urban environment, may tolerate a higher vibration level.

Structural damage can be classified as cosmetic only, such as paint flaking or minimal extension of cracks in building surfaces; minor, including limited surface cracking; or major, that may threaten the structural integrity of the building. Safe vibration limits that can be applied to assess the potential for damaging a structure vary by researcher. The damage criteria presented in Table A3 include several categories for ancient, fragile, and historic structures, the types of structures most at risk to damage. Most buildings are included within the categories ranging from “Historic and some old buildings” to “Modern industrial/commercial buildings”. Construction-induced vibration that can be detrimental to the building is very rare and has only been observed in instances where the structure is at a high state of disrepair and the construction activity occurs immediately adjacent to the structure.

The annoyance levels shown in Table A3 should be interpreted with care since vibration may be found to be annoying at lower levels than those shown, depending on the level of activity or the sensitivity of the individual. To sensitive individuals, vibrations approaching the threshold of perception can be annoying. Low-level vibrations frequently cause irritating secondary vibration, such as a slight rattling of windows, doors, or stacked dishes. The rattling sound can give rise to exaggerated vibration complaints, even though there is very little risk of actual structural damage.

TABLE A3 Reaction of People and Damage to Buildings from Continuous or Frequent Intermittent Vibration Levels

Velocity Level, PPV (in/sec)	Human Reaction	Effect on Buildings
0.01	Barely perceptible	No effect
0.04	Distinctly perceptible	Vibration unlikely to cause damage of any type to any structure
0.08	Distinctly perceptible to strongly perceptible	Recommended upper level of the vibration to which ruins and ancient monuments should be subjected
0.1	Strongly perceptible	Threshold at which there is a risk of damage to fragile buildings with no risk of damage to most buildings
0.25	Strongly perceptible to severe	Threshold at which there is a risk of damage to historic and some old buildings.
0.3	Strongly perceptible to severe	Threshold at which there is a risk of damage to older residential structures
0.5	Severe - Vibrations considered unpleasant	Threshold at which there is a risk of damage to new residential and modern commercial/industrial structures

Source: Transportation and Construction Vibration Guidance Manual, California Department of Transportation, September 2013.

Appendix B: Figures and Noise Measurement Charts

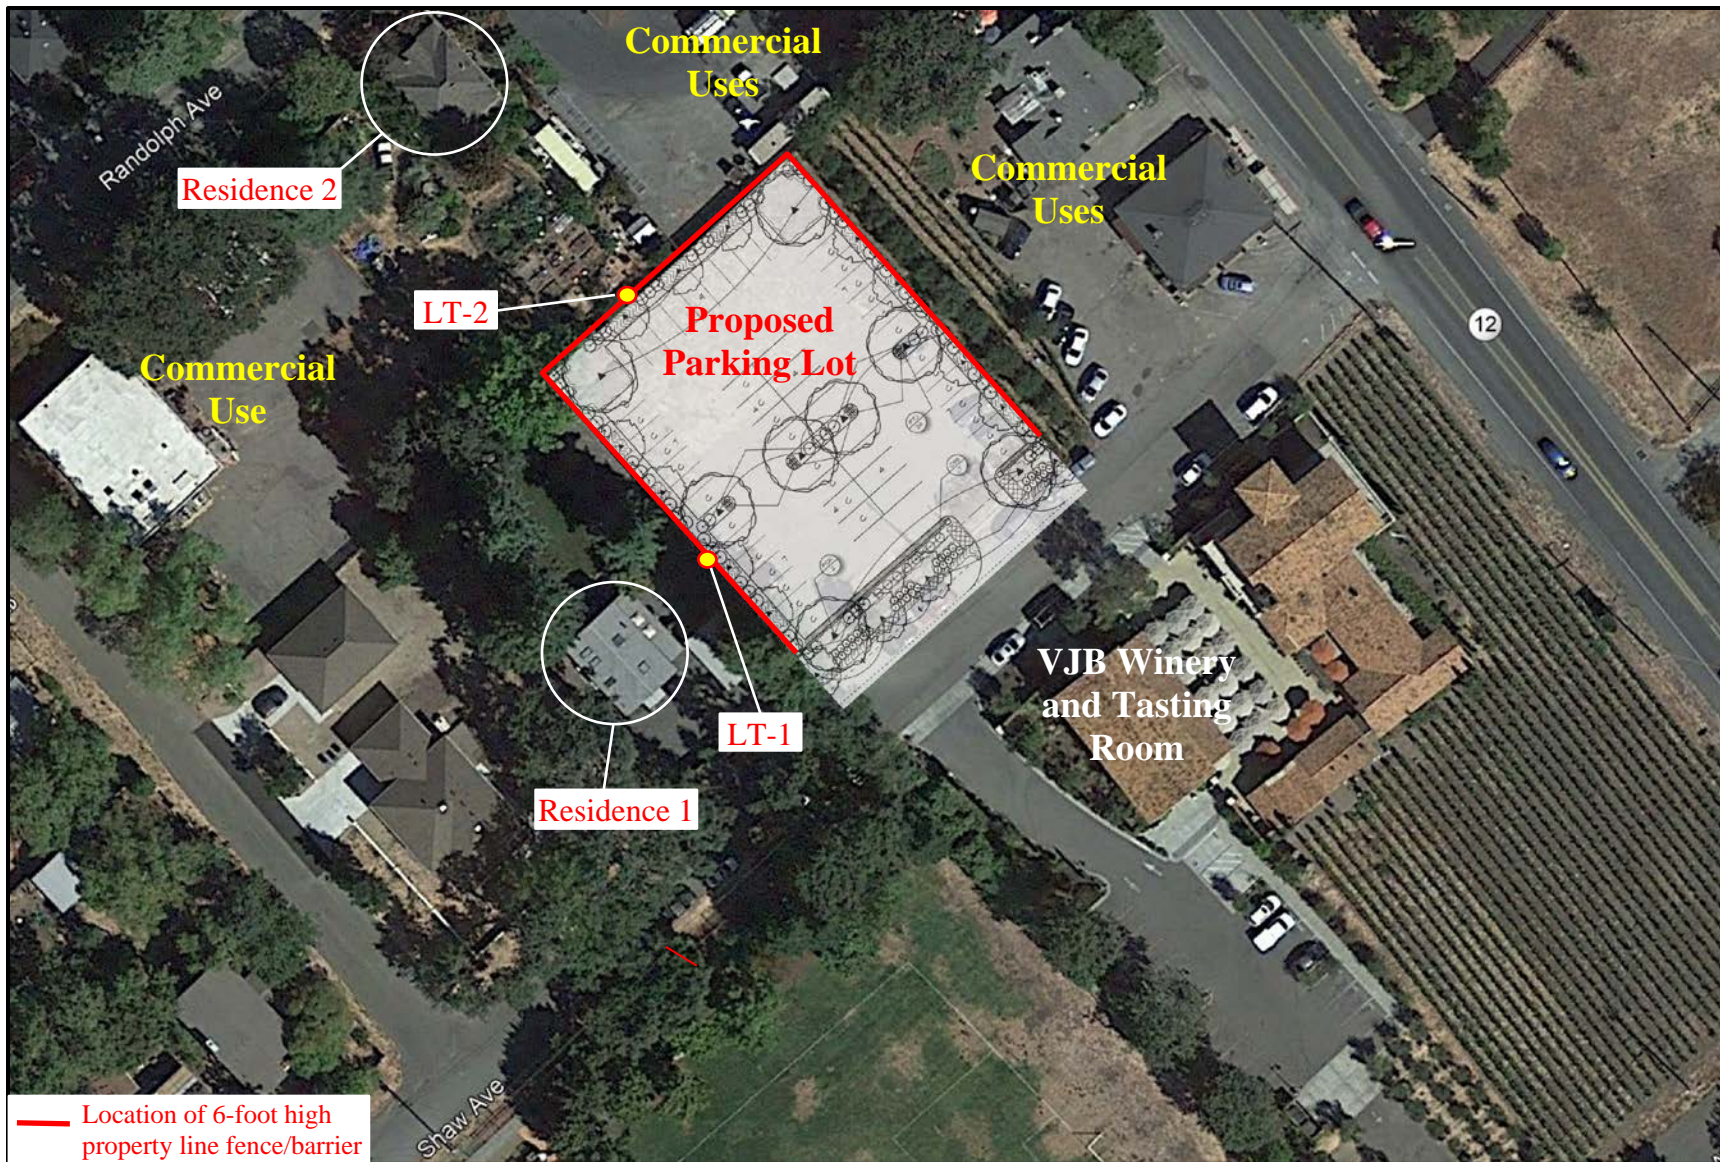


Figure 1: Site Plan Showing Noise Monitoring Locations, Nearby Land Uses, and Receptor Locations

Chart 1: Measured Noise Levels at LT-1

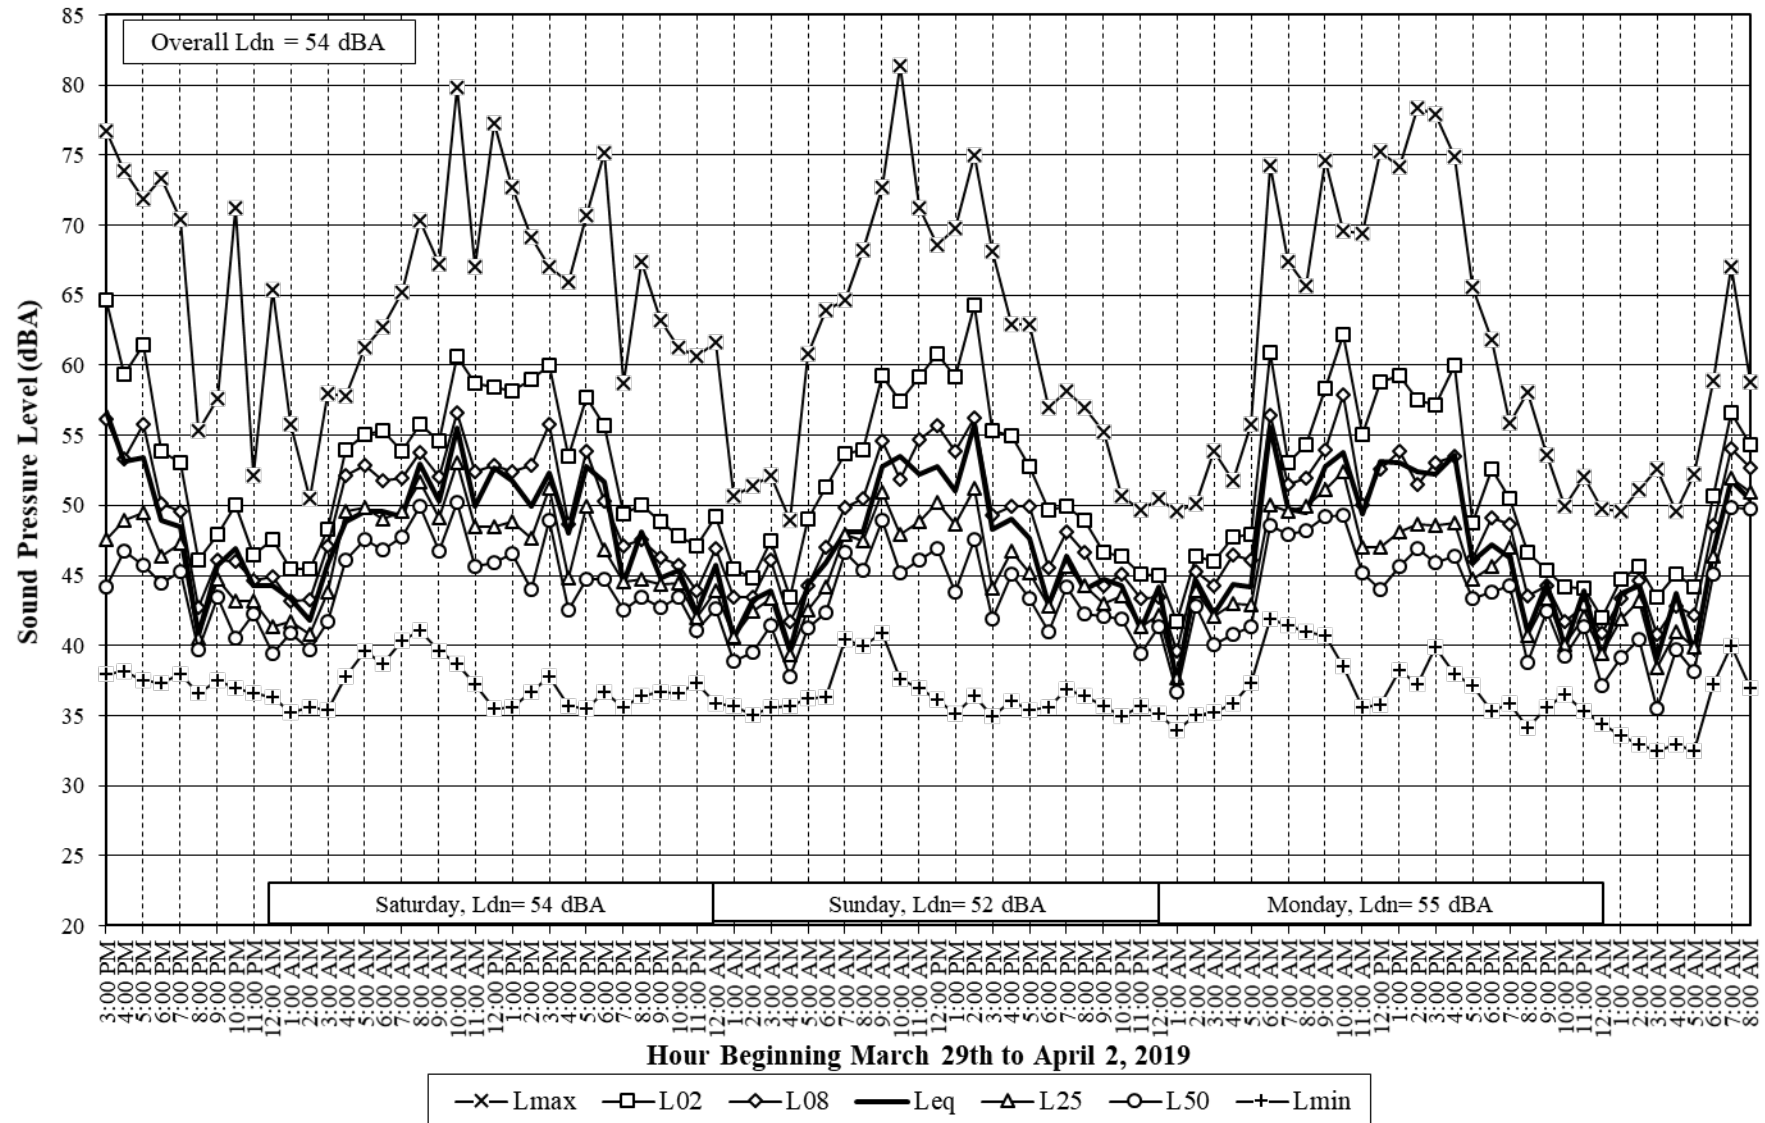


Chart 2: Measured Noise Levels at LT-2



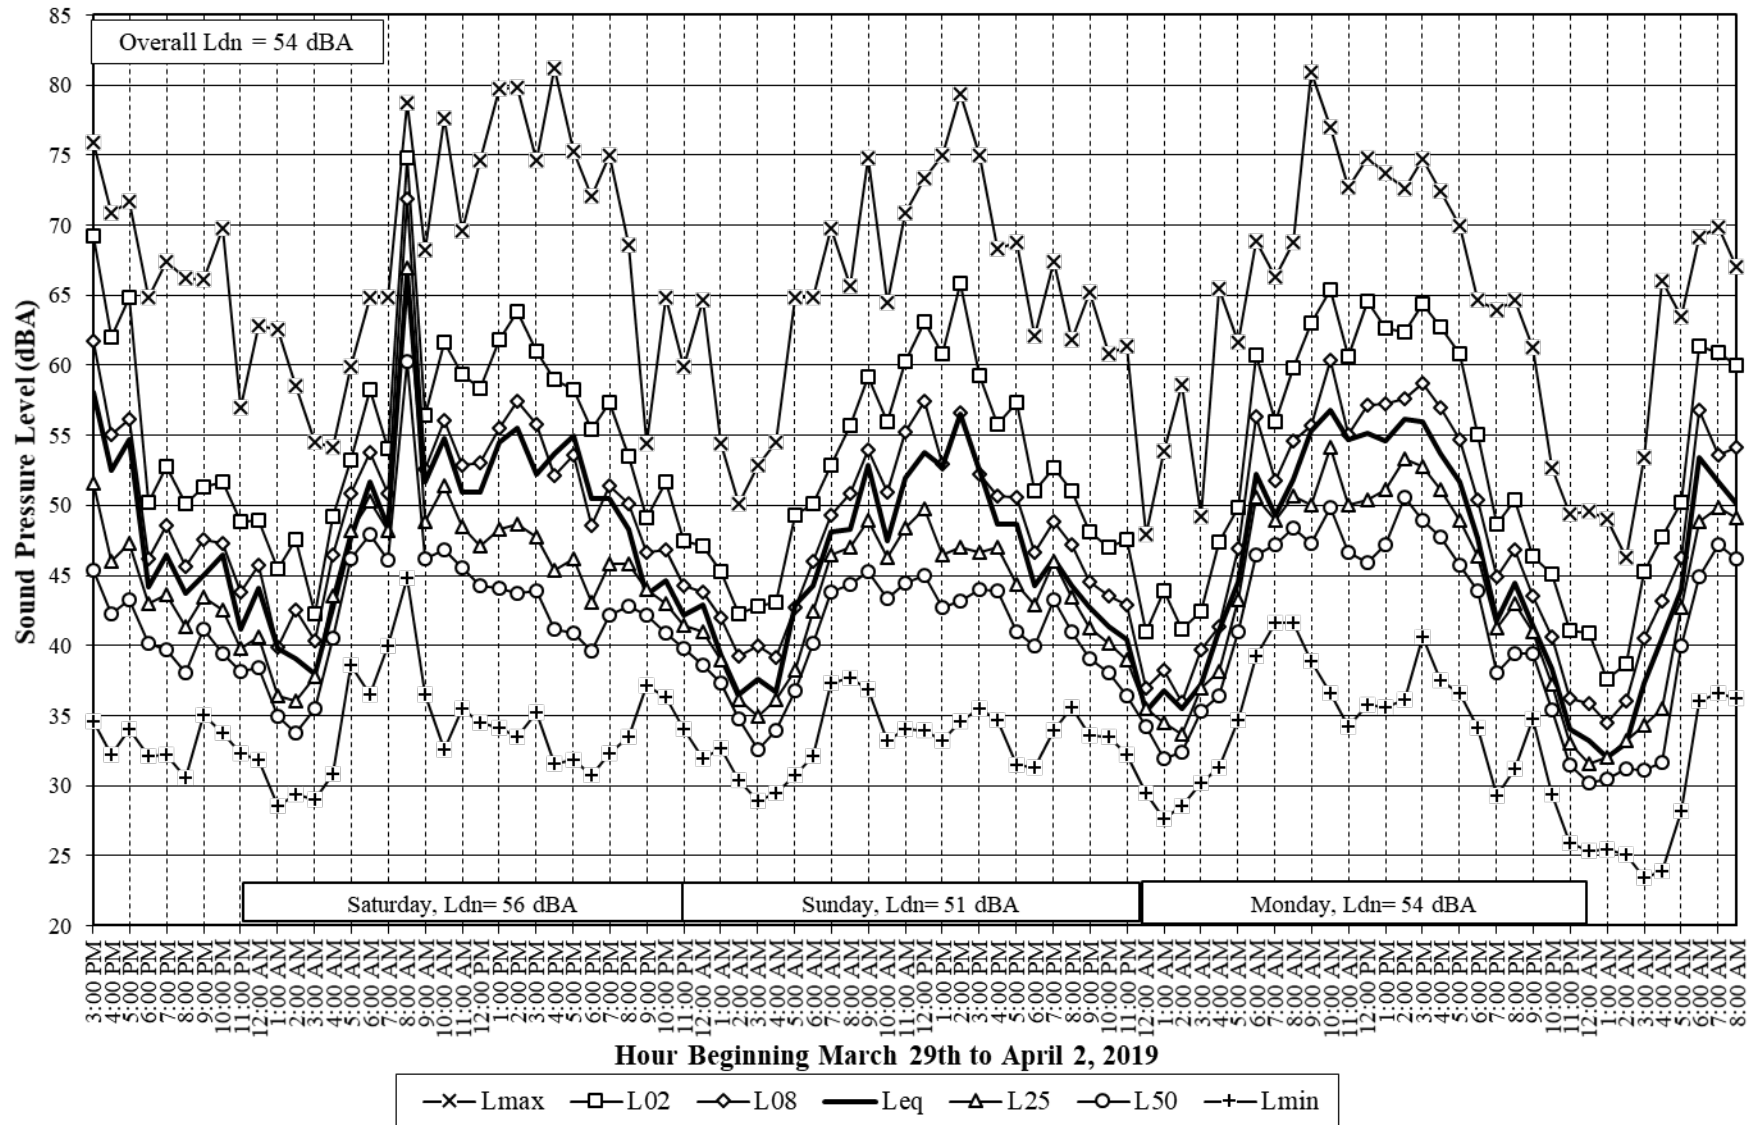


Table 11.1
Multiunit and Non-Residential Design Flow Rates

TYPE OF OCCUPANCY	GALLONS PER DAY
Airports	5 per passenger
Campgrounds:	
Campground with central comfort station	35 per person
Campground with flush toilet, no showers	25 per person
Day Camps (no meals)	15 per person
Luxury Camp, private bath	100 per person
Summer and seasonal	50 per person
Churches (sanctuary)	5 per seat
With kitchen wastes	7 per seat
Country Club	125 per person
Factories	35 per person per shift
Hospitals	250 per bed space
Kitchen waste only	25 per bed
Laundry waste only	40 per bed
Hotels/Motels with private bathroom (no kitchen waste)	60 per two person room
Hotels/Motels without private bathroom (no kitchen waste)	50 per two person room
Hotel/Motel with private bath and kitchen	75 gallons per person
Institutions other than hospitals	125 per bed space
Movie Theaters	5 per seat
Offices	20 per employee
Picnic parks with toilets and showers	10 per person
Picnic parks with toilet waste only	5 per person
Resort camps with limited plumbing	50 gallons per person
Restaurants:	
Kitchen waste (multi-use utensils)	5 per meal served
Kitchen waste (disposable utensils)	3 per meal served
And add the following for type of facility present:	
Conventional sit down	10 per person
Short Order	8 per person
Bar and Cocktail	3 per person
School (non-boarding)	20 per student
With gym and showers add	5 per student
With cafeteria using disposable utensils	3 per meal served
Self service laundries	50 gallons per wash
Service station	10 gallons per vehicle served
Retail stores	20 per employee
For public restrooms add	1 per 10 square feet
Swimming pools and bathhouses	10 per person
Tourist camps or mobile home parks with individual bath units	100 per person
Tourist camps or trailer parks with central bathhouse	75 per person
Work or construction camps (semi-permanent)	50 per person
Wine tasting facility (no meals served)	3 per person
Employee	15 per employee

NOTE:
EXISTING FEATURES SHOWN HEREON WERE OBTAINED FROM CALTRANS RECORD DRAWINGS, SONOMA COUNTY GIS DATA, INFORMATION PROVIDED BY OTHERS AND ARE APPROXIMATE. THIS IS A CONCEPTUAL EXHIBIT FOR PLANNING PURPOSES ONLY.

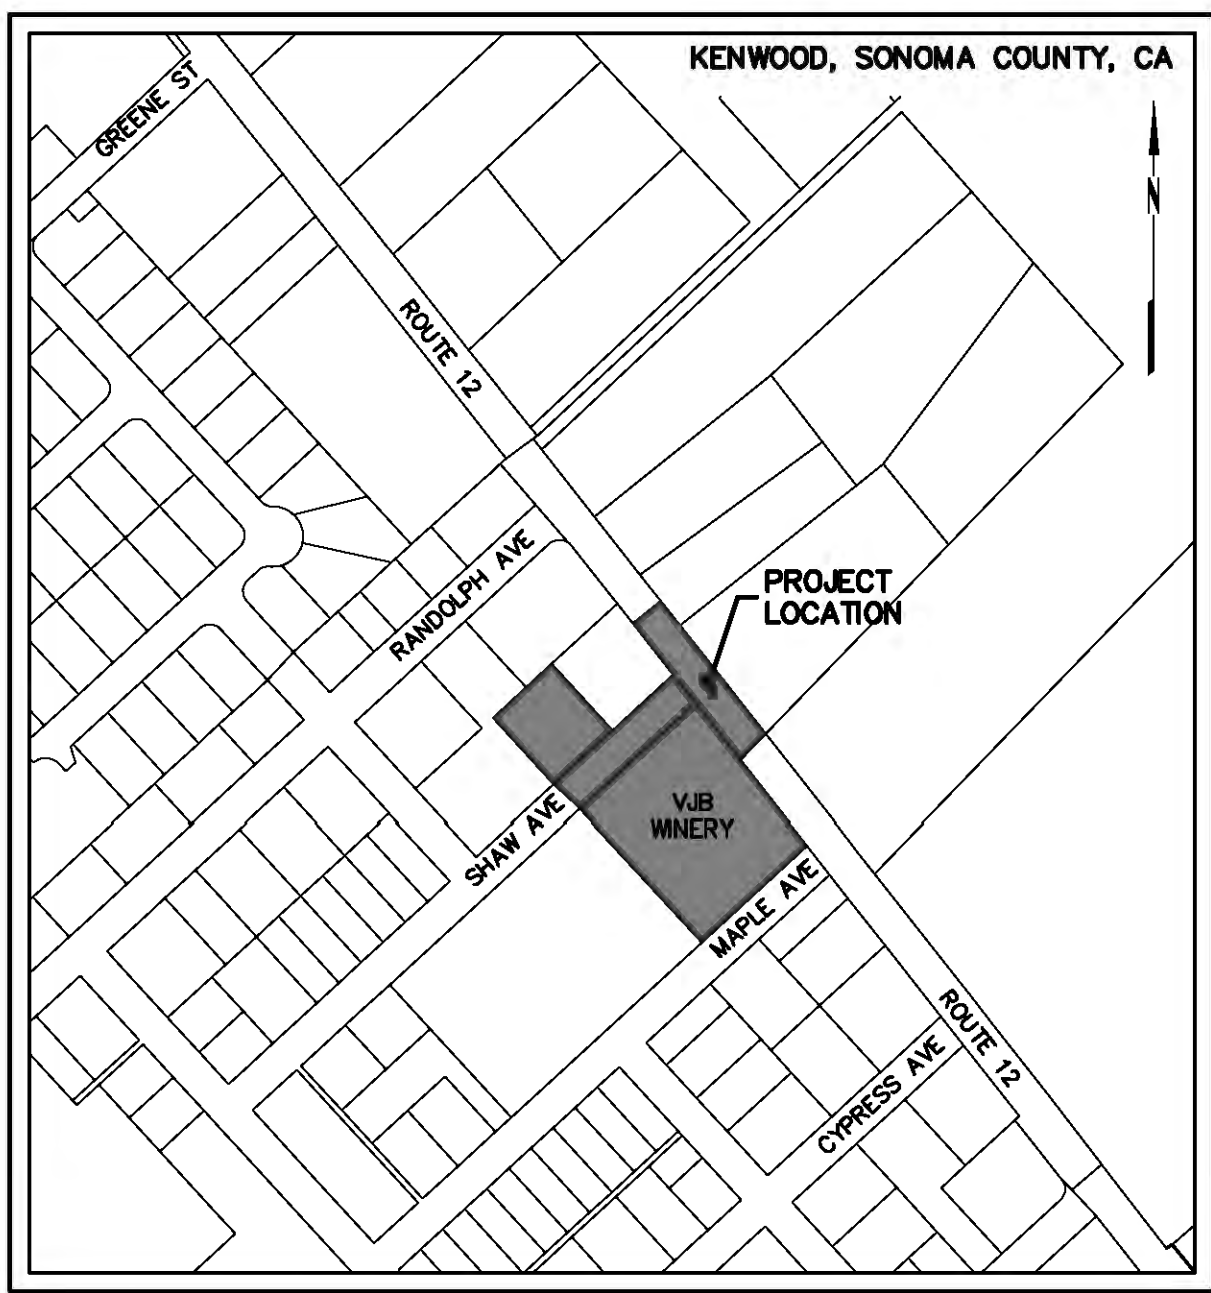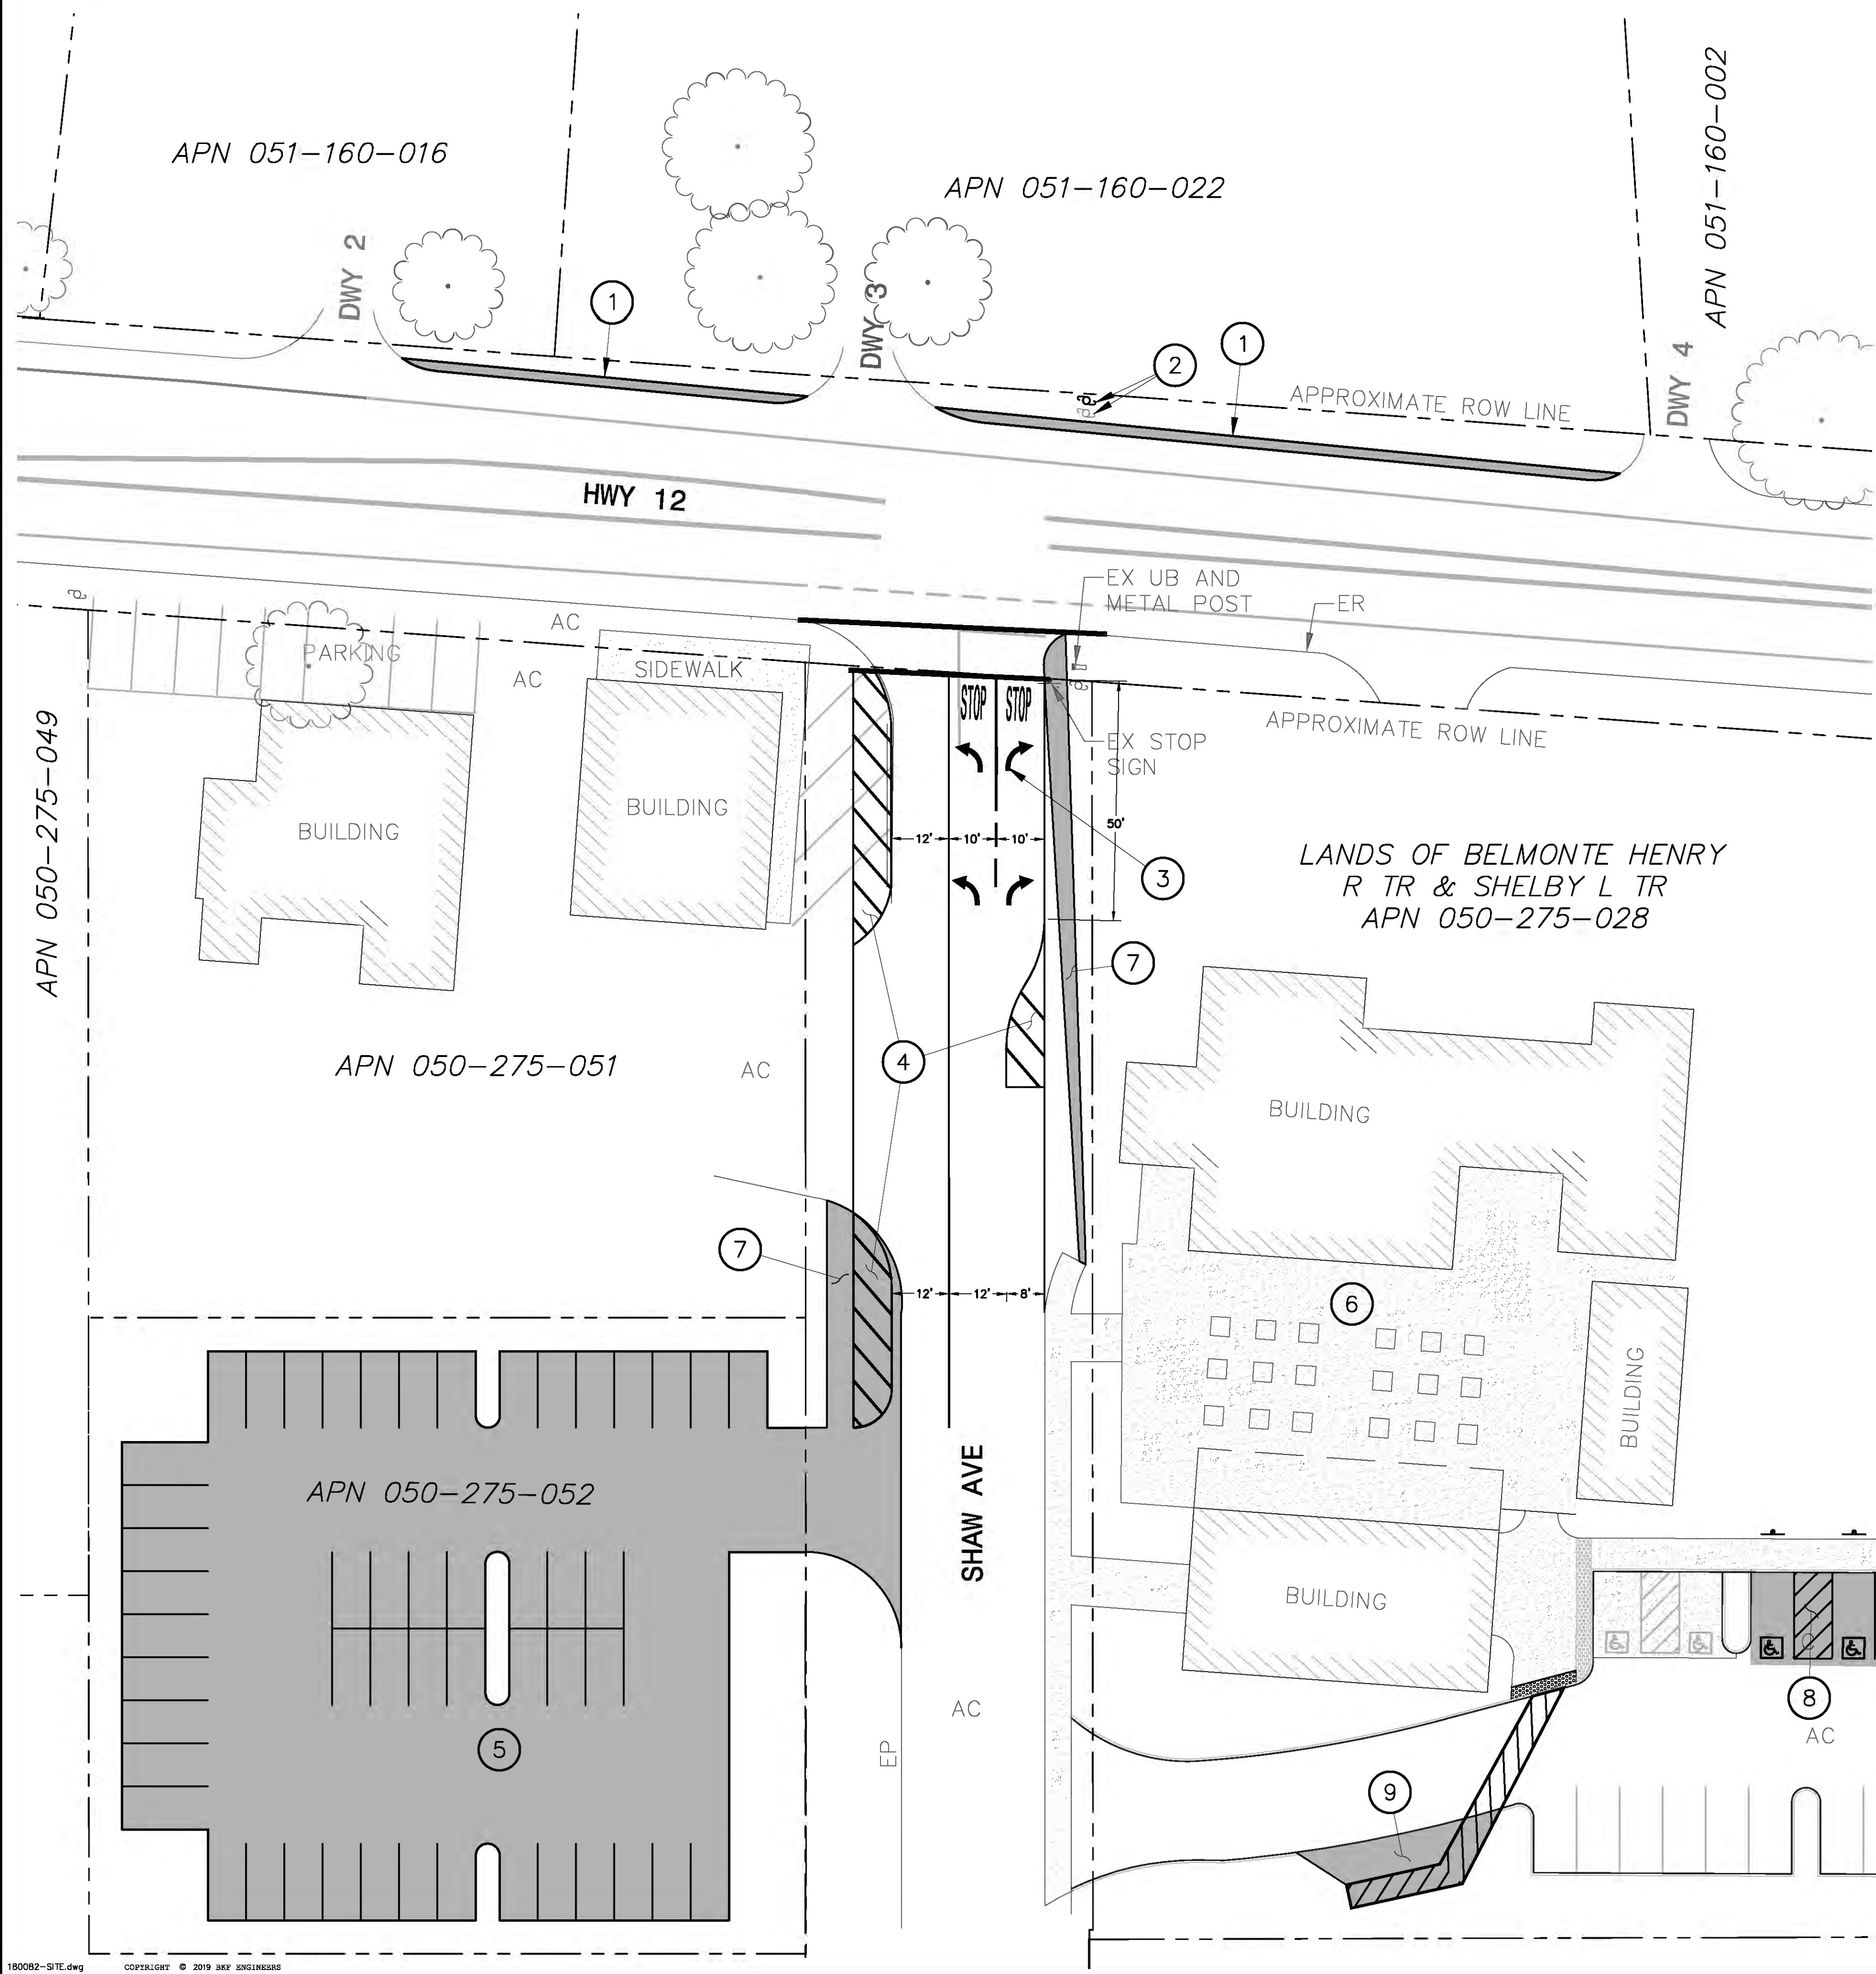

ABBREVIATIONS

AC	ASPHALT CONCRETE
APN	ASSESSOR'S PARCEL NUMBER
DWY	DRIVEWAY
EG	EXISTING GROUND
EP	EDGE OF PAVEMENT
ER	EDGE OF ROAD
FT	FOOT
HDM	CALTRANS HIGHWAY DESIGN MANUAL
HWY	HIGHWAY
EX	EXISTING
MIN	MINIMUM
MPH	MILE PER HOUR
NB	NORTHBOUND
PUE	PUBLIC UTILITY EASEMENT
ROW	RIGHT OF WAY
SB	SOUTHBOUND
TYP	TYPICAL
UB	UTILITY BOX

SYMBOLS & LEGEND

EXISTING	PROPOSED	
		UTILITY POLE
		CATCH BASIN
		TREE
		APPROXIMATE ASSESSOR'S PARCEL LINE
		OVERHEAD UTILITY LINE
		CONCRETE
		PAVEMENT

- KEYNOTED**
- ① WIDEN SHOULDER APPROXIMATELY 3- FEET TO PROVIDE 8- FOOT WIDE SHOULDERS IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE DRAFT TRAFFIC IMPACT STUDY REPORT PREPARED BY W-TRANS DATED FEBRUARY 1, 2018.
 - ② RELOCATE THE UTILITY POLE TO BE 4- FEET CLEAR FROM THE EDGE OF THE ROAD.
 - ③ NEW PAVEMENT STRIPING TO DELINEATE A DEDICATED RIGHT TURN LANE FROM SHAW AVE TO HIGHWAY 12.
 - ④ NEW PAVEMENT STRIPING TO RESTRICT PARKING ON SHAW AVE.
 - ⑤ NEW PARKING LOT. SEE DRAWINGS BY MACNAIR LANDSCAPE ARCHITECTURE FOR MORE DETAILS.
 - ⑥ REFER TO SHEET 1 OF 1 OF THE SEATING PLAN AND DINING AREA DRAWING RPEARED BY DIMENSIONS 4 ENGINEERING DATED SEPTEMBER 2019 FOR MORE INFORMATION REGARDING THE VJB WINERY SITE.
 - ⑦ NEW ASPHALT PAVING TO ACCOMMODATE PEDESTRIANS.
 - ⑧ NEW ACCESSIBLE PARKING SPACES.
 - ⑨ NEW PASSENGER DROP-OFF AND LOADING PULL UP SPACE AND ACCESS AISLE.

**PRIVATE PARKING AREAS,
SHAW AVENUE TURN LANE &
HWY 12 SHOULDER WIDENING
CONCEPTUAL EXHIBIT**

VJB WINERY
SONO12623 / SON-12-26.68-26.75
66 SHAW AVE, KENWOOD, CA (APN 050-275-051)
SEPT 2019





June 15, 2010

FROM: Darla Pimlott, Supervising REHS, Well & Septic Section
TO: Blake Hillegas, Supervising Planner, Project Review
SUBJECT: VJB 60 Shaw Road, APN 050-275-028; Septic Capacity

I have reviewed the letter submitted to Permit Sonoma, by Steve Brown, RCE dated February 5, 2020 and sent to Mr. Belmonte. The letter is an overview and an analysis completed by Steve Brown, RCE for Mr. Belmonte, of the information provided by Dimensions 4 regarding the septic system flows for the new septic system design proposal and use permit. After a meeting with Steve Brown, RCE, I was asked to review this letter along with additional documentation provided by Steve Brown, RCE from similar facilities. The businesses used as comparisons are Sonoma's Best and Cornerstone.

The On-site Waste Water Treatment System (OWTS) Manual, section 4.5, C., provides direction for sizing wastewater flow for multi-unit residences and non-residential projects. The first two methods in this section, being the most direct and commonly used methods to sizing septic systems are done using the listed flows and types of use in table 11.1 of the OWTS or appropriate literature references such as the US/EPA. The third method which Steve Brown, RCE used, is a review of documentation of data from comparable facilities along with data obtained by Dimensions 4. The Director of Permit Sonoma may consider adjustments to the listed table in 11.1 or the US/EPA along with the review of the technical information afforded in the comparability methodology.

Under the methodology allowed in section 4.5, C. Under the comparison information method and the data about VJBs operation and recorded flows, the following operational types, number of visitors, employees and waste water flows equaling a maximum of 1500 gallons per day in septic system flows are acceptable.

1. Total services provided by VJB, noted in the letters from Dimension 4, Steve Brown RCE, and subsequent emails and meetings are a wine tasting bar, gelato shop, outdoor barbeque, deli kitchen, outdoor pizza oven, Kenwood Pasta Company (packaged dry pasta), a chocolatier and a Tommy Bahama shop.
2. Steve Brown, RCE analyzed D4's report by applying a peak factor or multiplier of 2.3 to the peak average flows observed from March 15 to October 31, 2019. Steve Brown, RCE noted when discussing commercial projects with his clients he uses a peak factor method. Further research into the application and use of peak factors I found that this method of calculation is also used to capture potential uncounted for uses or flows outside of daily use for sewer flows. Steve Brown, RCE then using Dimensions 4 estimated peak flow of 1500 gallons per day, separated out flows for employees and visitor use and broke the flows down further to estimated uses from the visitors for wine tasting, food and employees that was comparable and in line with Dimensions 4's estimates of the visitor use and employee use.
3. The total maximum number of customers per day is 313. Wine tasting customers (153) are assigned flows of 3 gallons per person and the customers partaking in food services (160) is 5 gallons per person. Total flows for both wine tasting and food services is 1259 gallons per day.
4. Total maximum number of employees is 16 using a flow of 15 gallons per day equals 240 gallons per day of waste flow.
5. The total flows from above is 1499 gallons per day, but the rounding up of the number to 1500 gallons per day per Dimensions 4 reports seems practical.
6. Ongoing monitoring of the system will be required through our Nonstandard Operational Program. We will be able to monitor the care and maintenance of the system along with septic flows from the business. The flows shall not exceed the capacity of the dispersal field size of 1500 gallons per day.
7. The submitted septic plan will need to be reviewed for completeness for construction purposes and submitted through our new electronic format.





July 20, 2020

Mr. Henry R. Belmonte
VJB Vineyards & Cellars
60 Shaw Avenue
Kenwood, CA 95452

Addendum to the *Updated Traffic Impact Study for the VJB Vineyard and Cellars*

Dear Mr. Belmonte;

As requested, this letter provides additional information relative to a left turn lane on Highway 12 at Shaw Avenue and analysis provided in the *Updated Traffic Impact Study for the VJB Vineyard and Cellars* (TIS) dated July 17, 2019.

Left-turn Lane

Previous analyses going back to 2005 have consistently indicated that the traffic volume warrant is met for a left-turn lane on Highway 12 at Shaw Avenue. However, as volume warrants are routinely met along high-volume corridors such as Highway 12 for turn lanes, signals, additional stop signs, and other modifications, the volume warrant is typically not the only one used to determine if there is a need for an improvement. Consideration should also be given to operational and safety concerns to establish whether there is an actual need for the improvement or not.

In the case of the intersection of Highway 12/Shaw Avenue, the operational analysis provided in the TIS indicates that drivers turning left onto Shaw Avenue from Highway 12 would encounter an average delay of about 10 seconds or less, which represents acceptable LOS A operation – even under projected 2040 traffic volumes. Given that this is well above the County's threshold of LOS D, there is no operational concern that has been identified or forecasted that would require installation of a separate left-turn pocket.

Similarly, a review of the collision history for this location indicates that since 2000 there have been a total of three crashes reported that include a westbound left-turning vehicle; the most recent of these was in 2012. Crash analyses are typically based on a five-year study period, so had the shorter five-year study period been used, no crashes of a type that could be addressed through installation of a left-turn pocket would be included in the analysis. Based on this review, it is clear that no safety problems have been identified that would require the installation of a left-turn pocket.

It is noted that there is an approximately 6-foot wide "painted median" on the westbound approach to Shaw Avenue that is used by some drivers while turning left into Shaw Avenue. While this is an illegal movement and is therefore neither suggested nor supported, this median does provide space that separates directions of travel and can be used in an emergency, thereby giving an increased measure of safety to this location that would not otherwise exist.

The need for a left-turn lane is based solely on traffic volumes and not on any actual operational deficiency or safety concern. As the intersection can operate adequately and accommodate the existing and projected number of vehicles, the addition of a separate left turn lane does not appear to be necessary at this time.

Thus, we continue to recommend that the installation of the improvement be deferred, though right-of-way along the project site's Highway 12 frontage should be dedicated if not already available to allow future installation of a center turn lane through Kenwood, as is planned by Caltrans.

We hope this information is of assistance in the review process. Thank you for giving us the opportunity to provide these services.

Sincerely,



Dalene J. Whitlock, PE, PTOE
Senior Principal



DJW/djw/SOX227.L1

ABBREVIATIONS

AC ASPHALT CONCRETE
 APN ASSESSOR'S PARCEL NUMBER
 DWY DRIVEWAY
 EG EXISTING GROUND
 EP EDGE OF PAVEMENT
 ER EDGE OF ROAD
 FT FOOT
 HDM CALTRANS HIGHWAY DESIGN MANUAL
 HWY HIGHWAY
 IB "I" BEAM
 IP IRON PIPE
 EX EXISTING
 MIN MINIMUM
 MPH MILE PER HOUR
 NB NORTHBOUND
 PUE PUBLIC UTILITY EASEMENT
 ROW RIGHT OF WAY
 SB SOUTHBOUND
 TYP TYPICAL
 UB UTILITY BOX

SYMBOLS & LEGEND

EXISTING	PROPOSED	
UTILITY POLE		UTILITY POLE
CATCH BASIN		CATCH BASIN
TREE		TREE
APPROXIMATE ASSESSOR'S PARCEL LINE		APPROXIMATE ASSESSOR'S PARCEL LINE
OVERHEAD UTILITY LINE		OVERHEAD UTILITY LINE
CONCRETE		CONCRETE
PAVEMENT		PAVEMENT
EXTENT OF REQUIRED ROW		EXTENT OF REQUIRED ROW

DESIGN INPUTS


HIGHWAY CATEGORY.....CONVENTIONAL HIGHWAY-URBAN ARTERIAL-TROUGHWAY
 POSTED SPEED ADVISORY.....45 MPH
 AVERAGE DAILY TRAFFIC.....16,900 VEHICLES PER DAY (TRAFFIC IMPACT STUDY
 DRAFT REPORT BY W-TRANS, FEBRUARY 1, 2018)
 STOPPING SIGHT DISTANCE.....400'
 CORNER SIGHT DISTANCE.....495'
 DESIGN VEHICLE.....STAA

PURPOSE STATEMENT:


BKF ENGINEERS WAS RETAINED TO EVALUATE THE FEASIBILITY OF PROVIDING A DEDICATED LEFT-TURN LANE FROM HIGHWAY 12 TO SHAW AVE. WE DETERMINED THAT THIS TURN LANE COULD NOT BE BUILT WITHIN THE EXISTING RIGHT OF WAY WHILE CONFORMING TO THE REQUIREMENTS OF THE CALTRANS HIGHWAY DESIGN MANUAL AND REFERENCED STANDARDS. THIS CONCEPTUAL EXHIBIT HAS BEEN PREPARED AT THE REQUEST OF SONOMA COUNTY TO SHOW A LEFT-TURN LANE AND THE EXTENT OF THE REQUIRED RIGHT OF WAY DEDICATION.

MAPPING NOTES:


EXISTING FEATURES SHOWN HEREON WERE OBTAINED FROM CALTRANS RECORD DRAWINGS SONOMA COUNTY GIS DATA AND A FIELD SURVEY CONDUCTED BY BKF ENGINEERS ON OCTOBER 22, 2019.

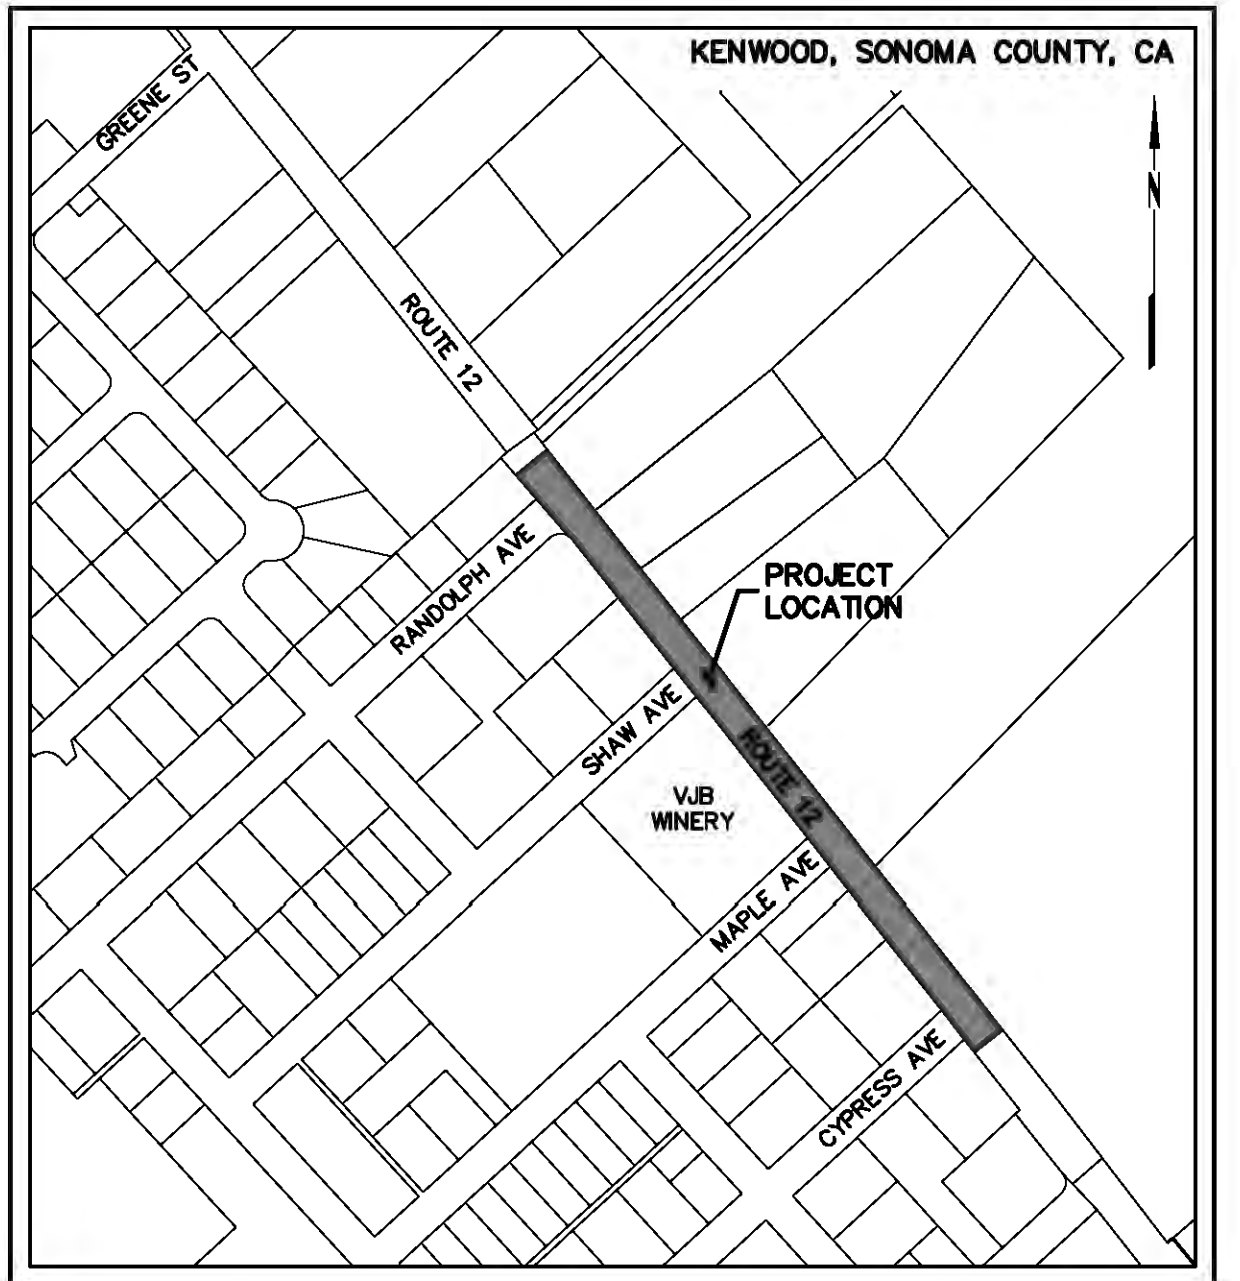

VICINITY MAP
 NOT TO SCALE

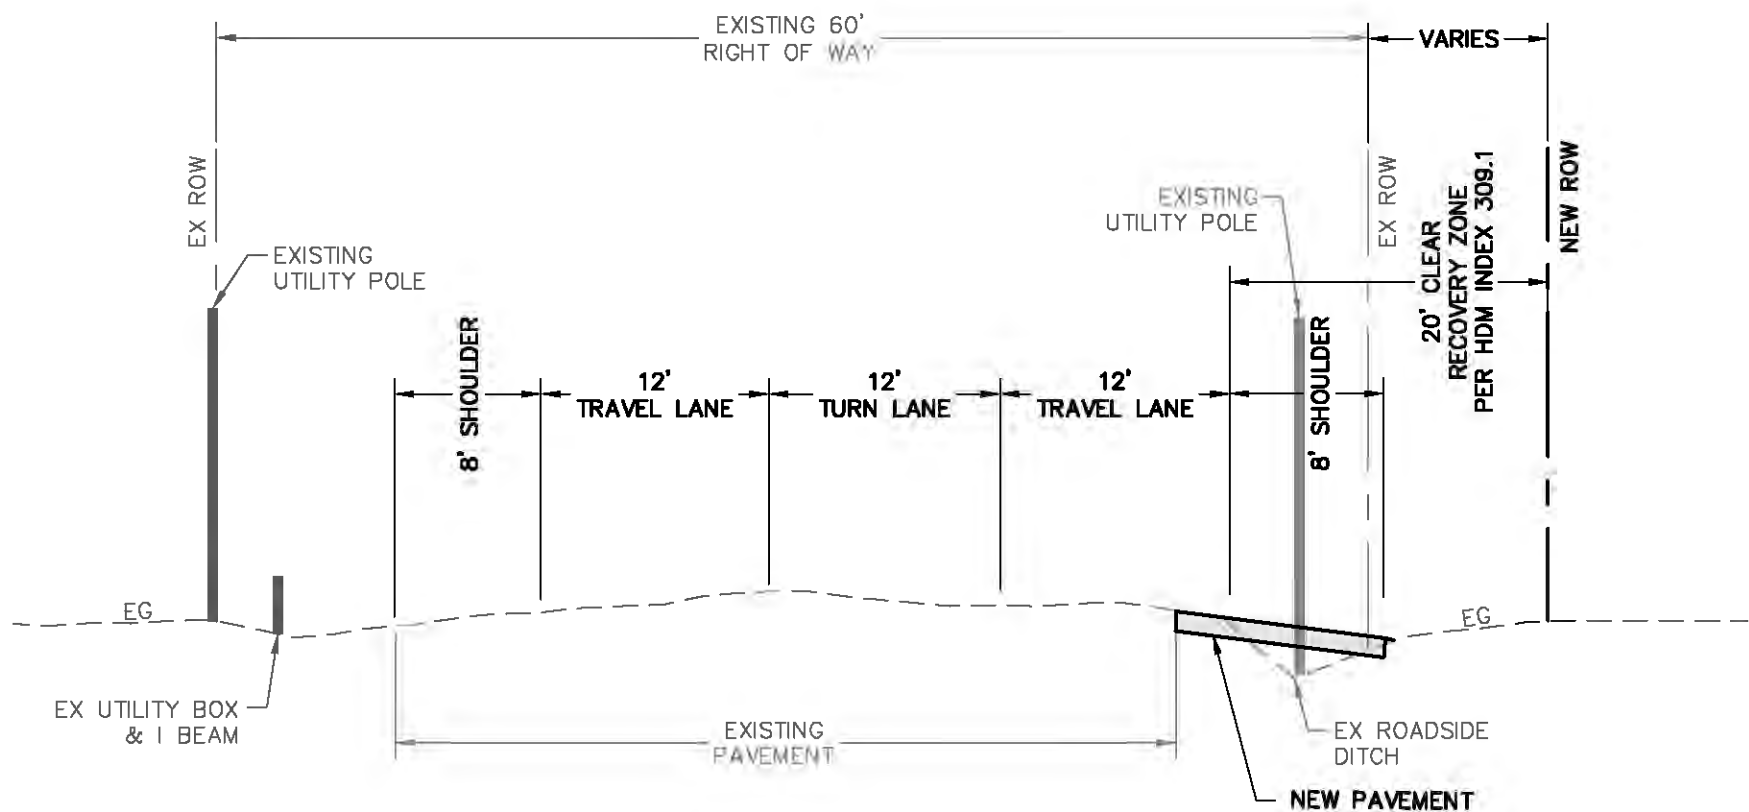


SECTION "A"
 NO SCALE

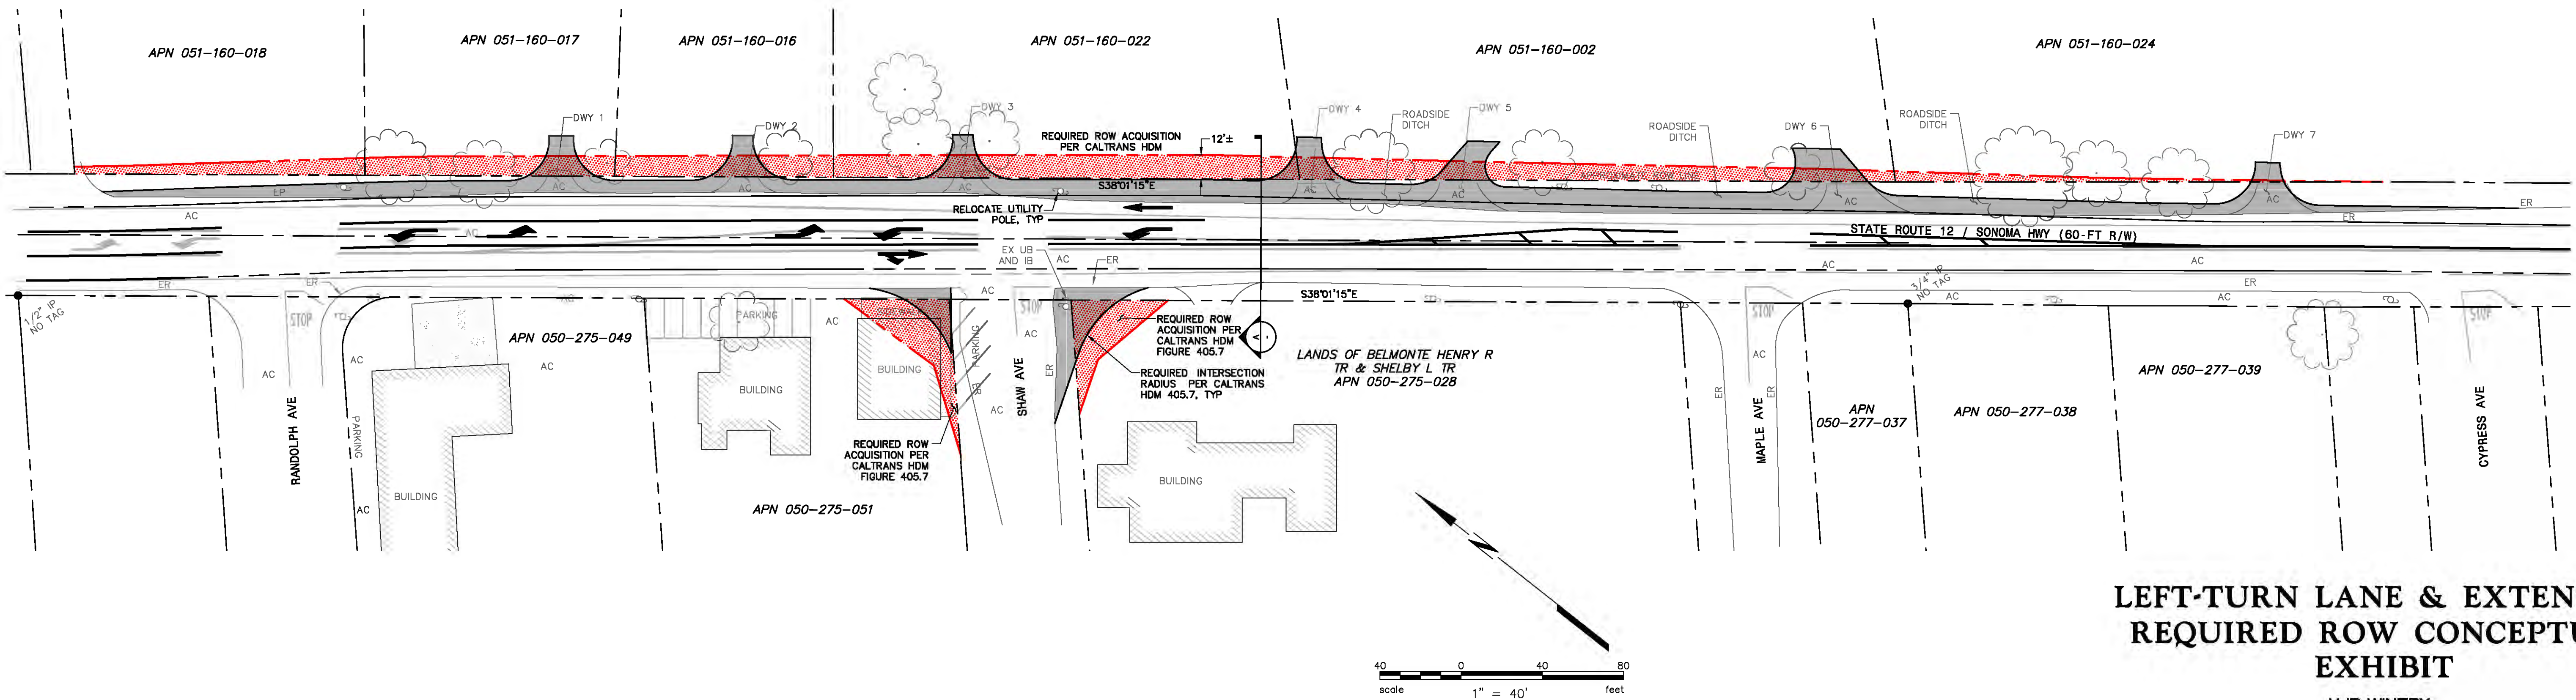

LEFT-TURN LANE & EXTENT OF REQUIRED ROW CONCEPTUAL EXHIBIT

VJB WINERY
 SONO12623 / SON-12-26.68-26.75
 66 SHAW AVE, KENWOOD, CA (APN 050-275-051)
 DECEMBER 2019

PREPARED BY

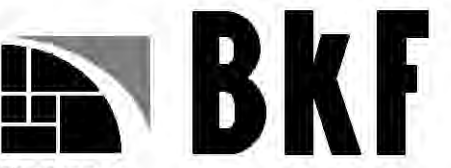

200 4TH ST, STE. 300 SANTA ROSA, CA 95401
 (707) 583-8500 FAX (707) 583-8539

PRELIMINARY
 NOT FOR CONSTRUCTION

DATE: 12/20/2019
 ERIC D. WADE C 81862

JOB NO. 20180082

SHEET 1 OF 2 SHEETS



Updated Traffic Impact Study for the VJB Vineyard and Cellars



Prepared for the County of Sonoma

Submitted by
W-Trans

July 17, 2019



**TRAFFIC ENGINEERING
TRANSPORTATION PLANNING**
Balancing Functionality and Livability since 1995
w-trans.com



This page intentionally left blank

Project Information

File Number: UPE05-0009

Address: 60 Shaw Avenue, Kenwood

APN: 050-275-028 and 050-275-052

Project Name: VJB Vineyard and Cellars

Applicant Name: Vittorio and Henry Belmonte

Property Owner Name: Vittorio and Henry Belmonte



This page intentionally left blank

Table of Contents

Executive Summary	1
Introduction.....	2
Transportation Setting.....	4
Capacity Analysis	7
Alternative Modes	15
Access and Circulation.....	17
Parking.....	19
Conclusions and Recommendations.....	20
Study Participants and References.....	21

Figures

1. Study Area, Lane Configurations & Existing/Future Traffic Volumes.....	3
2. Project, Existing plus Project & Future plus Project Traffic Volumes	13

Tables

1. Collision Rates at the Study Intersections.....	5
2. Two-Way Stop-Controlled Intersection Level of Service Criteria	7
3. Existing Peak Hour Intersection Levels of Service	10
4. Future Peak Hour Intersection Levels of Service	11
5. Trip Generation Summary	11
6. Existing plus Project Peak Hour Intersection Levels of Service.....	12
7. Future plus Project Peak Hour Intersection Levels of Service	12
8. Parking Requirements per Sonoma County Municipal Code.....	19

Appendices

- A. Collision Rate Calculations
- B. Intersection Turning Movement Counts
- C. Intersection Level of Service Calculations
- D. Pedestrian Facilities and Highway 12 Left-turn Lane Concept Drawing



This page intentionally left blank

Executive Summary

The VJB Vineyard and Cellar opened in 2012 under a Conditional Use Permit (CUP) approved in 2009. The current proposal would modify some aspects of this 2009 CUP to better fit with operation as it has evolved over time. While the continued operation is essentially unchanged, the application would limit operating hours to 10:00 a.m. to 4:00 p.m., would limit the number of employees, would modify access by limiting the Maple Avenue driveway to egress only, would adjust the parking supply to include a lot on the opposite side of Shaw Avenue, and would eliminate some requirements for off-site improvements to the adjacent street system.

Based on counts performed at the site, the project currently generates 25 trips during the morning peak hour, 36 trips during the evening peak hour, and 64 trips during the weekend peak hour. Although the weekday peak hour trips would be reduced to only those associated with employees with the proposed operating hours, upon conservatively adding these existing trips to existing and future volumes without the project, the study intersections are expected to operate acceptably except for the northbound Shaw Avenue approach to SR 12, which is expected to operate at LOS E under future p.m. peak hour volumes with the project. Because the increase in delay associated with adding project trips is less than five seconds, the project has a less-than-significant impact in terms of traffic operation. It is further noted that the analysis was based on the current trip generation, while the trip generation with the proposed changes to the CUP would be less, making this a conservative analysis that overstates the project's impact.

Under the current Conditions of Approval (COA), the project was required to install a left-turn lane on SR 12 at Shaw Avenue and a right-turn lane on Shaw Avenue at SR 12. While the project as proposed would provide the northbound right-turn lane, based on the analysis performed, and given the proposed limits to operating hours, it is recommended that the left-turn lane requirement be rescinded. It is recommended that in lieu of the left-turn pocket the applicant install improvements along the northerly side of SR 12 by widening the shoulder to provide space that could be used to pass a vehicle waiting to turn into Shaw Avenue.

The project is expected to generate a nominal number of pedestrian trips, though visitors will need to walk across Shaw Avenue to get to the site from the off-site parking lot. Given the low volumes and low speed on Shaw Avenue, installation of a mid-block crosswalk, as has been suggested by staff, is not recommended. The project should, however, include provision of pedestrian facilities connecting the site's entrance to the off-site parking lot. It is recommended that the site provide at least 18 bicycle parking spaces to accommodate visitors on bicycles.

Introduction

This report presents an analysis of the potential traffic impacts associated with the proposed modifications to the existing Use Permit for VJB Vineyards and Cellars located at 60 Shaw Avenue in the community of Kenwood in the County of Sonoma. The traffic study was completed in accordance with the criteria established by the County of Sonoma and is consistent with standard traffic engineering techniques.

Prelude


The purpose of a traffic impact study is to provide County staff and policy makers with data that they can use to make an informed decision regarding the potential traffic impacts of a proposed project, and any associated improvements that would be required to mitigate these impacts to a level of insignificance as defined by the County's General Plan or other policies. Vehicular traffic impacts are typically evaluated by determining the number of new trips that the proposed use would be expected to generate, distributing these trips to the surrounding street system based on existing travel patterns or anticipated travel patterns specific to the proposed project, then analyzing the impact the new traffic would be expected to have on critical intersections or roadway segments. Impacts relative to access for pedestrians, bicyclists, and to transit are also addressed.

Project Profile

The project site is developed with the uses as approved in 2009 and as interpreted by the Permits and Resource Management Department (PRMD) since that date, including an outdoor pizza oven and barbeque; outdoor picnic/dining area; food and wine pairing; and retail store, gelato shop and office. Various modifications to the Use Permit as approved are requested, as follows.

- Elimination of the requirement for a left-turn lane on the westbound SR 12 approach to Shaw Avenue and widening of the north shoulder across from the intersection as an alternative.
- The opening of Maple Avenue for egress, only, per Sonoma County Fire Marshall.
- The reduction of off-site parking along Shaw Avenue through paving of the east side of Shaw Avenue back 50 feet from the stop sign to the entrance and signage as outlined in the conditions of approval.
- The development of an off-site parking lot, providing 53 spaces, at 75 Shaw Avenue for the exclusive use of VJB Vineyards & Cellars.
- A maximum of 6 employees (full time equivalent) Monday through Thursday; 9 employees on Friday and 16 employees Saturday and Sunday.
- Change the hours of operation to 10 a.m. to 4 p.m. daily.

The project site location is shown in Figure 1.

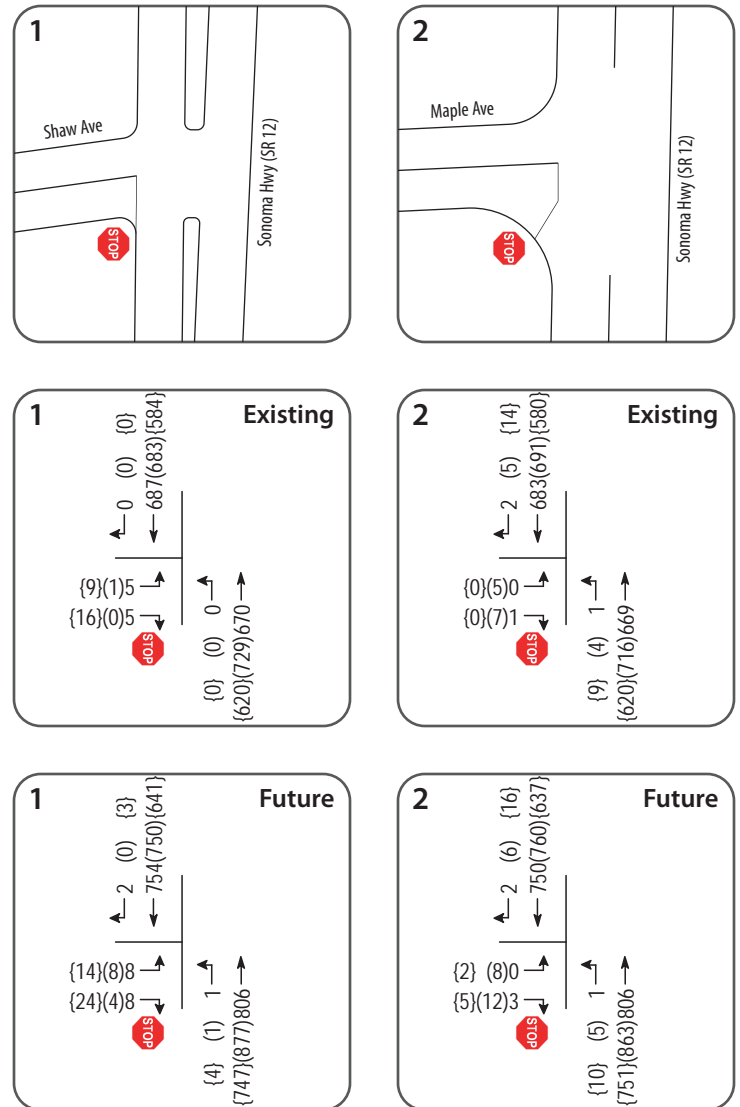

LEGEND	
●	Study Intersection
xx	Weekday AM Peak Hour Volume
(xx)	Weekday PM Peak Hour Volume
{xx}	Weekend MD Peak Hour Volume

Transportation Setting

Operational Analysis

Study Area and Periods

The study area consists of the following intersections:

1. SR 12/Shaw Avenue
2. SR 12/Maple Avenue

Operating conditions during the weekday a.m. and p.m. peak periods as well as the weekend midday peak period were evaluated to capture the highest potential impacts for the proposed project as well as the highest volumes on the local transportation network. The morning peak hour occurs between 7:00 and 9:00 a.m. and reflects conditions during the home to work or school commute, while the p.m. peak hour occurs between 4:00 and 6:00 p.m. and typically reflects the highest level of congestion during the homeward bound commute. The weekend midday peak period occurs between noon and 2:00 p.m.

Study Intersections

SR 12/Shaw Avenue is a tee intersection with the Shaw Avenue approach stop-controlled.

SR 12/Maple Avenue is a stop-controlled tee intersection.

The locations of the study intersections and the existing lane configurations and controls are shown in Figure 1.

Study Roadways

SR 12 in the vicinity of the proposed project is a two-lane road running in a north-south alignment with narrow shoulders and a posted speed limit of 45 miles per hour (mph). Traffic volumes published by Caltrans on their website indicate an average daily volume of approximately 16,900 vehicles per day. There is an existing center/left-turn lane on SR 12 for about 350 feet near Randolph Avenue, northwest of Shaw Avenue.

Shaw Avenue and Maple Avenue have posted speed limits of 25 mph and are unimproved residential two-lane roads with limited room for parking on the shoulders.

Collision History

The collision history for the study area was reviewed to determine any trends or patterns that may indicate a safety issue. Collision rates were calculated based on records available from the California Highway Patrol as published in their Statewide Integrated Traffic Records System (SWITRS) reports. The most current five-year period available is January 1, 2012 through December 31, 2016.

As presented in Table 1, the calculated collision rates for the study intersections were compared to average collision rates for similar facilities statewide, as indicated in *2014 Collision Data on California State Highways*, California Department of Transportation (Caltrans). Both study intersections have actual rates that are lower than the corresponding Statewide rates, indicating that operation is generally consistent with anticipated safety conditions. The collision rate calculations are provided in Appendix A.

Table 1 – Collision Rates at the Study Intersections

Study Intersection	Number of Collisions (2012-2016)	Calculated Collision Rate (c/mve)	Statewide Average Collision Rate (c/mve)	Number with Injuries	Percent with Injuries	Statewide Average Percent with Injuries
1. SR 12/Shaw Ave	3	0.11	0.14	0	0.0%	38.0%
2. SR 12/Maple Ave	2	0.08	0.14	0	0.0%	38.0%

Note: c/mve = collisions per million vehicles entering

Alternative Modes

Pedestrian Facilities

Pedestrian facilities include sidewalks, crosswalks, pedestrian signal phases, curb ramps, curb extensions, and various streetscape amenities such as lighting, benches, etc. In general, there are limited pedestrian facilities near the project site. Existing gaps and obstacles along the connecting roadways impact convenient and continuous access for pedestrians and present safety concerns in those locations where appropriate pedestrian infrastructure would address potential conflict points.

- **SR 12** – Six- to eight-foot shoulders exist on both sides of SR 12 and are used by pedestrians to access bus stops near the intersections of SR 12 and Laurel Avenue and SR 12 and Greene Street.
- **Shaw Avenue** – There are no sidewalks on Shaw Avenue, so pedestrians walk along the shoulder, where such exists, or in the roadway. Given the low speed, low volume, and straight, flat alignment that provides good sight distance, the current conditions are adequate to serve the limited volume of pedestrian traffic.

Bicycle Facilities

The *Highway Design Manual*, Caltrans, 2017, classifies bikeways into four categories:

- **Class I Multi-Use Path** – a completely separated right-of-way for the exclusive use of bicycles and pedestrians with cross flows of motorized traffic minimized.
- **Class II Bike Lane** – a striped and signed lane for one-way bike travel on a street or highway.
- **Class III Bike Route** – signing only for shared use with motor vehicles within the same travel lane on a street or highway.
- **Class IV Bikeway** – also known as a separated bikeway, a Class IV Bikeway is for the exclusive use of bicycles and includes a separation between the bikeway and the motor vehicle traffic lane. The separation may include, but is not limited to, grade separation, flexible posts, inflexible physical barriers, or on-street parking.

There are currently no designated bicycle facilities in the immediate vicinity of the winery, though SR 12 has shoulders of at least six feet in width delineated by an edgeline stripe that is used by cyclists. The roadway is identified as having a Class I bike path in the future per the *2014 Sonoma County Bicycle Pedestrian Master Plan*, and the existing right-of-way width appears to be adequate to accommodate this planned future widening.

Transit Facilities

Sonoma County Transit (SCT) provides fixed route bus service in the County of Sonoma. SCT Routes 30 and 34 provide regional service to destinations throughout Santa Rosa and Sonoma Valley and stop on both sides of Sonoma Highway at Greene Street, approximately 1,200 feet west of the site. Route 30 operates seven days a week with approximately one-and-a-half hour headways on weekdays between 6:00 a.m. and 9:00 p.m. and approximately 3-hour headways on weekends from 7:00 a.m. to 7:00 p.m.

Two to three bicycles can be carried on most SCT buses. Bike rack space is on a first come, first served basis. Additional bicycles are allowed on SCT buses at the discretion of the driver.

Dial-a-ride, also known as paratransit, or door-to-door service, is available for those who are unable to independently use the transit system due to a physical or mental disability. SCT Paratransit is designed to serve the needs of individuals with disabilities within Santa Rosa and the greater County of Sonoma area.

Capacity Analysis

Intersection Level of Service Methodologies

Level of Service (LOS) is used to rank traffic operation on various types of facilities based on traffic volumes and roadway capacity using a series of letter designations ranging from A to F. Generally, Level of Service A represents free flow conditions and Level of Service F represents forced flow or breakdown conditions. A unit of measure that indicates a level of delay generally accompanies the LOS designation. The study intersections were analyzed using the unsignalized methodology for two-way stop-controlled intersections published in the *Highway Capacity Manual* (HCM), Transportation Research Board, 2010. This source contains methodologies for various types of intersection control, all of which are related to a measurement of delay in average number of seconds per vehicle.

The “Two-Way Stop-Controlled” intersection capacity method determines a level of service for each minor turning movement by estimating the level of average delay in seconds per vehicle. Results are presented for individual movements together with the weighted overall average delay for the intersection. The ranges of delay associated with the various levels of service are indicated in Table 2.

Table 2 – Two-Way Stop-Controlled Intersection Level of Service Criteria

LOS A	Delay of 0 to 10 seconds. Gaps in traffic are readily available for drivers exiting the minor street.
LOS B	Delay of 10 to 15 seconds. Gaps in traffic are somewhat less readily available than with LOS A, but no queuing occurs on the minor street.
LOS C	Delay of 15 to 25 seconds. Acceptable gaps in traffic are less frequent, and drivers may approach while another vehicle is already waiting to exit the side street.
LOS D	Delay of 25 to 35 seconds. There are fewer acceptable gaps in traffic, and drivers may enter a queue of one or two vehicles on the side street.
LOS E	Delay of 35 to 50 seconds. Few acceptable gaps in traffic are available, and longer queues may form on the side street.
LOS F	Delay of more than 50 seconds. Drivers may wait for long periods before there is an acceptable gap in traffic for exiting the side streets, creating long queues.

Reference: *Highway Capacity Manual*, Transportation Research Board, 2010

Traffic Operation Standards

Because SR 12 and its intersections are under the jurisdiction of Caltrans, the applicable standards for both agencies were considered.

County of Sonoma

Based on the most recent criteria published by the County of Sonoma in May 2016, as updated in June 2019, the project would have a significant traffic impact if it results in any of the following conditions.

1. **On-site roads and frontage improvements** – Proposed on-site circulation and street frontage would not meet the County’s minimum standards for roadway or driveway design, or potentially result in safety hazards, as determined by the County in consultation with a registered Traffic Engineer or Civil Engineer.
2. **Parking** – Proposed on-site parking supply does not meet County standards and does not adequately accommodate parking demand.

3. **Emergency Access** – The project site would have inadequate emergency access.
4. **Alternative Transportation** – The project provides inadequate facilities for alternative transportation modes (e.g., bus turnouts, bicycle racks, pedestrian pathways) and/or the project creates potential conflicts with the County's Complete Streets Policy, other adopted policies, plans, or programs supporting alternative transportation.
5. **Road Hazards** – Road design features that do not meet standards (e.g., sharp curves or skewed intersections) or any perceived incompatible uses (e.g., farm equipment, major bicycle route, rail or pedestrian crossings).
6. **Vehicle Queues** – An impact on projected 95th percentile queues shall be considered significant when any of the following occur:
 - A. The projected queue can be accommodated within the available stacking in a dedicated turn lane (defined as the length of the channelized turn pocket together plus 8 feet in length) but would exceed the available stacking upon adding project-generated traffic. Where a left-turn lane transitions into a two-way left-turn lane, the center turn lane is to be considered part of the available stacking space.
 - B. There is adequate sight distance between the end of the queue and following traffic without the project, and the addition of project traffic increases the queue to a point where sight lines are no longer adequate to meet stopping sight distance criteria.
7. **Signal Warrants** – The addition of the project's vehicle or pedestrian traffic causes an intersection to meet or exceed Caltrans or CA-MUTCD signal warrant criteria.
8. **Turn Lanes** – The addition of project traffic causes an intersection to meet or exceed criteria for provision of a right or left turn lane on an intersection approach.
9. **Sight Lines** – The project constructs an unsignalized intersection (including driveways) and/or adds traffic to an existing unsignalized intersection approach that does not have adequate sight lines based upon Caltrans criteria for State highway intersections and AASHTO criteria for County roadway intersections.
10. **County Intersection Operations** – The County level of service standard for County intersection operations is to maintain a Level of Service D or better pursuant to General Plan Policy CT-4.2. The project would have a significant traffic impact if the project's traffic would cause an intersection currently operating at an acceptable level of service (LOS D or better) to operate at an unacceptable level (LOS E or worse).

If the intersection currently operates or is projected to operate below the County standard, the project's impact is considered significant and cumulatively considerable if it causes the average delay to increase by five seconds or more. The delay will be determined by comparing intersection operations with and without the project's traffic for both the existing baseline and projected future conditions.

The above criteria applies to all controlled intersections except for driveways and minor side streets that have less than 30 vehicle trips per hour per approach or exclusive left turn movement.

11. **County Roadway Operations** – The County level of service standard for County roadway operations is to maintain a Level of Service C pursuant to General Plan Policy CT-4.1; or, for specific roadway segments, the level of service standard adopted in the General Plan Figure CT-3. The project would have a significant traffic impact if the project's traffic would cause a road currently operating at an acceptable level of service (LOS C or better) to operate at an unacceptable level (LOS D or worse).

If a road segment currently operates or is projected to operate below the County standard, the project's impact is considered significant and cumulatively considerable if it causes the average speed to decrease by 2 mph for a roadway operating at LOS D without the project, 1 mph if existing operation is LOS E, and any

reduction in travel speed is significant for a roadway operating at LOS F. The change will be determined by comparing roadway conditions with and without the project's traffic for both the existing baseline and projected future conditions.

12. **State Highways** – Caltrans' general level of service policy on State highways is to maintain the level of service at the transition between LOS C and LOS D. However, level of service goals for specific Caltrans facilities should be taken from transportation planning documents for that facility. A project would have a significant impact if the project traffic would cause the operation of a State highway to operate below LOS C. If a State highway currently operates or is projected to operate below the standard, the project's impact is considered significant and cumulatively considerable if it does not maintain the existing "measure of effectiveness." Measures of effectiveness are: (a) control delay per vehicle for signalized intersections; (b) average control delay per vehicle for unsignalized intersections; (c) average speed for two-lane highways, and (d) density for multi-lane highways.
13. **Mitigation Measures** – In order to reduce project impacts to levels of insignificance, the proposed mitigation measures must result in post-development affected intersections and roadways that have an LOS that is no worse than the County General Plan LOS standard for roadways and intersections, reduce safety impacts to insignificance by bringing the site up to Caltrans or AASHTO design standards, and provide adequate parking and alternative transportation facilities consistent with County plans and policies. The scope of the mitigation measures must reduce the project impacts below the identifiable thresholds mentioned.

The payment of County wide traffic impact fees in and of itself may not be adequate to mitigate a project's local impacts if the existing facilities are already below standard, and the required improvements are not fully funded or programmed to be operational at the time of project completion. The timing of the mitigation measure implementation may require construction of off-site improvements by the developer using a Reimbursement Agreement to pay for any oversized facilities associated with the public share of the improvement pursuant to Section 26-670 of the Sonoma County Code. Traffic impact fees do not address specific impacts related to a particular project. Payment of the traffic impact fee only mitigates or addresses cumulative countywide impacts related to projects that are programmed or listed to be funded by the fees on file with DTPW.

The project's contribution to cumulative impacts must also be addressed in proportion to the project's impact. A proportional fair share contribution to a traffic improvement related to a cumulative impact may be required based on the "Methodology for Calculating Equitable Mitigation Measures" included in Caltrans' *Guide for the Preparation of Traffic Impact Studies* as referenced above. Mitigation measures for both project impacts and cumulative impacts must be implemented prior to occurrence of the impact. An analysis of the timing, funding and responsibilities for implementation of mitigation measures should be included in the traffic study.

Caltrans

Caltrans indicates that they endeavor to maintain operation at the transition from LOS C to LOS D. Based on previous discussions with Caltrans staff, it is understood that the standard is to be applied to the overall average intersection delay and *not* that associated with any single movement or approach. Under this approach, if one movement experiences very high delay and has moderate to high traffic volumes, the overall delay and level of service should reflect the critical nature of the condition. However, if one movement is expected to experience high delay, but has very low traffic volumes, the overall intersection operation will likely still meet Caltrans standards.

Existing Conditions

The Existing Conditions scenario provides an evaluation of current operation based on existing traffic volumes during the three study periods. This condition does not include project-generated traffic volumes, which were

subtracted out of volume data collected on September 16 and 21, 2017 because all the activities associated with the proposed Conditional Use Permit modification are already occurring, so their traffic is included in current traffic streams. Copies of the counts, including those of both vehicles and pedestrians used to derive the site-generated trips deducted from existing counts, are provided in Appendix B.

Intersection Levels of Service

Under existing conditions with project traffic excluded, both study intersections are operating at LOS D or better both overall and on the stop-controlled approach. The existing traffic volumes are shown in Figure 1. A summary of the intersection level of service calculations is contained in Table 3, and copies of the Level of Service calculations are provided in Appendix C. It is noted that the delay indicated for the minor street approaches reflects the average for both left and right turns as neither intersection has separate turn lanes. The output provided in Appendix C presents the delay for the highest movement, but this result is not used for purposes of the evaluation as it represents a single movement on a shared-movement approach and that movement has less than 30 vehicles an hour under any scenario evaluated, so falls below the County's minimum threshold for application of the Level of Service standard.

Table 3 – Existing Peak Hour Intersection Levels of Service

Study Intersection <i>Approach</i>	AM Peak		PM Peak		Weekend Peak	
	Delay	LOS	Delay	LOS	Delay	LOS
1. SR 12/Shaw Ave	0.2	A	0.0	A	0.3	A
<i>NB (Shaw Ave) Approach</i>	<i>23.2</i>	<i>C</i>	<i>29.3</i>	<i>D</i>	<i>17.1</i>	<i>C</i>
2. SR 12/Maple Ave	0.0	A	0.2	A	0.1	A
<i>NB (Maple Ave) Approach</i>	<i>13.5</i>	<i>B</i>	<i>21.7</i>	<i>C</i>	<i>18.2</i>	<i>C</i>

Notes: Delay is measured in average seconds per vehicle; LOS = Level of Service; Results for minor approaches to two-way stop-controlled intersections are indicated in *italics*

Future Conditions

Segment volumes for the horizon year of 2040 were obtained from the County's gravity demand model as maintained by the Sonoma County Transportation Authority and translated to turning movement volumes at the study intersections of SR 12/Shaw Avenue and SR 12/Maple Avenue. Because there were no volumes available for Shaw Avenue and Maple Avenue in the County's model, growth factors per approach were calculated based on 2010 and 2040 model volumes on Warm Springs Road and applied to existing volumes at the Shaw and Maple Avenue approaches to arrive at future volumes. The growth factor calculation is provided with the counts in Appendix B.

Under the anticipated Future volumes, the study intersections are expected to operate acceptably at LOS A overall, and at LOS D or better on the side-street approaches. Future volumes are shown in Figure 1 and operating conditions are summarized in Table 4.

Table 4 – Future Peak Hour Intersection Levels of Service

Study Intersection Approach	AM Peak		PM Peak		Weekend Peak	
	Delay	LOS	Delay	LOS	Delay	LOS
1. SR 12/Shaw Ave	0.3	A	0.2	A	0.6	A
NB (Shaw Ave) Approach	30.5	D	31.6	D	21.2	C
2. SR 12/Maple Ave	0.0	A	0.4	A	0.2	A
NB (Maple Ave) Approach	14.4	B	27.0	D	18.1	C

Notes: Delay is measured in average seconds per vehicle; LOS = Level of Service; Results for minor approaches to two-way stop-controlled intersections are indicated in *italics*

Project Description

The project consists of changes to the Conditional Use Permit for the VJB Vineyards and Cellars to reflect operation as it has evolved over time and to address requests to modify several Conditions of Approval placed on the project. The specific components of the project addressed in the analysis include the actual current trip generation, the opening of Maple Avenue for egress only, the request not to provide a left-turn lane on SR 12 at Shaw Avenue, and the development of an off-site parking lot, providing 53 spaces, at 75 Shaw Avenue for the exclusive use of VJB Vineyards & Cellars. It is noted that a separate right-turn lane would be provided on Shaw Avenue at SR 12 through elimination of four parking spaces on the east side of Shaw Avenue north of the project entrance. This change to the configuration has not been included as part of the project for analysis purposes to provide a more direct comparison between conditions without and with the project. Operational changes include limiting staff to a maximum of six full-time equivalent employees Monday through Thursday; nine on Friday and 16 Saturday and Sunday, and revision of the hours of operation to 10 a.m. to 4 p.m. daily. Because the changes to the Use Permit would bring the current operation into compliance with existing conditions, the project trips are already on the street network. The actual counts obtained on Thursday, September 21, 2017 and Saturday, September 16, 2017 were therefore used to represent “plus Project” conditions.

Trip Generation

The trip generation for the project was developed based on counts obtained at the site during each of the peak periods. All persons entering or leaving the site either by vehicle to and from the parking lot or walking to nearby parking spaces were observed, and inbound and outbound vehicle counts determined, with outbound trips via the driveway to Maple Avenue counted separately. Based on the counts obtained, the site is currently generating 25 trips during the a.m. peak hour, 36 during the p.m. peak hour, and 64 during the weekend peak hour. These results are shown in Table 5, and these are the volumes that were subtracted from the actual counts to arrive at the volumes used to evaluate “Existing” conditions.

Table 5 – Trip Generation Summary

Land Use	AM Peak Hour			PM Peak Hour			Weekend Peak Hour		
	Trips	In	Out	Trips	In	Out	Trips	In	Out
VJB	25	18	7	36	9	27	64	46	18

Notes: Trip generation based on count of actual site-generated trips.

Trip Distribution

As the actual numbers of trips were counted for each peak period while the turning movement counts were being collected, the pattern used to allocate the project trips to the street network was determined based on the turning

movement counts. Based on the site counts, 55 percent of outbound trips were assigned to Maple Avenue, with the remaining 45 percent using Shaw Avenue. All inbound trips were assigned to Shaw Avenue.

Intersection Operation

Existing plus Project Conditions

Upon the addition of project-related traffic to the Existing volumes, the study intersections are expected to continue operating acceptably at LOS D or better both overall and on the side-street approaches. It is noted that while the project as proposed would result in the addition of a separate right-turn lane on the Shaw Avenue approach to SR 12 that would increase capacity and reduce delay, the intersections was conservatively evaluated with the existing single-lane approach. These results are summarized in Table 6. Project traffic volumes and the resulting Existing plus Project volumes are shown in Figure 2.

Table 6 – Existing plus Project Peak Hour Intersection Levels of Service

Study Intersection Approach	AM Peak		PM Peak		Weekend Peak	
	Delay	LOS	Delay	LOS	Delay	LOS
1. SR 12/Shaw Ave <i>NB (Shaw Ave) Approach</i>	0.3 <i>25.1</i>	A <i>D</i>	0.5 <i>25.9</i>	A <i>D</i>	0.6 <i>19.0</i>	A <i>C</i>
3. SR 12/Maple Ave <i>NB (Maple Ave) Approach</i>	0.1 <i>17.0</i>	A <i>C</i>	0.3 <i>22.4</i>	A <i>C</i>	0.3 <i>17.0</i>	A <i>C</i>

Notes: Delay is measured in average seconds per vehicle; LOS = Level of Service; Results for minor approaches to two-way stop-controlled intersections are indicated in *italics*

Finding – The study intersections are expected to continue operating acceptably at the same levels of service upon the addition of project-generated traffic.


Future plus Project Conditions

Upon the addition of project-generated traffic to the anticipated Future volumes, the study intersections are expected to operate acceptably at LOS A overall and LOS D or better on the side-street approaches, again conservatively treating the Shaw Avenue approach to SR 12 as a single lane and not accounting for the added capacity associated with the separate right-turn lane to be provided by the project. The Future plus Project operating conditions are summarized in Table 7 and the volumes are shown on Figure 2.

Table 7 – Future plus Project Peak Hour Intersection Levels of Service

Study Intersection Approach	AM Peak		PM Peak		Weekend Peak	
	Delay	LOS	Delay	LOS	Delay	LOS
1. SR 12/Shaw Ave <i>NB (Shaw Ave) Approach</i>	0.4 <i>33.1</i>	A <i>D</i>	0.7 <i>34.2</i>	A <i>D</i>	0.8 <i>24.0</i>	A <i>C</i>
2. SR 12/Maple Ave <i>NB (Maple Ave) Approach</i>	0.1 <i>18.2</i>	A <i>C</i>	0.5 <i>28.4</i>	A <i>D</i>	0.4 <i>19.9</i>	A <i>C</i>

Notes: Delay is measured in average seconds per vehicle; LOS = Level of Service; Results for minor approaches to two-way stop-controlled intersections are indicated in *italics*

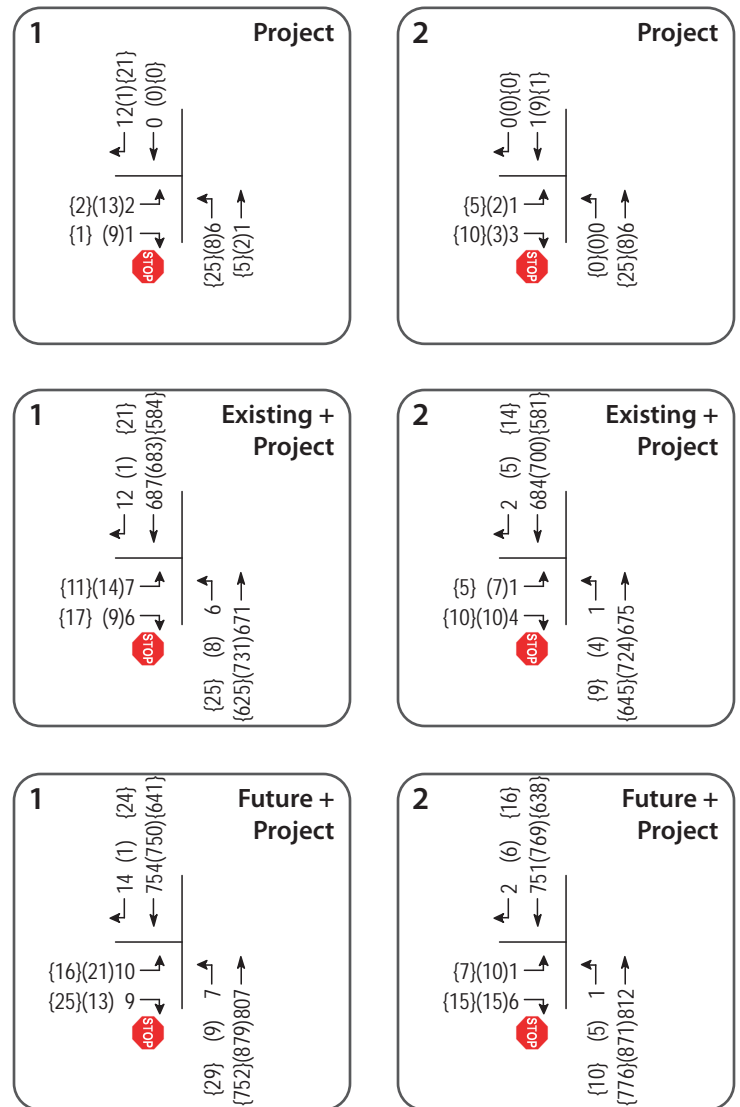

LEGEND	
●	Study Intersection
xx	Weekday AM Peak Hour Volume
(xx)	Weekday PM Peak Hour Volume
{xx}	Weekend MD Peak Hour Volume

Finding – The study intersections will continue operating acceptably with project traffic added to Future volumes, at the same Levels of Service as without it, indicating a less-than-significant impact on traffic operation.

Travel Demand Analysis

Senate Bill (SB) 743 established a change in the metric to be applied to determining traffic impacts associated with development projects. Rather than the delay-based criteria associated with a Level of Service analysis, the increase in vehicle-miles-travelled (VMT) as a result of a project will be the basis for determining impacts once this new metric is fully vetted and adopted. While the specific methodologies and standards of significance are still under development, consideration was given to the extent to which this project results in increased VMT.

As proposed, many of the visitors to VJB Winery would arrive in limousines or buses, resulting in fewer trips to and from the site than might otherwise occur. The site is located along SR 12, a route that serves numerous other wineries and tasting rooms, so the project is likely to attract a substantial amount of pass-by traffic from guests visiting multiple tasting rooms in the area rather than generating new trips associated with the project itself. SR 12 also attracts a substantial number of bicyclists, and bicycle traffic reduces the VMT. The project would be expected to draw from this bicycle traffic as well, especially when the Class I trail is constructed parallel to SR 12.

Alternative Modes

Pedestrian Facilities

Given the proximity of agricultural and residential land uses, it is reasonable to assume that most winery visitors and employees will travel to and from the site by motor vehicle. Therefore, the winery is expected to generate little to no pedestrian travel except between the buildings and parking lots. The existing parking lot is located to the south of the buildings and provides the accessible parking for the project. Visitors can enter the site directly from the parking lot through a gate at the southeast corner of the outdoor patio. This route provides a virtually flat access route from the accessible parking spaces.

To achieve adequate parking for the uses at the site and avoid use of street parking, it is understood that the parcel at 75 Shaw Avenue has been purchased, and the plan is to use the vacant lot for parking. County staff has expressed concerns regarding pedestrian access between the project site and the off-site parking lot, so the need for a mid-block pedestrian crosswalk was evaluated.

Shaw Avenue has a paved width of about 25 feet south of the project site and narrow shoulders on one or both sides that are used for parking and pedestrian travel. Near SR 12 the road widens to approximately 35 feet. Counts performed in 2017 at the intersection of SR 12/Shaw Avenue indicate that the daily volume on Shaw Avenue is about 340 trips per day, including project-generated traffic. Even with project trips added, the average daily traffic volume on Shaw Avenue remains well below 400 vehicles per day, a volume that is considered “very low” by the American Association of State Highway and Transportation Officials (AASHTO). The speed limit on this short road segment is 25 mph, and field observations indicate that drivers are traveling at or below this speed. Given that sight distance is adequate to allow sufficient visibility between motorists and pedestrians, at this low volume pedestrians should be able to find an adequate gap in traffic to safely cross from the parking lot directly to the VJB site.

Consideration was given to the need for a mid-block crosswalk as a channelizing device and not a safety device. Given that most pedestrians will want to cross in a relatively straight line between the parking lot and the site entrance, there is little need for these walking trips to be channelized. Further, the presence of a mid-block crosswalk may provide pedestrians with a false sense of security and discourage them from waiting for traffic to clear prior to entering the street. It is recommended that a crosswalk be installed at the intersection with SR 12, including provision of space along both sides of Shaw Avenue for pedestrian travel. A copy of the plan showing the proposed improvements is provided in Appendix D. It is noted that this would result in out-of-the way travel, and some pedestrians would be unwilling to increase their trip length by 200 feet so would continue walking directly across Shaw Avenue. However, because this is a local street, pedestrians crossing between the project site and the parking lot would be similar to neighbors walking across to visit one another, an activity that would be normal and well within driver expectation. As a result, while the volume of pedestrian traffic would be greater than normally encountered on a local street, given the geometric and operational characteristics of the street, with adequate facilities provided for those pedestrians who wish to use a specified pathway, facilities would be adequate.

Finding – The project is expected to generate limited pedestrian traffic except between the project and on-site and off-site parking lots. Facilities should be provided to connect the project to the on- and off-site parking lots; this could consist of dedicated paved shoulder areas outside the travel lanes. Given the operational characteristics of Shaw Avenue, it is expected that those pedestrians that wish to do so will be able to cross safely directly between the off-site parking lot and VJB Marketplace.

Recommendation – Installation of the mid-block crosswalk from the site to the parking lot at 75 Shaw Avenue should not be required, though it is recommended that a crosswalk be installed across Shaw Avenue at SR 12 with

space dedicated to pedestrians marked connecting the project entrance to the off-site parking lot via the crosswalk.

Bicycle Facilities

Existing and planned future bicycle facilities, including the future Sonoma Valley Trail paralleling SR 12, together with shared use of minor streets provide adequate access for bicyclists.

Bicycle Storage

The project site plan does not identify the provision of bicycle parking or storage facilities; however, the project should provide bicycle parking consistent with the requirements for the specific uses outlined in Article 86 of the County of Sonoma Code of Ordinances which states that one bicycle parking space should be provided for every five required automobile parking spaces. With a proposed supply of 89 spaces, parking for 18 bicycles is needed.

Finding – Bicycle facilities are adequate to serve the expected demand and would be improved upon installation of the planned Sonoma Valley Trail paralleling SR 12.

Recommendation – Parking to secure at least eighteen bicycles should be provided on-site.

Transit

Existing transit routes are adequate to accommodate project-generated transit trips. Existing stops are within acceptable walking distance of the site.

Finding – Transit facilities serving the project site are adequate.

Access and Circulation

Site Access

Access to the parking lot located on the project site is via a two-way driveway on Shaw Street and a one-way egress to Maple Street. Additional parking is provided in a lot on the opposite side of Shaw Street that is accessed by a two-way driveway.

Sight Distance

Sight distance along Shaw Avenue from the project driveway was evaluated based on sight distance criteria contained in *A Policy on Geometric Design on Highways and Streets* published by American Association of State Highway and Transportation Officials (AASHTO). For drivers exiting a driveway, stopping sight distance recommendations are typically applied. Given the 25-mph speed on both Shaw and Maple avenues, the applicable stopping sight distance recommendation is 155 feet. The available sight lines from all three driveways exceed this and are therefore adequate.

Access Analysis

Left-Turn Lane Warrants

The need for left-turn lanes on SR 12 at Shaw Avenue was evaluated based on criteria contained in the *Intersection Channelization Design Guide*, National Cooperative Highway Research Program (NCHRP) Report No. 279, Transportation Research Board, 1985, as well as a more recent update of the methodology developed by the Washington State Department of Transportation. The NCHRP report references a methodology developed by M. D. Harmelink that includes equations that can be applied to expected or actual traffic volumes to determine the need for a left-turn pocket based on safety issues. Based on our research and discussions with Caltrans staff, this methodology is consistent with the "Guidelines for Reconstruction of Intersections," August 1985, which was referenced in Section 405.2, Left-turn Channelization, of previous editions of the Caltrans *Highway Design Manual*, though this reference has been deleted from the most recent edition of this manual.

Based on the volume warrants alone, a left-turn lane is warranted on SR 12 at Shaw Avenue based on Existing volumes during the p.m. and midday peak periods. However, a review of the collision history for the intersection of SR 12/ Shaw Avenue indicates that only one crash involving a left-turning vehicle (July 2012) was reported during the eight-year period reviewed (2009-2016), indicating that there is not a safety problem at the intersection that would need to be addressed by installing a left-turn lane. Additionally, there are significant construction constraints affecting the design of a left-turn pocket, such as the relocation of existing utility poles and shoulder and drainage facilities. The lack of sufficient right-of-way makes it infeasible for a private party to construct a left-turn pocket. A preliminary design showing the right-of-way that would need to be obtained is provided in Appendix D.

Further, Condition of Approval 41e as set forth for the project in 2007 indicated that the left-turn lane needed to be constructed to allow operation past the hour of 4:00 p.m. Until the left-turn lane was constructed, operation was limited to 10:00 a.m. to 4:00 p.m. Since operation outside of these hours is not currently proposed, there would not be an extension of operating hours that would trigger the need for the left-turn lane, so the left-turn lane should not be required at this time.

However, County staff suggested an alternative improvement that would achieve the desired result of providing space so that following vehicles could pass around a left-turning vehicle if necessary, and improving safety, especially in the case of an inattentive driver approaching a vehicle stopped and waiting to turn left having insufficient time to avoid colliding with the stopped vehicle despite the adequacy of sight distance. The County

has, on numerous occasions, placed a condition that applicants construct a wider shoulder on the opposite side of the street from their driveway, or in this case a side street, so that approaching drivers have adequate space to move around the vehicle stopped before turning left. This alternative improvement has been applied in other places along state highways, including SR 116 and 121. Under this alternative the shoulder on the northeast side of the roadway would need to be widened to a minimum of eight feet for a total distance of 200 feet: 100 feet on each side of the centerline of Shaw Avenue. The widening of the shoulder results in conditions that are an improvement over existing conditions, leading to better operation with the project than without it, regardless of any increase in left turns associated with the project, and therefore a less-than-significant impact due to the project. While not required to accommodate the project as currently proposed, the applicant has agreed to construct this improvement.

Parking

The project was analyzed to determine whether the proposed parking supply would be sufficient for the anticipated parking demand. This analysis provides an update to the previous parking study conducted in a report titled, *Revised Traffic and Parking Analysis for VJB Marketplace Modification*, July 16, 2015. The proposed project's parking supply consists of 37 spaces on site and an additional 53 spaces in an off-site parking lot at 75 Shaw Avenue for the exclusive use of VJB Vineyards & Cellars, for a total supply of 90 spaces.

Required Parking

Based on the Sonoma County Zoning Code, Section 26-86-010, one parking space is required per 60 square feet of dining area, one space per 200 square feet of general retail, and one space per 250 square feet of office space. Project plans include 3,654 square feet of dining area (including the picnic area, bar, covered area adjacent to the wine cellar, and area in front of the gelato bar), 425 square feet of retail space, which includes the market, and 306 square feet of office space. This equates to a parking requirement of 65 spaces. With plans to provide 90 spaces, the supply is adequate to meet County codes with a surplus of 25 spaces. Table 8 provides a summary of the County's parking requirements.

Table 8 – Parking Requirements per Sonoma County Municipal Code			
Land Use	Units	County Requirements	
		Rate	Spaces Required
Dining	3,654 sf	1.0 per 60 sf	61
Market (retail)	425 sf	1.0 per 200 sf	2
Office	414 sf	1.0 per 250 sf	2
Total Parking Required			65

Notes: sf = square feet

The proposed project also includes an on-site limousine and bus drop off which would also reduce the parking demand generated by the project by increasing the vehicle occupancy above the typical 2.5 persons per vehicle.

Finding – The proposed parking supply would accommodate the anticipated parking demand with a surplus of 25 spaces.

Conclusions and Recommendations

Conclusions

- Based on the counts obtained, the site currently generates 25 trips during the a.m. peak hour, 36 during the p.m. peak hour, and 64 during the weekend peak hour.
- Under existing conditions with project traffic excluded, both study intersections are operating at LOS A overall and at LOS D or better on the stop-controlled approaches.
- Under anticipated Future volumes, both study intersections are expected to operate at acceptable service levels overall and on the side-street approaches.
- Upon the addition of project-related traffic to the Existing and Future volumes, the study intersections are expected to continue operating acceptably at LOS D or better both overall and on the side-street approaches.
- Pedestrian traffic associated with the project is expected to be minimal and comprised primarily of visitors walking from and to the off-site parking lot (there is a direct connection from the patio to the on-site parking lot). There are safety concerns related to the mid-block crosswalk proposed by the County, especially the potential for pedestrians to walk out in front of oncoming traffic due to a false sense of security. Given the availability of adequate sight distance and low speeds and volumes on Shaw Avenue, pedestrians are expected to be able to cross relatively easily and safely. However, dedicated space for pedestrians should be provided between the project entrance and the off-site parking lot.
- There are no bicycle facilities serving the project site. However, striped eight-foot shoulders on SR 12 are used by bicycles and a bike trail parallel to SR 12 is planned for the future.
- Transit facilities connect the site to Santa Rosa to the west and Sonoma to the east, and the site is served by bus stops near the intersection of SR 12/Greene Street. While few transit trips to and from the site are expected, the available transit facilities are adequate to serve those that may occur.
- The available sight lines for all three project driveways exceed the recommended 155 feet for roads with 25 mph speed limits and are therefore adequate.
- A left-turn lane is not warranted on westbound SR 12 at the intersection with Shaw Avenue due to construction constraints and safe operation of the intersection indicated by the lack of collisions for the past nine years.

Recommendations

- While the volume at the intersection of SR 12/Shaw Avenue indicates that a left-turn lane for the westbound approach may be warranted, the incidence of only one reported collision in nine years indicates that there is not a safety problem that warrants attention. As a result, and in consideration of the geometric, right-of-way and utility constraints associated with adding a left-turn pocket as well as the current proposal to limit operating hours and closing at 4:00 p.m., it is recommended that the requirement for the left-turn pocket be eliminated.
- It is recommended that the applicant widen the shoulder on the north side of SR 12 for 200 feet (100 feet on either side of Shaw Avenue) to provide recovery space if a driver needs to pass around a vehicle waiting to turn left into Shaw Avenue.
- A mid-block crosswalk between the off-site parking lot and the VJB site may pose safety concerns to pedestrians and is therefore not recommended.
- The project should mark space that can be used by pedestrians connecting the entrance to the off-site parking lot, including a crosswalk on Shaw Avenue at SR 12.
- Secure parking facilities for at least 18 bicycles should be provided on site.

Study Participants and References

Study Participants

Principal in Charge	Dalene J. Whitlock, PE, PTOE
Assistant Engineer	Cameron Nye, EIT, Kevin Rangel, EIT
Graphics	Hannah Yung-Boxdell
Editing/Formatting	Alex Scrobonia

References

2014 Collision Data on California State Highways, California Department of Transportation, 2017
A Policy on Geometric Design of Highways and Streets, 6th Edition, American Association of State Highway and Transportation Officials, 2011
Caltrans 2015 Traffic Volumes, <http://www.dot.ca.gov/trafficops/census/volumes2015/Route12-15.html>
Guide for the Preparation of Traffic Impact Studies, California Department of Transportation, 2002
Guidelines for Traffic Impact Studies, County of Sonoma, 2016
Highway Capacity Manual, Transportation Research Board, 2010
Highway Design Manual, 6th Edition, California Department of Transportation, 2017
Intersection Channelization Design Guide, National Cooperative Highway Research Program (NCHRP) Report No. 279, Transportation Research Board, 1985
Sonoma County Bicycle and Pedestrian Master Plan, County of Sonoma, 2014
Sonoma County General Plan 2020, County of Sonoma, 2013
Sonoma County Municipal Code, Municipal Code Corporation, 2017
Sonoma County Transit, <http://sctransit.com/>
Statewide Integrated Traffic Records System (SWITRS), California Highway Patrol, 2012-2016

SOX227





This page intentionally left blank

Appendix A

Collision Rate Calculations



This page intentionally left blank

Intersection Collision Rate Calculations

VJB Marketplace Modification

Intersection # 1: SR 12 & Shaw Avenue

Date of Count: Thursday, September 21, 2017

Number of Collisions: 3

Number of Injuries: 0

Number of Fatalities: 0

ADT: 14500

Start Date: January 1, 2012

End Date: December 31, 2016

Number of Years: 5

Intersection Type: Tee

Control Type: Stop & Yield Controls

Area: Suburban

$$\text{collision rate} = \frac{\text{Number of Collisions} \times 1 \text{ Million}}{\text{ADT} \times 365 \text{ Days per Year} \times \text{Number of Years}}$$

$$\text{collision rate} = \frac{3}{14,500} \times \frac{1,000,000}{365 \times 5}$$

	Collision Rate	Fatality Rate	Injury Rate
Study Intersection	0.11 c/mve	0.0%	0.0%
Statewide Average*	0.14 c/mve	0.7%	38.0%

ADT = average daily total vehicles entering intersection

c/mve = collisions per million vehicles entering intersection

* 2013 Collision Data on California State Highways, Caltrans

Intersection # 2: State Route 12 & Maple Avenue

Date of Count: Thursday, September 21, 2017

Number of Collisions: 2

Number of Injuries: 0

Number of Fatalities: 0

ADT: 14500

Start Date: January 1, 2012

End Date: December 31, 2016

Number of Years: 5

Intersection Type: Tee

Control Type: Stop & Yield Controls

Area: Suburban

$$\text{collision rate} = \frac{\text{Number of Collisions} \times 1 \text{ Million}}{\text{ADT} \times 365 \text{ Days per Year} \times \text{Number of Years}}$$

$$\text{collision rate} = \frac{2}{14,500} \times \frac{1,000,000}{365 \times 5}$$

	Collision Rate	Fatality Rate	Injury Rate
Study Intersection	0.08 c/mve	0.0%	0.0%
Statewide Average*	0.14 c/mve	0.7%	38.0%

ADT = average daily total vehicles entering intersection

c/mve = collisions per million vehicles entering intersection

* 2013 Collision Data on California State Highways, Caltrans



This page intentionally left blank

Appendix B

Intersection Turning Movement Counts



This page intentionally left blank

National Data & Surveying Services

Intersection Turning Movement Count

Location: SR 12 & Shaw Ave
City: Kenwood
Control:

Project ID: 17-07753-001
Date: 9/21/2017

Total

NS/EW Streets:	SR 12				SR 12				Shaw Ave				Shaw Ave				
AM	NORTHBOUND				SOUTHBOUND				EASTBOUND				WESTBOUND				TOTAL
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	NL	NT	NR	NU	SL	ST	SR	SU	EL	ET	ER	EU	WL	WT	WR	WU	
7:00 AM	3	134	0	0	0	141	1	0	1	0	0	0	0	0	0	0	280
7:15 AM	1	162	0	0	0	139	3	0	2	0	0	0	0	0	0	0	307
7:30 AM	0	142	0	0	0	174	0	0	2	0	0	0	0	0	0	0	318
7:45 AM	0	169	0	0	0	182	3	0	2	0	1	0	0	0	0	0	357
8:00 AM	3	179	0	0	0	149	1	0	1	0	3	0	0	0	0	0	336
8:15 AM	2	188	0	0	0	181	3	0	2	0	0	0	0	0	0	0	376
8:30 AM	1	135	0	0	0	175	5	0	2	0	2	0	0	0	0	0	320
8:45 AM	1	121	0	0	0	168	3	0	2	0	2	0	0	0	0	0	297
TOTAL VOLUMES :	NL	NT	NR	NU	SL	ST	SR	SU	EL	ET	ER	EU	WL	WT	WR	WU	TOTAL
APPROACH %'s :	11	1230	0	0	0	1309	19	0	14	0	8	0	0	0	0	0	2591
PEAK HR :	07:45 AM - 08:45 AM																TOTAL
PEAK HR VOL :	6	671	0	0	0	687	12	0	7	0	6	0	0	0	0	0	1389
PEAK HR FACTOR :	0.500	0.892	0.000	0.000	0.000	0.944	0.600	0.000	0.875	0.000	0.500	0.000	0.000	0.000	0.000	0.000	0.924
	0.891				0.945				0.813								

PM	NORTHBOUND				SOUTHBOUND				EASTBOUND				WESTBOUND				TOTAL
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	NL	NT	NR	NU	SL	ST	SR	SU	EL	ET	ER	EU	WL	WT	WR	WU	
4:00 PM	4	184	0	0	0	171	0	0	5	0	0	0	0	0	0	0	364
4:15 PM	2	193	0	0	0	153	0	0	6	0	2	0	0	0	0	0	356
4:30 PM	2	169	0	0	0	184	1	0	1	0	4	0	0	0	0	0	361
4:45 PM	0	185	0	0	0	175	0	0	2	0	3	0	0	0	0	0	365
5:00 PM	2	164	0	0	0	166	1	0	5	0	1	0	0	0	0	0	339
5:15 PM	1	210	0	0	0	150	0	0	2	0	1	0	0	0	0	0	364
5:30 PM	0	178	0	0	0	183	0	0	1	0	0	0	0	0	0	0	362
5:45 PM	1	160	0	0	0	167	3	0	1	0	0	0	0	0	0	0	332
TOTAL VOLUMES :	NL	NT	NR	NU	SL	ST	SR	SU	EL	ET	ER	EU	WL	WT	WR	WU	TOTAL
APPROACH %'s :	12	1443	0	0	0	1349	5	0	23	0	11	0	0	0	0	0	2843
PEAK HR :	04:00 PM - 05:00 PM																TOTAL
PEAK HR VOL :	8	731	0	0	0	683	1	0	14	0	9	0	0	0	0	0	1446
PEAK HR FACTOR :	0.500	0.947	0.000	0.000	0.000	0.928	0.250	0.000	0.583	0.000	0.563	0.000	0.000	0.000	0.000	0.000	0.990
	0.947				0.924				0.719								

National Data & Surveying Services

Intersection Turning Movement Count

Location: SR 12 & Shaw Ave
City: Kenwood
Control:

Project ID: 17-07753-001
Date: 2017-09-16

Total

NS/EW Streets:	SR 12				SR 12				Shaw Ave				Shaw Ave				
NOON	NORTHBOUND				SOUTHBOUND				EASTBOUND				WESTBOUND				TOTAL
	0 NL	0 NT	0 NR	0 NU	0 SL	0 ST	0 SR	0 SU	0 EL	0 ET	0 ER	0 EU	0 WL	0 WT	0 WR	0 WU	
12:00 PM	10	161	0	0	0	127	3	0	0	0	0	0	0	0	0	0	301
12:15 PM	3	159	0	0	0	127	4	0	2	0	3	0	0	0	0	0	298
12:30 PM	9	144	0	0	0	154	5	0	2	0	1	0	0	0	0	0	315
12:45 PM	5	164	0	0	0	134	6	0	5	0	6	0	0	0	0	0	320
1:00 PM	5	161	0	0	0	146	6	0	2	0	6	0	0	0	0	0	326
1:15 PM	6	156	0	0	0	150	4	0	2	0	4	0	0	0	0	0	322
1:30 PM	7	163	0	0	0	116	5	1	7	0	4	0	0	0	0	0	303
1:45 PM	6	143	0	1	0	156	8	0	6	0	7	0	0	0	0	0	327
TOTAL VOLUMES :	NL 51	NT 1251	NR 0	NU 1	SL 0	ST 1110	SR 41	SU 1	EL 26	ET 0	ER 31	EU 0	WL 0	WT 0	WR 0	WU 0	TOTAL 2512
APPROACH %'s :	3.91%	96.01%	0.00%	0.08%	0.00%	96.35%	3.56%	0.09%	45.61%	0.00%	54.39%	0.00%					
PEAK HR :	12:30 PM - 01:30 PM																TOTAL
PEAK HR VOL :	25	625	0	0	0	584	21	0	11	0	17	0	0	0	0	0	1283
PEAK HR FACTOR :	0.694	0.953	0.000	0.000	0.000	0.948	0.875	0.000	0.550	0.000	0.708	0.000	0.000	0.000	0.000	0.000	0.984
	0.962				0.951				0.636								

National Data & Surveying Services

Intersection Turning Movement Count

Location: SR 12 & Maple Ave
City: Kenwood
Control:

Project ID: 17-07753-002
Date: 9/21/2017

Total

NS/EW Streets:	SR 12				SR 12				Maple Ave				Maple Ave				
AM	NORTHBOUND				SOUTHBOUND				EASTBOUND				WESTBOUND				TOTAL
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	NL	NT	NR	NU	SL	ST	SR	SU	EL	ET	ER	EU	WL	WT	WR	WU	
7:00 AM	0	135	0	0	0	142	0	0	1	0	1	0	0	0	0	0	279
7:15 AM	0	160	0	0	0	139	1	0	0	0	0	0	0	0	0	0	300
7:30 AM	0	143	0	0	0	170	0	0	2	0	1	0	0	0	0	0	316
7:45 AM	0	170	0	0	0	189	1	0	0	0	2	0	0	0	0	0	362
8:00 AM	1	173	0	0	0	144	0	0	0	0	0	0	0	0	0	0	318
8:15 AM	0	190	0	0	0	172	0	0	1	0	1	0	0	0	0	0	364
8:30 AM	0	142	0	0	0	179	1	0	0	0	1	0	0	0	0	0	323
8:45 AM	2	117	0	0	0	178	0	0	0	0	3	0	0	0	0	0	300
TOTAL VOLUMES :	NL	NT	NR	NU	SL	ST	SR	SU	EL	ET	ER	EU	WL	WT	WR	WU	TOTAL
APPROACH %'s :	3	1230	0	0	0	1313	3	0	4	0	9	0	0	0	0	0	2562
PEAK HR :	07:45 AM - 08:45 AM																TOTAL
PEAK HR VOL :	1	675	0	0	0	684	2	0	1	0	4	0	0	0	0	0	1367
PEAK HR FACTOR :	0.250	0.888	0.000	0.000	0.000	0.905	0.500	0.000	0.250	0.000	0.500	0.000	0.000	0.000	0.000	0.000	0.939
	0.889				0.903				0.625								

PM	NORTHBOUND				SOUTHBOUND				EASTBOUND				WESTBOUND				TOTAL
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	NL	NT	NR	NU	SL	ST	SR	SU	EL	ET	ER	EU	WL	WT	WR	WU	
4:00 PM	1	179	0	0	0	169	3	0	4	0	4	0	0	0	0	0	360
4:15 PM	1	191	0	0	0	151	0	0	2	0	3	0	0	0	0	0	348
4:30 PM	1	169	0	0	0	189	1	0	1	0	2	0	0	0	0	0	363
4:45 PM	1	185	0	0	0	191	1	0	0	0	1	0	0	0	0	0	379
5:00 PM	1	165	0	0	0	166	1	0	1	0	0	0	0	0	0	0	334
5:15 PM	2	203	0	0	0	140	1	0	1	0	1	0	0	0	0	0	348
5:30 PM	1	181	0	0	0	189	0	0	2	0	2	0	0	0	0	0	375
5:45 PM	0	154	0	0	0	162	0	0	0	0	0	0	0	0	0	0	316
TOTAL VOLUMES :	NL	NT	NR	NU	SL	ST	SR	SU	EL	ET	ER	EU	WL	WT	WR	WU	TOTAL
APPROACH %'s :	8	1427	0	0	0	1357	7	0	11	0	13	0	0	0	0	0	2823
PEAK HR :	04:00 PM - 05:00 PM																TOTAL
PEAK HR VOL :	4	724	0	0	0	700	5	0	7	0	10	0	0	0	0	0	1450
PEAK HR FACTOR :	1.000	0.948	0.000	0.000	0.000	0.916	0.417	0.000	0.438	0.000	0.625	0.000	0.000	0.000	0.000	0.000	0.956
	0.948				0.918				0.531								

National Data & Surveying Services

Intersection Turning Movement Count

Location: SR 12 & Maple Ave
City: Kenwood
Control:

Project ID: 17-07753-002
Date: 2017-09-16

Total


NS/EW Streets:	SR 12				SR 12				Maple Ave				Maple Ave				
NOON	NORTHBOUND				SOUTHBOUND				EASTBOUND				WESTBOUND				TOTAL
	0 NL	0 NT	0 NR	0 NU	0 SL	0 ST	0 SR	0 SU	0 EL	0 ET	0 ER	0 EU	0 WL	0 WT	0 WR	0 WU	
12:00 PM	1	170	0	0	0	120	4	0	2	0	1	0	0	0	0	0	298
12:15 PM	2	154	0	0	0	132	1	0	2	0	1	0	0	0	0	0	292
12:30 PM	5	159	0	0	0	153	1	1	0	0	4	0	0	0	0	0	323
12:45 PM	1	169	0	0	0	134	2	0	1	0	3	0	0	0	0	0	310
1:00 PM	2	162	0	0	0	145	6	0	0	0	1	0	0	0	0	0	316
1:15 PM	1	155	0	0	0	149	5	0	4	0	2	0	0	0	0	0	316
1:30 PM	2	164	0	0	0	118	2	0	3	0	8	0	0	0	0	0	297
1:45 PM	2	150	0	0	0	162	2	0	1	0	3	0	0	0	0	0	320
TOTAL VOLUMES :	NL 16	NT 1283	NR 0	NU 0	SL 0	ST 1113	SR 23	SU 1	EL 13	ET 0	ER 23	EU 0	WL 0	WT 0	WR 0	WU 0	TOTAL 2472
APPROACH %'s :	1.23%	98.77%	0.00%	0.00%	0.00%	97.89%	2.02%	0.09%	36.11%	0.00%	63.89%	0.00%					
PEAK HR :	12:30 PM - 01:30 PM																TOTAL
PEAK HR VOL :	9	645	0	0	0	581	14	1	5	0	10	0	0	0	0	0	1265
PEAK HR FACTOR :	0.450	0.954	0.000	0.000	0.000	0.949	0.583	0.250	0.313	0.000	0.625	0.000	0.000	0.000	0.000	0.000	0.979
	0.962				0.961				0.625								

Winery Dwy & Maple Ave

Peak Hour Turning Movement Count

ID: 17-07753-003
City: Kenwood

Day: Thursday
Date: 09/21/2017

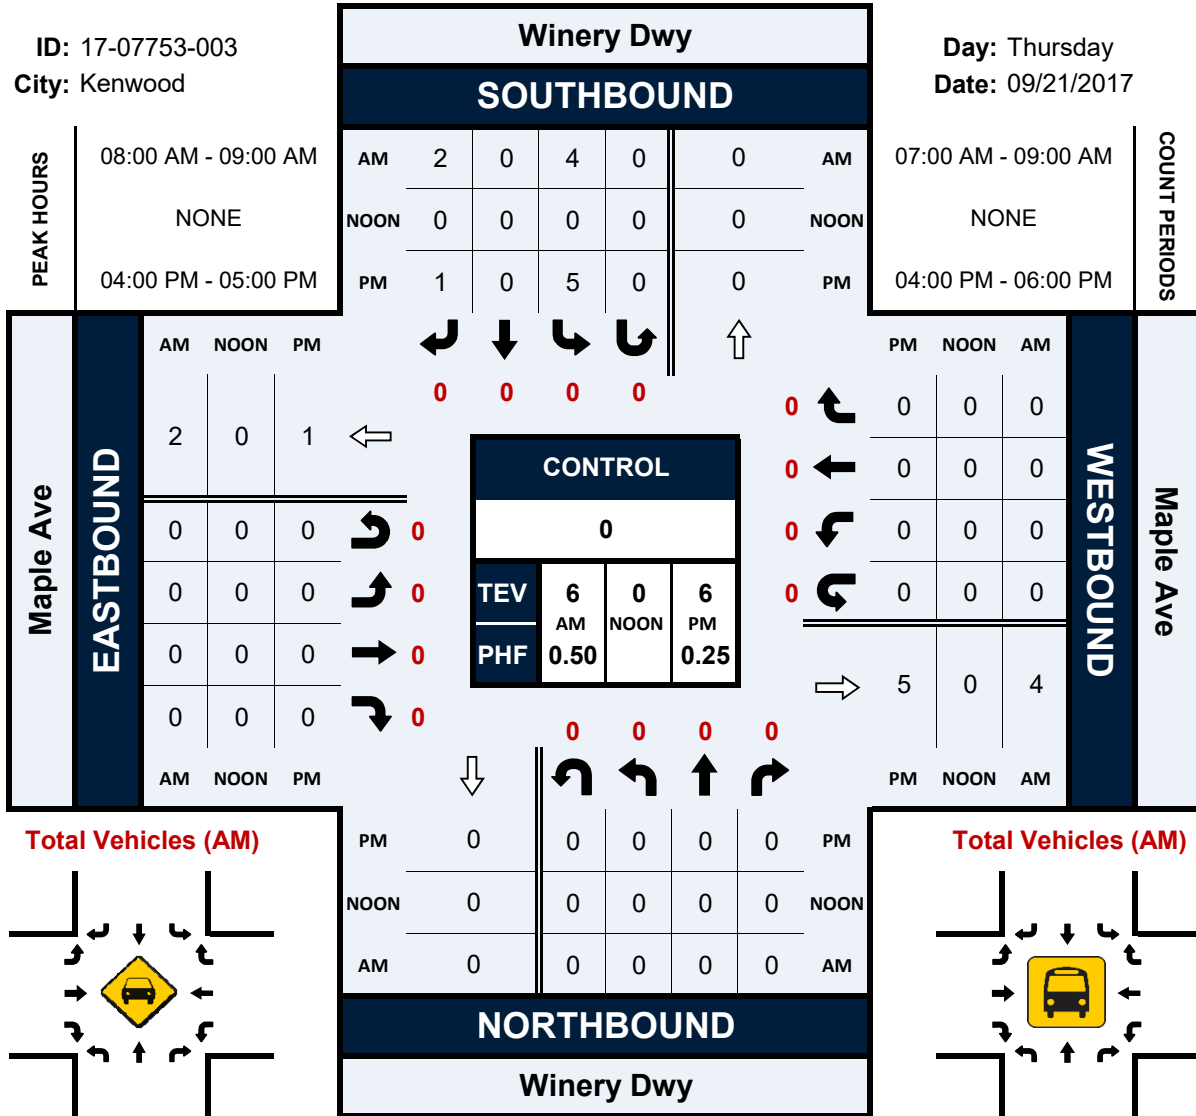


Winery Dwy & Maple Ave


Peak Hour Turning Movement Count

ID: 17-07753-003
City: Kenwood


Day: Saturday
Date: 09/16/2017

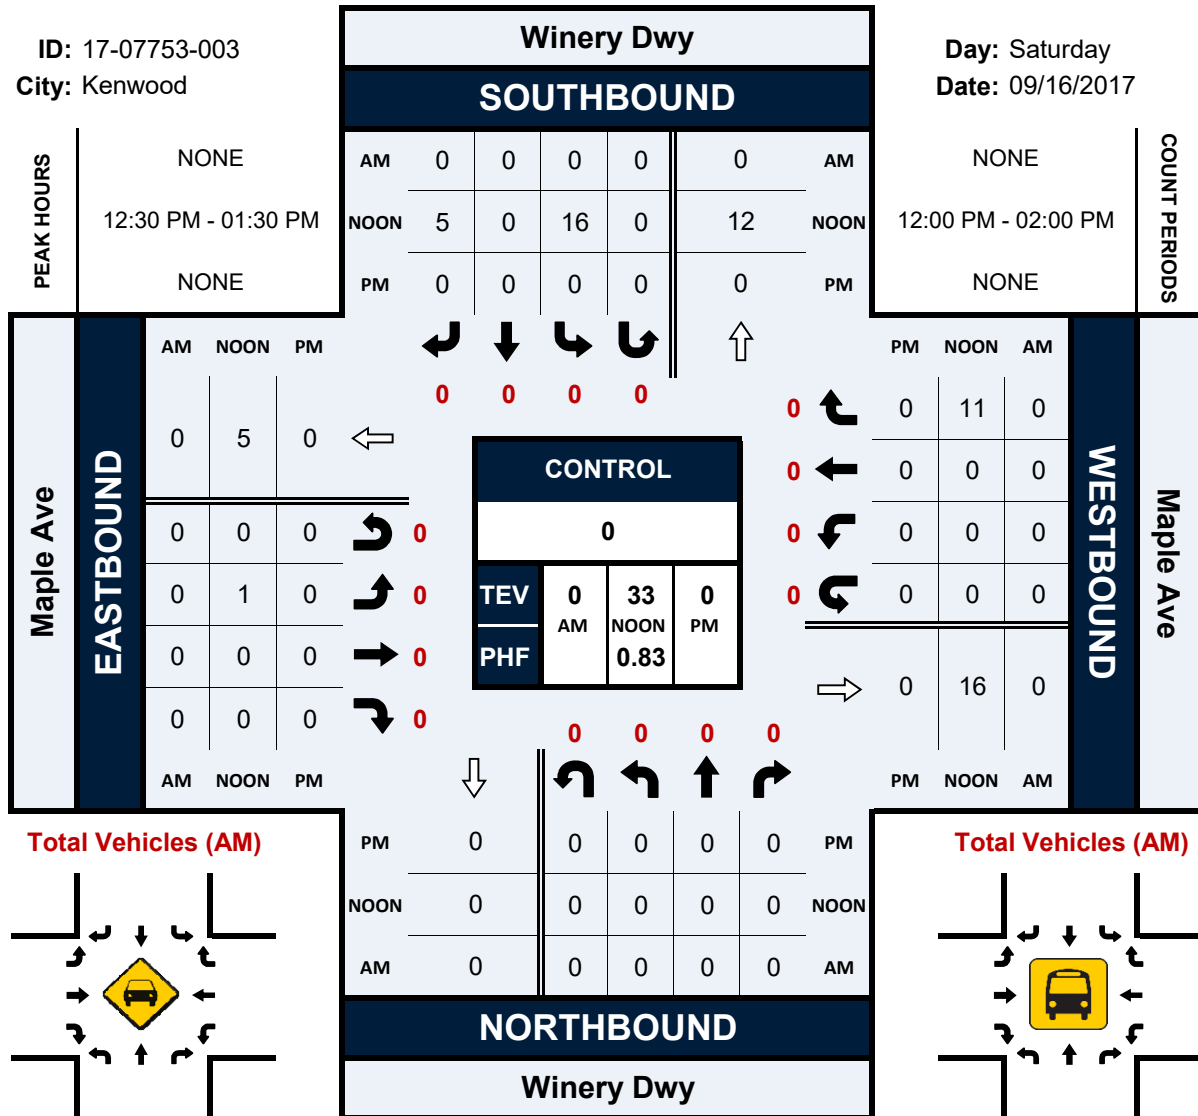



Total Vehicles (AM)




Total Vehicles (NOON)




Total Vehicles (PM)

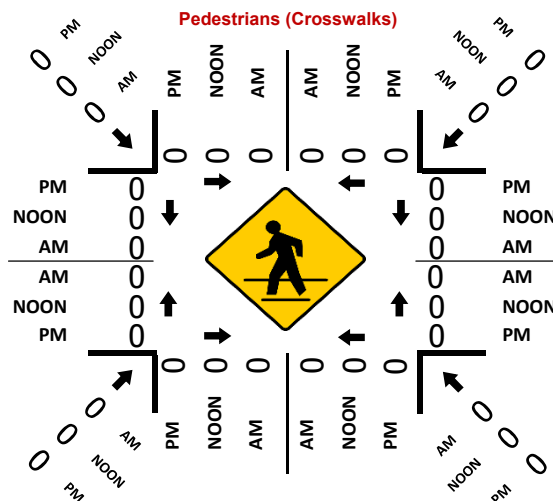


Total Vehicles (AM)



Total Vehicles (NOON)



Total Vehicles (PM)



Prepared by National Data & Surveying Services

In Out Study

Locations: 60 Shaw Ave

City: Kenwood,CA

Day: Saturday

Date: 9/16/2017

Time	Entrance 1	
	In	Out
12:00	13	1
12:15	3	2
12:30	13	2
12:45	6	5
13:00	10	4
13:15	10	3
13:30	6	3
13:45	13	14

Time	Entrance 2A	
	In	Out
12:00	2	1
12:15	3	1
12:30	6	0
12:45	5	2
13:00	3	1
13:15	8	4
13:30	4	7
13:45	8	11

Time	Entrance 2B	
	In	Out
12:00	0	0
12:15	0	0
12:30	0	1
12:45	2	1
13:00	0	0
13:15	1	1
13:30	0	0
13:45	0	0

Ped Grouping Study

Locations: 60 Shaw Ave

City: Kenwood,CA

Day: Thursday

Date: 9/21/2017

Time	Entrance 1	
	In	Out
7:00	1	0
7:15	2	0
7:30	0	0
7:45	2	1
8:00	0	0
8:15	1	0
8:30	1	0
8:45	0	1

Time	Entrance 2A	
	In	Out
7:00	2	2
7:15	3	2
7:30	1	0
7:45	2	1
8:00	3	1
8:15	8	1
8:30	2	5
8:45	6	5

Time	Entrance 2B	
	In	Out
7:00	0	0
7:15	0	0
7:30	0	0
7:45	0	0
8:00	0	0
8:15	0	0
8:30	0	0
8:45	0	0

Time	Entrance 1	
	In	Out
4:00	3	5
4:15	1	1
4:30	0	5
4:45	2	2
5:00	-	-
5:15	-	-
5:30	-	-
5:45	-	-

Time	Entrance 2A	
	In	Out
4:00	1	3
4:15	1	2
4:30	0	1
4:45	0	1
5:00	-	-
5:15	-	-
5:30	-	-
5:45	-	-

Time	Entrance 2B	
	In	Out
4:00	0	0
4:15	1	3
4:30	1	3
4:45	0	2
5:00	-	-
5:15	-	-
5:30	-	-
5:45	-	-

Note: Entrance 1: Gate closed at 5PM

Entrance 2A: Gate closed at 5PM

Entrance 2B: Gate closed at 5PM

Future Volume Growth Factor Derivation
JVB Marketplace Traffic Analysis

SR 12		NB	
	Model Years	2010	2040
	Model Segment Volumes	448	567
	Current Year	2017	
	Growth Factor	1.203	

SR 12		NB	
	Model Years	2010	2040
	Model Segment Volumes	843	951
	Current Year	2017	
	Growth Factor	1.098	

Shaw/Maple Ave		EB	
	Model Years	2010	2040
	Model Segment Volumes	82	133
	Current Year	2017	
	Growth Factor	1.477	

Shaw Ave/Maple Ave		WB	
	Model Years	2010	2040
	Model Segment Volumes	177	210
	Current Year	2017	
	Growth Factor	1.143	

Peak Period: Weekday PM

Intersection: SR 12/Shaw Avenue

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Volume Existing	14	9	8	731	683	1
Volume Future	21	13	9	879	750	1



This page intentionally left blank

Appendix C

Intersection Level of Service Calculations








This page intentionally left blank

Intersection Level Of Service Report Intersection 1: SR 12 and Shaw Avenue

Control Type:	Two-way stop	Delay (sec / veh):	31.7
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.036

Intersection Setup

Name	SR 12		SR 12		Shaw Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		25.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Shaw Avenue	
Base Volume Input [veh/h]	0	670	687	0	5	5
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	0	670	687	0	5	5
Peak Hour Factor	0.9200	0.9200	0.9200	0.9200	0.9200	0.9200
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	0	182	187	0	1	1
Total Analysis Volume [veh/h]	0	728	747	0	5	5
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0

Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.00	0.01	0.01	0.00	0.04	0.01
d_M, Delay for Movement [s/veh]	9.18	0.00	0.00	0.00	31.73	14.59
Movement LOS	A	A	A	A	D	B
95th-Percentile Queue Length [veh]	0.00	0.00	0.00	0.00	0.15	0.15
95th-Percentile Queue Length [ft]	0.00	0.00	0.00	0.00	3.76	3.76
d_A, Approach Delay [s/veh]	0.00		0.00		23.16	
Approach LOS	A		A		C	
d_I, Intersection Delay [s/veh]	0.16					
Intersection LOS	D					

Intersection Level Of Service Report
Intersection 2: SR 12 and Maple Avenue

Control Type:	Two-way stop	Delay (sec / veh):	29.8
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.000

Intersection Setup

Name	SR 12		SR 12		Maple Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration	←		→		→	
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		30.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Maple Avenue	
Base Volume Input [veh/h]	1	669	683	2	0	1
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	1	669	683	2	0	1
Peak Hour Factor	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	0	178	182	1	0	0
Total Analysis Volume [veh/h]	1	712	727	2	0	1
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.00	0.01	0.01	0.00	0.00	0.00
d_M, Delay for Movement [s/veh]	9.12	0.00	0.00	0.00	29.75	13.52
Movement LOS	A	A	A	A	D	B
95th-Percentile Queue Length [veh]	9.11	9.11	0.00	0.00	0.01	0.01
95th-Percentile Queue Length [ft]	227.86	227.86	0.00	0.00	0.18	0.18
d_A, Approach Delay [s/veh]	0.01		0.00		13.52	
Approach LOS	A		A		B	
d_I, Intersection Delay [s/veh]			0.02			
Intersection LOS			D			

Intersection Level Of Service Report
Intersection 1: SR 12 and Shaw Avenue

Control Type:	Two-way stop	Delay (sec / veh):	29.3
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.007

Intersection Setup

Name	SR 12		SR 12		Shaw Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		25.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Shaw Avenue	
Base Volume Input [veh/h]	0	729	683	0	1	0
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	0	729	683	0	1	0
Peak Hour Factor	0.9900	0.9900	0.9900	0.9900	0.9900	0.9900
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	0	184	172	0	0	0
Total Analysis Volume [veh/h]	0	736	690	0	1	0
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.00	0.01	0.01	0.00	0.01	0.00
d_M, Delay for Movement [s/veh]	8.98	0.00	0.00	0.00	29.30	13.25
Movement LOS	A	A	A	A	D	B
95th-Percentile Queue Length [veh]	0.00	0.00	0.00	0.00	0.02	0.02
95th-Percentile Queue Length [ft]	0.00	0.00	0.00	0.00	0.51	0.51
d_A, Approach Delay [s/veh]	0.00		0.00		29.30	
Approach LOS	A		A		D	
d_I, Intersection Delay [s/veh]				0.02		
Intersection LOS				D		

Intersection Level Of Service Report
Intersection 2: SR 12 and Maple Avenue

Control Type:	Two-way stop	Delay (sec / veh):	32.0
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.036

Intersection Setup

Name	SR 12		SR 12		Maple Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		30.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Maple Avenue	
Base Volume Input [veh/h]	4	716	691	5	5	7
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	4	716	691	5	5	7
Peak Hour Factor	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	1	186	180	1	1	2
Total Analysis Volume [veh/h]	4	746	720	5	5	7
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.00	0.01	0.01	0.00	0.04	0.02
d_M, Delay for Movement [s/veh]	9.12	0.00	0.00	0.00	32.00	14.32
Movement LOS	A	A	A	A	D	B
95th-Percentile Queue Length [veh]	10.59	10.59	0.00	0.00	0.17	0.17
95th-Percentile Queue Length [ft]	264.71	264.71	0.00	0.00	4.15	4.15
d_A, Approach Delay [s/veh]	0.05		0.00		21.68	
Approach LOS	A		A		C	
d_I, Intersection Delay [s/veh]	0.20					
Intersection LOS	D					

Intersection Level Of Service Report Intersection 1: SR 12 and Shaw Avenue

Control Type:	Two-way stop	Delay (sec / veh):	24.3
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.046

Intersection Setup

Name	SR 12		SR 12		Shaw Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		25.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Shaw Avenue	
Base Volume Input [veh/h]	0	620	584	0	9	16
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	0	620	584	0	9	16
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	0	158	149	0	2	4
Total Analysis Volume [veh/h]	0	633	596	0	9	16
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.00	0.01	0.01	0.00	0.05	0.03
d_M, Delay for Movement [s/veh]	8.67	0.00	0.00	0.00	24.27	13.09
Movement LOS	A	A	A	A	C	B
95th-Percentile Queue Length [veh]	0.00	0.00	0.00	0.00	0.25	0.25
95th-Percentile Queue Length [ft]	0.00	0.00	0.00	0.00	6.27	6.27
d_A, Approach Delay [s/veh]	0.00		0.00		17.11	
Approach LOS	A		A		C	
d_I, Intersection Delay [s/veh]	0.34					
Intersection LOS	C					

Intersection Level Of Service Report
Intersection 2: SR 12 and Maple Avenue

Control Type:	Two-way stop	Delay (sec / veh):	24.1
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.000

Intersection Setup

Name	SR 12		SR 12		Maple Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		30.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Maple Avenue	
Base Volume Input [veh/h]	9	620	580	14	0	0
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	9	620	580	14	0	0
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	2	158	148	4	0	0
Total Analysis Volume [veh/h]	9	633	592	14	0	0
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.01	0.01	0.01	0.00	0.00	0.00
d_M, Delay for Movement [s/veh]	8.74	0.00	0.00	0.00	24.15	12.18
Movement LOS	A	A	A	A	C	B
95th-Percentile Queue Length [veh]	5.18	5.18	0.00	0.00	0.00	0.00
95th-Percentile Queue Length [ft]	129.59	129.59	0.00	0.00	0.00	0.00
d_A, Approach Delay [s/veh]	0.12		0.00		18.16	
Approach LOS	A		A		C	
d_I, Intersection Delay [s/veh]			0.06			
Intersection LOS			C			

Intersection Level Of Service Report
Intersection 1: SR 12 and Shaw Avenue

Control Type:	Two-way stop	Delay (sec / veh):	43.5
Analysis Method:	HCM 6th Edition	Level Of Service:	E
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.089

Intersection Setup

Name	SR 12		SR 12		Shaw Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		25.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Shaw Avenue	
Base Volume Input [veh/h]	1	806	754	2	8	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	1	806	754	2	8	8
Peak Hour Factor	0.9200	0.9200	0.9200	0.9200	0.9200	0.9200
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	0	219	205	1	2	2
Total Analysis Volume [veh/h]	1	876	820	2	9	9
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0

Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.00	0.01	0.01	0.00	0.09	0.02
d_M, Delay for Movement [s/veh]	9.46	0.00	0.00	0.00	43.46	17.48
Movement LOS	A	A	A	A	E	C
95th-Percentile Queue Length [veh]	22.99	22.99	0.00	0.00	0.37	0.37
95th-Percentile Queue Length [ft]	574.85	574.85	0.00	0.00	9.36	9.36
d_A, Approach Delay [s/veh]	0.01		0.00		30.47	
Approach LOS	F		A		D	
d_I, Intersection Delay [s/veh]	0.32					
Intersection LOS	E					

Intersection Level Of Service Report
Intersection 2: SR 12 and Maple Avenue

Control Type:	Two-way stop	Delay (sec / veh):	38.7
Analysis Method:	HCM 6th Edition	Level Of Service:	E
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.000

Intersection Setup

Name	SR 12		SR 12		Maple Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration	←		→		←	
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		30.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Maple Avenue	
Base Volume Input [veh/h]	1	806	750	2	0	3
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	1	806	750	2	0	3
Peak Hour Factor	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	0	214	199	1	0	1
Total Analysis Volume [veh/h]	1	857	798	2	0	3
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.00	0.01	0.01	0.00	0.00	0.01
d_M, Delay for Movement [s/veh]	9.38	0.00	0.00	0.00	38.65	14.41
Movement LOS	A	A	A	A	E	B
95th-Percentile Queue Length [veh]	20.26	20.26	0.00	0.00	0.02	0.02
95th-Percentile Queue Length [ft]	506.57	506.57	0.00	0.00	0.59	0.59
d_A, Approach Delay [s/veh]	0.01		0.00		14.41	
Approach LOS	F		A		B	
d_I, Intersection Delay [s/veh]			0.03			
Intersection LOS			E			

Intersection Level Of Service Report
Intersection 1: SR 12 and Shaw Avenue

Control Type:	Two-way stop	Delay (sec / veh):	39.4
Analysis Method:	HCM 6th Edition	Level Of Service:	E
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.072

Intersection Setup

Name	SR 12		SR 12		Shaw Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		25.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Shaw Avenue	
Base Volume Input [veh/h]	1	877	750	0	8	4
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	1	877	750	0	8	4
Peak Hour Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	0	219	188	0	2	1
Total Analysis Volume [veh/h]	1	877	750	0	8	4
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0

Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.00	0.01	0.01	0.00	0.07	0.01
d_M, Delay for Movement [s/veh]	9.20	0.00	0.00	0.00	39.37	15.90
Movement LOS	A	A	A	A	E	C
95th-Percentile Queue Length [veh/ln]	0.00	0.00	0.00	0.00	0.26	0.26
95th-Percentile Queue Length [ft/ln]	0.09	0.09	0.00	0.00	6.54	6.54
d_A, Approach Delay [s/veh]	0.01		0.00		31.55	
Approach LOS	A		A		D	
d_I, Intersection Delay [s/veh]				0.24		
Intersection LOS				E		

Intersection Level Of Service Report
Intersection 2: SR 12 and Maple Avenue

Control Type: Two-way stop
Analysis Method: HCM 6th Edition
Analysis Period: 15 minutes
Delay (sec / veh): 43.7
Level Of Service: E
Volume to Capacity (v/c): 0.080

Intersection Setup

Name	SR 12		SR 12		Maple Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration	←		→		→	
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		30.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Maple Avenue	
Base Volume Input [veh/h]	5	863	760	6	8	12
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	5	863	760	6	8	12
Peak Hour Factor	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	1	225	198	2	2	3
Total Analysis Volume [veh/h]	5	899	792	6	8	13
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.01	0.01	0.01	0.00	0.08	0.03
d_M, Delay for Movement [s/veh]	9.39	0.00	0.00	0.00	43.71	16.79
Movement LOS	A	A	A	A	E	C
95th-Percentile Queue Length [veh/ln]	0.02	0.02	0.00	0.00	0.38	0.38
95th-Percentile Queue Length [ft/ln]	0.46	0.46	0.00	0.00	9.47	9.47
d_A, Approach Delay [s/veh]	0.05		0.00		27.04	
Approach LOS	A		A		D	
d_I, Intersection Delay [s/veh]				0.36		
Intersection LOS				E		

Intersection Level Of Service Report
Intersection 1: SR 12 and Shaw Avenue

Control Type:	Two-way stop	Delay (sec / veh):	31.7
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.095

Intersection Setup

Name	SR 12		SR 12		Shaw Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		25.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Shaw Avenue	
Base Volume Input [veh/h]	4	747	641	3	14	24
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	4	747	641	3	14	24
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	1	191	164	1	4	6
Total Analysis Volume [veh/h]	4	762	654	3	14	24
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.00	0.01	0.01	0.00	0.09	0.05
d_M, Delay for Movement [s/veh]	8.89	0.00	0.00	0.00	31.65	15.08
Movement LOS	A	A	A	A	D	C
95th-Percentile Queue Length [veh]	9.54	9.54	0.00	0.00	0.50	0.50
95th-Percentile Queue Length [ft]	238.52	238.52	0.00	0.00	12.60	12.60
d_A, Approach Delay [s/veh]	0.05		0.00		21.19	
Approach LOS	A		A		C	
d_I, Intersection Delay [s/veh]			0.58			
Intersection LOS			D			

Intersection Level Of Service Report
Intersection 2: SR 12 and Maple Avenue

Control Type:	Two-way stop	Delay (sec / veh):	30.6
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.014

Intersection Setup

Name	SR 12		SR 12		Maple Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		30.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Maple Avenue	
Base Volume Input [veh/h]	10	751	637	16	2	5
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	10	751	637	16	2	5
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	3	192	163	4	1	1
Total Analysis Volume [veh/h]	10	766	650	16	2	5
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.01	0.01	0.01	0.00	0.01	0.01
d_M, Delay for Movement [s/veh]	8.94	0.00	0.00	0.00	30.56	13.08
Movement LOS	A	A	A	A	D	B
95th-Percentile Queue Length [veh]	10.18	10.18	0.00	0.00	0.08	0.08
95th-Percentile Queue Length [ft]	254.39	254.39	0.00	0.00	1.90	1.90
d_A, Approach Delay [s/veh]	0.12		0.00		18.07	
Approach LOS	A		A		C	
d_I, Intersection Delay [s/veh]	0.15					
Intersection LOS	D					

Intersection Level Of Service Report
Intersection 1: SR 12 and Shaw Avenue

Control Type:	Two-way stop	Delay (sec / veh):	33.6
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.060

Intersection Setup

Name	SR 12		SR 12		Shaw Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		25.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Shaw Avenue	
Base Volume Input [veh/h]	6	671	687	12	7	6
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	6	671	687	12	7	6
Peak Hour Factor	0.9200	0.9200	0.9200	0.9200	0.9200	0.9200
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	2	182	187	3	2	2
Total Analysis Volume [veh/h]	7	729	747	13	8	7
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.01	0.01	0.01	0.00	0.06	0.02
d_M, Delay for Movement [s/veh]	9.26	0.00	0.00	0.00	33.57	15.34
Movement LOS	A	A	A	A	D	C
95th-Percentile Queue Length [veh]	10.89	10.89	0.00	0.00	0.25	0.25
95th-Percentile Queue Length [ft]	272.13	272.13	0.00	0.00	6.20	6.20
d_A, Approach Delay [s/veh]	0.09		0.00		25.06	
Approach LOS	A		A		D	
d_I, Intersection Delay [s/veh]	0.29					
Intersection LOS	D					

Intersection Level Of Service Report
Intersection 2: SR 12 and Maple Avenue

Control Type:	Two-way stop	Delay (sec / veh):	30.2
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.007

Intersection Setup

Name	SR 12		SR 12		Maple Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		30.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Maple Avenue	
Base Volume Input [veh/h]	1	675	684	2	1	4
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	1	675	684	2	1	4
Peak Hour Factor	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	0	180	182	1	0	1
Total Analysis Volume [veh/h]	1	718	728	2	1	4
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.00	0.01	0.01	0.00	0.01	0.01
d_M, Delay for Movement [s/veh]	9.12	0.00	0.00	0.00	30.18	13.71
Movement LOS	A	A	A	A	D	B
95th-Percentile Queue Length [veh]	9.38	9.38	0.00	0.00	0.05	0.05
95th-Percentile Queue Length [ft]	234.42	234.42	0.00	0.00	1.25	1.25
d_A, Approach Delay [s/veh]	0.01		0.00		17.00	
Approach LOS	A		A		C	
d_I, Intersection Delay [s/veh]			0.06			
Intersection LOS			D			

Intersection Level Of Service Report
Intersection 1: SR 12 and Shaw Avenue

Control Type:	Two-way stop	Delay (sec / veh):	32.6
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.098

Intersection Setup

Name	SR 12		SR 12		Shaw Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		25.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Shaw Avenue	
Base Volume Input [veh/h]	8	731	683	1	14	9
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	8	731	683	1	14	9
Peak Hour Factor	0.9900	0.9900	0.9900	0.9900	0.9900	0.9900
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	2	185	172	0	4	2
Total Analysis Volume [veh/h]	8	738	690	1	14	9
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.01	0.01	0.01	0.00	0.10	0.02
d_M, Delay for Movement [s/veh]	9.02	0.00	0.00	0.00	32.61	15.55
Movement LOS	A	A	A	A	D	C
95th-Percentile Queue Length [veh]	9.55	9.55	0.00	0.00	0.39	0.39
95th-Percentile Queue Length [ft]	238.87	238.87	0.00	0.00	9.86	9.86
d_A, Approach Delay [s/veh]	0.10		0.00		25.93	
Approach LOS	A		A		D	
d_I, Intersection Delay [s/veh]				0.46		
Intersection LOS	D					

Intersection Level Of Service Report
Intersection 2: SR 12 and Maple Avenue

Control Type:	Two-way stop	Delay (sec / veh):	33.1
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.052

Intersection Setup

Name	SR 12		SR 12		Maple Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		30.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Maple Avenue	
Base Volume Input [veh/h]	4	724	700	5	7	10
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	4	724	700	5	7	10
Peak Hour Factor	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	1	189	182	1	2	3
Total Analysis Volume [veh/h]	4	754	729	5	7	10
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.00	0.01	0.01	0.00	0.05	0.02
d_M, Delay for Movement [s/veh]	9.15	0.00	0.00	0.00	33.07	14.85
Movement LOS	A	A	A	A	D	B
95th-Percentile Queue Length [veh]	11.22	11.22	0.00	0.00	0.24	0.24
95th-Percentile Queue Length [ft]	280.40	280.40	0.00	0.00	6.09	6.09
d_A, Approach Delay [s/veh]	0.05		0.00		22.35	
Approach LOS	A		A		C	
d_I, Intersection Delay [s/veh]			0.28			
Intersection LOS			D			

Intersection Level Of Service Report
Intersection 1: SR 12 and Shaw Avenue

Control Type:	Two-way stop	Delay (sec / veh):	27.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.064

Intersection Setup

Name	SR 12		SR 12		Shaw Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		25.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Shaw Avenue	
Base Volume Input [veh/h]	25	625	584	21	11	17
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	25	625	584	21	11	17
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	6	159	149	5	3	4
Total Analysis Volume [veh/h]	26	638	596	21	11	17
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.03	0.01	0.01	0.00	0.06	0.03
d_M, Delay for Movement [s/veh]	8.84	0.00	0.00	0.00	27.39	13.63
Movement LOS	A	A	A	A	D	B
95th-Percentile Queue Length [veh]	5.77	5.77	0.00	0.00	0.32	0.32
95th-Percentile Queue Length [ft]	144.29	144.29	0.00	0.00	8.11	8.11
d_A, Approach Delay [s/veh]	0.35		0.00		19.03	
Approach LOS	A		A		C	
d_I, Intersection Delay [s/veh]			0.58			
Intersection LOS			D			

Intersection Level Of Service Report
Intersection 2: SR 12 and Maple Avenue

Control Type:	Two-way stop	Delay (sec / veh):	25.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.028

Intersection Setup

Name	SR 12		SR 12		Maple Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		30.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Maple Avenue	
Base Volume Input [veh/h]	9	645	581	14	5	10
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	9	645	581	14	5	10
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	2	165	148	4	1	3
Total Analysis Volume [veh/h]	9	658	593	14	5	10
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.01	0.01	0.01	0.00	0.03	0.02
d_M, Delay for Movement [s/veh]	8.74	0.00	0.00	0.00	25.43	12.76
Movement LOS	A	A	A	A	D	B
95th-Percentile Queue Length [veh]	5.72	5.72	0.00	0.00	0.15	0.15
95th-Percentile Queue Length [ft]	142.94	142.94	0.00	0.00	3.73	3.73
d_A, Approach Delay [s/veh]	0.12		0.00		16.98	
Approach LOS	A		A		C	
d_I, Intersection Delay [s/veh]	0.26					
Intersection LOS	D					

Intersection Level Of Service Report Intersection 1: SR 12 and Shaw Avenue

Control Type:	Two-way stop	Delay (sec / veh):	46.3
Analysis Method:	HCM 6th Edition	Level Of Service:	E
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.114

Intersection Setup

Name	SR 12		SR 12		Shaw Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		25.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Shaw Avenue	
Base Volume Input [veh/h]	6	671	687	12	7	6
Base Volume Adjustment Factor	1.1430	1.2030	1.0980	1.1430	1.4770	1.4770
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	7	807	754	14	10	9
Peak Hour Factor	0.9200	0.9200	0.9200	0.9200	0.9200	0.9200
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	2	219	205	4	3	2
Total Analysis Volume [veh/h]	8	877	820	15	11	10
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.01	0.01	0.01	0.00	0.11	0.03
d_M, Delay for Movement [s/veh]	9.55	0.00	0.00	0.00	46.28	18.63
Movement LOS	A	A	A	A	E	C
95th-Percentile Queue Length [veh]	24.41	24.41	0.00	0.00	0.48	0.48
95th-Percentile Queue Length [ft]	610.29	610.29	0.00	0.00	11.96	11.96
d_A, Approach Delay [s/veh]	0.09		0.00		33.11	
Approach LOS	F		A		D	
d_I, Intersection Delay [s/veh]	0.44					
Intersection LOS	E					

Intersection Level Of Service Report
Intersection 2: SR 12 and Maple Avenue

Control Type:	Two-way stop	Delay (sec / veh):	39.3
Analysis Method:	HCM 6th Edition	Level Of Service:	E
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.009

Intersection Setup

Name	SR 12		SR 12		Maple Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		30.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Maple Avenue	
Base Volume Input [veh/h]	1	675	684	2	1	4
Base Volume Adjustment Factor	1.1430	1.2030	1.0980	1.1430	1.4770	1.4770
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	1	812	751	2	1	6
Peak Hour Factor	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	0	216	200	1	0	2
Total Analysis Volume [veh/h]	1	864	799	2	1	6
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.00	0.01	0.01	0.00	0.01	0.02
d_M, Delay for Movement [s/veh]	9.38	0.00	0.00	0.00	39.30	14.68
Movement LOS	A	A	A	A	E	B
95th-Percentile Queue Length [veh]	20.88	20.88	0.00	0.00	0.08	0.08
95th-Percentile Queue Length [ft]	522.04	522.04	0.00	0.00	1.92	1.92
d_A, Approach Delay [s/veh]	0.01		0.00		18.20	
Approach LOS	F		A		C	
d_I, Intersection Delay [s/veh]	0.08					
Intersection LOS	E					

Intersection Level Of Service Report
Intersection 1: SR 12 and Shaw Avenue

Control Type:	Two-way stop	Delay (sec / veh):	43.7
Analysis Method:	HCM 6th Edition	Level Of Service:	E
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.197

Intersection Setup

Name	SR 12		SR 12		Shaw Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		25.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Shaw Avenue	
Base Volume Input [veh/h]	8	731	683	1	14	9
Base Volume Adjustment Factor	1.1430	1.2030	1.0980	1.1430	1.4770	1.4770
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	9	879	750	1	21	13
Peak Hour Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	2	220	188	0	5	3
Total Analysis Volume [veh/h]	9	879	750	1	21	13
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			Yes
Storage Area [veh]	0	0	5
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.01	0.01	0.01	0.00	0.20	0.03
d_M, Delay for Movement [s/veh]	9.24	0.00	0.00	0.00	43.72	18.78
Movement LOS	A	A	A	A	E	C
95th-Percentile Queue Length [veh/ln]	0.03	0.03	0.00	0.00	0.71	0.71
95th-Percentile Queue Length [ft/ln]	0.79	0.79	0.00	0.00	17.63	17.63
d_A, Approach Delay [s/veh]	0.09		0.00		34.18	
Approach LOS	A		A		D	
d_I, Intersection Delay [s/veh]			0.74			
Intersection LOS			E			

Intersection Level Of Service Report
Intersection 2: SR 12 and Maple Avenue

Control Type:	Two-way stop	Delay (sec / veh):	45.5
Analysis Method:	HCM 6th Edition	Level Of Service:	E
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.103

Intersection Setup

Name	SR 12		SR 12		Maple Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		30.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Maple Avenue	
Base Volume Input [veh/h]	4	724	700	5	7	10
Base Volume Adjustment Factor	1.1430	1.2030	1.0980	1.1430	1.4770	1.4770
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	5	871	769	6	10	15
Peak Hour Factor	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	1	227	200	2	3	4
Total Analysis Volume [veh/h]	5	907	801	6	10	16
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.01	0.01	0.01	0.00	0.10	0.04
d_M, Delay for Movement [s/veh]	9.43	0.00	0.00	0.00	45.47	17.77
Movement LOS	A	A	A	A	E	C
95th-Percentile Queue Length [veh/ln]	0.02	0.02	0.00	0.00	0.50	0.50
95th-Percentile Queue Length [ft/ln]	0.46	0.46	0.00	0.00	12.38	12.38
d_A, Approach Delay [s/veh]	0.05		0.00		28.42	
Approach LOS	A		A		D	
d_I, Intersection Delay [s/veh]				0.45		
Intersection LOS				E		

Intersection Level Of Service Report Intersection 1: SR 12 and Shaw Avenue

Control Type:	Two-way stop	Delay (sec / veh):	36.6
Analysis Method:	HCM 6th Edition	Level Of Service:	E
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.125

Intersection Setup

Name	SR 12		SR 12		Shaw Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		25.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Shaw Avenue	
Base Volume Input [veh/h]	25	625	584	21	11	17
Base Volume Adjustment Factor	1.1430	1.2030	1.0980	1.1430	1.4770	1.4770
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	29	752	641	24	16	25
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	7	192	164	6	4	6
Total Analysis Volume [veh/h]	30	767	654	24	16	26
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0




Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.03	0.01	0.01	0.00	0.13	0.06
d_M, Delay for Movement [s/veh]	9.07	0.00	0.00	0.00	36.56	16.26
Movement LOS	A	A	A	A	E	C
95th-Percentile Queue Length [veh]	11.46	11.46	0.00	0.00	0.65	0.65
95th-Percentile Queue Length [ft]	286.53	286.53	0.00	0.00	16.20	16.20
d_A, Approach Delay [s/veh]	0.34		0.00		23.99	
Approach LOS	A		A		C	
d_I, Intersection Delay [s/veh]	0.84					
Intersection LOS	E					

Intersection Level Of Service Report Intersection 2: SR 12 and Maple Avenue

Control Type:	Two-way stop	Delay (sec / veh):	32.5
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.051

Intersection Setup

Name	SR 12		SR 12		Maple Avenue	
Approach	Northbound		Southbound		Eastbound	
Lane Configuration						
Turning Movement	Left	Thru	Thru	Right	Left	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Pocket	0	0	0	0	0	0
Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
Speed [mph]	45.00		45.00		30.00	
Grade [%]	0.00		0.00		0.00	
Crosswalk	No		No		No	

Volumes

Name	SR 12		SR 12		Maple Avenue	
Base Volume Input [veh/h]	9	645	581	14	5	10
Base Volume Adjustment Factor	1.1430	1.2030	1.0980	1.1430	1.4770	1.4770
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Rate	1.00	1.00	1.00	1.00	1.00	1.00
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	10	776	638	16	7	15
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	3	198	163	4	2	4
Total Analysis Volume [veh/h]	10	792	651	16	7	15
Pedestrian Volume [ped/h]	0		0		0	

Intersection Settings

Priority Scheme	Free	Free	Stop
Flared Lane			No
Storage Area [veh]	0	0	0
Two-Stage Gap Acceptance			No
Number of Storage Spaces in Median	0	0	0

Movement, Approach, & Intersection Results

V/C, Movement V/C Ratio	0.01	0.01	0.01	0.00	0.05	0.03
d_M, Delay for Movement [s/veh]	8.94	0.00	0.00	0.00	32.46	14.00
Movement LOS	A	A	A	A	D	B
95th-Percentile Queue Length [veh]	11.37	11.37	0.00	0.00	0.27	0.27
95th-Percentile Queue Length [ft]	284.31	284.31	0.00	0.00	6.76	6.76
d_A, Approach Delay [s/veh]	0.11		0.00		19.87	
Approach LOS	A		A		C	
d_I, Intersection Delay [s/veh]			0.35			
Intersection LOS			D			



Appendix D

Pedestrian Facilities and Highway 12 Left-turn Lane Concept Drawings



This page intentionally left blank

NOTE:
EXISTING FEATURES SHOWN HEREON WERE OBTAINED FROM CALTRANS RECORD
DRAWINGS AND SONOMA COUNTY GIS DATA AND ARE APPROXIMATE. THIS IS A
CONCEPTUAL EXHIBIT FOR PLANNING PURPOSES ONLY.

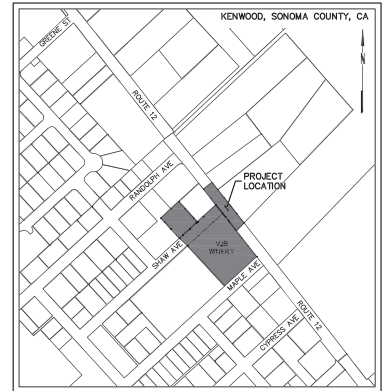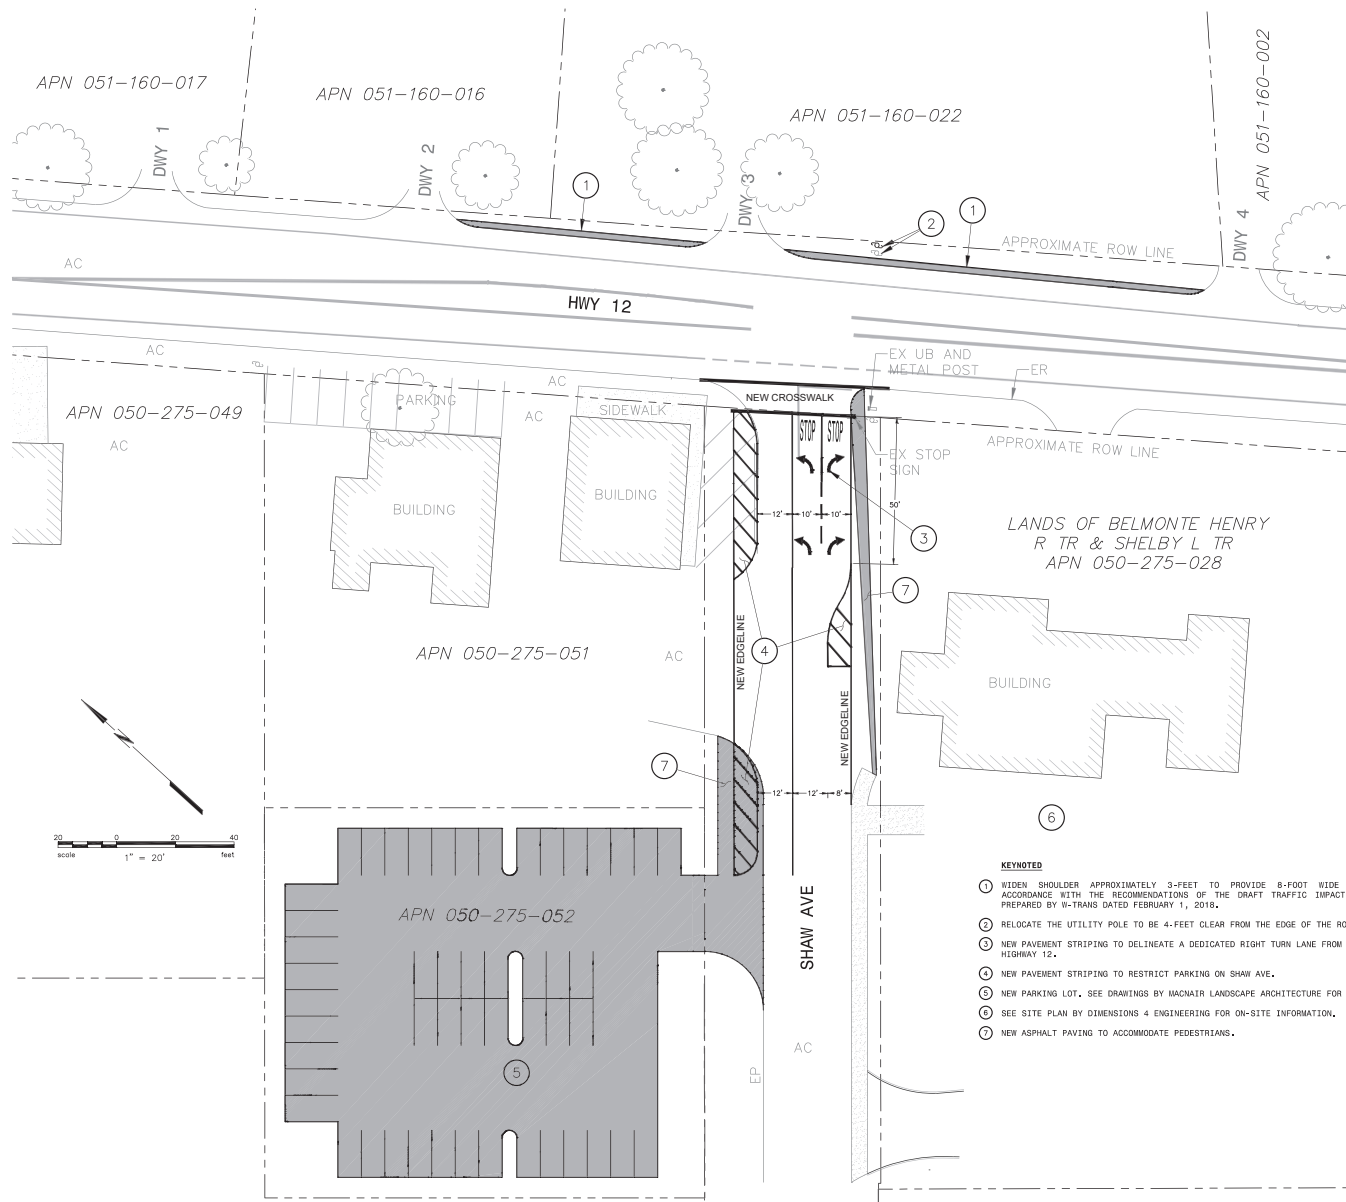

VICINITY MAP
NOT TO SCALE

ABBREVIATIONS

AC	ASPHALT CONCRETE
APN	ASSESSOR'S PARCEL NUMBER
DWY	DRIVEWAY
EG	EXISTING GROUND
EP	EDGE OF PAVEMENT
ER	EDGE OF ROAD
FT	FOOT
HDM	CALTRANS HIGHWAY DESIGN MANUAL
HWY	HIGHWAY
IB	"I" BEAM
EX	EXISTING
MIN	MINIMUM
MPH	MILE PER HOUR
NB	NORTHBOUND
PUE	PUBLIC UTILITY EASEMENT
ROW	RIGHT OF WAY
SB	SOUTHBOUND
TYP	TYPICAL
UB	UTILITY BOX

SYMBOLS & LEGEND

EXISTING	PROPOSED	
		UTILITY POLE
		CATCH BASIN
		TREE
		APPROXIMATE ASSESSOR'S PARCEL LINE
		OVERHEAD UTILITY LINE
		CONCRETE
		PAVEMENT

KEYNOTED

- 1 WIDEN SHOULDER APPROXIMATELY 3-FEET TO PROVIDE 8-FOOT WIDE SHOULDERS IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE DRAFT TRAFFIC IMPACT STUDY REPORT PREPARED BY H-TRANS DATED FEBRUARY 1, 2018.
- 2 RELOCATE THE UTILITY POLE TO BE 4-FEET CLEAR FROM THE EDGE OF THE ROAD.
- 3 NEW PAVEMENT STRIPING TO DELINEATE A DEDICATED RIGHT TURN LANE FROM SHAW AVE TO HIGHWAY 12.
- 4 NEW PAVEMENT STRIPING TO RESTRICT PARKING ON SHAW AVE.
- 5 NEW PARKING LOT. SEE DRAWINGS BY HACHATRI LANDSCAPE ARCHITECTURE FOR MORE DETAILS.
- 6 SEE SITE PLAN BY DIMENSIONS 4 ENGINEERING FOR ON-SITE INFORMATION.
- 7 NEW ASPHALT PAVING TO ACCOMMODATE PEDESTRIANS.

PARKING LOT, SHAW AVENUE TURN LANE & HWY 12 SHOULDER WIDENING CONCEPTUAL EXHIBIT

VJB WINERY
SON012623 / SON-12-26.68-26.75
66 SHAW AVE, KENWOOD, CA (APN 050-275-051)

JULY 2018

PREPARED BY



JOB NO. C20180082-10

SHEET 1 OF 1 SHEETS