

IV. Environmental Impact Analysis

IV. Environmental Impact Analysis

A. Air Quality

1. Introduction

This section of the Draft EIR addresses the air emissions generated by construction and operation of the Project. The analysis also addresses the consistency of the Project with the air quality policies in the South Coast Air Quality Management District's (SCAQMD) Air Quality Management Plan (AQMP) and the City of Los Angeles General Plan (General Plan). The analysis of Project-generated air emissions focuses on whether the Project would cause an exceedance of an ambient air quality standard or SCAQMD significance threshold. To the extent applicable or feasible, the analysis explains the potential human health effects that could be associated with air emissions caused by the Project. Calculation worksheets, assumptions, and model outputs used in the analysis are included in Appendix B to this Draft EIR.

2. Environmental Setting

a. Air Quality Background

The Project is located within the South Coast Air Basin (Air Basin), an approximately 6,745-square-mile area bounded by the Pacific Ocean to the west; the San Gabriel, San Bernardino, and San Jacinto Mountains to the north and east; and San Diego County to the south. The Air Basin includes all of Orange County and the non-desert portions of Los Angeles, Riverside, and San Bernardino Counties, in addition to the Coachella Valley area in Riverside County. The regional climate within the Air Basin is considered semi-arid and is characterized by warm summers, mild winters, infrequent seasonal rainfall, moderate daytime onshore breezes, and moderate humidity. The air quality within the Air Basin is primarily influenced by meteorology and a wide range of emissions sources, such as dense population centers, heavy vehicular traffic, and industry.

Air pollutant emissions within the Air Basin are generated primarily by stationary and mobile sources. Stationary sources can be divided into two major subcategories: point and area sources. Point sources occur at a specific location and are often identified by an exhaust vent or stack. Examples include boilers or combustion equipment that produce electricity or generate heat. Area sources are widely distributed and include such sources as residential and commercial water heaters, painting operations, lawn mowers, agricultural fields, landfills, and some consumer products. Mobile sources refer to emissions from

motor vehicles, including tailpipe and evaporative emissions, and are classified as either on-road or off-road. On-road sources may be legally operated on roadways and highways. Off-road sources include aircraft, ships, trains, and self-propelled construction equipment. Air pollutants can also be generated by the natural environment, such as when high winds suspend fine dust particles.

Both the federal and state governments have established ambient air quality standards for outdoor concentrations of various pollutants in order to protect the public health and welfare. These pollutants are referred to as “criteria air pollutants” as a result of the specific standards, or criteria, which have been adopted for them. The national and state standards have been set at levels considered safe to protect public health, including the health of sensitive populations such as asthmatics, children, and the elderly with a margin of safety; and to protect public welfare, including protection against decreased visibility and damage to animals, crops, vegetation, and buildings. The national and state criteria pollutants and the applicable ambient air quality standards are listed in Table IV.A-1 on page IV.A-3.

b. Air Pollution and Potential Health Effects

Certain air pollutants have been recognized to cause notable health problems and consequential damage to the environment either directly or in reaction with other pollutants due to their presence in elevated concentrations in the atmosphere. The criteria air pollutants for which national and state standards have been promulgated and which are most relevant to current air quality planning and regulation in the Air Basin include ozone (O_3), respirable particulate matter (PM_{10}), fine particulate matter ($PM_{2.5}$), carbon monoxide (CO), nitrogen dioxide (NO_2), sulfur dioxide (SO_2), lead (Pb), sulfates, and hydrogen sulfide (H_2S). In addition, volatile organic compounds (VOCs) and toxic air contaminants (TACs) are of concern in the Air Basin. The health implications of each of these pollutants briefly described below.

(1) Criteria Pollutants

(a) Ozone (O_3)

O_3 is a gas that is formed when VOCs and nitrogen oxides (NO_x)—both byproducts of internal combustion engine exhaust—undergo slow photochemical reactions in the presence of sunlight. O_3 concentrations are generally highest during the summer months when direct sunlight, light wind, and warm temperature conditions are favorable. An elevated level of O_3 irritates the lungs and breathing passages, causing coughing and pain in the chest and throat, thereby increasing susceptibility to respiratory infections and reducing the ability to exercise. Effects are more severe in people with asthma and other respiratory ailments. Long-term exposure may scar lung tissue and lower lung efficiency.

**Table IV.A-1
Ambient Air Quality Standards**

Pollutant	Averaging Period	California Standard (CAAQS) ^{a,b}	Federal Standard (NAAQS) ^{a,b}	SCAQMD Attainment Status ^c	
				California Standard ^d	Federal Standard ^d
Ozone (O ₃)	1 hour	0.09 ppm (180 µg/m ³)	—	Non-Attainment	—
	8 hour	0.07 ppm (137 µg/m ³)	0.070 ppm (137 µg/m ³)	Non-Attainment	Non-Attainment (Extreme)
Respirable Particulate Matter (PM ₁₀)	24 hour	50 µg/m ³	150 µg/m ³	Non-Attainment	Attainment
	Annual	20 µg/m ³	—		
Fine Particulate Matter (PM _{2.5})	24 hour	—	35 µg/m ³	Non-Attainment	Non-Attainment (Serious)
	Annual	12 µg/m ³	12 µg/m ³		
Carbon Monoxide (CO)	1 hour	20 ppm (23 mg/m ³)	35 ppm (40 mg/m ³)	Attainment	Attainment
	8 hour	9.0 ppm (10 mg/m ³)	9 ppm (10 mg/m ³)		
Nitrogen Dioxide (NO ₂)	1 hour	0.18 ppm (339 µg/m ³)	0.10 ppm (188 µg/m ³)	Attainment	Unclassified/Attainment
	Annual	0.030 ppm (57 µg/m ³)	0.053 ppm (100 µg/m ³)		
Sulfur Dioxide (SO ₂)	1 hour	0.25 ppm (655 µg/m ³)	0.075 ppm (196 µg/m ³)	Attainment	Unclassified/Attainment
	3 hour	—	0.5 ppm (1,300 µg/m ³)		
	24 hour	0.04 ppm (105 µg/m ³)	0.14 ppm (365 µg/m ³)		
	Annual	—	0.03 ppm (80 µg/m ³)		
Lead (Pb)	30-day average	1.5 µg/m ³	—	Attainment	Partial Non-Attainment ^e
	Rolling 3-month average	—	0.15 µg/m ³		
Sulfates	24 hour	25 µg/m ³	—	Attainment	—
Hydrogen Sulfide (H ₂ S)	1 hour	0.03 ppm (42 µg/m ³)	—	Unclassified	—

ppm = parts per million by volume

µg/m³ = micrograms per cubic meter

^a An ambient air quality standard is a concentration level expressed in either parts per million or micrograms per cubic meter and averaged over a specific time period (e.g., 1 hour). The different averaging times and concentrations are meant to protect against different exposure effects. Some ambient air quality standards are expressed as a concentration that is not to be exceeded. Others are

Table IV.A-1 (Continued)
Ambient Air Quality Standards

Pollutant	Averaging Period	California Standard (CAAQS) ^{a,b}	Federal Standard (NAAQS) ^{a,b}	SCAQMD Attainment Status ^c	
				California Standard ^d	Federal Standard ^d
<i>expressed as a concentration that is not to be equaled or exceeded.</i>					
^b <i>Ambient Air Quality Standards based on the 2016 AQMP.</i>					
^c <i>“Attainment” means that the regulatory agency has determined based on established criteria, that the Air Basin meets the identified standard. “Non-attainment” means that the regulatory agency has determined that the Air Basin does not meet the standard. “Unclassified” means there is insufficient data to designate an area, or designations have yet to be made.</i>					
^d <i>California and federal standard attainment status based on SCAQMD’s 2016 AQMP.</i>					
^e <i>A small portion of Los Angeles county exceeded the Lead NAAQS during the 2007–2009 data period. However, in 2015, the SCAQMD lead monitoring network of eight regular monitoring sites and five source-specific sites did not exceed lead NAAQS. An attainment re-designation request is pending.</i>					
<i>Source: Eyestone Environmental, 2020.</i>					

(b) Particulate Matter (PM₁₀ and PM_{2.5})

The human body naturally prevents the entry of larger particles into the body. However, small particles, with an aerodynamic diameter equal to or less than 10 microns (PM₁₀) and even smaller particles with an aerodynamic diameter equal to or less than 2.5 microns (PM_{2.5}), can enter the body and are trapped in the nose, throat, and upper respiratory tract. These small particulates could potentially aggravate existing heart and lung diseases, change the body’s defenses against inhaled materials, and damage lung tissue. The elderly, children, and those with chronic lung or heart disease are most sensitive to PM₁₀ and PM_{2.5}. Lung impairment can persist for two to three weeks after exposure to high levels of particulate matter. Some types of particulates could become toxic after inhalation due to the presence of certain chemicals and their reaction with internal body fluids.

(c) Carbon Monoxide (CO)

CO is primarily emitted from combustion processes and motor vehicles due to incomplete combustion of fuel. Elevated concentrations of CO weaken the heart’s contractions and lower the amount of oxygen carried by the blood. It is especially dangerous for people with chronic heart disease. Inhalation of CO can cause nausea, dizziness, and headaches at moderate concentrations and can be fatal at high concentrations.

(d) Nitrogen Dioxide (NO₂)

NO₂ is a byproduct of fuel combustion and major sources include power plants, large industrial facilities, and motor vehicles. The principal form of nitrogen oxide produced

by combustion is nitric oxide (NO), which reacts quickly to form NO₂, creating the mixture of NO and NO₂ commonly called NO_x. NO₂ absorbs blue light and results in a brownish-red cast to the atmosphere and reduced visibility. NO₂ also contributes to the formation of PM₁₀. NO_x irritate the nose and throat, and increase one's susceptibility to respiratory infections, especially in people with asthma. The principal concern of NO_x is as a precursor to the formation of O₃.

(e) Sulfur Dioxide (SO₂)

Major sources of SO₂ include power plants, large industrial facilities, diesel vehicles, and oil-burning residential heaters. Emissions of SO₂ aggravate lung diseases, especially bronchitis. It also constricts the breathing passages, especially in asthmatics and people involved in moderate to heavy exercise. SO₂ potentially causes wheezing, shortness of breath, and coughing. High levels of particulates appear to worsen the effect of SO₂, and long-term exposures to both pollutants leads to higher rates of respiratory illness.

(f) Lead (Pb)

Pb is emitted from industrial facilities and from the sanding or removal of old lead-based paint. Smelting or processing the metal is the primary source of lead emissions, which is primarily a regional pollutant. Pb affects the brain and other parts of the body's nervous system. Exposure to lead in very young children impairs the development of the nervous system, kidneys, and blood forming processes in the body.

(g) Sulfates (SO₄²⁻)

SO₄²⁻ are the fully oxidized ionic form of sulfur. SO₄²⁻ occur in combination with metal and/or hydrogen ions. In California, emissions of sulfur compounds occur primarily from the combustion of petroleum-derived fuels (e.g., gasoline and diesel fuel) that contain sulfur. This sulfur is oxidized during the combustion process and subsequently converted to sulfate compounds in the atmosphere. Effects of SO₄²⁻ exposure at levels above the standard include a decrease in ventilatory function, aggravation of asthmatic symptoms, and an increased risk of cardio-pulmonary disease. SO₄²⁻ are particularly effective in degrading visibility, and, due to fact that they are usually acidic, can harm ecosystems and damage materials and property.

(h) Hydrogen Sulfide (H₂S)

H₂S is a colorless gas with the odor of rotten eggs. It is formed during bacterial decomposition of sulfur-containing organic substances. Also, it can be present in sewer gas and some natural gas and can be emitted as the result of geothermal energy exploitation. Breathing H₂S at levels above the State standard could result in exposure to a very disagreeable odor.

(2) Volatile Organic Compounds (VOCs)

VOCs are typically formed from combustion of fuels and/or released through evaporation of organic liquids. Some VOCs are also classified by the state as TACs. While there are no specific VOC ambient air quality standards, VOC is a prime component (along with NO_x) of the photochemical processes by which such criteria pollutants as O₃, NO₂, and certain fine particles are formed. They are, thus, regulated as “precursors” to formation of those criteria pollutants.

(3) Toxic Air Contaminants (TACs)

TACs refer to a diverse group of “non-criteria” air pollutants that can affect human health but have not had ambient air quality standards established for them. This is not because they are fundamentally different from the pollutants discussed above but because their effects tend to be local rather than regional. TACs are classified as carcinogenic and noncarcinogenic, where carcinogenic TACs can cause cancer and noncarcinogenic TACs can cause acute and chronic impacts to different target organ systems (e.g., eyes, respiratory, reproductive, developmental, nervous, and cardiovascular).

The California Air Resources Board (CARB)¹ and the Office of Environmental Health Hazard Assessment (OEHHA) determine if a substance should be formally identified, or “listed,” as a TAC in California. A complete list of these substances is maintained on CARB’s website.²

Diesel particulate matter (DPM), which is emitted in the exhaust from diesel engines, was listed by the State as a TAC in 1998. DPM has historically been used as a surrogate measure of exposure for all diesel exhaust emissions. DPM consists of fine particles (fine particles have a diameter less than 2.5 micrometer (µm)), including a subgroup of ultrafine particles (ultrafine particles have a diameter less than 0.1 µm). Collectively, these particles have a large surface area which makes them an excellent medium for absorbing organics. The visible emissions in diesel exhaust include carbon particles or “soot.” Diesel exhaust also contains a variety of harmful gases and cancer-causing substances.

Exposure to DPM may be a health hazard, particularly to children whose lungs are still developing and the elderly who may have other serious health problems. DPM levels and resultant potential health effects may be higher in close proximity to heavily traveled

¹ CARB, a part of the California Environmental Protection Agency, is responsible for the coordination and administration of both state and federal air pollution control programs within California.

² CARB, *Toxic Air Contaminant Identification List*, ww2.arb.ca.gov/resources/documents/carb-identified-toxic-air-contaminants, accessed November 23, 2020.

roadways with substantial truck traffic or near industrial facilities. According to CARB, DPM exposure may lead to the following adverse health effects: (1) aggravated asthma; (2) chronic bronchitis; (3) increased respiratory and cardiovascular hospitalizations; (4) decreased lung function in children; (5) lung cancer; and (6) premature deaths for people with heart or lung disease.^{3,4}

c. Regulatory Framework

The Project Site and vicinity are subject to federal, state, and local air quality laws and regulations. A number of plans and policies have been adopted by various agencies that address air quality concerns. Those laws, regulations, plans, and policies that are relevant to the Project are discussed below.

(1) Criteria Pollutants

(a) Federal

The Federal Clean Air Act (CAA) was first enacted in 1955 and has been amended numerous times in subsequent years, with the most recent amendments in 1990. At the federal level, the USEPA is responsible for implementation of some portions of the CAA (e.g., certain mobile source and other requirements). Other portions of the CAA (e.g., stationary source requirements) are implemented by state and local agencies.

The 1990 amendments to the CAA identify specific emission reduction goals for areas not meeting the National Ambient Air Quality Standard (NAAQS). These amendments require both a demonstration of reasonable further progress toward attainment and incorporation of additional sanctions for failure to attain or to meet interim milestones. Table IV.A-1 on page IV.A-3 shows the NAAQS currently in effect for each criteria pollutant and their relative attainment status. The Air Basin fails to meet national standards for O₃ and PM_{2.5} and, therefore, is considered a federal “non-attainment” area for these pollutants. In addition, Los Angeles County fails to meet the national standard for lead and, therefore, is considered a federal “non-attainment” area for lead.

³ CARB, *Overview: Diesel Exhaust and Health*, www.arb.ca.gov/research/diesel/diesel-health.htm, accessed November 23, 2020.

⁴ CARB, *Fact Sheet: Diesel Particulate Matter Health Risk Assessment Study for the West Oakland Community: Preliminary Summary of Results*, March 2008.

(b) State

(i) California Clean Air Act

The California Clean Air Act (CCAA), signed into law in 1988, requires all areas of the State to achieve and maintain the California Ambient Air Quality Standards (CAAQS) by the earliest practicable date. CARB is responsible for the coordination and administration of both state and federal air pollution control programs within California. In this capacity, CARB conducts research, sets state ambient air quality standards, compiles emission inventories, develops suggested control measures, and provides oversight of local programs. CARB establishes emissions standards for motor vehicles sold in California, consumer products, and various types of commercial equipment. It also sets fuel specifications to further reduce vehicular emissions. Table IV.A-1 on page IV.A-3 includes the CAAQS currently in effect for each of the criteria pollutants, as well as other pollutants recognized by the State. As shown in Table IV.A-1, the CAAQS include more stringent standards than the NAAQS. The Air Basin fails to meet state standards for O₃, PM₁₀ and PM_{2.5} and, therefore, is considered a state “non-attainment” area for these pollutants.

(ii) California Code of Regulations

The California Code of Regulations (CCR) is the official compilation and publication of regulations adopted, amended or repealed by the state agencies pursuant to the Administrative Procedure Act (APA). The CCR includes regulations that pertain to air quality emissions. Specifically, Section 2485 in Title 13 of the CCR states that the idling of all diesel-fueled commercial vehicles (weighing over 10,000 pounds) during construction shall be limited to 5 minutes at any location. In addition, Section 93115 in Title 17 of the CCR states that operation of any stationary, diesel-fueled, compression-ignition engines shall meet specified fuel and fuel additive requirements and emission standards.

(c) Regional

(i) South Coast Air Quality Management District (SCAQMD)

The SCAQMD shares responsibility with CARB for ensuring that all state and federal ambient air quality standards are achieved and maintained throughout the Air Basin.

To meet the CAAQS and NAAQS, the SCAQMD has adopted a series of Air Quality Management Plans (AQMPs). The 2016 AQMP incorporates the Southern California Association of Governments’ (SCAG) 2016–2040 Regional Transportation Plan/ Sustainable Communities Strategy (2016–2040 RTP/SCS) and updated emission inventory methodologies for various source categories. The 2016 AQMP also includes new federal

requirements, implementation of new technology measures, and the continued development of economically sound, flexible compliance approaches.

The AQMP provides emissions inventories, ambient measurements, meteorological episodes, and air quality modeling tools. The AQMP also provides policies and measures to guide responsible agencies in achieving federal standards for healthful air quality in the Air Basin. It also incorporates a comprehensive strategy aimed at controlling pollution from all sources, including stationary sources, on-road and off-road mobile sources, and area sources.

The SCAQMD adopts rules and regulations to implement portions of the AQMP. Several of these rules may apply to a project's construction or operation.

The following SCAQMD rules and regulations would be applicable to the Project:

- SCAQMD Rule 403 requires projects to incorporate fugitive dust control measures at least as effectively as the following measures:
 - Use watering to control dust generation during the demolition of structures;
 - Clean-up mud and dirt carried onto paved streets from the site;
 - Install wheel washers for all exiting trucks, or wash off the tires or tracks of all trucks and equipment leaving the site;
 - All haul trucks would be covered or would maintain at least 6 inches of freeboard;
 - All materials transported off-site shall be either sufficiently watered or securely covered to prevent excessive amounts of spillage or dust;
 - Suspend earthmoving operations or implement additional watering to meet Rule 403 criteria if wind gusts exceed 25 mph; and
 - The owner or contractor shall keep the construction area sufficiently dampened to control dust caused by construction and hauling, and at all times provide reasonable control of dust caused by wind. All unpaved demolition and construction areas shall be wetted at least twice daily during excavation and construction, and temporary dust covers shall be used to reduce dust emissions.
- SCAQMD Rule 1113 limits the VOC content of architectural coatings.

- SCAQMD Rule 1121 specifies NO_x emission limits from residential type, natural gas-fired water heaters. This rule applies to water heaters with heat input rates less than 75,000 British Thermal Units (BTUs) per hour.
- SCAQMD Rule 1403 requires owners and operators of any demolition or renovation activity and the associated disturbance of asbestos-containing materials, any asbestos storage facility, or any active waste disposal site to implement work practice requirements to limit asbestos emissions from building demolition and renovation activities, including the removal and associated disturbance of asbestos-containing materials.
- SCAQMD Regulation XIII, New Source Review, requires new on-site facility nitrogen oxide emissions to be minimized through the use of emission control measures (e.g., use of best available control technology for new combustion sources such as boilers, emergency generators, and water heaters).

(ii) Southern California Association of Governments (SCAG)

SCAG is the regional planning agency for Los Angeles, Orange, Ventura, Riverside, San Bernardino, and Imperial Counties, and addresses regional issues relating to transportation, the economy, community development and the environment. SCAG coordinates with various air quality and transportation stakeholders in Southern California to ensure compliance with the federal and state air quality requirements, including applicable federal, state, and air district laws and regulations. As the federally designated Metropolitan Planning Organization (MPO) for the six-county Southern California region, SCAG is required by law to ensure that transportation activities “conform” to, and are supportive of, the goals of regional and state air quality plans to attain the NAAQS. In addition, SCAG is a co-producer, with the SCAQMD, of the transportation strategy and transportation control measure sections of the 2016 AQMP. The development of the 2016 AQMP relies on population and transportation growth projections contained in SCAG’s 2016–2040 RTP/SCS.

SCAG’s 2016–2040 RTP/SCS, adopted on April 7, 2016, presents a long-term transportation vision through the year 2040 for the six-county region of Imperial, Los Angeles, Orange, Riverside, San Bernardino, and Ventura Counties. The mission of the 2016–2040 RTP/SCS is to provide “leadership, vision and progress which promote economic growth, personal well-being, and livable communities for all Southern Californians.” The 2016–2040 RTP/SCS places a greater emphasis on sustainability and integrated planning compared to previous versions of the RTP. These strategies include supporting projects that encourage a diverse job opportunities for a variety of skills and education, recreation and culture and a full-range of shopping, entertainment and services all within a relatively short distance, while encouraging employment development around current and planned transit stations and neighborhood commercial centers.

On September 3, 2020, SCAG's Regional Council adopted an updated RTP/SCS known as the 2020–2045 RTP/SCS or Connect SoCal.⁵ As with the 2016–2020 RTP/SCS, the purpose of the 2020–2045 RTP/SCS is to meet the mobility needs of the six-county SCAG region over the subject planning period through a roadmap identifying sensible ways to expand transportation options, improve air quality and bolster Southern California long-term economic viability.⁶ On October 30, 2020, the California Air Resources Board (CARB) accepted SCAG's determination that the SCS met the applicable state greenhouse gas emissions targets. The goals and policies of the 2020–2045 RTP/SCS are similar to, and consistent with, those of the 2016–2040 RTP/SCS. Hence, because the Project would be consistent with the 2016–2020 RTP/SCS as discussed later in this section, the Project would also be consistent with the 2020–2045 RTP/SCS.⁷ Because the 2020–2045 RTP/SCS was adopted by SCAG subsequent to circulation of the Notice of Preparation (NOP) for the Project on March 29, 2019, this section and the balance of this Draft EIR provided detailed analysis of Project consistency with the 2016–2020 RTP/SCS.

(d) Local

Local jurisdictions, such as the City of Los Angeles (City), have the authority and responsibility to reduce air pollution through their police power and decision-making authority. Specifically, the City is responsible for the assessment and mitigation of air emissions resulting from its land use decisions.

The City of Los Angeles General Plan (General Plan) was prepared in response to California Government Code, Title 7, Division 1, Chapter 3, Article 5, Section 65302, which, requires each city and county to adopt a long-term comprehensive general plan. This plan must be integrated and internally consistent, and must present goals, objectives, policies, and implementation guidelines for decision makers to use. The General Plan includes an Air Quality Element, which was adopted on November 24, 1992, that serves to aid the City in attaining the state and federal ambient air quality standards at the earliest feasible date, while still maintaining economic growth and improving the quality of life. The planning area for the Air Quality Element covers the entire City, which encompasses an area of about

⁵ SCAG, *News Release: SCAG Regional Council Formally Adopts Connect SoCal*, September 3, 2020.

⁶ SCAG, *News Release: SCAG Regional Council Formally Adopts Connect SoCal*, September 3, 2020.

⁷ For example, the Project would be consistent with both the 2016–2040 RTP/SCS and the 2020–2045 RTP/SCS because it would increase urban density within a High-Quality Transit Area (HQTa) immediately adjacent to a Metro light rail station and in close proximity to more than a dozen bus routes, would include transit-oriented development, and would implement TDM, all of which would reduce the City's per capita VMT and associated air emissions. Another example is that because the Project would be consistent with the City's existing General Plan land use designation and zoning of the Project Site, it has been accounted for in the regional growth projections in both the 2016–2040 RTP/SCS and 2020–2045 RTP/SCS.

465 square miles. The Air Quality Element of the General Plan and the accompanying Clean Air Program acknowledge the interrelationships between transportation and land use planning in meeting the City's mobility and clean air goals. With the City's adoption of the Air Quality Element and the accompanying Clean Air Program, the City is seeking to achieve consistency with regional air quality growth management, mobility, and congestion management plans.

The Air Quality Element sets forth the goals, objectives, and policies, which guide the City in the implementation of its air quality improvement programs and strategies. To achieve the goals of the Air Quality Element, performance-based standards have been adopted to provide flexibility in implementation of its policies and objectives. The following Air Quality Element goals, objectives, and policies are relevant to the Project:

Goal 1—Good air quality and mobility in an environment of continued population growth and health economic structure.

Objective 1.1—It is the objective of the City of Los Angeles to reduce air pollutants consistent with the Regional Air Quality Management Plan (AQMP), increase traffic mobility, and sustain economic growth citywide.

Objective 1.3—It is the objective of the City of Los Angeles to reduce particulate air pollutants emanating from unpaved areas, parking lots, and construction sites.

Goal 2—Less reliance on single-occupant vehicles with fewer commute and non-work trips.

Objective 2.1—It is the objective of the City of Los Angeles to reduce work trips as a step towards attaining trip reduction objectives necessary to achieve regional air quality goals.

Policy 2.1.1—Utilize compressed work weeks and flextime, telecommuting, carpooling, vanpooling, public transit, and improve walking/bicycling related facilities in order to reduce Vehicle Trips and/or Vehicle Miles Traveled (VMT) as an employer and encourage the private sector to do the same to reduce work trips and traffic congestion.

Goal 4—Minimize impacts of existing land use patterns and future land use development on air quality by addressing the relationship between land use, transportation, and air quality.

Objective 4.1—It is the objective of the City of Los Angeles to include regional attainment of ambient air quality standards as a primary consideration in land use planning.

Policy 4.1.1—Coordinate with all appropriate regional agencies in the implementation of strategies for the integration of land use, transportation, and air quality policies.

Objective 4.2—It is the objective of the City of Los Angeles to reduce vehicle trips and vehicle miles traveled associated with land use patterns.

Policy 4.2.2—Improve accessibility for the City’s residents to places of employment, shopping centers, and other establishments.

Policy 4.2.3—Ensure that new development is compatible with pedestrians, bicycles, transit, and alternative fuel vehicles.

Policy 4.2.4—Require that air quality impacts be a consideration in the review and approval of all discretionary projects.

Policy 4.2.5—Emphasize trip reduction, alternative transit and congestion management measures for discretionary projects.

In accordance with CEQA requirements, the City assesses the air quality impacts of new development projects, requires mitigation of potentially significant air quality impacts by conditioning discretionary permits, and monitors and enforces implementation of such mitigation. The City uses the SCAQMD’s *CEQA Air Quality Handbook* and SCAQMD’s supplemental online guidance/information for the environmental review of plans and development proposals within its jurisdiction.

(2) Toxic Air Contaminants (TACs)

(a) State

The California Air Toxics Program⁸ was established in 1983, when the California Legislature adopted Assembly Bill (AB) 1807 to establish a two-step process of risk identification and risk management to address potential health effects from exposure to toxic substances in the air. In the risk identification step, CARB and OEHHA determine if a substance should be formally identified, or “listed,” as a TAC in California. Since inception of the program, a number of such substances have been listed and include benzene,

⁸ CARB, *California Air Toxics Program*, ww2.arb.ca.gov/our-work/programs/air-toxics-program, accessed November 23, 2020.

chloroform, formaldehyde, and particulate emissions from diesel-fueled engines, among others.⁹ In 1993, the California Legislature amended the program to identify the 189 federal hazardous air pollutants (HAPs) as TACs.

In the risk management step, CARB reviews emission sources of an identified TAC to determine whether regulatory action is needed to reduce risk. Based on results of that review, CARB has promulgated a number of airborne toxic control measures (ATCMs), both for mobile and stationary sources. In 2004, CARB adopted an ATCM to limit heavy-duty diesel motor vehicle idling in order to reduce public exposure to DPM and other TACs. The measure applies to diesel-fueled commercial vehicles with gross vehicle weight ratings greater than 10,000 pounds that are licensed to operate on highways, regardless of where they are registered. This measure does not allow diesel-fueled commercial vehicles to idle for more than 5 minutes at any given time.

In addition to limiting exhaust from idling trucks, CARB adopted regulations on July 26, 2007, for off-road diesel construction equipment such as bulldozers, loaders, backhoes, and forklifts, as well as many other self-propelled, off-road diesel vehicles to reduce emissions by installation of diesel particulate filters and encouraging the replacement of older, dirtier engines with newer emission controlled models. Implementation is staggered based on fleet size, with the largest operators beginning compliance in 2014.¹⁰

The AB 1807 program is supplemented by the AB 2588 Air Toxics “Hot Spots” program, which was established by the California Legislature in 1987. Under this program, facilities are required to report their air toxics emissions, assess health risks, and notify nearby residents and workers of significant risks if present. In 1992, the AB 2588 program was amended by Senate Bill (SB) 1731 to require facilities that pose a significant health risk to the community to reduce their risk through implementation of a risk management plan.

The *Air Quality and Land Use Handbook: A Community Health Perspective* provides important air quality information about certain types of facilities (e.g., freeways, refineries, rail yards, ports, etc.) that should be considered when siting sensitive land uses such as residences.¹¹ CARB provides recommended site distances from certain types of facilities when considering siting new sensitive land uses. The recommendations are advisory and should not be interpreted as defined “buffer zones.” If a project is within the siting distance,

⁹ CARB, *Toxic Air Contaminant Identification List*, ww2.arb.ca.gov/resources/documents/carb-identified-toxic-air-contaminants, accessed November 23, 2020.

¹⁰ CARB, *In-Use Off-Road Diesel-Fueled Fleets Regulation Overview*, Revised October 2016.

¹¹ CARB, *Air Quality and Land Use Handbook, a Community Health Perspective*, April 2005.

CARB recommends further analysis. Where possible, CARB recommends a minimum separation between new sensitive land uses and existing sources.

(b) Regional

Pursuant to California AB 1807, which directs the CARB to identify substances as TACs and adopt ATCMs to control such substances, the SCAQMD has adopted numerous rules (primarily in Regulation XIV) that specifically address TAC emissions. SCAQMD has adopted two rules to limit cancer and non-cancer health risks from facilities located within its jurisdiction. Rule 1401 (New Source Review of Toxic Air Contaminants) regulates new or modified facilities, and Rule 1402 (Control of Toxic Air Contaminants from Existing Sources) regulates facilities that are already operating. Rule 1402 incorporates requirements of the AB 2588 program, including implementation of risk reduction plans for significant risk facilities. Significant risk facilities are those facilities which have an increased cancer risk exceeding 10 in 1 million or a total hazard index exceeding 1.0. Examples include landfills, refineries and oil production facilities.

d. Existing Conditions

(1) Regional Air Quality

The Southern California region lies in the semi-permanent high-pressure zone of the eastern Pacific. As a result, the climate is mild, tempered by cool sea breezes. The usually mild climatological pattern is interrupted infrequently by periods of extremely hot weather, winter storms, or Santa Ana winds. The extent and severity of the air pollution problem in the Air Basin is a function of the area's natural physical characteristics (weather and topography), as well as man-made influences (development patterns and lifestyle). Factors, such as wind, sunlight, temperature, humidity, rainfall, and topography, affect the accumulation and dispersion of pollutants throughout the Air Basin, making it an area of high pollution potential.

The greatest air pollution throughout the Air Basin occurs from June through September. This condition is generally attributed to the large amount of pollutant emissions, light winds, and shallow vertical atmospheric mixing. This frequently reduces pollutant dispersion, thus causing elevated air pollution levels. Pollutant concentrations in the Air Basin vary with location, season, and time of day. O₃ concentrations, for example, tend to be lower along the coast, higher in the near inland valleys, and lower in the far inland areas of the Air Basin and adjacent desert. Over the past 30 years, substantial progress has been made in reducing air pollution levels in Southern California. However, the Air Basin still fails to meet the national standards for O₃ and PM_{2.5} and, therefore, is considered a federal "non-attainment" area for these pollutants. In addition, Los Angeles

County still fails to meet the national standard for Pb and, therefore, is considered a federal “non-attainment” area for Pb.

SCAQMD has the responsibility for ensuring that all national and state ambient air quality standards are achieved and maintained throughout the Air Basin. To meet the standards, SCAQMD has adopted a series of AQMPs. The 2016 AQMP includes strategies to ensure that rapidly approaching attainment deadlines are met and that public health is protected to the maximum extent feasible. The most significant air quality challenge in the Air Basin is to reduce NO_x emissions¹² sufficiently to meet the upcoming O₃ standard deadlines. The 2016 AQMP provides a baseline year 2012 inventory of 512 tons per day (tpd) of NO_x and modeling results show that NO_x emissions are projected to be 214 tpd in the 8-hour ozone attainment year of 2031, due to continued implementation of already adopted regulatory actions (“baseline emissions”). The 2016 AQMP suggests that total Air Basin emissions of NO_x must be reduced to 96 tpd by 2031 to attain the 8-hour O₃ standard. Although the existing air regulations and programs will continue to lower NO_x emissions in the region, an additional 55 percent reduction in the year 2031 are necessary to attain the 8-hour O₃ standard.^{13,14}

The overall control strategy is an integral approach relying on fair-share emission reductions from federal, state and local levels. The 2016 AQMP is composed of stationary and mobile source emission reductions from traditional regulatory control measures, incentive-based programs, co-benefits from climate programs, mobile source strategies and reductions from federal sources, which include aircraft, locomotives and ocean-going vessels. These strategies are to be implemented in partnership with CARB and USEPA. The 2016 AQMP also includes the transportation programs, measures, and strategies in SCAG’s 2016–2040 RTP/SCS¹⁵ that are generally designed to reduce VMT.

Appendix IV-C, Regional Transportation Plan/Sustainable Communities Strategy and Transportation Control Measures, of the 2016 AQMP describes the regional land use and transportation strategies and the transportation control measures in SCAG’s 2016–2040 RTP/SCS that are included in the 2016 AQMP.

The 2016 AQMP forecasts the 2031 emissions inventories “with growth” based on SCAG’s 2016–2040 RTP/SCS. The region is projected to see a 12-percent growth in

¹² NO_x emissions are a precursor to the formation of both ozone and secondary PM_{2.5}.

¹³ Estimates are based on the inventory and modeling results and are relative to the baseline emission levels for each attainment year (see Final 2016 AQMP for detailed discussion).

¹⁴ SCAQMD, Final 2016 AQMP, 2017 (page ES-2).

¹⁵ SCAQMD, Final 2016 AQMP, 2017.

population, 16-percent growth in housing units, 23-percent growth in employment, and 8-percent growth in VMT between 2012 and 2031.

Despite this regional growth, air quality has improved substantially over the years, primarily due to the impacts of air quality control programs at the local, state and federal levels. The graphic included in Figure IV.A-1 on page IV.A-18 shows the percent change in air quality along with demographic data for the 4-county region from the 2016 AQMP. In particular, Figure IV.A-1 illustrates the trends since 1990 of the 8-hour O₃ levels, the 1-hour O₃ levels, and annual average PM_{2.5} concentrations (since 1999), compared to the regional gross domestic product, total employment and population. Human activity in the region has an impact on achieving reductions in emissions. However, the O₃ and particulate matter levels continue to trend downward as the economy and population increase, demonstrating that it is possible to maintain a healthy economy while improving public health through air quality improvements.¹⁶

The SCAQMD has released the Multiple Air Toxics Exposure Study (MATES IV).¹⁷ The MATES IV study was aimed at estimating the cancer risk from toxic air emissions throughout the Air Basin by conducting a comprehensive monitoring program, an updated emissions inventory of TACs, and a modeling effort to fully characterize health risks for those living in the Air Basin. The MATES IV study concluded that the average carcinogenic risk from air pollution in the Air Basin is approximately 897 in one million over a 70-year duration. Mobile sources (e.g., cars, trucks, trains, ships, aircraft, etc.) represent the greatest contributors. Approximately 68 percent of the risk is attributed to diesel particulate emissions, approximately 21 percent to other toxics associated with mobile sources (including benzene, butadiene, and carbonyls), and approximately 11 percent of all carcinogenic risk is attributed to stationary sources (which include large industrial operations, such as refineries and metal processing facilities, as well as smaller businesses, such as gas stations and chrome plating).¹⁸

As part of the MATES IV study, the SCAQMD prepared a series of maps that shows regional trends in estimated outdoor inhalation cancer risk from toxic emissions, as part of an ongoing effort to provide insight into relative risks. The estimates represent the number of potential cancers per million people associated with a lifetime of breathing air toxics (24 hours per day outdoors for 70 years) in parts of the area. The MATES IV map is the most recently available map to represent existing conditions near the Project area. The

¹⁶ SCAQMD, *Final 2016 AQMP, 2017* (p. 1-6).

¹⁷ SCAQMD, *Multiple Air Toxics Exposure Study in the South Coast Air Basin (MATES IV) Final Report*, May 2015.

¹⁸ SCAQMD, *Multiple Air Toxics Exposure Study in the South Coast Air Basin (MATES IV) Final Report*, May 2015.

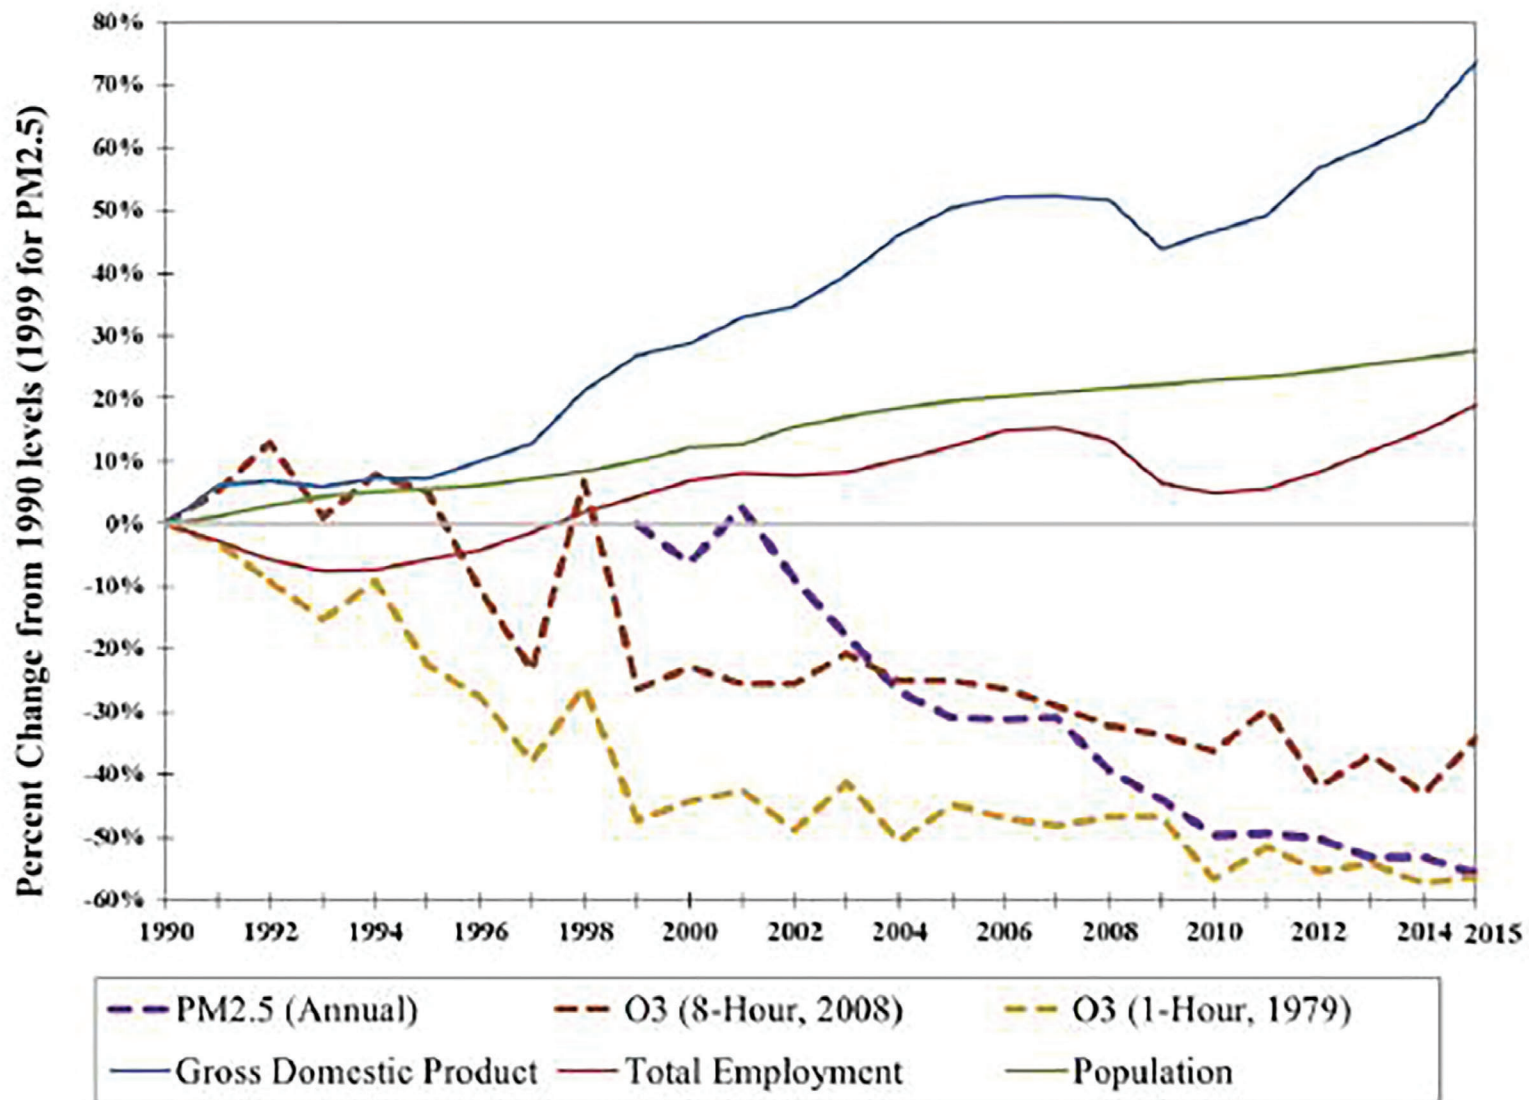


Figure IV.A-1
Ozone Trends

estimated cancer risk for the vast majority of the urbanized area within the Air Basin ranges from 200 to over 1,200 cancers per million over a 70-year duration.¹⁹ Generally, the risk from air toxics is lower near the coastline and higher risks are concentrated near large diesel sources (e.g., freeways, airports, and ports).

(2) Local Air Quality

Air pollutant emissions are generated in the local vicinity by stationary and area-wide sources, such as commercial and industrial activity, space and water heating, landscape maintenance, consumer products, and mobile sources primarily consisting of automobile traffic. Motor vehicles are the primary source of pollutants in the local vicinity.

(a) Existing Pollutant Levels at Nearby Monitoring Stations

The SCAQMD maintains a network of air quality monitoring stations located throughout the Air Basin and has divided the Air Basin into 38 source receptor areas (SRAs) in which 31 monitoring stations operate. Figure IV.A-2 on page IV.A-20 shows the locations of the SRAs located in Los Angeles County. The Project Site is located within SRA 1, which covers the Central Los Angeles area. The monitoring station most representative of the Project Site is the North Main Street Station, located at 1630 North Main Street in the City, approximately two miles northeast of the Project Site. Criteria pollutants monitored at this station are PM₁₀, PM_{2.5}, O₃, CO, NO₂, Pb, and SO₄². Table IV.A-2 on page IV.A-21 identifies the national and state ambient air quality standards for relevant air pollutants along with the ambient pollutant concentrations that have been measured at this station through the period of 2016–2018.

(b) Existing Health Risk in the Surrounding Area

As shown in Figure IV.A-3 on page IV.A-23, based on the MATES IV model, the calculated cancer risk in the Project area is approximately 1,854 in one million.²⁰ The cancer risk in this area is predominately related to nearby sources of diesel particulate (e.g., the US-101 and I-10 freeways). Other sources in the Project vicinity include emergency generators, boilers and char broilers. In general, the risk at the Project Site is comparable with other urbanized areas in Los Angeles.

¹⁹ SCAQMD, *Multiple Air Toxics Exposure Study in the South Coast Air Basin (MATES IV)*, *MATES IV Interactive Carcinogenicity Map*, 2015.

²⁰ SCAQMD, *Multiple Air Toxics Exposure Study in the South Coast Air Basin (MATES IV)*, *MATES IV Interactive Carcinogenicity Map*, 2015.



SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT

21865 Copley Drive, Diamond Bar, CA 91765-4182
Information: 1-800-CUT-SMOG (1-800-288-7664)
Internet: <http://www.aqmd.gov>

Air Quality Reporting

Since 1977, the South Coast Air Quality Management District has served as the local government agency responsible for measuring, reporting and taking steps to improve air quality.

To inform the AQMD's 15 million residents about air quality conditions, the AQMD issues an air quality forecast each day and reports current air quality conditions for each

numbered Monitoring Area and General Forecast Area depicted here.

This air quality information is transmitted to the public through newspapers, television, radio and pager services, through faxes to schools, through recorded messages on the AQMD's toll-free Smog Update telephone line, 1-800-CUT-SMOG, and on the AQMD's Internet Website <http://www.aqmd.gov>.

Newspapers, television and radio stations typically will report air

quality information using the General Forecast Areas, shown in color below, which are larger groupings of the more specific Air Monitoring Areas.

The 1-800-CUT-SMOG (1-800-288-7664) line also provides smog forecast and current smog level information by ZIP code.

The AQMD's Internet Website provides both forecasts as well as smog levels for that day and the previous day. Forecasts for the next day normally are posted by noon.

General Forecast Areas & Air Monitoring Areas

Coastal

Northwest Los Angeles County Coastal	2
Southwest Los Angeles County Coastal	3
South Los Angeles County Coastal	4
North Orange County Coastal	18
Central Orange County Coastal	20

Metropolitan

Central Los Angeles County	1
Southeast Los Angeles County	5
South Central Los Angeles County	12
North Orange County	16

San Fernando Valley

West San Fernando Valley	6
East San Fernando Valley	7
Santa Clarita Valley	13

San Gabriel Valley

West San Gabriel Valley	8
East San Gabriel Valley	9
Pomona/Walnut Valley	10
South San Gabriel Valley	11

Inland Orange County

Central Orange County	17
Saddleback Valley	19
Capistrano Valley	21

Riverside Valley

Corona/Norco Area	22
Metropolitan Riverside	23

San Bernardino Valley

Northwest San Bernardino Valley	32
Southwest San Bernardino Valley	33
Central San Bernardino Valley	34
East San Bernardino Valley	35

Hemet/Elsinore Area

Perris Valley	24
Lake Elsinore	25
Hemet/San Jacinto Valley	28

Temecula/Anza Area

Temecula Valley	26
Anza Area	27

San Gabriel Mountains

West San Bernardino Mountains	36
Central San Bernardino Mountains	37

San Bernardino Mountains

West San Bernardino Mountains	36
Central San Bernardino Mountains	37

Big Bear Lake

Big Bear Lake	38
---------------	----

Banning Pass Area

Banning Pass Area	29
-------------------	----

Coachella/Low Desert

Coachella Valley	30
East Riverside County	31


Antelope Valley APCD*

Antelope Valley APCD*	14
-----------------------	----

Mojave Desert AQMD*

Mojave Desert AQMD*	39
Northern Mojave Desert	40
Central Mojave Desert	41

*These agencies contract with the South Coast AQMD for forecasting services. Also, the Antelope Valley APCD contracts with the Mojave Desert AQMD for other services. For more air quality information in these areas, please call the Mojave Desert AQMD at (760) 245-1661, extension 5067.

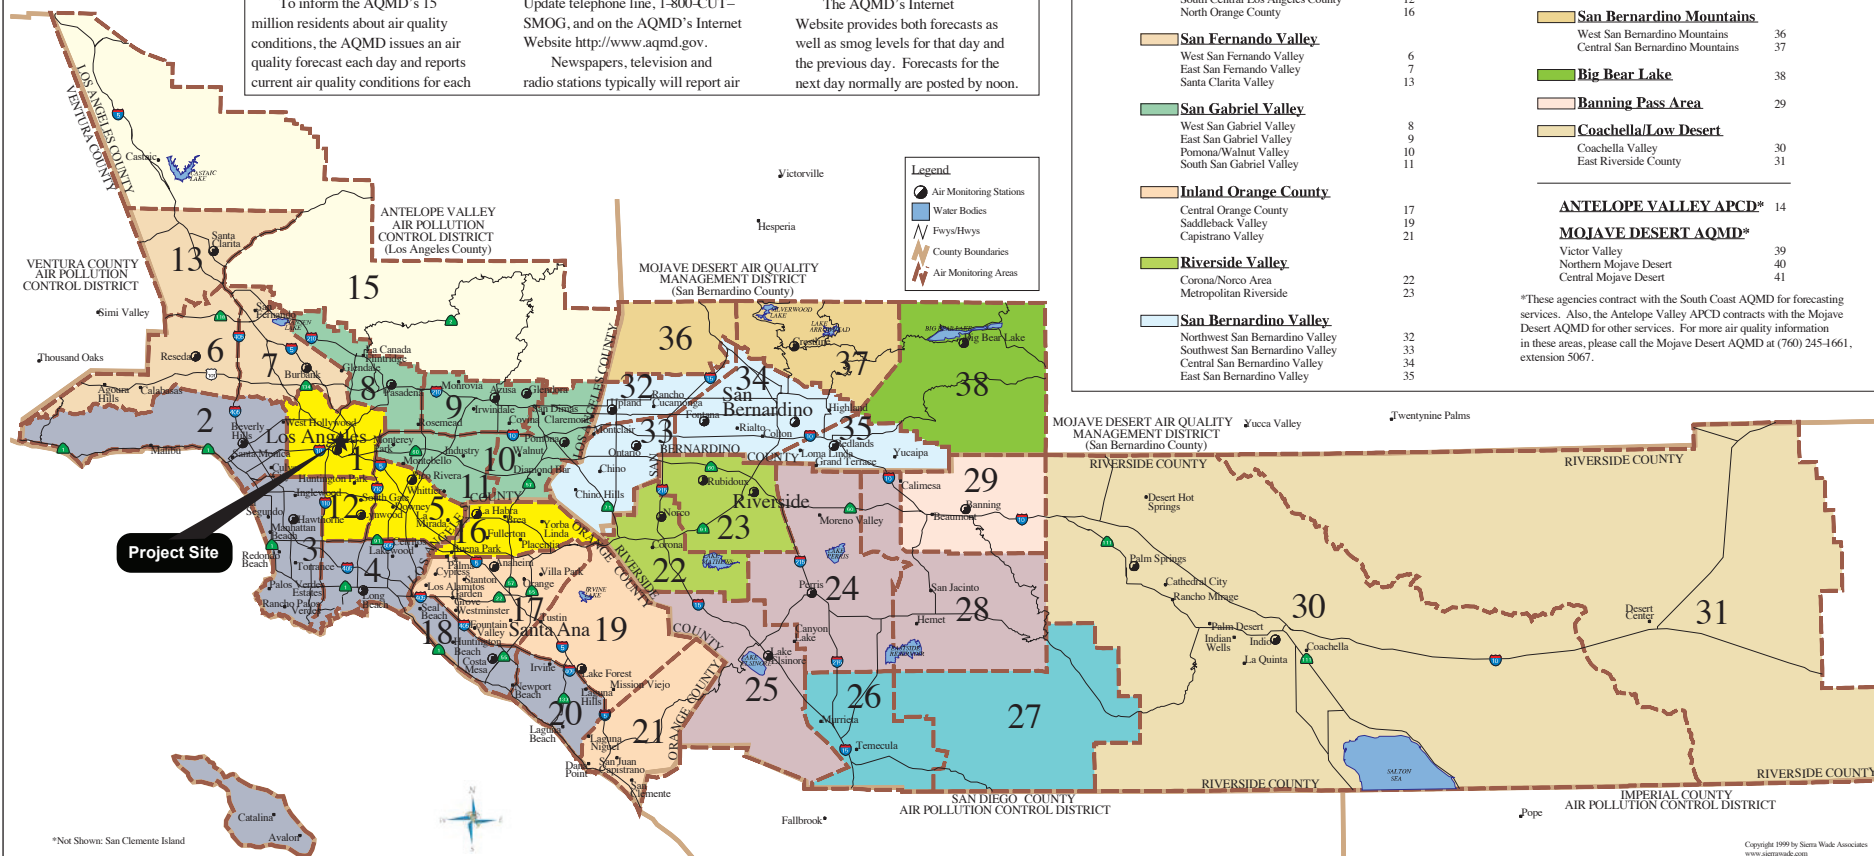

Copyright 1999 by Sierra Wade Associates
www.sawade.com

Figure IV.A-2
SCAQMD SRA Map

**Table IV.A-2
Summary of Ambient Air Quality in the Project Vicinity**

Pollutant	Year		
	2016	2017	2018
Ozone (O₃)			
Maximum 1-hour Concentration (ppm)	0.10	0.12	0.10
Days exceeding CAAQS (0.09 ppm)	2	6	2
Maximum 8-hour Concentration (ppm)	0.08	0.09	0.07
Days exceeding NAAQS (0.070 ppm)	4	14	4
Days exceeding CAAQS (0.07 ppm)	4	14	4
Respirable Particulate Matter (PM₁₀)			
Maximum 24-hour Concentration (µg/m ³)	67	96	81
Days exceeding NAAQS (150 µg/m ³)	0	0	0
Days exceeding CAAQS (50 µg/m ³)	18	41	31
Annual Arithmetic Mean (µg/m ³)	32	34	34
Does measured AAM exceed CAAQS (20 µg/m ³)?	Yes	Yes	Yes
Fine Particulate Matter (PM_{2.5})			
Maximum 24-hour Concentration (µg/m ³)	44	49	44
Days exceeding NAAQS (35 µg/m ³)	2	5	3
Annual Arithmetic Mean (µg/m ³)	12	12	13
Does measured AAM exceed NAAQS (12 µg/m ³)?	No	No	No
Does measured AAM exceed CAAQS (12 µg/m ³)?	No	No	No
Carbon Monoxide (CO)			
Maximum 1-hour Concentration (ppm)	2	2	2
Days exceeding NAAQS (35.0 ppm)	0	0	0
Days exceeding CAAQS (20.0 ppm)	0	0	0
Maximum 8-hour Concentration (ppm)	1	2	2
Days exceeding NAAQS and CAAQS (9 ppm)	0	0	0
Nitrogen Dioxide (NO₂)			
Maximum 1-hour Concentration (ppm)	0.06	0.08	0.07
Days exceeding CAAQS (0.18 ppm)	0	0	0
Annual Arithmetic Mean (ppm)	0.02	0.02	0.02
Does measured AAM exceed NAAQS (0.0534 ppm)?	No	No	No
Does measured AAM exceed CAAQS (0.03 ppm)?	No	No	No
Sulfur Dioxide (SO₂)			
Maximum 1-hour Concentration (ppm)	0.01	0.01	0.01
Days exceeding CAAQS (0.25 ppm)	0	0	0
Maximum 24-hour concentration (ppm)	N/A	N/A	N/A
Days exceeding CAAQS (0.04 ppm)	0	0	0
Days exceeding NAAQS (0.14 ppm)	0	0	0
Annual Arithmetic Mean (ppm)	N/A	N/A	N/A
Does measured AAM exceed NAAQS (0.030 ppm)?	N/A	N/A	N/A

Table IV.A-2 (Continued)
Summary of Ambient Air Quality in the Project Vicinity

Pollutant	Year		
	2016	2017	2018
Lead^a			
Maximum 30-day Average Concentration ($\mu\text{g}/\text{m}^3$)	0.02	0.02	0.01
Does measured concentration exceed NAAQS ($1.5 \mu\text{g}/\text{m}^3$)	No	No	No
Maximum Calendar Quarter Concentration ($\mu\text{g}/\text{m}^3$)	0.01	0.01	0.01
Does measured concentration exceed CAAQS ($1.5 \mu\text{g}/\text{m}^3$)	No	No	No
Sulfate			
Maximum 24-hour Concentration ($\mu\text{g}/\text{m}^3$)	6	5	5
Does measured concentration exceed CAAQS ($25 \mu\text{g}/\text{m}^3$)	No	No	No
<p>^a USEPA regulation requires the SCAQMD operate lead monitoring stations near sources of lead. As of 2018, no monitoring stations within the South Coast Basin demonstrated an exceedance of the lead NAAQS. Attainment redesignation for lead is currently pending with the USEPA</p> <p>AAM = annual arithmetic mean ppm = parts per million by volume $\mu\text{g}/\text{m}^3$ = micrograms per cubic meter N/A = Not available at this monitoring station.</p> <p>Source: South Coast Air Quality Management District Ambient Monitoring Data (2016–2018), www.aqmd.gov/home/air-quality/air-quality-data-studies/historical-data-by-year, accessed January 28, 2020.</p>			

The OEHHA, on behalf of the California Environmental Protection Agency, provides a screening tool (CalEnviroScreen) that can be used to help identify California communities that are disproportionately burdened by multiple sources of pollution. According to CalEnviroScreen, the Project Site is located above the 80th percentile, which means that the Project Site is worse than average in terms of pollution in comparison to other communities within California.²¹

The SCAQMD developed the Facility Information Database (FIND), a web search tool that provides public information about SCAQMD-regulated facilities that are required to have a permit to operate equipment that release pollutants into the air.²² A search was performed on the FIND and a site reconnaissance was conducted to identify potential air toxic emitting sources (e.g., freeways, diesel trucks idling at warehouse distribution facilities

²¹ OEHHA, CalEnviroScreen 3.0 MAP, <https://oehha.ca.gov/calenviroscreen/report/calenviroscreen-30>, accessed September 13, 2019.

²² SCAQMD, Facility Information Detail (F.I.N.D.), www.aqmd.gov/nav/FIND, accessed January 28, 2020.

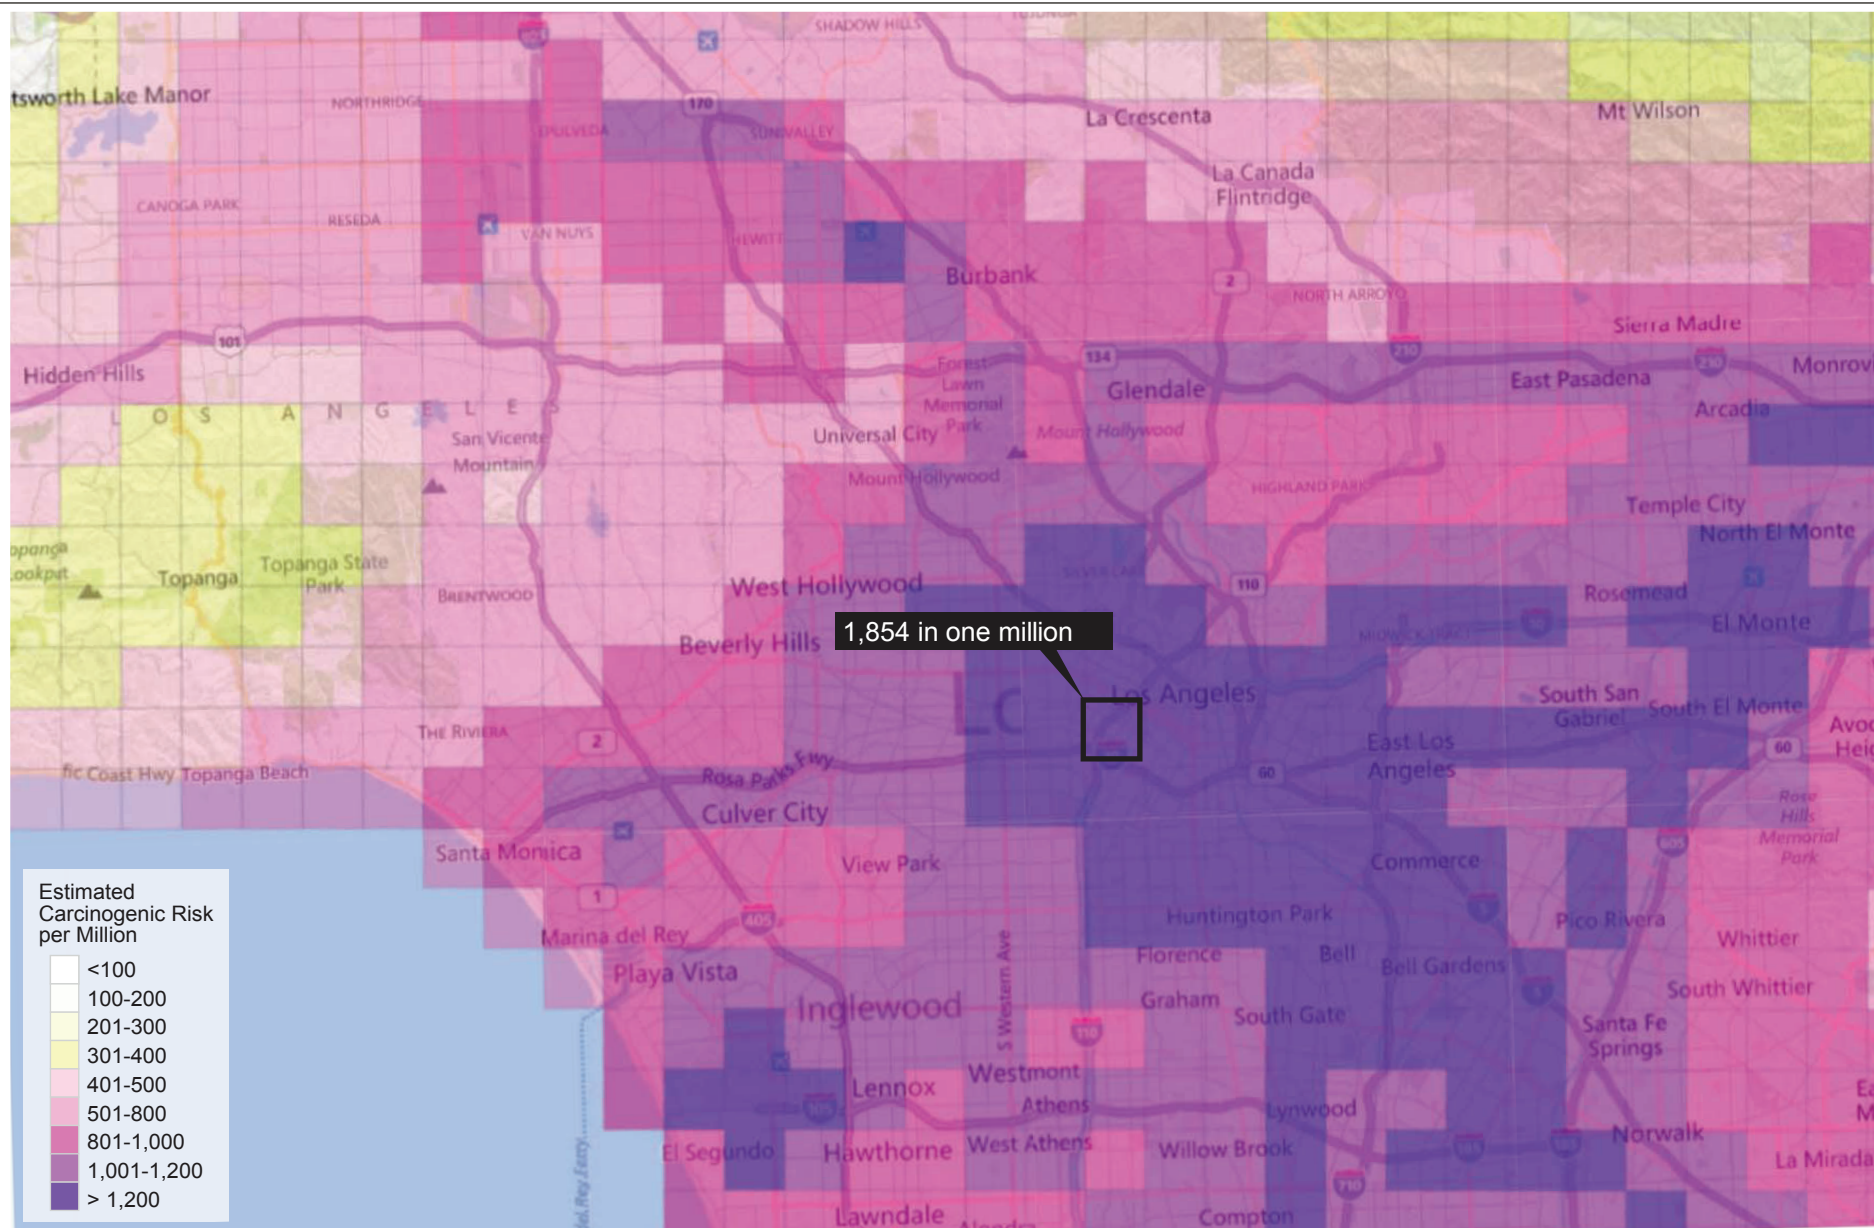


Figure IV.A-3
MATES Cancer Risk

in excess of 100 trucks per day). Based on this screening analysis, no major sources of TACs were found within the Project vicinity.

(c) Surrounding Uses

As shown in Figure IV.A-4 on page IV.A-25, the Project Site is located in an urbanized area. To the north of the Project Site are a series of multi-family residential towers located at 300–220 S. Olive Street and a set of iconic cultural arts buildings, such as the Broad Museum, Museum of Contemporary Arts, and the Walt Disney Concert Hall. To the west of the Project Site, across Olive Street, are two large office building high rises (One and Two California Plaza). To the east of the Project Site, across Hill Street, are several restaurants and the Grand Central Market, which is an open and semi-enclosed retail use that includes numerous restaurants, food markets, and general commercial space. To the south of the Project Site, across 4th Street are two above grade parking structures and the Metro 417 mid-rise apartment building. The uses surrounding the Project Site are primarily designated for Regional Center Commercial land uses, with interspersed residential uses, and zoned C2-4D (Commercial Zone, Height District 4 with Development Limitations) or R5-4D (Multiple Dwelling Zone, Height District 4 with Development Limitations).

(d) Sensitive Uses

Some population groups, including children, elderly, and acutely and chronically ill persons (especially those with cardio-respiratory diseases), are considered more sensitive to air pollution than others. As shown in Figure IV.A-4, the closest sensitive receptors to the Project Site are residential towers north of the Project Site and Metro 417 mid-rise apartment building south of the Project Site. These residences would experience the highest levels of Project emissions. All other existing air quality-sensitive uses are located at greater distances from the Project Site and would experience lower air pollutant impacts from potential sources of pollutants generated by the Project due to atmospheric dispersion effects.

(e) Existing Project Site Emissions

The Project Site is currently mostly landscaped and vacant, except for the Metro B and D (formerly Red and Purple) Lines Pershing Square Station portal located at the southeast corner of the Project Site and the publicly accessible stairway adjacent to Angels Flight on the northern boundary of the Project Site. Area source emissions are generated by the use of maintenance equipment, landscape equipment, and products that contain solvents. Energy source emissions are typically associated with building natural gas usage. As the Project Site is currently vacant, energy source emissions are minimal. To provide a conservative analysis of the Project, existing source emissions are considered to

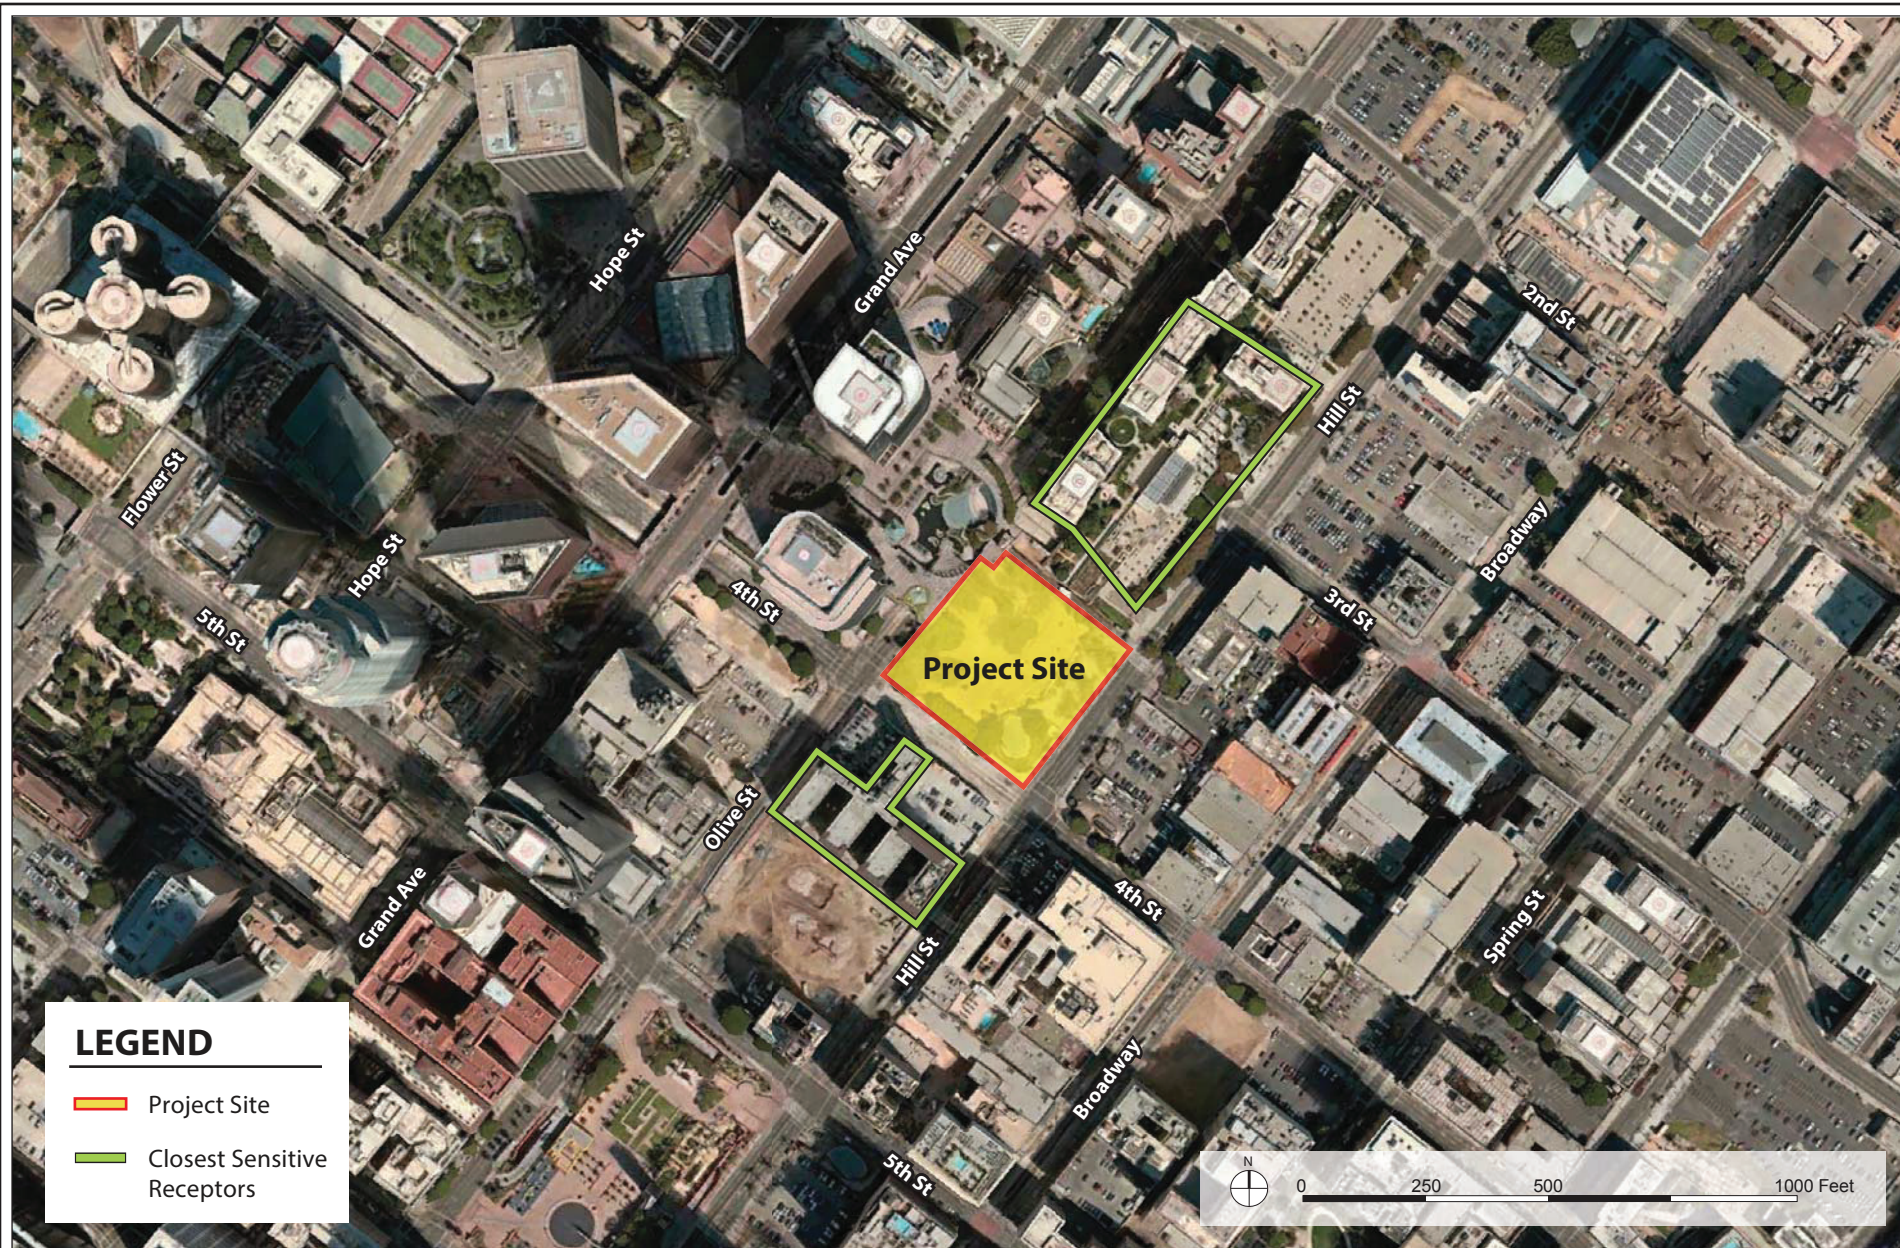


Figure IV.A-4
Sensitive Receptors

be minimal and assumed to be zero pounds per day (i.e., no offset emissions for comparison to Project).

3. Project Impacts

a. Thresholds of Significance

(1) State CEQA Guidelines Appendix G

In accordance with Appendix G of the State CEQA Guidelines, the Project would have a significant impact related to air quality if it would:

Threshold (a): Conflict with or obstruct implementation of the applicable air quality plan.

Threshold (b): Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is non-attainment under an applicable federal or state ambient air quality standard.

Threshold (c): Expose sensitive receptors to substantial pollutant concentrations.

For this analysis, the Appendix G Thresholds listed above are relied upon. The City's 2006 *L.A. CEQA Thresholds Guide* includes factors to assist in answering the Appendix G Threshold questions.

(2) 2006 L.A. CEQA Thresholds Guide

The *L.A. CEQA Thresholds Guide* identifies the following factors that may be relevant to preparing the air quality impacts analysis:

(a) Construction

(i) Combustion Emissions from Construction Equipment

- Type, number of pieces and usage for each type of construction equipment;
- Estimated fuel usage and type of fuel (diesel, natural gas) for each type of equipment; and
- Emission factors for each type of equipment.

(ii) Fugitive Dust—Grading, Excavation and Hauling

- Amount of soil to be disturbed on-site or moved off-site;
- Emission factors for disturbed soil;
- Duration of grading, excavation and hauling activities;
- Type and number of pieces of equipment to be used; and
- Projected haul route.

(iii) Fugitive Dust—Heavy-Duty Equipment Travel on Unpaved Road

- Length and type of road;
- Type, number of pieces, weight and usage of equipment; and
- Type of soil.

(iv) Other Mobile Source Emissions

- Number and average length of construction worker trips to Project Site, per day; and
- Duration of construction activities.

(b) Operation

- Operational emissions exceed 10 tons per year of volatile organic gases or any of the daily thresholds presented below (as reprinted from the CEQA Air Quality Handbook):

Pollutant	Significance Threshold (lbs/day)
ROG	55
NO _x	55
CO	550
PM ₁₀	150
SO _x	150

- Either of the following conditions would occur at an intersection or roadway within one-quarter mile of a sensitive receptor:

- The proposed project causes or contributes to an exceedance of the California 1-hour or 8-hour CO standards of 20 or 9.0 parts per million (ppm), respectively; or
- The incremental increase due to the project is equal to or greater than 1.0 ppm for the California 1-hour CO standard, or 0.45 ppm for the 8-hour CO standard.

(c) Toxic Air Contaminants

The determination of significance shall be made on a case-by-case basis, considering the following factors:

- The regulatory framework for the toxic material(s) and process(es) involved;
- The proximity of the TACs to sensitive receptors;
- The quantity, volume and toxicity of the contaminants expected to be emitted;
- The likelihood and potential level of exposure; and
- The degree to which project design will reduce the risk of exposure.

(3) SCAQMD's CEQA Air Quality Handbook

To assist in answering the Appendix G Threshold questions and factors identified in the City's 2006 *L.A. CEQA Thresholds Guide* for purposes of this analysis, the City utilizes the thresholds of significance in the SCAQMD's *CEQA Air Quality Handbook, Chapter 6*, as identified below, to assess the significance of the Project's estimated air quality impacts. Specifically, Table IV.A-3 on page IV.A-29 shows SCAQMD's currently recommended significance thresholds, which provide numerical thresholds for evaluating the significance of a project's estimated air quality emissions.

(a) Construction

Based on the criteria set forth in the SCAQMD's *CEQA Air Quality Handbook*,²³ the Project would have a significant impact with regard to construction emissions if any of the following would occur:

- Emissions from both direct and indirect sources would exceed any of the SCAQMD prescribed threshold levels identified in Table IV.A-3.

²³ SCAQMD, *CEQA Air Quality Handbook*, 1993.

**Table IV.A-3
SCAQMD Air Quality Significance Thresholds**

Mass Daily Thresholds ^a		
Pollutant	Construction ^b	Operation ^c
NO _x	100 lbs/day	55 lbs/day
VOC ^d	75 lbs/day	55 lbs/day
PM ₁₀	150 lbs/day	150 lbs/day
PM _{2.5}	55 lbs/day	55 lbs/day
SO _x	150 lbs/day	150 lbs/day
CO	550 lbs/day	550 lbs/day
Lead ^e	3 lbs/day	3 lbs/day
Toxic Air Contaminants (TACs), Odor, and GHG Thresholds		
TACs (including carcinogens and non-carcinogens)	Maximum Incremental Cancer Risk ≥ 10 in 1 million Cancer Burden > 0.5 excess cancer cases (in areas ≥ 1 in 1 million) Chronic & Acute Hazard Index ≥ 1.0 (project increment)	
Odor	Project creates an odor nuisance pursuant to SCAQMD Rule 402	
Ambient Air Quality Standards for Criteria Pollutants		
NO ₂ 1-hour average Annual Arithmetic Mean	SCAQMD is in attainment; project is significant if It causes or contributes to an exceedance of the following attainment standards: 0.18 ppm (state) 0.03 ppm (state) and 0.0534 ppm (federal)	
PM ₁₀ 24-hour average Annual Average	10.4 µg/m3 (construction) & 2.5 µg/m3 (operation) 1.0 µg/m3	
PM _{2.5} 24-hour average	10.4 µg/m3 (construction) & 2.5 µg/m3 (operation)	
SO ₂ 1-hour average 24-hour average	0.25 ppm (state) & 0.075 ppm (federal—99th percentile) 0.04 ppm (state)	
Sulfate 24-hour average	25 µg/m3 (state)	
CO 1-hour average 8-hour average	SCAQMD is in attainment; project is significant if it causes or contributes to an exceedance of the following attainment standards: 20 ppm (state) and 35 ppm (federal) 9.0 ppm (state/federal)	
Lead 30-day average Rolling 3-month average	1.5 µg/m3 (state) 0.15 µg/m3 (federal)	
<hr/> lbs/day = pounds per day		
^a SCAQMD CEQA Handbook (SCAQMD, 1993), Pages 6-2 and 6-3.		
^b Construction thresholds apply to both the South Coast Air Basin and Coachella Valley (Salton Sea and Mojave Desert Air Basins).		
^c For Coachella Valley, the mass daily thresholds for operation are the same as the construction thresholds.		

Table IV.A-3 (Continued)
SCAQMD Air Quality Significance Thresholds

^d Please note that the SCAQMD significance threshold is in terms of VOC while CalEEMod calculates reactive organic compounds (ROG) emissions. For purposes of this analysis, VOC and ROG are used interchangeably since ROG represents approximately 99.9 percent of VOC emissions.

^e While the South Coast Air Quality Management District CEQA Air Quality Handbook contains significance thresholds for lead, Project construction and operation would not include sources of lead emissions and would not exceed the significance thresholds for lead. Unleaded fuel and unleaded paints have virtually eliminated lead emissions from commercial land use projects such as the Project. As a result, lead emissions are not further evaluated in this Draft EIR.

Source: South Coast Air Quality Management District, 2015.

- Maximum on-site daily localized emissions exceed the Localized Significance Thresholds (LST), resulting in predicted ambient concentrations in the vicinity of the Project Site greater than the most stringent ambient air quality standards for CO (20 ppm [23,000 µg/m³] over a 1-hour period or 9.0 ppm [10,350 µg/m³] averaged over an 8-hour period) and NO₂ (0.18 ppm [338.4 µg/m³] over a 1-hour period, 0.1 ppm [188 µg/m³] over a three-year average of the 98th percentile of the daily maximum 1-hour average, or 0.03 ppm [56.4 µg/m³] averaged over an annual period).
- Maximum on-site localized PM₁₀ or PM_{2.5} emissions during construction exceed the applicable LSTs, resulting in predicted ambient concentrations in the vicinity of the Project Site to exceed the incremental 24-hr threshold of 10.4 µg/m³ or 1.0 µg/m³ PM₁₀ averaged over an annual period.

(b) Operation

Based on the criteria set forth in the SCAQMD's *CEQA Air Quality Handbook*,²⁴ the Project would have a significant impact with regard to operational emissions if any of the following would occur:

- Emissions from both direct and indirect sources exceed any of the SCAQMD prescribed threshold levels identified in Table IV.A-3 on page IV.A-29.
- Maximum on-site daily localized emissions exceed the LSTs, resulting in predicted ambient concentrations in the vicinity of the Project Site greater than the most stringent ambient air quality standards for CO (20 parts per million (ppm) over a 1-hour period or 9.0 ppm averaged over an 8-hour period) and NO₂ (0.18 ppm over a 1-hour period, 0.1 ppm over a 3-year average of the

²⁴ SCAQMD, *CEQA Air Quality Handbook*, 1993.

98th percentile of the daily maximum 1-hour average, or 0.03 ppm averaged over an annual period).²⁵

- Maximum on-site localized operational PM₁₀ and PM_{2.5} emissions exceed the incremental 24-hr threshold of 2.5 µg/m³ or 1.0 µg/m³ PM₁₀ averaged over an annual period.²⁶
- The Project causes or contributes to an exceedance of the California 1-hour or 8-hour CO standards of 20 or 9.0 ppm, respectively; or
- The Project creates an odor nuisance pursuant to SCAQMD Rule 402 (i.e., objectionable odor at the nearest sensitive receptor).

(c) *Toxic Air Contaminants*

Based on the criteria set forth in the SCAQMD's *CEQA Air Quality Handbook*, the Project would have a significant TAC impact, if:²⁷

- The Project emits carcinogenic or TACs that exceed the maximum incremental cancer risk as provided in Table IV.A-3 on page IV.A-29.

In assessing impacts related to TACs in this section, the City will use Appendix G as the thresholds of significance. The criteria identified above from the *L.A. CEQA Thresholds Guide* will be used where applicable and relevant to assist in analyzing the Appendix G thresholds. In addition, the following criteria set forth in SCAQMD's *CEQA Air Quality Handbook* serve as quantitative air quality standards to be used to evaluate project impacts under Appendix G thresholds:

- The Project results in the exposure of sensitive receptors to carcinogenic or toxic air contaminants that exceed the maximum incremental cancer risk of 10 in one million or an acute or chronic hazard index of 1.0.²⁸ For projects with a maximum incremental cancer risk between 1 in one million and 10 in one million, a project would result in a significant impact if the cancer burden exceeds 0.5 excess cancer cases.

²⁵ SCAQMD, *LST Methodology*.

²⁶ SCAQMD, *Final-Methodology to Calculate Particulate Matter (PM) 2.5 and PM_{2.5} Significance Thresholds*, October 2006.

²⁷ SCAQMD, *CEQA Air Quality Handbook*, Chapter 6 (Determining the Air Quality Significance of a project) and Chapter 10 (Assessing Toxic Air Pollutants), 1993.

²⁸ The hazard index is the ratio of a toxic air contaminant's concentration divided by its Reference Concentration, or safe exposure level. If the hazard index exceeds one, people are exposed to levels of TACs that may pose noncancer health risks.

(d) Consistency with Applicable Air Quality Plans

Section 15125 of the State CEQA Guidelines requires an analysis of project consistency with applicable governmental plans and policies. In accordance with the SCAQMD's *CEQA Air Quality Handbook*,²⁹ the following criteria were used to evaluate the Project's consistency with the SCAQMD and SCAG regional plans and policies, including the AQMP:

- Criterion 1: Will the Project result in any of the following:
 - An increase in the frequency or severity of existing air quality violations;
 - Cause or contribute to new air quality violations; or
 - Delay timely attainment of air quality standards or the interim emission reductions specified in the AQMP?
- Criterion 2: Will the Project exceed the assumptions utilized in preparing the AQMP?
 - Is the Project consistent with the population and employment growth projections upon which AQMP forecasted emission levels are based;
 - Does the Project include air quality mitigation measures; or
 - To what extent is Project development consistent with the AQMP control measures?

In addition, the Project's consistency with the General Plan's Air Quality Element is discussed.

(e) Cumulative Impacts

Based on SCAQMD guidance, individual construction projects that exceed the SCAQMD's recommended daily thresholds for project-specific impacts would also cause a cumulatively considerable increase in emissions for those pollutants for which the Air Basin is in non-attainment.³⁰ As discussed in the SCAQMD's White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution (August 2003):

²⁹ SCAQMD, *CEQA Air Quality Handbook*, Chapter 12, *Assessing Consistency with Applicable Regional Plans*, 1993.

³⁰ Jillian Wong, SCAQMD CEQA Specialist, personal communication, August 8, 2016.

*As Lead Agency, the AQMD uses the same significance thresholds for project specific and cumulative impacts for all environmental topics analyzed in an Environmental Assessment or EIR.... Projects that exceed the project-specific significance thresholds are considered by the SCAQMD to be cumulatively considerable. This is the reason project-specific and cumulative significance thresholds are the same. Conversely, projects that do not exceed the project-specific thresholds are generally not considered to be cumulatively significant.*³¹

The cumulative analysis of air quality impacts within this Draft EIR follows SCAQMD's guidance such that construction or operational Project emissions will be considered cumulatively considerable if Project-specific emissions exceed an applicable SCAQMD recommended significance threshold.

b. Methodology

Although the SCAQMD is responsible for regional air quality planning efforts, it does not have the authority to directly regulate the air quality issues associated with new development projects within the Air Basin, such as the Project. Instead, the SCAQMD published the *CEQA Air Quality Handbook* in November 1993 to assist lead agencies, as well as consultants, project proponents, and other interested parties, in evaluating potential air quality impacts of projects proposed in the Air Basin. The *CEQA Air Quality Handbook* provides standards, methodologies, and procedures for conducting air quality analyses in EIRs and was used extensively in the preparation of this analysis. The SCAQMD is currently in the process of replacing the *CEQA Air Quality Handbook* with the *Air Quality Analysis Guidance Handbook*.³²

In order to assist the CEQA practitioner in conducting an air quality analysis in the interim while the replacement *Air Quality Analysis Guidance Handbook* is being prepared, supplemental guidance/information is provided on the SCAQMD website (www.aqmd.gov/ceqa/hdbk.html) and includes: (1) EMFAC on-road vehicle emission factors; (2) background CO concentrations; (3) localized significance thresholds; (4) mitigation measures and control efficiencies; (5) mobile source toxics analysis; (6) off-road mobile source emission factors; (7) PM_{2.5} significance thresholds and calculation methodology; and (8) updated SCAQMD Air Quality Significance Thresholds. The SCAQMD also recommends using approved models to calculate emissions from land use projects, such

³¹ *White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution. Appendix D, South Coast Air Quality Management District, August 2003.*

³² *SCAQMD, Air Quality Analysis Handbook, www.aqmd.gov/home/regulations/ceqa/air-quality-analysis-handbook, accessed January 28, 2020.*

as the California Emissions Estimator Model (CalEEMod). These recommendations were followed in the preparation of this analysis.

The SCAQMD has also adopted land use planning guidelines in the *Guidance Document for Addressing Air Quality Issues in General Plans and Local Planning*, which considers impacts to sensitive receptors from facilities that emit TAC emissions.³³ SCAQMD's siting distance recommendations are the same as those provided by CARB (e.g., a 500-foot siting distance for sensitive land uses proposed in proximity of freeways and high-traffic roads, and the same siting criteria for distribution centers and dry cleaning facilities). The SCAQMD's document introduces land use-related policies that rely on design and distance parameters to minimize emissions and lower potential health risk. SCAQMD's guidelines are voluntary initiatives recommended for consideration by local planning agencies.

This analysis focuses on the potential change in the air quality environment due to implementation of the Project. Air pollutant emissions would result from both construction and operation of the Project. Specific methodologies used to evaluate these emissions are discussed below.

(1) Construction Emissions Methodology

Construction of the Project has the potential to generate temporary pollutant emissions through the use of heavy-duty construction equipment, such as excavators and cranes, and through vehicle trips generated from workers and haul and delivery trucks traveling to and from the Project Site. In addition, fugitive dust emissions would result from demolition and various soil-handling activities. Mobile source emissions, primarily NO_x, would result from the use of construction equipment. Construction emissions can vary substantially from day to day, depending on the level of activity, the specific type of construction activity, and prevailing weather conditions. The assessment of construction air quality impacts considers each of these potential sources.

(a) Regional Emissions

The Project's "regional" emissions refer to emissions that will be evaluated based on regional significance thresholds established by the SCAQMD, as discussed above. Daily regional emissions during construction are estimated by assuming a conservative estimate of construction activities (i.e., assuming all construction occurs at the earliest feasible date) and applying mobile source and fugitive dust emissions factors. The emissions are

³³ SCAQMD, *Guidance Document for Addressing Air Quality Issues in General Plans and Local Planning*, May 6, 2005.

estimated using CalEEMod (Version 2016.3.2) software, an emissions inventory software program recommended by SCAQMD. The CalEEMod model was developed for the California Air Pollution Control Officers Association (CAPCOA) in collaboration with SCAQMD, received input from other California air districts, and is currently used by numerous lead agencies in the Los Angeles area and within the State for quantifying the emissions associated with development projects undergoing environmental review, including the City.

CalEEMod is based on outputs from Off-road Emissions Inventory Program model³⁴ (OFFROAD) and Emission FACTor model³⁵ (EMFAC), which are emissions estimation models developed by CARB, and used to calculate emissions from construction activities, including off- and on-road vehicles, respectively. CalEEMod also relies upon known emissions data associated with certain activities or equipment (often referred to as “default” data, values or factors) that can be used if site-specific information is not available. CalEEMod contains default values to use in each specific local air district region. Default values within CalEEMod were obtained from a survey of construction sites conducted by the SCAQMD. The construction survey data was used to determine appropriate construction equipment based on lot size and project type.³⁶ Appropriate statewide default values can be used, if regional default values are not defined.

The input values used in this analysis were adjusted to be Project-specific based on equipment types and the construction schedule. These values were then applied to the construction phasing assumptions used in the criteria pollutant analysis to generate criteria pollutant emissions values for each construction activity. Construction tasks were aggregated to reflect overlapping tasks and identify the reasonably expected maximum construction emissions occurring over the course of Project construction. To be conservative, this analysis evaluates the Project’s air quality impacts during construction based on reasonably expected maximum construction emissions even though such emissions would not occur throughout the entire construction phase. Detailed equipment lists, construction scheduling, and emissions calculations are provided in Appendix B.2 to this Draft EIR.

³⁴ California Air Resources Board, 2017 Off-road Diesel Emission Factors, ww2.arb.ca.gov/our-work/programs/mobile-source-emissions-inventory/road-documentation/msei-documentation-road, accessed November 24, 2020.

³⁵ California Air Resources Board, EMFAC 2014, ww2.arb.ca.gov/our-work/programs/mobile-source-emissions-inventory/msei-modeling-tools, accessed November 24, 2020

³⁶ CAPCOA, California Emissions Estimator Model, Appendix E1: Construction Survey and SCAQMD, October 2017.

(b) Localized Emissions

The localized effects from the on-site portion of daily construction emissions were evaluated at sensitive receptor locations potentially impacted by the Project according to the SCAQMD's LST methodology, which uses on-site mass emissions rate look-up tables and Project-specific modeling, where appropriate, to assess whether the Project's local emissions would exceed the SCAQMD's significance thresholds, as described above.³⁷ SCAQMD provides LSTs applicable to the following criteria pollutants: NO_x; CO; PM₁₀; and PM_{2.5}.³⁸ SCAQMD does not provide an LST for Pb, H₂S, and SO₂ since land use development projects typically result in negligible construction and long-term operation emissions of these pollutants as on-site activities during construction and operation do not include activities that emit high levels of these emissions. Since VOCs are not a criteria pollutant, there is no ambient standard or SCAQMD LST for VOCs. Due to the role VOCs play in O₃ formation, it is classified as a precursor pollutant, and only a regional emissions threshold has been established.

LSTs represent the maximum emissions from a project that are not expected to cause or contribute to an exceedance of the most stringent applicable federal or state ambient air quality standards and are developed based on the ambient concentrations of that pollutant for each source receptor area and distance to the nearest sensitive receptor. The SCAQMD developed mass rate look-up tables for each source receptor area and to determine whether or not a project may generate significant adverse localized air quality impacts. SCAQMD provides LST mass rate look-up tables for projects with active construction areas that are less than or equal to 5 acres. For projects that exceed 5 acres, such as the Project, the 5-acre LST look-up values can be used as a screening tool to determine which pollutants require detailed analysis.³⁹ This approach is conservative as it assumes that all on-site emissions would occur within a 5-acre area and would over-predict potential localized impacts (i.e., more pollutant emissions occurring within a smaller area, resulting in greater concentrations). If the project exceeds the LST look-up values, then the SCAQMD recommends that project-specific air quality modeling must be performed to determine if the Project's local emissions exceed applicable significance thresholds.

³⁷ SCAQMD, *LST Methodology Appendix C-Mass Rate LST Look-Up Table*, October 2009.

³⁸ SCAQMD, *LST Methodology*, p. 1-4.

³⁹ *Telephone Conversation*, Ian MacMillan, SCAQMD CEQA Program Supervisor, November 10, 2011.

(2) Operation Emissions Methodology

(a) Regional Emissions

Analysis of the Project's impact on regional air quality during long-term Project operations (i.e., after construction is complete) takes into consideration four types of sources: (1) area; (2) energy; (3) mobile; and (4) stationary. Area source emissions are generated by, among other things, landscape equipment, fireplaces, and the use of consumer products. Energy source emissions are generated as a result of activities in buildings for which natural gas is used (e.g., natural gas for heat or cooking). Mobile source emissions are generated by the increase in motor vehicle trips to and from the Project Site associated with operation of the Project. Stationary source emissions are generated from proposed emergency generators during routine maintenance/testing.

Similar to construction, SCAQMD's CalEEMod model was used to estimate Project emissions during operation. Mobile-source emissions were calculated using CalEEMod. However, CalEEMod default VMT was bypassed to account for the Project-related VMT provided using the Los Angeles Department of Transportation (LADOT) VMT Calculator.⁴⁰ The VMT Calculator was developed by the City and LADOT to comply with SB 743, which requires lead agencies to adopt VMT criteria to determine transportation-related impacts. Area source emissions are based on natural gas (building heating and water heaters), landscaping equipment, and consumer product usage (including paints) rates provided in CalEEMod. Natural gas usage factors in CalEEMod are based on the California Energy Commission California Commercial End Use Survey data set, which provides energy demand by building type and climate zone. Emissions associated with use of emergency generators were calculated using CalEEMod, in which emission factors are based on Table 3.4-1 (Gaseous Emission Factors for Large Stationary Diesel Engines) from USEPA's AP-42: Compilation of Air Pollutant Emission Factors. The emissions are based on the horsepower rating of the diesel generator and the number of hours operated per year for testing purposes.

To determine if a significant air quality impact would occur, the net increase in regional operational emissions generated by the Project was compared against the SCAQMD's significance thresholds.⁴¹ To be conservative, this analysis evaluates the Project's air quality impacts during operations based on reasonably expected maximum

⁴⁰ Gibson Transportation Consulting, Inc., *Transportation Assessment for the Proposed Angels Landing Project*, City of Los Angeles, November 2020.

⁴¹ SCAQMD, *SCAQMD Air Quality Significance Thresholds*, revised March 2015. SCAQMD based these thresholds, in part, on the federal Clean Air Act and, to enable defining "significant" for CEQA purposes, defined the setting as the South Coast Air Basin. (See SCAQMD, *CEQA Air Quality Handbook*, April 1993, pp. 6-1–6-2.)

operational emissions even though such emissions would not occur throughout the entire operational phase. Refer to Appendix B.1 to this Draft EIR for additional information regarding methodology.

(b) Localized Emissions

(i) On-Site Emissions

Localized impacts from Project operations include calculation of on-site emissions (e.g., combustion from natural gas usage) using SCAQMD's recommended CalEEMod and evaluation of these emissions consistent with the SCAQMD's LST methodology discussed above.

(ii) Off-Site Emissions

Potential localized CO concentrations from induced traffic at nearby intersections are addressed consistent with the methodologies and assumptions used in the consistency analysis provided in the 2003 AQMP.⁴²

It has long been recognized that CO exceedances are caused by vehicular emissions,⁴³ primarily when idling at intersections.^{44,45} Accordingly, vehicle emissions standards have become increasingly more stringent. Before the first vehicle emission regulations, cars in the 1950s were typically emitting about 87 grams of CO per mile.⁴⁶ Currently, the CO standard in California is a maximum of 3.4 grams/mile for passenger cars (with provisions for certain cars to emit even less).⁴⁷ With the turnover of older vehicles, introduction of cleaner fuels, and implementation of control technology on industrial facilities, CO concentrations in the Air Basin have steadily declined.

The analysis prepared for CO attainment in the Air Basin by the SCAQMD can be used to assist in evaluating the potential for CO exceedances in the Air Basin.

⁴² The latest CO hotspots modeling and attainment demonstration was performed as part of the 2003 AQMP. Results of the attainment demonstration were eventually incorporated into the redesignation request and approved by the USEPA.

⁴³ USEPA. 2000. *Air Quality Criteria for Carbon Monoxide*. EPA 600/P-099/001F.

⁴⁴ SCAQMD. 1993. *CEQA Air Quality Handbook*. Section 4.5.

⁴⁵ SCAQMD. 2003. *Air Quality Management Plan*.

⁴⁶ USEPA, *Timeline of Major Accomplishments in Transportation, Air Pollution, and Climate Change*, www.epa.gov/air-pollution-transportation/timeline-major-accomplishments-transportation-air-pollution-and-climate, accessed January 17, 2018.

⁴⁷ CARB, *California Exhaust Emission Standards and Test Procedures for 2001 and Subsequent Model Passenger Cars, Light-duty Trucks, and Medium-duty Vehicles*, amended September 27, 2010.

CO attainment was thoroughly analyzed as part of the SCAQMD's 2003 AQMP and the 1992 Federal Attainment Plan for Carbon Monoxide (1992 CO Plan).⁴⁸ As discussed in the 1992 CO Plan, peak CO concentrations in the Air Basin are due to unusual meteorological and topographical conditions, and not due to the impact of particular intersections. Considering the region's unique meteorological conditions and the increasingly stringent CO emissions standards, CO modeling was performed as part of the 1992 CO Plan and subsequent plan updates and air quality management plans.

In the 1992 CO Plan, a CO hot spot analysis was conducted for the four worst-case scenario intersections in Los Angeles at the peak morning and afternoon time periods. The intersections evaluated included: Long Beach Boulevard and Imperial Highway (Lynwood); Wilshire Boulevard and Veteran Avenue (Westwood); Sunset Boulevard and Highland Avenue (Hollywood); and La Cienega Boulevard and Century Boulevard (Inglewood). These analyses did not predict a violation of CO standards. The peak modeled CO concentrations due to vehicle emissions occurred at the intersection of Wilshire Boulevard and Veteran Avenue, which had a daily traffic volume of approximately 100,000 vehicles per day. The 2003 AQMP estimated that the 1-hour concentration for this intersection was 4.6 ppm, which indicates that the most stringent 1-hour CO standard (20.0 ppm) would likely not be exceeded until the daily traffic at the intersection exceeded more than 400,000 vehicles per day.⁴⁹ The AQMP CO hotspots modeling also took into account worst-case meteorological conditions and background CO concentrations. The Los Angeles County Metropolitan Transportation Authority (Metro) evaluated the level of service (LOS) in the vicinity of the Wilshire Boulevard and Veteran Avenue intersection and found it to be LOS E at peak morning traffic and LOS F at peak afternoon traffic.^{50,51} As an initial screening step, if a project intersection does not exceed 400,000 vehicles per day, then the project does not need to prepare a detailed CO hot spot. If a project would potentially result in a CO hotspot based on the initial screening, detailed modeling may be performed using California LINE Source Dispersion Model, version 4 (CALINE4), which is a model used to assess air quality impacts near transportation facilities (i.e., roadways, intersections, street canyons, and parking facilities).

⁴⁸ SCAQMD, 1992. *Federal Attainment Plan for Carbon Monoxide*.

⁴⁹ Based on the ratio of the CO standard (20.0 ppm) and the modeled value (4.6 ppm).

⁵⁰ The Metropolitan Transportation Authority measured traffic volumes and calculated the LOS for the intersection of Wilshire Blvd./ Sepulveda Ave. which is a block west along Wilshire Blvd., still east of Interstate 405.

⁵¹ Metropolitan Transportation Authority. 2004. *Congestion Management Program for Los Angeles County. Exhibit 2-6 and Appendix A*.

(3) Toxic Air Contaminants Impacts (Construction and Operations)

The SCAQMD has also adopted land use planning guidelines in the *Guidance Document for Addressing Air Quality Issues in General Plans and Local Planning*, which considers impacts to sensitive receptors from facilities that emit TAC emissions.⁵² SCAQMD's siting distance recommendations are the same as those provided by CARB (e.g., a 500-foot siting distance for sensitive land uses proposed in proximity of freeways and high-traffic roads, and the same siting criteria for distribution centers and dry cleaning facilities). The SCAQMD's document introduces land use-related policies that rely on design and distance parameters to minimize emissions and lower potential health risk. SCAQMD's guidelines are voluntary initiatives recommended for consideration by local planning agencies.

Potential TAC impacts are evaluated by conducting a qualitative analysis consistent with SCAQMD guidance and the CARB Handbook. The qualitative analysis consists of reviewing the Project to identify any new or modified TAC emissions sources and evaluating the potential for such sources to cause significant TAC impacts. If the qualitative evaluation determines the potential for significant impacts from a new TAC source, or modification of an existing TAC emissions source, a more detailed dispersion analysis is conducted to evaluate estimated Project TAC emissions against the applicable SCAQMD significance thresholds based on downwind sensitive receptor locations.

c. Project Design Features

No specific project design features are proposed with regard to air quality. The Project would incorporate project design features to support and promote environmental sustainability as discussed under Section IV.E, Greenhouse Gas Emissions, of this Draft EIR. While these features are designed primarily to reduce greenhouse gas (GHG) emissions, they would also serve to reduce criteria air pollutants discussed herein. In addition, the Project would be located within a City-designated Transit Priority Area (TPA) and SCAG-designated High-Quality Transit Area (HQTa) which would maximize transit use and minimize VMT and associated air emissions. Furthermore, the Project would be constructed to qualify for Leadership in Energy and Environmental Design (LEED) Silver certification, and would include energy and fuel-efficient design, construction, features, appliances and fixtures, which would also minimize associated emissions.

⁵² SCAQMD, *Guidance Document for Addressing Air Quality Issues in General Plans and Local Planning*, May 6, 2005.

d. Analysis of Project Impacts

Threshold (a): Conflict with or obstruct implementation of the applicable air quality plan.

(1) Impact Analysis

(a) SCAQMD CEQA Air Quality Handbook Policy Analysis

To assess whether the Project would conflict with or obstruct implementation of an applicable air quality plan, this analysis evaluates the Project's consistency with SCAQMD's AQMP and SCAG's RTP/SCS. In accordance with the SCAQMD's *CEQA Air Quality Handbook*, Chapter 12, the following criteria are considered as part of this evaluation:

- Criterion 1: Would the project result in any of the following:
 - An increase in the frequency or severity of existing air quality violations; or
 - Cause or contribute to new air quality violations; or
 - Delay timely attainment of air quality standards or the interim emission reductions specified in the AQMP.
- Criterion 2: Would the project exceed the assumptions utilized in preparing the AQMP?
 - Is the Project consistent with the population and employment growth projections upon which AQMP forecasted emission levels are based;
 - Does the Project include air quality mitigation measures; or
 - To what extent is Project development consistent with the AQMP control measures?

(i) Criterion 1

The Project is an infill development near transit within an existing urbanized area that would concentrate new residential uses within a SCAG-designated HQTa. This means the Project advances regional goals to reduce VMT through infill development near transit that has the co-benefit of reducing air emissions and GHG emissions compared to the average regional project. As shown below, the Project would not exceed any SCAQMD significance thresholds for air quality emissions.

Localized concentrations of NO₂ as NO_x, CO, PM₁₀, and PM_{2.5} have been analyzed for the Project. Due to California Low Sulfur Diesel Fuel requirements, calculations shown below demonstrate that SO₂ emissions would be negligible during construction and long-term operations, and, therefore, would not have the potential to cause or affect a violation of the SO₂ ambient air quality standard. Since VOCs are not a criteria pollutant, there is no ambient standard or localized threshold for VOCs. Due to the role VOCs play in O₃ formation, it is classified as a precursor pollutant and only a regional emissions threshold has been established.

The Project's maximum potential NO_x, CO, PM₁₀, and PM_{2.5} daily emissions during construction were analyzed under Threshold (c) below to ascertain potential effects on localized concentrations and to determine if there is a potential for such emissions to cause or affect a violation of an applicable ambient air quality standard. As shown in Table IV.A-8 on page IV.A-57 in the analysis below, localized NO₂ as NO_x, CO, PM₁₀, and PM_{2.5} would not exceed the SCAQMD-recommended localized significance thresholds, and are thus well within the margin of safety established to protect human health. **Therefore, Project construction would not result in a significant impact with regard to localized air quality.**

Because the Project would not introduce any substantial stationary sources of emissions, CO is the preferred benchmark pollutant for assessing local area air quality impacts from post-construction motor vehicle operations.⁵³ As discussed under Threshold (c) below, no intersections would require a CO hotspot analysis, and impacts would be less than significant. **Therefore, the Project would not increase the frequency or severity of an existing CO violation or cause or contribute to new CO violations.**

An analysis of potential localized operational impacts from on-site activities was also conducted. As shown in Table IV.A-9 on page IV.A-59 in the analysis below under Threshold (c), localized NO₂ as NO_x, CO, PM₁₀, and PM_{2.5} operational impacts would be less than significant. **Therefore, the Project would also not delay timely attainment of air quality standards or interim emission reductions specified in the AQMP.**

(ii) Criterion 2

The projections in the AQMP for achieving air quality goals are based on assumptions in SCAG's 2016–2040 RTP/SCS regarding population, housing, and growth trends. Determining whether or not a project exceeds the assumptions reflected in the AQMP involves the evaluation of three criteria: (1) consistency with applicable population,

⁵³ SCAQMD, *CEQA Air Quality Handbook*, Chapter 12, *Assessing Consistency with Applicable Regional Plans*, 1993.

housing, and employment growth projections; (2) project mitigation measures; and (3) appropriate incorporation of AQMP land use planning strategies. The following discussion provides an analysis with respect to each of these three criteria.

- Is the project consistent with the population, housing, and employment growth projections upon which AQMP forecasted emission levels are based?

A project is consistent with the AQMP, in part, if it is consistent with the population, housing, and employment assumptions that were used in the development of the AQMP. In the case of the 2016 AQMP, two sources of data form the basis for the projections of air pollutant emissions: the City's General Plan and SCAG's 2016–2040 RTP/SCS.

As described in Section IV.F, Land Use and Planning, of this Draft EIR, the City's General Plan serves as a comprehensive, long-term plan for future development of the City. The 2016–2040 RTP/SCS provides socioeconomic forecast projections of regional population growth. The population, housing, and employment forecasts, which are adopted by SCAG's Regional Council, are based on the local plans and policies applicable to the specific area; these are used by SCAG in all phases of implementation and review.

According to SCAG's 2016–2040 RTP/SCS, the forecasted population for the City of Los Angeles Subregion in 2019 is approximately 4,036,475 persons.⁵⁴ In 2026, the projected occupancy year of the Project, the City of Los Angeles Subregion is anticipated to have a population of approximately 4,227,450 persons.⁵⁵

The Project would provide housing for approximately 1,042 people.⁵⁶ These new residents would represent approximately 0.55 percent of the population growth forecasted by SCAG in the City of Los Angeles Subregion of 190,975 residents between 2019 and 2026 (the buildout year of the Project).⁵⁷ The Project would also generate approximately 535 employees.⁵⁸ These employees would constitute approximately 0.45 percent of the

⁵⁴ Based on a linear interpolation of 2012–2040 data.

⁵⁵ Based on a linear interpolation of 2012–2040 data.

⁵⁶ Based on a 2.41 persons per household rate for multi-family units based on the 2018 American Community Survey 5-Year Average Estimates. Source: Jack Tsao, Data Analyst II, Los Angeles Department of City Planning, June 12, 2020. The formula applied is: 432 units x 2.41 persons per unit = 1,042 residents

⁵⁷ See Section IV.H, Population and Housing, of this Draft EIR for further discussion and calculations (including Table IV.H-1).

⁵⁸ Based on employee generation rates from the Los Angeles Department of Transportation and Los Angeles Department of City Planning, City of Los Angeles VMT Calculator Documentation Version 1.3, May 2020, Table 1, including: General Retail = 2/1,000 sf; Restaurant (high-turnover sit-down and quality restaurants) = 4/1,000 sf; Hotel = 0.5/rm; and General Office = 4/1,000 sf. The formula applied is: (Footnote continued on next page)

employment growth forecasted in the City of 118,175 employees between 2019 and 2026.⁵⁹ Accordingly, the Project's generation of residents and employees would be well within and consistent with the population and employment projections contained in the 2016–2040 RTP/SCS. **Because similar projections form the basis of the 2016 AQMP, the Project would be consistent with the projections in the AQMP.**

- Does the project implement feasible air quality mitigation measures?

The Project would comply with all applicable regulatory standards (e.g., SCAQMD Rule 403, etc.) as required by SCAQMD, as summarized above. The Project also would incorporate project design features to support and promote environmental sustainability as discussed in Section IV.E, Greenhouse Gas Emissions, of this Draft EIR. While these features are designed primarily to reduce GHG emissions, they would also serve to reduce the criteria air pollutants discussed herein. Furthermore, Mitigation Measures Air MM-1 through Air MM-5 combined with regulatory requirements identified above and in Section IV.E, Greenhouse Gas Emissions, of this Draft EIR, would ensure that significant air quality impacts would not occur. **As such, the Project is consistent with this AQMP consistency criterion.**

- To what extent is project development consistent with the control measures set forth in the AQMP?

Pursuant to California Health and Safety Code Section 40460, SCAG has the responsibility of preparing and approving the portions of the AQMP relating to the integration of regional land use programs, measures, and strategies. SCAQMD combines its portion of the AQMP with those prepared by SCAG. Appendix IV-C to the 2016 AQMP for the Air Basin includes the regional land use and transportation strategies and the transportation control measures contained in SCAG's 2016–2040 RTP/SCS. For land use developments such as the Project, the AQMP's land use control measures (i.e., goals and policies) focus on the reduction of vehicle trips and VMT. As an infill development located in a HQTAs, the Project advances goals of the AQMP and RTP/SCS to reduce VMT and related vehicle emissions. The Project Site is transit accessible and is close to many bus transit lines, rail lines, and local shuttle service. Public transit service in the vicinity of the Project Site includes Metro's B/D Lines and numerous local and regional bus lines, which provide connections to other Downtown subway stations. In particular, the Metro B/D Lines Pershing Square Station portal is located on the southeastern corner of the Project Site.

(30,466 sf retail/2 employees per 1,000 sf) + (53,795 sf restaurant/4 employees per 1,000 sf) + (515 hotel rms/0.5 per rm) = 535 employees.

⁵⁹ See Section IV.H, Population and Housing, of this Draft EIR for further discussion and calculations (including Table IV.H-1).

There is also a bus stop along Hill Street, across from the Project Site, which serves Metro Bus Lines 2/302, 4, 10/48, 81, 90/91, and 94 and the Los Angeles Department of Transportation (LADOT)'s Commuter Express 419. An additional bus stop along Hill Street, near 3rd Street, serves Metro Bus Lines 2/302, 4, 10/48, and 794. In addition, the adjacent Angels Flight, a historic funicular railway, provides a connection between Hill Street and California Plaza above Olive Street.

The Project would also provide required short- and long-term bicycle parking spaces in compliance with the requirements of the Los Angeles Municipal Code (LAMC). The increase in transit accessibility and the bicycle parking spaces provided on-site would further reduce vehicle trips and VMT by encouraging walking and non-automotive forms of transportation. The Project design would also provide pedestrian access that minimizes barriers and links the Project Site with external streets to encourage people to walk instead of drive.

As further discussed in Section IV.E, Greenhouse Gas Emissions, of this Draft EIR, the Project design includes characteristics that would reduce trips and VMT as compared to a standard project within the Air Basin as measured by CalEEMod. While these Project characteristics primarily reduce GHGs, they would also reduce criteria air pollutants discussed herein. These relative reductions in vehicle trips and VMT from a standard project within the Air Basin help quantify the criteria air pollutant emissions reductions achieved by locating the Project in an infill, HQTa area that promotes alternative modes of transportation.

Previously, trip generation for land uses was calculated based on survey data collected by the Institute of Transportation Engineers (ITE). However, these ITE trip generation rates were based on data collected at suburban, single-use, free standing sites, which may not be representative of urban mixed-use environments. Beginning in 2019, the USEPA has sponsored a study to collect travel survey data from mixed-use developments in order provide a more representative trip generation rate for multi-use sites. Results of the USEPA survey indicate that trip generation and VMT are affected by factors such as resident and job density, availability of transit, and accessibility of biking and walking paths. Based on these factors, the USEPA has developed equations known as the EPA Mixed-Use Development (MXD) model to calculate trip reductions for multi-use developments.⁶⁰ The LADOT VMT Calculator incorporates the USEPA MXD model and accounts for project features such as increased density and proximity to transit, which would reduce VMT and associated fuel usage in comparison to free-standing sites. As shown in Appendix B.2,

⁶⁰ USEPA, *Mixed-Use Trip Generation Model*. www.epa.gov/smartgrowth/mixed-use-trip-generation-model, accessed on December 16, 2019.

incorporation of USEPA MXD VMT reduction features applicable to the Project results in a 52 percent reduction in overall VMT and resultant pollutant emissions.

As discussed in detail in Section IV.E, Greenhouse Gas Emissions, of this Draft EIR, the Project results in a daily per capita VMT of 3.9 miles for residents and 7.3 miles for employees, which represents a reduction of 33 percent for combined residents and employees in daily per capita VMT when compared to the Area Planning Commission (APC) designated for the Project area. This level of VMT per capita reduction does not conflict with the percent reduction goals provided in the 2016–2040 RTP/SCS and 2020–2045 RTP/SCS. **Accordingly, the Project would support AQMP and RTP/SCS objectives of reducing VMT and the related vehicular air emissions.**

In conclusion, the determination of AQMP consistency is primarily concerned with the long-term influence of the Project on air quality in the Air Basin. The Project is an infill development near transit within an existing urbanized area that would locate new residential and mixed-uses within an HQTAs, thus reducing VMT. The Project would not have a significant long-term impact on the region's ability to meet state and federal air quality standards. **As discussed above, the Project's would be consistent with the goals and policies of the AQMP and, therefore, would not conflict with or obstruct implementation of the SCAQMD's AQMP.**

(b) City of Los Angeles Policies

To achieve the goals of the Air Quality Element, performance-based standards have been adopted to provide flexibility in implementation of its policies and objectives.

As an infill development located in a HQTAs, the Project advances regional and City goals to reduce VMT and related vehicle emissions, which has the co-benefit of decreasing GHG emissions and air pollutants from mobile sources. In addition, the Project includes short- and long-term bicycle parking spaces for the proposed residential uses as required by the LAMC and is serviced by local bus lines. The Project would provide opportunities for the use of alternative modes of transportation, including convenient access to public transit, opportunities for walking and biking, thereby facilitating a reduction in VMT. The Project is consistent with the existing land use pattern in the vicinity that concentrates urban density along major arterials and near transit options. The Project also includes primary entrances for pedestrians and bicyclists that would be safe, easily accessible, and in close proximity to transit stops. A more detailed analysis of the Project's consistency with the City's General Plan is presented in Table IV.A-4 on page IV.A-47 which identifies specific goals and policies of the City's General Plan and demonstrates the Project's consistency with these goals.

Table IV.A-4
Project Consistency with City of Los Angeles General Plan (Air Quality Element)

Recommendation	Analysis of Project Consistency
Air Quality Element	
Goal 1: Good air quality and mobility in an environment of continued population growth and healthy economic structure	Consistent. The Project Site is located in an area in proximity to a regional job center (i.e., Downtown Los Angeles) and other residential developments thereby reducing the distance traveled for future residents and employees, respectively. Future residents and employees on the Project Site would also have access to local bus lines as well as use of bicycle parking spaces provided on the Project Site. The Project's proximity to both job centers and housing, and the option to use alternative modes of transportation would reduce reliance on single-occupant vehicles, consistent with this goal.
Objective 1.1: It is the objective of the City of Los Angeles to reduce air pollutants consistent with the Regional Air Quality Management Plan (AQMP), increase traffic mobility, and sustain economic growth citywide	Consistent The Metro B/D Lines Pershing Square Station portal is located on the southeastern corner of the Project site and is served by local bus lines. The Project would locate residential uses near major employment centers (Downtown Los Angeles) which would reduce trips and encourage employees to utilize alternative modes of transportation.
Objective 1.3: It is the objective of the City of Los Angeles to reduce particulate air pollutants emanating from unpaved areas, parking lots, and construction sites.	Consistent. The Project would comply with SCAQMD Rule 403 which requires dust control measures during construction activities..
Goal 2: Less reliance on single-occupant vehicles with fewer commute and non-work trips.	Consistent. The Project Site is located in an area in proximity to a regional job center (i.e., Downtown Los Angeles) and other residential developments thereby reducing the distance traveled for future residents and employees, respectively. Future residents and employees on the Project Site would also have access to local bus lines as well as use of bicycle parking spaces provided on the Project Site. The Project's proximity to both job centers and housing, and the option to use alternative modes of transportation would reduce reliance on single-occupant vehicles, consistent with this goal.
Objective 2.1: It is the objective of the City of Los Angeles to reduce work trips as a step towards attaining trip reduction objectives necessary to achieve regional air quality goals.	Consistent. The Metro B/D Lines Pershing Square Station portal is located on the southeastern corner of the Project site and is served by local bus lines. The Project would locate residential uses near major employment centers (Downtown Los Angeles) which would reduce trips and encourage employees to utilize alternative modes of transportation.
Policy 2.1.1: Utilize compressed work weeks and flextime, telecommuting, carpooling, vanpooling, public transit, and improve walking/bicycling related facilities in order to reduce Vehicle Trips and/or Vehicle Miles Traveled (VMT) as an employer and encourage the private sector to do the same	Consistent. The Metro B/D Lines Pershing Square Station portal is located on the southeastern corner of the Project site and is served by local bus lines. The Project would incorporate pedestrian pathways that would connect to the existing sidewalk network. In addition, the Project would provide bicycle parking spaces consistent with City code requirements.

Table IV.A-4 (Continued)
Project Consistency with City of Los Angeles General Plan (Air Quality Element)

Recommendation	Analysis of Project Consistency
to reduce work trips and traffic congestion.	
Goal 4: Minimal impact of existing land use patterns and future land use development on air quality by addressing the relationship between land use, transportation, and air quality.	Consistent. The Project would reduce VMT due to its infill location, development of residential uses near major employment areas, and access to public transportation within 0.25 mile of the Project Site.
Objective 4.1: It is the objective of the City of Los Angeles to include the regional attainment of ambient air quality standards as a primary consideration in land use planning.	Consistent. The Project analysis of potential air quality impacts relied upon the numeric indicators established by the SCAQMD, which considers attainment of the ambient air quality standards. The Project also incorporates land use characteristics that would reduce land use planning-related air pollutant emissions.
Policy 4.1.2: Ensure that project level review and approval of land use development remain at the local level.	Consistent. The Project environmental review and approval would occur at the local level.
Objective 4.2: It is the objective of the City of Los Angeles to reduce vehicle trips and VMT associated with land use patterns.	Consistent. The Project would reduce VMT due to its infill location, development of residential uses near major employment areas, and access to public transportation within 0.25 mile of the Project Site.
Policy 4.2.2: Improve accessibility for the City's residents to places of employment, shopping centers and other establishments.	Consistent. The Project would reduce VMT due to its infill location, development of residential uses near major employment areas, and access to public transportation within 0.25 mile of the Project Site. The Project would also be located within 0.5 mile of off-site commercial, retail, restaurant, and entertainment uses, potentially reducing residential trips.
Policy 4.2.3: Ensure that new development is compatible with pedestrians, bicycles, transit, and alternative fuel vehicles.	<p>Consistent. The Project would incorporate pedestrian pathways that would connect to the existing sidewalk network. In addition, the Project would provide bicycle parking spaces consistent with City code requirements.</p> <p>The Project would also comply with City requirements for providing electric vehicle charging capabilities and electric vehicle charging stations within the proposed parking areas.</p>
Policy 4.2.4: Require that air quality impacts be a consideration in the review and approval of all discretionary projects.	Consistent. The environmental review conducted for the Project would include an analysis of air quality impacts; and the decision-maker(s) for the discretionary actions would be responsible for determining that the environmental review was conducted in compliance with CEQA.
Policy 4.2.5: Emphasize trip reduction, alternative transit and congestion management measures for discretionary projects.	Consistent. The Project would occupy an infill location within 0.25 mile of existing public transportation, which would help to promote transit usage and in turn reduce the number of vehicle trips to and from the Project Site. In addition, the Project would provide bicycle parking spaces consistent with City code requirements.

Table IV.A-4 (Continued)
Project Consistency with City of Los Angeles General Plan (Air Quality Element)

Recommendation	Analysis of Project Consistency
<p><i>Source: Eyestone Environmental, 2020.</i></p>	

Based on the above, the Project is consistent with applicable policies of the City of Los Angeles Air Quality Element. Refer to Section IV.F, Land Use and Planning, of this Draft EIR, for an analysis of the Project's consistency with the City's General Plan. **As such, the Project is consistent with applicable policies of the City's Air Quality Element.**

Based on the above discussions, the Project would not conflict with or obstruct implementation of SCAQMD's AQMP, SCAG's RTP/SCS, or the City's General Plan. Therefore, impacts to Threshold (a) would be less than significant.

(2) Mitigation Measures

Project-level impacts related to Threshold (a) would be less than significant during construction and operation of the Project. Therefore, no mitigation measures are required.

(3) Level of Significance After Mitigation

Project-level impacts related to Threshold (a) during both construction and operation of the Project were determined to be less than significant without mitigation. Therefore, no mitigation measures were required or included, and the impact level remains less than significant.

Threshold (b): Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is non-attainment under an applicable federal or state ambient air quality standard.

(1) Impact Analysis

(a) Regional Emissions

(i) Construction

It is anticipated that Project construction would commence in September 2022 and be completed in June 2026. Project construction activities would start with the clearing of the existing landscaping on the Project Site. This would be followed by grading and

excavation for the subterranean parking. The Project would require excavation up to approximately 70 feet below ground surface as measured from the surface elevation of Hill Street adjacent to the Project Site. It is estimated that approximately 334,000 cubic yards of export material would be hauled from the Project Site during the excavation phase. Building foundations would then be laid, followed by building construction, paving/concrete installation, and landscape installation.

Construction of the Project has the potential to create air quality impacts through the use of heavy-duty construction equipment and through vehicle trips generated from construction workers traveling to and from the Project Site. In addition, fugitive dust emissions would result from demolition and construction activities. Mobile source emissions, primarily NO_x, would result from the use of construction equipment, such as dozers, loaders, and cranes. During the finishing phase of the Project, paving and the application of architectural coatings (e.g., paints) would potentially release VOCs. The assessment of construction air quality impacts considers each of these potential sources. Construction emissions can vary substantially from day to day, depending on the level of activity, the specific type of operation, and, for dust, the prevailing weather conditions.

As presented in Table IV.A-5 on page IV.A-51, construction-related daily maximum regional construction emissions (i.e., combined on-site and off-site emissions) would not exceed the SCAQMD daily significance thresholds for VOC, CO, SO_x, PM₁₀, or PM_{2.5}. However, maximum unmitigated construction emissions would exceed the SCAQMD daily significance threshold for NO_x as a result of the overlap between utility trenching and grading/excavation and also during the concrete pour for the mat foundation. **Therefore, regional construction emissions resulting from the Project would result in a significant short-term impact without incorporation of mitigation measures. However, as discussed below, mitigation measures would reduce impacts to a less-than-significant level. Therefore, impacts would be less than significant with implementation of mitigation measures.**

(ii) Operation

As discussed above, SCAQMD's CalEEMod was used to calculate regional area, energy, mobile source, and stationary emissions. The Project would incorporate project design features to support and promote environmental sustainability, as discussed in Section IV.E, Greenhouse Gas Emissions, of this Draft EIR. While these features are designed primarily to reduce GHGs, they would also likely serve to reduce criteria air pollutants discussed herein. For purposes of the air quality analysis, project design features incorporated in this analysis include the Project Site's increase in accessibility to transit and increase in diversity of uses and density. These project design features are explained further in Section IV.E, Greenhouse Gas Emissions, of this Draft EIR.

Table IV.A-5
Estimate of Maximum Regional Project Daily Construction Emissions (pounds per day)

Construction Year	VOC	NO _x	CO	SO _x	PM ₁₀	PM _{2.5}
Regional Construction Emissions						
2022	8	164	73	<1	32	10
2023	8	124	78	<1	15	5
2024	7	46	69	<1	12	4
2025	42	44	71	<1	13	5
2026	42	52	77	<1	14	5
Maximum Unmitigated Construction Emissions^a	42	164	78	<1	32	10
SCAQMD Daily Significance Thresholds	75	100	550	150	150	55
Over/(Under)	(33)	64	(472)	(150)	(117)	(45)
Maximum Unmitigated Construction Emissions Exceed Threshold?	No	Yes	No	No	No	No
<p><i>Numbers may not add up exactly due to rounding.</i></p> <p>^a <i>The CalEEMod model printout sheets and/or calculation worksheets are presented in Appendix B.2 to this Draft EIR.</i></p> <p><i>Source: Eyestone Environmental, 2020.</i></p>						

Table IV.A-6 on page IV.A-52 provides Project operational emissions with incorporation of project design features. As shown in Table IV.A-6, regional emissions resulting from operation of the Project would not exceed any of the SCAQMD's daily regional operational thresholds. **Therefore, air quality impacts from Project operational emissions would be less than significant.**

(b) Localized Emissions

As previously discussed, the SCAQMD recommends the evaluation of localized air quality impacts to sensitive receptors in the immediate vicinity of the Project Site as a result of Project construction and operations. The thresholds are based on applicable short-term state and federal ambient air quality standards.

(i) Construction

Project-related localized construction impacts are evaluated based on SCAQMD LST methodology which takes into account ambient pollutant concentrations. Based on SCAQMD methodology, localized emissions which exceed LSTs would also cause an exceedance of ambient air quality standards. As analyzed in Threshold (c) below, Project-related construction emissions would not exceed localized thresholds. Therefore,

Table IV.A-6
Estimate of Maximum Regional Project Daily Operational Emissions—At Project Buildout (2026)^a

Emission Source	Pollutant Emissions (pounds per day)					
	VOC	NO _x	CO	SO _x	PM ₁₀	PM _{2.5}
Project						
Area	29	3	37	<1	<1	<1
Energy (Natural Gas)	<1	6	5	<1	<1	<1
Mobile	9	39	98	<1	37	10
Stationary	<1	<1	1	<1	<1	<1
Total Proposed Uses Emissions	39	49	141	<1	38	11
SCAQMD Significance Threshold	55	55	550	150	150	55
Over/(Under)	(16)	(6)	(409)	(150)	(112)	(44)
Exceed Threshold?	No	No	No	No	No	No
<p><i>Numbers may not add up exactly due to rounding.</i></p> <p>^a <i>The CalEEMod model printout sheets and/or calculation worksheets are presented in Appendix B.2 to this Draft EIR.</i></p> <p><i>Source: Eyestone Environmental, 2020.</i></p>						

localized construction emissions resulting from the Project would result in a less-than-significant air quality impact.

(ii) Operations

Project-related operational emissions were also evaluated based on SCAQMD LST methodology. The SCAQMD LST methodology evaluates emissions from on-site sources (e.g., water heaters, cooking appliances, HVAC). As analyzed in Threshold (c) below, Project-related operational emissions from on-site and off-site sources would not exceed localized thresholds. Accordingly, the operational emissions are well within the margin of safety established to protect human health. **Therefore, localized operational emissions resulting from the Project would result in a less-than-significant air quality impact.**

(c) Conclusion

According to the SCAQMD, individual projects that exceed the SCAQMD's recommended daily thresholds for project-specific impacts would cause a cumulatively considerable increase in emissions for those pollutants for which the Air Basin is in non-attainment. As shown in Table IV.A-5 on page IV.A-51, Project daily emissions at the Project Site would exceed the SCAQMD's regional significance threshold for NO_x during construction of the Project. However, as discussed below, implementation of mitigation measures would reduce impacts to a less-than-significant level. Therefore, the Project's contribution to cumulative air quality impacts due to localized emissions would also not be

cumulatively considerable and therefore would be less than significant with mitigation. **As such, the Project would not result in a cumulatively considerable net increase of any criteria pollutant for which the Project region is non-attainment under an applicable federal or state ambient air quality standard, and impacts would be less than significant.**

(2) Mitigation Measures

The following mitigation measures set forth a program of air pollution control strategies designed to reduce the Project's air quality impacts during construction, particularly those impacts related to NO_x emissions:

Mitigation Measure AIR-MM-1: All off-road diesel-powered equipment greater than 50 hp used during Project grading/excavation and utility trenching phases shall meet USEPA Tier 4 final emissions standards.

Mitigation Measure AIR-MM-2: During the grading/excavation and utility trenching phases, all haul trucks shall be model year 2007 or newer.

Mitigation Measure AIR-MM-3: All construction equipment shall be properly tuned and maintained in accordance with the manufacturer's specifications. The contractor shall keep documentation on-site demonstrating that the equipment has been maintained in accordance with the manufacturer's specifications.

Mitigation Measure AIR-MM-4: Contractors shall maintain and operate construction equipment so as to minimize exhaust emissions. During construction, trucks and vehicles in loading and unloading queues shall have their engines turned off after five minutes when not in use, to reduce vehicle emissions.

Mitigation Measure AIR-MM-5: To the extent possible, petroleum-powered construction activity shall utilize electricity from power poles rather than temporary diesel power generators and/or gasoline power generators. If stationary petroleum-powered construction equipment, such as generators, must be operated continuously, such equipment shall be located at least 100 feet from sensitive land uses, whenever possible.

Mitigation Measure AIR-MM-6: The Project would include the use of solar-powered generators, to the extent commercially available and feasible, should generators be required during construction.

(3) Level of Significance After Mitigation

(a) Construction

Mitigation Measure AIR-MM-1, the use of EPA Tier 4 emissions compliant equipment would reduce onsite peak daily construction NO_x emissions associated with off-road equipment during grading/excavation and utility trenching phases from 44 pounds per day to 8 pounds per day. Mitigation Measure AIR-MM-2 would reduce Project-related on-road construction emissions from haul trucks during the grading/excavation and utility trenching phases. Quantifying the reduction of pollutant emissions goes beyond the capabilities within CalEEMod (i.e., no model input for selection of specific model year vehicles). In order to properly characterize the emissions from the grading/excavation and utility trenching phases, truck emissions were calculated in a spreadsheet using the same methodology contained in CalEEMod, with emission factors from CARB's EMFAC model. Paved road dust was calculated using USEPA AP-42 equations, consistent with CalEEMod methodology.

Within CalEEMod, truck emissions are calculated for idling, engine startup, and travelling (running) activities. During the grading/excavation and utility trenching phases, the Project would use approximately 50 trucks running in a continuous loop between the Project Site and the landfill. Trucks were assumed to start once per day (cold start) and run continuously. Due to the nature of the export activities, the haul trucks are not expected to shut off engines for an extended duration. Trucks were assumed to idle for 15 minutes per load (5 minutes at site entrance, 5 minutes during unloading activities, and 5 minutes during site exit) in compliance with the CARB ATCM to limit diesel-fueled commercial motor vehicle idling. As shown in Appendix B.2, on-road emissions associated with grading/excavation and utility trenching phases would be reduced from 120 pounds per day to 74 pounds per day.

As shown in Table IV.A-7 on page IV.A-55, combined peak day construction emissions with implementation of Mitigation Measures AIR-MM-1 and AIR-MM-2 would be reduced from 164 pounds per day to 82 pounds per day and less than the SCAQMD significance threshold of 100 pounds per day.

Mitigation measures AIR-MM-3 through AIR-MM-6, presented above, would reduce criteria pollutant emissions (including NO_x) during Project construction activities. However, quantification of these mitigation measures are not feasible (e.g., due to the number of construction equipment manufacturers each with their own specifications regarding engine tuning and extent of use of solar generators). Although Mitigation Measures AIR-MM-3 through AIR-MM-6 are included as part of the Project, emissions presented above do not account for these measures. Therefore, Project construction emissions presented above along with impact conclusions are conservative.

Table IV.A-7
Estimate of Maximum Regional Project Daily Construction Emissions—Mitigated (pounds per day)

Construction Year	VOC	NO _x	CO	SO _x	PM ₁₀	PM _{2.5}
Regional Construction Emissions^a						
2022	3	82	63	<1	1	<1
2023	3	82	72	<1	<1	<1
2024	7	46	68	<1	12	4
2025	42	44	71	<1	13	5
2026	42	52	77	<1	14	5
Maximum Mitigated Construction Emissions^b	42	82	77	<1	14	5
SCAQMD Daily Significance Thresholds	75	100	550	150	150	55
Over/(Under)	(33)	(18)	(473)	(150)	(136)	(50)
Maximum Unmitigated Construction Emissions Exceed Threshold?	No	No	No	No	No	No
Maximum Unmitigated Construction Emissions	42	164	78	<1	32	10
Percent Reduction	<1%	-50%	<1%	-14%	-57%	-49%
<p><i>Numbers may not add up exactly due to rounding.</i></p> <p>^a The CalEEMod model printout sheets and/or calculation worksheets are presented in Appendix B.2 to this Draft EIR.</p> <p>^b Mitigation includes EPA Tier 4 emissions compliant equipment and use of 2007 and newer trucks.</p> <p>Source: Eyestone Environmental, 2020.</p>						

Based on the above, Project-level impacts related to Threshold (b) during construction of the Project would be less than significant with incorporation of the above mitigation measures.

(b) Operation

Project-level impacts related to Threshold (b) during operation of the Project would be less than significant without mitigation. Therefore, no mitigation measures are required.

Threshold (c): Exposed sensitive receptors to substantial pollutant concentrations.

(1) Impact Analysis

(a) Construction

(i) On-Site Construction Activities (Criteria Pollutants)

The localized construction air quality analysis was conducted using the methodology promulgated by the SCAQMD. Look-up tables provided by the SCAQMD were used to determine localized construction emissions thresholds for the Project.⁶¹ LSTs represent the maximum emissions from a project that are not expected to cause or contribute to an exceedance of the most stringent applicable federal or state ambient air quality standard and are based on the most recent background ambient air quality monitoring data (2016–2018) for the Project area presented in Table IV.A-2 on page IV.A-21. Although the trend shown in Table IV.A-2 demonstrates that ambient air quality is improving in the area, the localized construction emissions analysis conservatively did not apply a reduction in background pollutant concentrations for subsequent years of construction (i.e., 2022–2026). By doing so, the allowable pollutant increment to not exceed an ambient air quality standard is more stringent. The analysis is based on existing background ambient air quality monitoring data (2016–2018).

Maximum on-site daily construction emissions for NO_x, CO, PM₁₀, and PM_{2.5} were calculated using CalEEMod and compared to the applicable SCAQMD LSTs for SRA 1 based on a 2.24-acre site. Potential impacts were evaluated at the closest off-site sensitive receptor, which are residential uses north of the Project Site. The closest receptor distance on the SCAQMD mass rate LST look-up tables is 25 meters. Based on SCAQMD LST methodology, projects with boundaries located closer than 25 meters to the nearest receptor (such as the Project) should use the LSTs for receptors located at 25 meters.⁶²

The maximum daily localized emissions from Project construction and LSTs are presented in Table IV.A-8 on page IV.A-57. The localized construction emissions calculations take into account heavy equipment operating on-site as well as truck travel and idling on the Project Site. As discussed above, CARB adopted an ATCM to limit diesel vehicle (truck) idling as well as construction equipment to no more than 5 minutes at any given time. Compliance with the CARB ATCM would control Project construction related emissions from trucks traveling on the Project site and along roadways near the Project site. As shown in Table IV.A-8, maximum construction emissions would not exceed the SCAQMD-recommended localized screening thresholds for NO_x, CO, PM₁₀ and PM_{2.5}.

⁶¹ SCAQMD, *LST Methodology Appendix C-Mass Rate LST Look-up Table*, revised October 2009.

⁶² SCAQMD, *Final Localized Significance Threshold Methodology*, revised July 2008.

**Table IV.A-8
Estimate of Maximum Localized Daily Project Construction Emissions
(pounds per day)**

Construction Year	NO _x	CO	PM ₁₀	PM _{2.5}
2022	50	39	3	2
2023	46	47	3	2
2024	31	40	1	1
2025	29	40	1	1
2026	36	48	2	1
Maximum Unmitigated Daily Localized Emissions	50	48	3	2
SCAQMD Localized Significance Thresholds^b	61	1,061	8	5
Over/(Under)	(11)	(1,013)	(5)	(3)
Exceed Threshold?	No	No	No	No
<p>Numbers may not add up exactly due to rounding.</p> <p>^a Potential localized construction impacts were evaluated using SCAQMD's LSTs for Source Receptor Area 1.</p> <p>^b The SCAQMD Daily Significance Thresholds are based on the 2.2-acre Project Site. The closest sensitive receptors are residential uses north of the Project Site. The localized threshold is based on a 25-meter receptor distance which is the closest receptor distance on the SCAQMD mass rate LST look-up table.</p> <p>Source: Eyestone Environmental, 2020.</p>				

Project-related on-site construction activities would not expose sensitive receptors to substantial pollutant concentrations. Therefore, impacts would be less than significant, and no mitigation measures are required.

(ii) Off-Site Construction Activities (Toxic Air Contaminants)

The greatest potential for TAC emissions during construction would be from diesel particulate emissions associated with heavy equipment operations. According to SCAQMD methodology, health effects from carcinogenic air toxics are usually described in terms of individual cancer risk. "Individual Cancer Risk" is the likelihood that a person continuously exposed to concentrations of TACs over a 70-year lifetime will contract cancer based on the use of standard risk assessment methodology. Given the short-term construction schedule of approximately 45 months, the Project would not result in a long-term (i.e., 70-year) source of TAC emissions. Additionally, the SCAQMD CEQA guidance does not require a health risk assessment (HRA) for short-term construction emissions. It is, therefore, not necessary to evaluate long-term cancer impacts from construction activities which occur over a relatively short duration. In addition, there would be no residual emissions or corresponding individual cancer risk after construction. **Project construction activities would not expose sensitive receptors to substantial**

concentrations of TACs. As such, Project-related TAC impacts during construction would be less than significant.

(b) Operation

(i) On-Site Operational Activities (Criteria Pollutants)

Operation of the Project would not introduce major new sources of air pollution within the Project Site. Emissions estimates for criteria air pollutants from on-site sources are presented in Table IV.A-9 on page IV.A-59. Maximum on-site daily operational emissions for NO_x, CO, PM₁₀, and PM_{2.5} were calculated using CalEEMod and compared to the applicable SCAQMD LSTs for SRA 1 based on a 2.24-acre site. As shown in Table IV.A-9, on-site operational emissions would not exceed any of the LSTs. **The Project on-site operational activities would not expose sensitive receptors to substantial concentrations of criteria pollutants. Therefore, localized on-site operational emissions resulting from the Project would result in a less-than-significant air quality impact.**

(ii) Off-Site Operational Activities (CO “Hot Spots” Analysis)

Consistent with the CO methodology above, if a project intersection does not exceed 400,000 vehicles per day, then the project does not need to prepare a detailed CO hot spot analysis.

At buildout of the Project, the highest average daily trips at an intersection under the Future With Project Conditions⁶³ would be approximately 104,310 trips at the Hill Street and 3rd Street intersection,⁶⁴ which is significantly below the daily traffic volumes (i.e., 400,000 vehicles per day) that would be expected to generate CO exceedances as evaluated in the 2003 AQMP.⁶⁵ This daily trip estimate is based on the peak hour conditions of the intersection. There is no reason unique to the Air Basin meteorology to conclude that the CO concentrations at the Hill Street and 3rd Street intersection would exceed the 1-hour CO standard if modeled in detail, based on the studies undertaken for

⁶³ As defined in Section IV.G, Transportation, the Future With Project Conditions is a traffic scenario that provides projected traffic volumes and an assessment of operating conditions under future conditions with the addition of Project-generated traffic.

⁶⁴ Gibson Transportation Consulting, Inc., Transportation Assessment Memorandum of Understanding for Angels Landing, January 2020.

⁶⁵ The 2003 AQMP estimated that the 1-hour concentration for this intersection was 4.6 ppm, which indicates that the most stringent 1-hour CO standard (20.0 ppm) would likely not be exceeded until the daily traffic at the intersection exceeded more than 400,000 vehicles per day.

Table IV.A-9
Estimate of Maximum Localized Project Daily Operational Emissions—At Project Buildout (2025)^a
(pounds per day)

Emission Source	NO _x	CO	PM ₁₀	PM _{2.5}
Area	3	37	<1	<1
Energy (Natural Gas)	6	5	<1	<1
Stationary	<1	1	<1	<1
On-Site Total	9	43	<1	<1
SCAQMD Significance Threshold^b	61	1,061	2	2
Over/(Under)	(52)	(1,018)	(2)	(1)
Exceed Threshold?	No	No	No	No
<p>Numbers may not add up exactly due to rounding.</p> <p>^a The CalEEMod model printout sheets and/or calculation worksheets are presented in Appendix B.2 to this Draft EIR.</p> <p>^b The SCAQMD Daily Significance Thresholds are based on the 2.2-acre Project Site. The closest sensitive receptors are residential uses north of the Project Site. The localized threshold is based on a 25-meter receptor distance which is the closest receptor distance on the SCAQMD mass rate LST look-up table.</p> <p>Source: Eyestone Environmental, 2020.</p>				

the 2003 AQMP⁶⁶ and discussed above. Therefore, the Project does not trigger the need for a detailed CO hotspots model and would not cause any new or exacerbate any existing CO hotspots. **Project off-site operational activities would not expose sensitive receptors to substantial CO concentrations. As a result, impacts related to localized mobile-source CO emissions are considered less than significant.** The supporting data for this analysis is included in Appendix B.2 to this Draft EIR.

(iii) Toxic Air Contaminants

When considering potential air quality impacts under CEQA, consideration is given to the location of sensitive receptors within close proximity of land uses that emit TACs. CARB has published and adopted the *Air Quality and Land Use Handbook: A Community Health Perspective*, which provides recommendations regarding the siting of new sensitive land uses near potential sources of air toxic emissions (e.g., freeways, distribution centers, rail yards, ports, refineries, chrome plating facilities, dry cleaners, and gasoline dispensing facilities).⁶⁷ The SCAQMD adopted similar recommendations in its *Guidance Document for*

⁶⁶ It should be noted that CO background concentrations within the vicinity of the modeled intersection have substantially decreased since preparation of the 2003 AQMP. In 2003, the 1-hour background CO concentration was 5 ppm and has decreased to 2 ppm in 2014.

⁶⁷ CARB, *Air Quality and Land Use Handbook, a Community Health Perspective*, April 2005.

*Addressing Air Quality Issues in General Plans and Local Planning.*⁶⁸ Together, the CARB and SCAQMD guidelines recommend siting distances for both the development of sensitive land uses in proximity to TAC sources and the addition of new TAC sources in proximity to existing sensitive land uses.

The primary sources of potential air toxics associated with Project operations include DPM from delivery trucks (e.g., truck traffic on local streets and idling on adjacent streets) and, to a lesser extent, facility operations (e.g., natural gas fired boilers). However, these activities, and the land uses associated with the Project, are not considered land uses that generate substantial TAC emissions. It should be noted that the SCAQMD recommends that HRAs be conducted for substantial individual sources of DPM (e.g., truck stops and warehouse distribution facilities that generate more than 100 trucks per day or more than 40 trucks with operating transport refrigeration units) and has provided guidance for analyzing mobile source diesel emissions.⁶⁹ The Project would not include these types of land uses and is not considered to be a substantial source of DPM warranting a refined HRA since daily truck trips to the Project Site would not exceed 100 trucks per day or more than 40 trucks with operating transport refrigeration units. In addition, the CARB-mandated ATCM limits diesel-fueled commercial vehicles (delivery trucks) to idle for no more than five minutes at any given time, which would further limit diesel particulate emissions.

Typical sources of acutely and chronically hazardous TACs include industrial manufacturing processes (e.g., chrome plating, electrical manufacturing, petroleum refinery). The Project would not include these types of potential industrial manufacturing process sources. It is expected that quantities of hazardous TACs generated on-site (e.g., cleaning solvents, paints, landscape pesticides, etc.) for the types of proposed land uses would be below thresholds warranting further study under the California Accidental Release Program (CalARP). As such, the Project would not release substantial amounts of TACs, and impacts on human health would be less than significant.

In addition, the Project would only result in minimal emissions of TACs from the use of consumer products and landscape maintenance activities, among other things. As a result, toxic or carcinogenic air pollutants are not expected to occur in any meaningful amounts in conjunction with operation of the proposed Project.

As the Project would not contain substantial TAC sources and is consistent with the CARB and SCAQMD guidelines, the Project would not result in the exposure

⁶⁸ SCAQMD, *Guidance Document for Addressing Air Quality Issues in General Plans and Local Planning*, May 6, 2005.

⁶⁹ SCAQMD, *Health Risk Assessment Guidance for Analyzing Cancer Risks from Mobile Source Diesel Idling Emissions for CEQA Air Quality Analysis*, 2002.

of off-site sensitive receptors to carcinogenic or toxic air contaminants that exceed the maximum incremental cancer risk of 10 in one million or an acute or chronic hazard index of 1.0, and potential TAC impacts would be less than significant.

Based on the above, the Project would not expose sensitive receptors to substantial pollutant concentrations and impacts would be less than significant.

(2) Mitigation Measures

Project-level impacts related to Threshold (c) would be less than significant during construction and operation of the Project. Therefore, no mitigation measures are required.

(3) Level of Significance After Mitigation

Project-level impacts related to Threshold (c) during both the construction and operation of the Project were determined to be less than significant without mitigation. Therefore, no mitigation measures were required or included, and the impact level remains less than significant.

e. Cumulative Impacts

(1) Impact Analysis

The SCAQMD recommends evaluating cumulative impacts for individual projects based on whether the project exceeds the SCAQMD's recommended daily thresholds for project-specific impacts for those pollutants for which the Air Basin is in non-attainment. Thus, the cumulative analysis of air quality impacts follows SCAQMD's guidance such that construction or operational Project emissions will be considered cumulatively considerable if Project-specific emissions exceed an applicable SCAQMD recommended significance threshold.

As shown in Table IV.A-5 on page IV.A-51, Project construction daily maximum regional emissions at the Project Site would be less than significant with incorporation of mitigation measures. As shown in Table IV.A-6 on page IV.A-52, Project operational emissions would be less than significant. Further, maximum daily localized emissions during construction and operation of the Project would not exceed any of the SCAQMD's thresholds, and impacts would be less than significant. Moreover, impacts related to TACs emissions during construction and operation of the Project would be less than significant. Based on SCAQMD guidance, individual construction projects that exceed SCAQMD's recommended daily thresholds for project-specific impacts would cause a cumulatively considerable increase in emissions for those pollutants for which the Air Basin is in non-

attainment.⁷⁰ Therefore, the Project's contribution to cumulative air quality impacts would not be cumulatively considerable.

Accordingly, regional, localized, and TAC emissions during construction and operation of the Project would not be cumulatively considerable.

(2) Mitigation Measures

Cumulative impacts related to air quality would be less than significant during construction of the Project with incorporation of mitigation measures provided above (Mitigation Measure AIR-MM-1 through AIR-MM-6). As shown in Table IV.A-5 on page IV.A-51, Project construction daily maximum regional emissions at the Project Site would not exceed SCAQMD regional thresholds with implementation of mitigation. Cumulative impacts related to air quality would be less than significant during operation of the Project. Therefore, no mitigation measures are required for Project operations.

(3) Level of Significance After Mitigation

Cumulative impacts related to air quality during construction of the Project would be less than significant with incorporation of mitigation measures. Cumulative impacts related to air quality would be less than significant during operation of the Project. Therefore, no additional mitigation measures were required or included, and the impact level remains less than significant.

⁷⁰ SCAQMD, *White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution*, August 2003, Appendix D.