

APPENDIX C

FUTURE TRAFFIC CONDITIONS LEVEL OF SERVICE CALCULATION WORKSHEETS

APPENDIX C-1

**EXISTING WITH AMBIENT GROWTH WITH PROJECT
TRAFFIC CONDITIONS**

Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	19.4
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.908

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	58	1181	42	8	2251	83	110	0	157	19	0	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	58	1181	42	8	2251	83	110	0	157	19	0	8
Peak Hour Factor	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	16	316	11	2	603	22	29	0	42	5	0	2
Total Analysis Volume [veh/h]	62	1264	45	9	2410	89	118	0	168	20	0	9
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	50	0	52	91	0	0	18	0	0	18	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	92	92	2	88	88	14	14	14	14
g / C, Green / Cycle	0.05	0.77	0.77	0.02	0.73	0.73	0.12	0.12	0.12	0.12
(v / s)_i Volume / Saturation Flow Rate	0.03	0.35	0.35	0.01	0.68	0.06	0.08	0.00	0.11	0.02
s, saturation flow rate [veh/h]	1781	1870	1847	1781	3560	1589	1406	1870	1589	1380
c, Capacity [veh/h]	91	1435	1418	28	2605	1163	169	219	186	212
d1, Uniform Delay [s]	55.93	5.00	5.01	58.43	13.36	4.57	51.49	0.00	52.31	48.05
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	8.48	1.06	1.07	6.62	7.05	0.13	5.10	0.00	14.73	0.29
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.68	0.46	0.46	0.32	0.93	0.08	0.70	0.00	0.90	0.14
d, Delay for Lane Group [s/veh]	64.41	6.06	6.08	65.04	20.41	4.70	56.59	0.00	67.03	48.34
Lane Group LOS	E	A	A	E	C	A	E	A	E	D
Critical Lane Group	Yes	No	No	No	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	2.06	5.35	5.30	0.32	25.10	0.61	3.68	0.00	5.75	0.81
50th-Percentile Queue Length [ft/ln]	51.54	133.63	132.57	8.04	627.39	15.28	92.00	0.00	143.70	20.24
95th-Percentile Queue Length [veh/ln]	3.71	9.14	9.08	0.58	33.31	1.10	6.62	0.00	9.68	1.46
95th-Percentile Queue Length [ft/ln]	92.77	228.42	226.98	14.47	832.78	27.51	165.61	0.00	242.00	36.42

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	64.41	6.07	6.08	65.04	20.41	4.70	56.59	0.00	67.03	48.34	48.34	48.34
Movement LOS	E	A	A	E	C	A	E	A	E	D	D	D
d_A, Approach Delay [s/veh]	8.71			20.01			62.73			48.34		
Approach LOS	A			C			E			D		
d_I, Intersection Delay [s/veh]	19.42											
Intersection LOS	B											
Intersection V/C	0.908											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			0.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			0.00		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.268			2.251			0.000		
Crosswalk LOS	F			C			B			F		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	767			1450			233			233		
d_b, Bicycle Delay [s]	22.82			4.54			46.82			46.82		
I_b,int, Bicycle LOS Score for Intersection	2.691			3.629			2.032			1.607		
Bicycle LOS	B			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

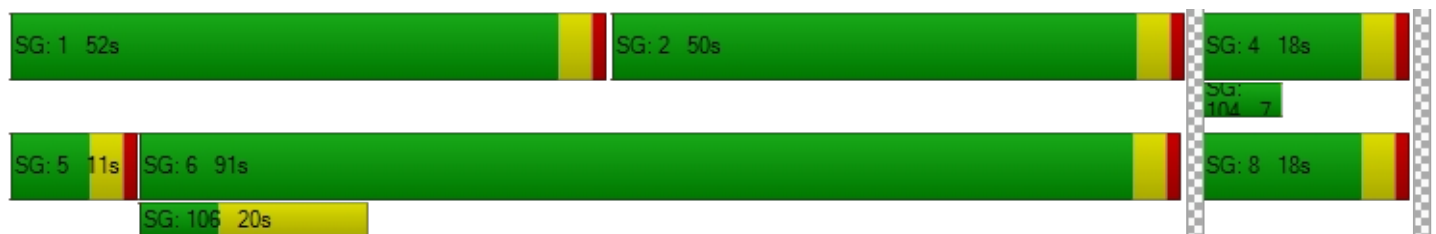

Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd

Control Type:	Signalized	Delay (sec / veh):	33.3
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.907

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	167	1066	1	12	2328	53	74	1	404	1	2	2
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	167	1066	1	12	2328	53	74	1	404	1	2	2
Peak Hour Factor	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	42	270	0	3	590	13	19	0	102	0	1	1
Total Analysis Volume [veh/h]	169	1081	1	12	2361	54	75	1	410	1	2	2
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	25	27	0	52	54	0	0	11	11	0	11	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	12	69	69	2	59	59	7	23	7
g / C, Green / Cycle	0.14	0.77	0.77	0.02	0.65	0.65	0.08	0.26	0.08
(v / s)_i Volume / Saturation Flow Rate	0.09	0.29	0.29	0.01	0.65	0.65	0.07	0.26	0.00
s, saturation flow rate [veh/h]	1781	1870	1869	1781	1870	1855	1068	1589	1085
c, Capacity [veh/h]	243	1436	1436	36	1220	1210	163	412	133
d1, Uniform Delay [s]	37.08	3.40	3.40	43.47	15.37	15.59	41.19	33.31	38.41
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.28	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	3.56	0.76	0.76	5.14	23.51	25.38	2.08	32.58	0.11
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.70	0.38	0.38	0.33	0.99	1.00	0.47	1.00	0.04
d, Delay for Lane Group [s/veh]	40.64	4.16	4.16	48.61	38.88	40.97	43.27	65.88	38.52
Lane Group LOS	D	A	A	D	D	D	D	E	D
Critical Lane Group	No	No	No	No	No	Yes	No	Yes	No
50th-Percentile Queue Length [veh/ln]	3.74	2.51	2.51	0.31	27.68	28.53	1.74	12.38	0.11
50th-Percentile Queue Length [ft/ln]	93.44	62.82	62.81	7.83	691.98	713.31	43.61	309.58	2.63
95th-Percentile Queue Length [veh/ln]	6.73	4.52	4.52	0.56	36.31	37.29	3.14	18.15	0.19
95th-Percentile Queue Length [ft/ln]	168.19	113.08	113.06	14.09	907.69	932.32	78.49	453.85	4.74

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	40.64	4.16	4.16	48.61	39.90	40.97	43.27	43.27	65.88	38.52	38.52	38.52
Movement LOS	D	A	A	D	D	D	D	D	E	D	D	D
d_A, Approach Delay [s/veh]	9.09			39.97			62.35			38.52		
Approach LOS	A			D			E			D		
d_I, Intersection Delay [s/veh]	33.31											
Intersection LOS	C											
Intersection V/C	0.907											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			34.67			34.67			34.67		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.105			2.171			1.724		
Crosswalk LOS	F			C			B			A		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	511			1111			156			156		
d_b, Bicycle Delay [s]	24.94			8.89			38.27			38.27		
I_b,int, Bicycle LOS Score for Intersection	2.592			3.562			2.362			1.568		
Bicycle LOS	B			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

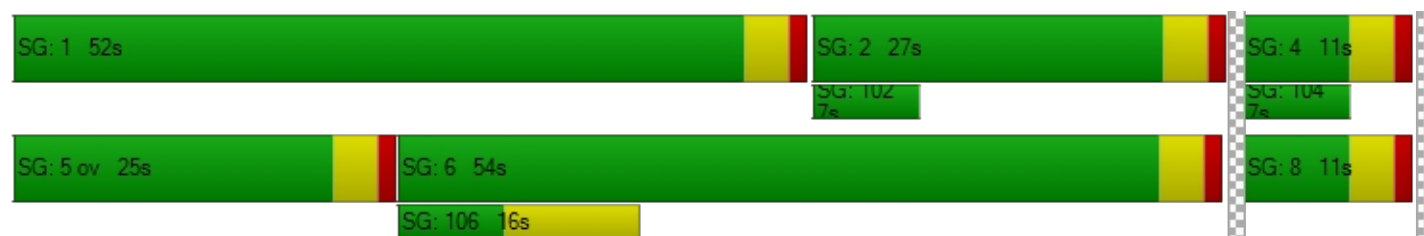

Intersection Level Of Service Report**Intersection 3: Winchester Rd at Robert Trent Jones Pkwy**

Control Type:	Signalized	Delay (sec / veh):	12.7
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.627

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	30	1110	152	282	2454	25	24	34	61	24	7	101
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	30	1110	152	282	2454	25	24	34	61	24	7	101
Peak Hour Factor	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	8	280	38	71	619	6	6	9	15	6	2	25
Total Analysis Volume [veh/h]	30	1120	153	285	2476	25	24	34	62	24	7	102
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	11	0	68	68	0	0	11	0	0	11	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	4	54	54	17	67	67	7	7	7	7	7	7
g / C, Green / Cycle	0.04	0.60	0.60	0.19	0.75	0.75	0.08	0.08	0.08	0.08	0.08	0.08
(v / s)_i Volume / Saturation Flow Rate	0.02	0.24	0.24	0.16	0.46	0.46	0.02	0.02	0.04	0.02	0.00	0.06
s, saturation flow rate [veh/h]	1781	3560	1757	1781	3560	1860	1284	1870	1589	1299	1870	1589
c, Capacity [veh/h]	75	2146	1059	330	2655	1387	82	147	125	109	147	125
d1, Uniform Delay [s]	42.01	9.34	9.34	35.58	5.40	5.42	45.02	38.92	39.76	43.85	38.36	40.83
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	3.38	0.55	1.12	6.73	1.09	2.09	1.94	0.79	3.01	1.01	0.13	11.97
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.40	0.40	0.40	0.86	0.62	0.62	0.29	0.23	0.50	0.22	0.05	0.82
d, Delay for Lane Group [s/veh]	45.39	9.89	10.46	42.30	6.49	7.51	46.96	39.71	42.77	44.86	38.49	52.80
Lane Group LOS	D	A	B	D	A	A	D	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	0.71	4.11	4.22	6.55	5.64	6.33	0.58	0.73	1.41	0.56	0.15	2.61
50th-Percentile Queue Length [ft/ln]	17.85	102.63	105.55	163.80	141.11	158.24	14.62	18.27	35.14	13.95	3.68	65.35
95th-Percentile Queue Length [veh/ln]	1.29	7.39	7.59	10.75	9.54	10.46	1.05	1.32	2.53	1.00	0.26	4.71
95th-Percentile Queue Length [ft/ln]	32.13	184.73	189.79	268.74	238.52	261.39	26.31	32.88	63.26	25.11	6.62	117.63

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	45.39	10.03	10.46	42.30	6.83	7.51	46.96	39.71	42.77	44.86	38.49	52.80
Movement LOS	D	B	B	D	A	A	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	10.89			10.47			42.74			50.62		
Approach LOS	B			B			D			D		
d_I, Intersection Delay [s/veh]	12.72											
Intersection LOS	B											
Intersection V/C	0.627											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	34.67	0.00	34.67	34.67
I_p,int, Pedestrian LOS Score for Intersection	3.166	0.000	2.335	2.417
Crosswalk LOS	C	F	B	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	156	1422	156	156
d_b, Bicycle Delay [s]	38.27	3.76	38.27	38.27
I_b,int, Bicycle LOS Score for Intersection	2.276	3.092	1.659	1.669
Bicycle LOS	B	C	A	A

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 4: Winchester Rd at Murrieta Hot Springs Rd**

Control Type:	Signalized	Delay (sec / veh):	41.8
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.918

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	152	706	136	202	1709	624	483	523	143	323	653	94
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	152	706	136	202	1709	624	483	523	143	323	653	94
Peak Hour Factor	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	40	185	36	53	447	163	126	137	37	85	171	25
Total Analysis Volume [veh/h]	159	739	142	212	1790	653	506	548	150	338	684	98
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	36	0	23	48	0	23	27	0	34	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	49	49	10	52	52	19	31	31	14	26	26
g / C, Green / Cycle	0.06	0.41	0.41	0.08	0.43	0.43	0.16	0.26	0.26	0.12	0.22	0.22
(v / s)_i Volume / Saturation Flow Rate	0.05	0.15	0.09	0.06	0.35	0.41	0.15	0.11	0.09	0.10	0.19	0.06
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	204	2095	654	278	2204	688	549	1300	406	414	771	344
d1, Uniform Delay [s]	55.71	24.34	22.85	54.07	29.79	32.80	49.78	37.31	36.76	51.55	45.62	39.28
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.30	0.47	0.76	4.29	3.40	23.97	7.02	0.22	0.56	3.97	3.71	0.45
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.78	0.35	0.22	0.76	0.81	0.95	0.92	0.42	0.37	0.82	0.89	0.28
d, Delay for Lane Group [s/veh]	62.01	24.81	23.62	58.36	33.19	56.77	56.80	37.52	37.32	55.53	49.33	39.73
Lane Group LOS	E	C	C	E	C	E	E	D	D	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	2.55	4.91	2.75	3.30	15.43	22.33	8.00	4.52	3.70	5.19	10.24	2.47
50th-Percentile Queue Length [ft/ln]	63.84	122.79	68.69	82.58	385.63	558.20	199.88	112.96	92.46	129.67	255.94	61.77
95th-Percentile Queue Length [veh/ln]	4.60	8.55	4.95	5.95	21.87	30.08	12.63	8.00	6.66	8.92	15.48	4.45
95th-Percentile Queue Length [ft/ln]	114.91	213.66	123.63	148.65	546.66	751.94	315.81	200.11	166.42	223.05	387.12	111.18

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	62.01	24.81	23.62	58.36	33.19	56.77	56.80	37.52	37.32	55.53	49.33	39.73
Movement LOS	E	C	C	E	C	E	E	D	D	E	D	D
d_A, Approach Delay [s/veh]	30.33			41.00			45.60			50.36		
Approach LOS	C			D			D			D		
d_I, Intersection Delay [s/veh]	41.82											
Intersection LOS	D											
Intersection V/C	0.918											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.296			3.068			2.986		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	533			733			383			567		
d_b, Bicycle Delay [s]	32.27			24.07			39.20			30.82		
I_b,int, Bicycle LOS Score for Intersection	2.132			3.020			2.222			2.484		
Bicycle LOS	B			C			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 5: Winchester Rd at Winchester Square Drive**

Control Type:	Signalized	Delay (sec / veh):	10.9
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.616

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	6	1156	134	49	2154	3	3	5	5	108	2	59
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	6	1156	134	49	2154	3	3	5	5	108	2	59
Peak Hour Factor	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	2	312	36	13	581	1	1	1	1	29	1	16
Total Analysis Volume [veh/h]	6	1247	145	53	2324	3	3	5	5	117	2	64
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	20	0	11	20	0	0	36	0	0	23	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	1	59	59	5	63	63	2	8	8
g / C, Green / Cycle	0.01	0.65	0.65	0.06	0.70	0.70	0.02	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.00	0.26	0.26	0.03	0.43	0.43	0.01	0.07	0.04
s, saturation flow rate [veh/h]	1781	3560	1772	1781	3560	1869	1732	1782	1589
c, Capacity [veh/h]	22	2315	1152	104	2480	1301	40	162	145
d1, Uniform Delay [s]	44.14	7.47	7.47	41.20	7.27	7.27	43.36	39.93	38.83
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.68	0.52	1.04	3.81	1.15	2.19	4.65	6.30	2.12
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.28	0.40	0.40	0.51	0.62	0.62	0.33	0.73	0.44
d, Delay for Lane Group [s/veh]	50.82	7.99	8.51	45.01	8.43	9.46	48.02	46.23	40.95
Lane Group LOS	D	A	A	D	A	A	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	0.17	3.83	3.98	1.24	6.63	7.34	0.33	2.82	1.41
50th-Percentile Queue Length [ft/ln]	4.30	95.78	99.53	31.02	165.75	183.40	8.35	70.46	35.27
95th-Percentile Queue Length [veh/ln]	0.31	6.90	7.17	2.23	10.85	11.78	0.60	5.07	2.54
95th-Percentile Queue Length [ft/ln]	7.74	172.40	179.16	55.83	271.32	294.45	15.04	126.83	63.49

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	50.82	8.12	8.51	45.01	8.78	9.46	48.02	48.02	48.02	46.23	46.23	40.95
Movement LOS	D	A	A	D	A	A	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	8.34			9.59			48.02			44.38		
Approach LOS	A			A			D			D		
d_I, Intersection Delay [s/veh]	10.88											
Intersection LOS	B											
Intersection V/C	0.616											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	34.67			0.00			34.67			34.67		
I_p,int, Pedestrian LOS Score for Intersection	3.129			0.000			1.726			2.065		
Crosswalk LOS	C			F			A			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	356			356			711			422		
d_b, Bicycle Delay [s]	30.42			30.42			18.69			28.01		
I_b,int, Bicycle LOS Score for Intersection	2.329			2.869			1.581			1.862		
Bicycle LOS	B			C			A			A		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

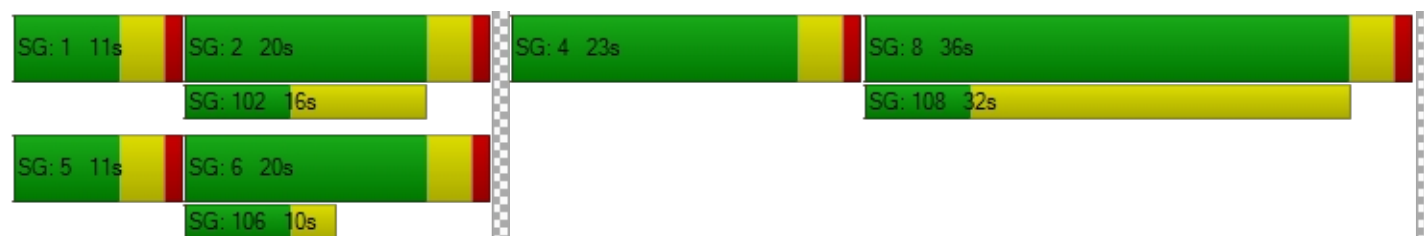

Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	23.6
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.775

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	55	1095	83	70	1915	209	146	30	37	198	54	54
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	55	1095	83	70	1915	209	146	30	37	198	54	54
Peak Hour Factor	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	15	304	23	19	531	58	41	8	10	55	15	15
Total Analysis Volume [veh/h]	61	1215	92	78	2125	232	162	33	41	220	60	60
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	100
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	40	0	11	40	0	0	13	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	100	100	100	100	100	100	100	100	100	100	100
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	56	56	6	57	57	11	11	10	10	10
g / C, Green / Cycle	0.06	0.56	0.56	0.06	0.56	0.56	0.11	0.11	0.10	0.10	0.10
(v / s)_i Volume / Saturation Flow Rate	0.03	0.24	0.24	0.04	0.44	0.45	0.09	0.04	0.08	0.08	0.04
s, saturation flow rate [veh/h]	1781	3560	1803	1781	3560	1779	1781	1703	1781	1818	1589
c, Capacity [veh/h]	104	1989	1007	112	2006	1002	204	195	186	189	166
d1, Uniform Delay [s]	45.99	12.90	12.90	45.98	16.99	17.29	43.20	41.05	43.57	43.57	41.76
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	5.22	0.70	1.37	7.50	3.05	6.51	6.89	1.22	5.90	5.75	1.33
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.59	0.44	0.44	0.70	0.78	0.80	0.80	0.38	0.75	0.75	0.36
d, Delay for Lane Group [s/veh]	51.20	13.59	14.27	53.48	20.03	23.80	50.09	42.27	49.47	49.31	43.08
Lane Group LOS	D	B	B	D	C	C	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	1.62	5.56	5.82	2.12	13.65	15.12	4.27	1.75	3.62	3.68	1.43
50th-Percentile Queue Length [ft/ln]	40.56	138.88	145.44	53.11	341.18	377.90	106.63	43.70	90.43	91.94	35.87
95th-Percentile Queue Length [veh/ln]	2.92	9.42	9.77	3.82	19.71	21.49	7.65	3.15	6.51	6.62	2.58
95th-Percentile Queue Length [ft/ln]	73.01	235.51	244.34	95.59	492.64	537.30	191.31	78.66	162.78	165.49	64.56

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	51.20	13.79	14.27	53.48	21.04	23.80	50.09	42.27	42.27	49.41	49.31	43.08
Movement LOS	D	B	B	D	C	C	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	15.49			22.34			47.64			48.28		
Approach LOS	B			C			D			D		
d_I, Intersection Delay [s/veh]	23.58											
Intersection LOS	C											
Intersection V/C	0.775											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			39.61			39.61			39.61		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.138			2.136			2.268		
Crosswalk LOS	F			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	720			720			180			640		
d_b, Bicycle Delay [s]	20.48			20.48			41.41			23.12		
I_b,int, Bicycle LOS Score for Intersection	2.312			2.899			1.949			2.121		
Bicycle LOS	B			C			A			B		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

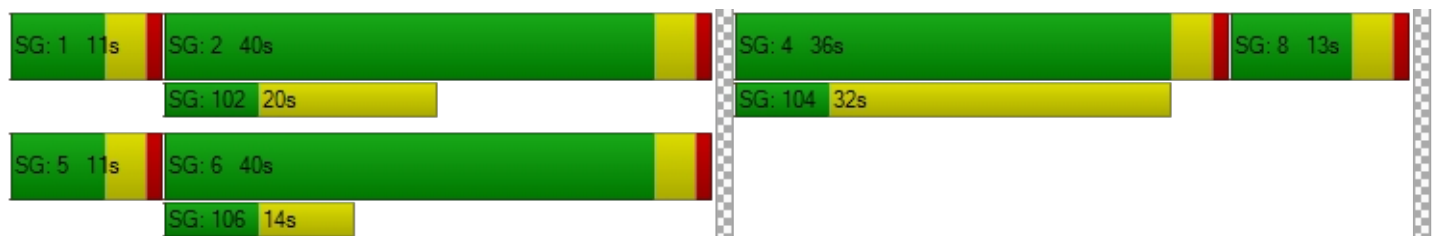

Intersection Level Of Service Report
Intersection 7: Winchester Rd at Nicolas Rd

Control Type:	Signalized	Delay (sec / veh):	44.8
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.944

Intersection Setup

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Base Volume Input [veh/h]	215	800	130	157	1738	289	163	87	93	308	252	137
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	215	800	130	157	1738	289	163	87	93	308	252	137
Peak Hour Factor	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	59	221	36	43	479	80	45	24	26	85	69	38
Total Analysis Volume [veh/h]	237	882	143	173	1916	319	180	96	103	340	278	151
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	20	29	0	32	41	0	16	38	0	16	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	7	0
Pedestrian Clearance [s]	0	18	0	0	9	0	0	27	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	16	54	54	13	51	51	12	20	20	12	20	20
g / C, Green / Cycle	0.14	0.47	0.47	0.12	0.45	0.45	0.10	0.17	0.17	0.10	0.17	0.17
(v / s)_i Volume / Saturation Flow Rate	0.13	0.17	0.09	0.10	0.42	0.43	0.10	0.05	0.06	0.10	0.15	0.09
s, saturation flow rate [veh/h]	1781	5094	1589	1781	3560	1739	1781	1870	1589	3459	1870	1589
c, Capacity [veh/h]	248	2394	747	206	1587	775	187	319	271	363	319	271
d1, Uniform Delay [s]	49.15	19.55	17.77	49.87	30.34	31.02	51.29	41.71	42.31	51.13	46.48	43.72
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	17.55	0.44	0.57	8.94	11.84	24.86	22.96	0.52	0.87	11.41	7.29	1.78
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.95	0.37	0.19	0.84	0.94	0.97	0.96	0.30	0.38	0.94	0.87	0.56
d, Delay for Lane Group [s/veh]	66.69	19.99	18.34	58.81	42.18	55.87	74.25	42.23	43.18	62.54	53.77	45.50
Lane Group LOS	E	B	B	E	D	E	E	D	D	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	7.94	5.09	2.32	5.38	21.51	24.80	6.34	2.44	2.67	5.43	8.36	4.08
50th-Percentile Queue Length [ft/ln]	198.54	127.17	58.08	134.40	537.63	620.00	158.58	60.92	66.69	135.64	209.00	101.89
95th-Percentile Queue Length [veh/ln]	12.56	8.79	4.18	9.18	29.11	32.97	10.47	4.39	4.80	9.25	13.10	7.34
95th-Percentile Queue Length [ft/ln]	314.08	219.64	104.55	229.46	727.76	824.18	261.84	109.65	120.04	231.14	327.54	183.40

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	66.69	19.99	18.34	58.81	45.25	55.87	74.25	42.23	43.18	62.54	53.77	45.50
Movement LOS	E	B	B	E	D	E	E	D	D	E	D	D
d_A, Approach Delay [s/veh]	28.57			47.63			57.70			56.02		
Approach LOS	C			D			E			E		
d_I, Intersection Delay [s/veh]	44.77											
Intersection LOS	D											
Intersection V/C	0.944											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	47.03			47.03			47.03			47.03		
I_p,int, Pedestrian LOS Score for Intersection	3.178			3.110			2.438			2.542		
Crosswalk LOS	C			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	435			643			591			591		
d_b, Bicycle Delay [s]	35.22			26.45			28.53			28.53		
I_b,int, Bicycle LOS Score for Intersection	2.254			2.884			2.185			2.828		
Bicycle LOS	B			C			B			C		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

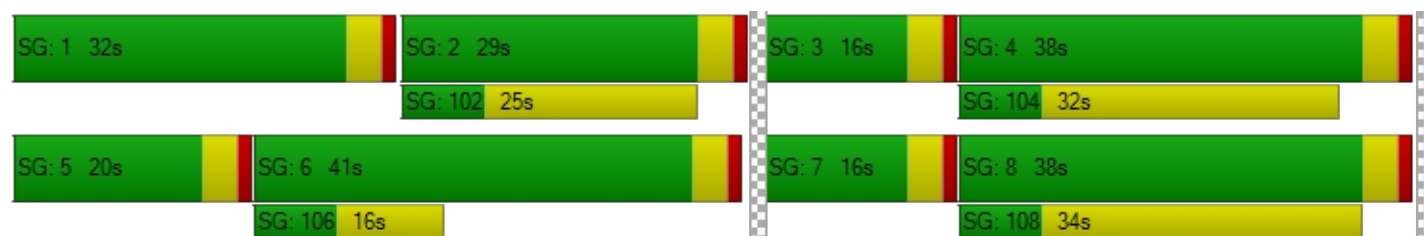

Intersection Level Of Service Report
Intersection 8: Winchester Rd at Margarita Rd

Control Type:	Signalized	Delay (sec / veh):	34.6
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.721

Intersection Setup

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Base Volume Input [veh/h]	101	553	123	735	1762	83	83	563	220	187	443	389
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	101	553	123	735	1762	83	83	563	220	187	443	389
Peak Hour Factor	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	27	147	33	195	469	22	22	150	59	50	118	103
Total Analysis Volume [veh/h]	107	588	131	782	1874	88	88	599	234	199	471	414
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	8	7	4	4
Auxiliary Signal Groups			2,7						5,8			1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	7	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	30	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	1.0	1.0	1.0	1.0
Split [s]	11	33	33	37	59	0	11	37	37	13	39	39
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	22	22	0	20	0	0	0	0	0	28	28
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No	No	No	No	No
Maximum Recall	No	No	No	No	No		No	No	No	No	No	No
Pedestrian Recall	No	No	No	No	No		No	No	No	No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	7	42	54	30	65	65	7	23	34	9	26	60
g / C, Green / Cycle	0.06	0.35	0.45	0.25	0.54	0.54	0.06	0.19	0.29	0.07	0.21	0.50
(v / s)_i Volume / Saturation Flow Rate	0.03	0.12	0.08	0.23	0.36	0.37	0.03	0.17	0.15	0.06	0.13	0.26
s, saturation flow rate [veh/h]	3459	5094	1589	3459	3560	1828	3459	3560	1589	3459	3560	1589
c, Capacity [veh/h]	204	1765	721	870	1919	985	194	693	456	256	757	791
d1, Uniform Delay [s]	54.85	28.99	19.52	43.45	19.99	20.20	54.89	46.80	35.78	54.62	42.89	20.49
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.15	0.11	0.11	0.42
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	2.08	0.51	0.55	3.67	1.89	3.84	1.66	3.38	1.23	5.07	0.84	2.06
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.52	0.33	0.18	0.90	0.67	0.68	0.45	0.86	0.51	0.78	0.62	0.52
d, Delay for Lane Group [s/veh]	56.92	29.49	20.08	47.11	21.89	24.04	56.55	50.18	37.01	59.70	43.73	22.55
Lane Group LOS	E	C	C	D	C	C	E	D	D	E	D	C
Critical Lane Group	Yes	No	No	No	No	Yes	No	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	1.63	4.27	2.30	11.60	13.09	14.34	1.34	8.96	5.89	3.14	6.43	8.22
50th-Percentile Queue Length [ft/ln]	40.81	106.73	57.47	289.88	327.28	358.45	33.40	223.88	147.26	78.41	160.75	205.43
95th-Percentile Queue Length [veh/ln]	2.94	7.66	4.14	17.18	19.03	20.55	2.40	13.86	9.87	5.65	10.59	12.92
95th-Percentile Queue Length [ft/ln]	73.46	191.44	103.45	429.49	475.63	513.70	60.12	346.57	246.77	141.14	264.71	322.96

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	56.92	29.49	20.08	47.11	22.56	24.04	56.55	50.18	37.01	59.70	43.73	22.55
Movement LOS	E	C	C	D	C	C	E	D	D	E	D	C
d_A, Approach Delay [s/veh]	31.55			29.60			47.45			38.57		
Approach LOS	C			C			D			D		
d_I, Intersection Delay [s/veh]	34.58											
Intersection LOS	C											
Intersection V/C	0.721											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.206			2.829			2.969		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	483			917			550			583		
d_b, Bicycle Delay [s]	34.50			17.60			31.54			30.10		
I_b,int, Bicycle LOS Score for Intersection	2.014			3.069			2.319			2.454		
Bicycle LOS	B			C			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

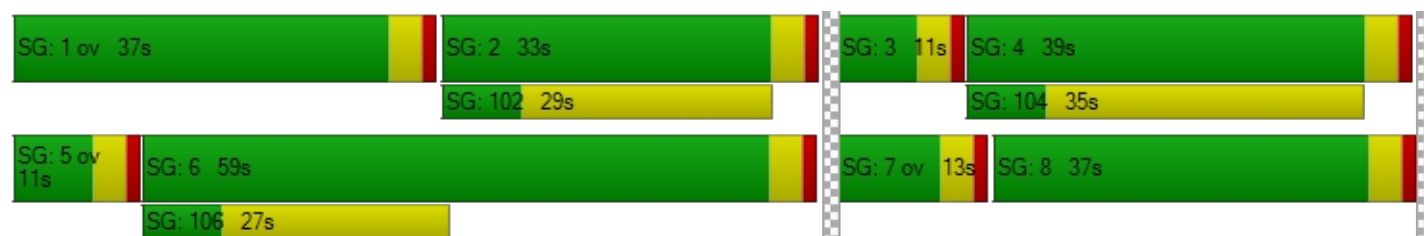

Intersection Level Of Service Report
Intersection 9: Winchester Rd at Ynez Rd

Control Type:	Signalized	Delay (sec / veh):	34.5
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.812

Intersection Setup

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Base Volume Input [veh/h]	274	1005	578	360	1666	76	108	402	450	263	180	138
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	274	1005	578	360	1666	76	108	402	450	263	180	138
Peak Hour Factor	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	74	270	156	97	448	20	29	108	121	71	48	37
Total Analysis Volume [veh/h]	295	1082	622	388	1793	82	116	433	484	283	194	149
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	0	7	4	4
Auxiliary Signal Groups			2,7									1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	0	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	0	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	1.0
Split [s]	16	47	47	21	52	0	11	40	0	12	41	41
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	30	30	0	23	0	0	0	0	0	30	30
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No		No	No	No
Maximum Recall	No	No	No	No	No		No	No		No	No	No
Pedestrian Recall	No	No	No	No	No		No	No		No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	12	56	68	16	59	59	7	25	25	25	8	26	46
g / C, Green / Cycle	0.10	0.46	0.56	0.13	0.49	0.49	0.06	0.21	0.21	0.21	0.07	0.22	0.38
(v / s)_i Volume / Saturation Flow Rate	0.09	0.16	0.39	0.11	0.27	0.27	0.03	0.18	0.18	0.18	0.05	0.05	0.09
s, saturation flow rate [veh/h]	3459	6792	1589	3459	5094	1817	3459	1870	1673	1589	5188	3560	1589
c, Capacity [veh/h]	348	3138	894	450	2504	893	200	388	347	330	349	772	604
d1, Uniform Delay [s]	53.10	20.67	18.86	51.17	21.30	21.30	55.14	45.93	45.93	45.93	55.23	38.95	25.45
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.16	0.16	0.16	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	5.77	0.30	4.45	5.01	0.88	2.46	2.64	8.20	9.09	9.52	4.51	0.17	0.21
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.85	0.34	0.70	0.86	0.55	0.55	0.58	0.86	0.86	0.86	0.81	0.25	0.25
d, Delay for Lane Group [s/veh]	58.87	20.97	23.31	56.18	22.18	23.76	57.78	54.13	55.02	55.45	59.74	39.11	25.66
Lane Group LOS	E	C	C	E	C	C	E	D	E	E	E	D	C
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	No	Yes	Yes	No	No
50th-Percentile Queue Length [veh/ln]	4.65	4.90	13.05	6.02	9.08	10.12	1.79	10.46	9.44	9.02	2.96	2.40	2.96
50th-Percentile Queue Length [ft/ln]	116.28	122.59	326.30	150.57	227.10	253.00	44.66	261.4	236.1	225.4	74.05	60.03	74.00
95th-Percentile Queue Length [veh/ln]	8.19	8.54	18.98	10.05	14.03	15.34	3.22	15.76	14.48	13.94	5.33	4.32	5.33
95th-Percentile Queue Length [ft/ln]	204.70	213.38	474.42	251.18	350.67	383.42	80.38	394.0	362.1	348.5	133.28	108.05	133.20

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	58.87	20.97	23.31	56.18	22.54	23.76	57.78	54.33	55.29	59.74	39.11	25.66
Movement LOS	E	C	C	E	C	C	E	D	E	E	D	C
d_A, Approach Delay [s/veh]	27.29			28.35			55.16			45.23		
Approach LOS	C			C			E			D		
d_I, Intersection Delay [s/veh]	34.46											
Intersection LOS	C											
Intersection V/C	0.812											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	49.50	49.50	49.50
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.332	2.831	2.991
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	717	800	600	617
d_b, Bicycle Delay [s]	24.70	21.60	29.40	28.70
I_b,int, Bicycle LOS Score for Intersection	2.384	2.493	2.412	2.076
Bicycle LOS	B	B	B	B

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

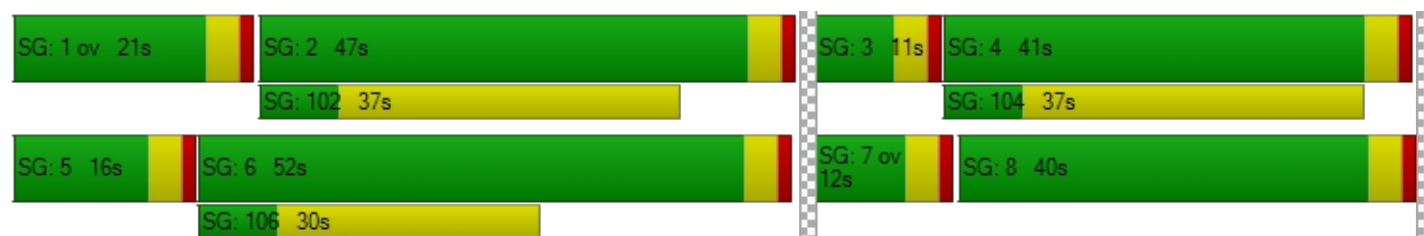

Intersection Level Of Service Report
Intersection 10: Sky Canyon Dr at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	13.2
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.117

Intersection Setup

Name	Sky Canyon Drive		Willows Avenue		Willows Avenue	
Approach	Southbound		Eastbound		Westbound	
Lane Configuration						
Turning Movement	Left	Right	Left	Thru	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00		30.00		30.00	
Grade [%]	0.00		0.00		0.00	
Curb Present	No		No		No	
Crosswalk	Yes		No		No	

Volumes

Name	Sky Canyon Drive		Willows Avenue		Willows Avenue	
Base Volume Input [veh/h]	15	58	17	132	248	20
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	15	58	17	132	248	20
Peak Hour Factor	0.9500	0.9500	0.9500	0.9500	0.9500	0.9500
Other Adjustment Factor	1.0000	1.0000	1.0000	0.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	4	15	4	0	65	5
Total Analysis Volume [veh/h]	16	61	18	0	261	21
Presence of On-Street Parking	No	No	No	No	No	No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing major street [ped/h]	0		0		0	
v_di, Inbound Pedestrian Volume crossing major street [ped/h]	0		0		0	
v_co, Outbound Pedestrian Volume crossing minor street [ped/h]	0		0		0	
v_ci, Inbound Pedestrian Volume crossing minor street [ped/h]	0		0		0	
v_ab, Corner Pedestrian Volume [ped/h]	0		0		0	
Bicycle Volume [bicycles/h]	0		0		0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Split	Split	Protected	Permissive	Permissive	Permissive
Signal Group	1	0	3	8	4	0
Auxiliary Signal Groups						
Lead / Lag	Lead	-	Lead	-	-	-
Minimum Green [s]	7	0	7	7	7	0
Maximum Green [s]	30	0	30	30	30	0
Amber [s]	3.0	0.0	3.0	3.0	3.0	0.0
All red [s]	1.0	0.0	1.0	1.0	1.0	0.0
Split [s]	33	0	12	57	45	0
Vehicle Extension [s]	3.0	0.0	3.0	3.0	3.0	0.0
Walk [s]	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	18	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk	No			No	No	
I1, Start-Up Lost Time [s]	2.0	0.0	2.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	0.0	2.0	2.0	2.0	0.0
Minimum Recall	No		No	No	No	
Maximum Recall	No		No	No	No	
Pedestrian Recall	No		No	No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	R	L	C	C	C
C, Cycle Length [s]	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	6	3	76	69	69
g / C, Green / Cycle	0.07	0.07	0.03	0.84	0.77	0.77
(v / s)_i Volume / Saturation Flow Rate	0.01	0.04	0.01	0.00	0.05	0.05
s, saturation flow rate [veh/h]	1781	1589	1781	1870	3560	1799
c, Capacity [veh/h]	120	107	52	1578	2741	1385
d1, Uniform Delay [s]	39.50	40.71	42.84	0.00	2.52	2.52
k, delay calibration	0.11	0.11	0.11	0.50	0.50	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	0.50	4.66	3.83	0.00	0.05	0.09
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.13	0.57	0.34	0.00	0.07	0.07
d, Delay for Lane Group [s/veh]	40.00	45.37	46.67	0.00	2.57	2.61
Lane Group LOS	D	D	D	A	A	A
Critical Lane Group	No	Yes	Yes	No	Yes	No
50th-Percentile Queue Length [veh/ln]	0.35	1.44	0.44	0.00	0.30	0.32
50th-Percentile Queue Length [ft/ln]	8.67	35.90	11.12	0.00	7.52	7.96
95th-Percentile Queue Length [veh/ln]	0.62	2.58	0.80	0.00	0.54	0.57
95th-Percentile Queue Length [ft/ln]	15.60	64.62	20.02	0.00	13.53	14.33

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	40.00	45.37	46.67	0.00	2.58	2.61
Movement LOS	D	D	D	A	A	A
d_A, Approach Delay [s/veh]	44.26		46.67		2.58	
Approach LOS	D		D		A	
d_I, Intersection Delay [s/veh]	13.20					
Intersection LOS	B					
Intersection V/C	0.117					

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	0.0
M_corner, Corner Circulation Area [ft²/ped]	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft²/ped]	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	34.67	0.00	0.00
I_p,int, Pedestrian LOS Score for Intersection	1.977	0.000	0.000
Crosswalk LOS	A	F	F
s_b, Saturation Flow Rate of the bicycle lane [bicycles/h]	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	644	1178	911
d_b, Bicycle Delay [s]	20.67	7.61	13.34
I_b,int, Bicycle LOS Score for Intersection	1.560	1.589	1.715
Bicycle LOS	A	A	A

Sequence

Ring 1	1	3	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	-	-	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	16.5
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.824

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	207	2227	50	4	1468	98	57	3	124	45	4	11
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	207	2227	50	4	1468	98	57	3	124	45	4	11
Peak Hour Factor	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	54	578	13	1	381	25	15	1	32	12	1	3
Total Analysis Volume [veh/h]	215	2310	52	4	1523	102	59	3	129	47	4	11
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	95
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	57	34	0	47	24	0	0	14	0	0	14	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	95	95	95	95	95	95	95	95	95	95
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	14	73	73	1	60	60	10	10	10	10
g / C, Green / Cycle	0.14	0.77	0.77	0.01	0.63	0.63	0.10	0.10	0.10	0.10
(v / s)_i Volume / Saturation Flow Rate	0.12	0.63	0.64	0.00	0.43	0.06	0.04	0.00	0.08	0.05
s, saturation flow rate [veh/h]	1781	1870	1856	1781	3560	1589	1398	1870	1589	1294
c, Capacity [veh/h]	256	1429	1418	15	2241	1000	123	188	160	197
d1, Uniform Delay [s]	39.62	7.16	7.25	46.81	11.41	6.98	40.49	38.49	41.82	40.95
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	7.25	5.59	5.86	8.75	1.69	0.20	2.86	0.03	9.13	0.91
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.84	0.83	0.83	0.26	0.68	0.10	0.48	0.02	0.81	0.31
d, Delay for Lane Group [s/veh]	46.87	12.74	13.11	55.56	13.10	7.18	43.35	38.52	50.95	41.85
Lane Group LOS	D	B	B	E	B	A	D	D	D	D
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	5.34	12.83	13.06	0.13	9.69	0.81	1.39	0.06	3.33	1.42
50th-Percentile Queue Length [ft/ln]	133.42	320.70	326.51	3.27	242.27	20.19	34.87	1.61	83.36	35.50
95th-Percentile Queue Length [veh/ln]	9.13	18.70	18.99	0.24	14.80	1.45	2.51	0.12	6.00	2.56
95th-Percentile Queue Length [ft/ln]	228.14	467.54	474.68	5.88	369.90	36.34	62.77	2.90	150.04	63.90

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	46.87	12.92	13.11	55.56	13.10	7.18	43.35	38.52	50.95	41.85	41.85	41.85
Movement LOS	D	B	B	E	B	A	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	15.76			12.83			48.41			41.85		
Approach LOS	B			B			D			D		
d_I, Intersection Delay [s/veh]	16.45											
Intersection LOS	B											
Intersection V/C	0.824											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			0.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			37.14			37.14			0.00		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.191			2.258			0.000		
Crosswalk LOS	F			C			B			F		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	632			421			211			211		
d_b, Bicycle Delay [s]	22.24			29.61			38.03			38.03		
I_b,int, Bicycle LOS Score for Intersection	3.686			2.904			1.875			1.662		
Bicycle LOS	D			C			A			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

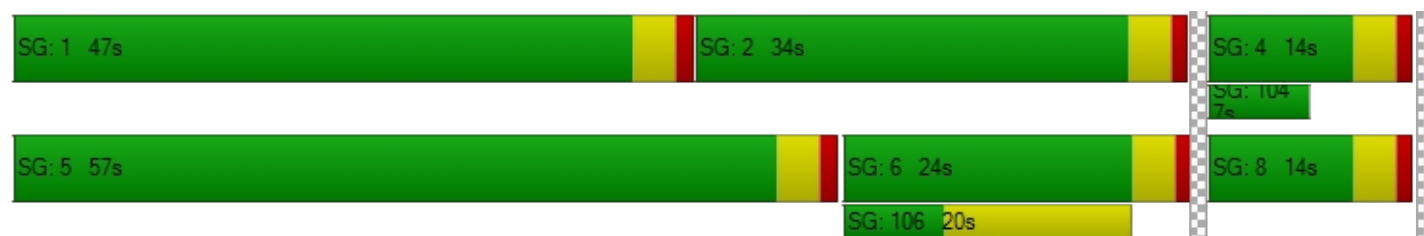

Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd

Control Type:	Signalized	Delay (sec / veh):	20.0
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.913

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	380	2455	2	2	1531	72	72	0	255	0	7	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	380	2455	2	2	1531	72	72	0	255	0	7	8
Peak Hour Factor	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	97	627	1	1	391	18	18	0	65	0	2	2
Total Analysis Volume [veh/h]	388	2508	2	2	1564	74	74	0	260	0	7	8
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	59	29	0	50	20	0	0	11	11	0	11	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	23	71	71	0	48	48	7	34	7
g / C, Green / Cycle	0.25	0.78	0.78	0.00	0.54	0.54	0.08	0.37	0.08
(v / s)_i Volume / Saturation Flow Rate	0.22	0.67	0.67	0.00	0.44	0.44	0.04	0.16	0.01
s, saturation flow rate [veh/h]	1781	1870	1869	1781	1870	1841	1758	1589	1598
c, Capacity [veh/h]	446	1464	1464	9	1005	989	218	594	166
d1, Uniform Delay [s]	32.33	6.45	6.46	44.62	17.20	17.30	39.87	21.11	38.55
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	5.33	6.69	6.70	11.74	7.40	7.78	0.91	0.51	0.23
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.87	0.86	0.86	0.22	0.82	0.82	0.34	0.44	0.09
d, Delay for Lane Group [s/veh]	37.66	13.14	13.15	56.36	24.60	25.08	40.78	21.62	38.79
Lane Group LOS	D	B	B	E	C	C	D	C	D
Critical Lane Group	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	8.53	12.32	12.33	0.07	14.79	14.83	1.61	4.06	0.32
50th-Percentile Queue Length [ft/ln]	213.21	308.12	308.37	1.84	369.79	370.77	40.30	101.51	7.90
95th-Percentile Queue Length [veh/ln]	13.32	18.08	18.09	0.13	21.10	21.15	2.90	7.31	0.57
95th-Percentile Queue Length [ft/ln]	332.94	452.06	452.37	3.31	527.47	528.67	72.55	182.72	14.22

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	37.66	13.15	13.15	56.36	24.82	25.08	40.78	40.78	21.62	38.79	38.79	38.79
Movement LOS	D	B	B	E	C	C	D	D	C	D	D	D
d_A, Approach Delay [s/veh]	16.43			24.87			25.87			38.79		
Approach LOS	B			C			C			D		
d_I, Intersection Delay [s/veh]	19.98											
Intersection LOS	B											
Intersection V/C	0.913											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			34.67			34.67			34.67		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.229			2.201			1.724		
Crosswalk LOS	F			C			B			A		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	556			356			156			156		
d_b, Bicycle Delay [s]	23.47			30.42			38.27			38.27		
I_b,int, Bicycle LOS Score for Intersection	3.950			2.913			2.111			1.584		
Bicycle LOS	D			C			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

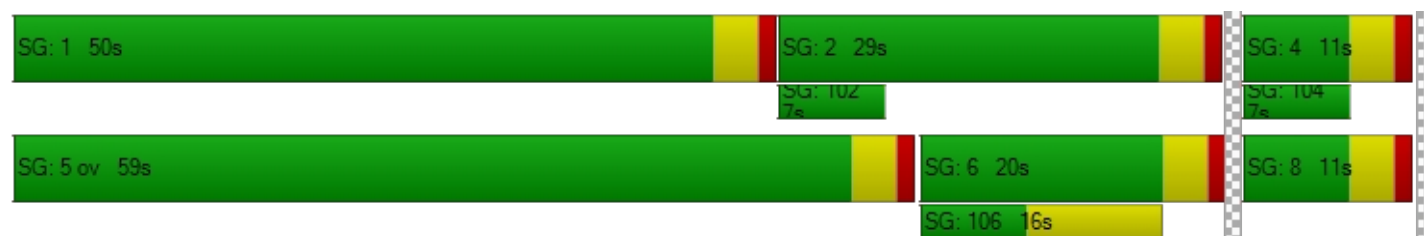

Intersection Level Of Service Report**Intersection 3: Winchester Rd at Robert Trent Jones Pkwy**

Control Type:	Signalized	Delay (sec / veh):	31.2
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.893

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	57	2390	112	151	1560	16	17	38	53	157	61	346
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	57	2390	112	151	1560	16	17	38	53	157	61	346
Peak Hour Factor	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	15	622	29	39	406	4	4	10	14	41	16	90
Total Analysis Volume [veh/h]	59	2490	117	157	1625	17	18	40	55	164	64	360
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	12	69	0	16	73	0	0	35	0	0	35	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	65	65	12	71	71	31	31	31	31	31	31
g / C, Green / Cycle	0.05	0.54	0.54	0.10	0.59	0.59	0.26	0.26	0.26	0.26	0.26	0.26
(v / s)_i Volume / Saturation Flow Rate	0.03	0.48	0.49	0.09	0.30	0.30	0.02	0.02	0.03	0.13	0.03	0.23
s, saturation flow rate [veh/h]	1781	3560	1828	1781	3560	1860	963	1870	1589	1301	1870	1589
c, Capacity [veh/h]	92	1929	990	180	2105	1100	80	481	409	335	481	409
d1, Uniform Delay [s]	55.74	24.25	24.61	53.12	14.37	14.37	58.53	33.81	34.27	42.64	34.26	42.77
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.36
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	7.22	6.56	12.94	12.23	0.89	1.71	1.39	0.07	0.15	1.11	0.12	17.72
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.64	0.89	0.90	0.87	0.51	0.51	0.22	0.08	0.13	0.49	0.13	0.88
d, Delay for Lane Group [s/veh]	62.97	30.80	37.55	65.35	15.26	16.08	59.93	33.88	34.42	43.75	34.38	60.49
Lane Group LOS	E	C	D	E	B	B	E	C	C	D	C	E
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	1.94	22.21	25.20	5.27	8.56	9.20	0.58	0.90	1.26	4.49	1.46	12.18
50th-Percentile Queue Length [ft/ln]	48.45	555.17	630.03	131.85	214.02	229.92	14.40	22.57	31.53	112.19	36.61	304.46
95th-Percentile Queue Length [veh/ln]	3.49	29.94	33.43	9.04	13.36	14.17	1.04	1.62	2.27	7.96	2.64	17.90
95th-Percentile Queue Length [ft/ln]	87.21	748.38	835.85	226.00	333.98	354.25	25.92	40.62	56.76	199.04	65.89	447.54

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	62.97	32.91	37.55	65.35	15.54	16.08	59.93	33.88	34.42	43.75	34.38	60.49
Movement LOS	E	C	D	E	B	B	E	C	C	D	C	E
d_A, Approach Delay [s/veh]	33.78			19.89			38.29			52.98		
Approach LOS	C			B			D			D		
d_I, Intersection Delay [s/veh]	31.22											
Intersection LOS	C											
Intersection V/C	0.893											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	49.50			0.00			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	3.469			0.000			2.363			2.490		
Crosswalk LOS	C			F			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	1083			1150			517			517		
d_b, Bicycle Delay [s]	12.60			10.84			33.00			33.00		
I_b,int, Bicycle LOS Score for Intersection	3.026			2.549			1.653			2.045		
Bicycle LOS	C			B			A			B		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 4: Winchester Rd at Murrieta Hot Springs Rd**

Control Type:	Signalized	Delay (sec / veh):	48.0
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.948

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	215	1815	222	136	1178	541	576	758	187	296	724	106
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	215	1815	222	136	1178	541	576	758	187	296	724	106
Peak Hour Factor	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	57	480	59	36	311	143	152	200	49	78	191	28
Total Analysis Volume [veh/h]	227	1919	235	144	1245	572	609	801	198	313	765	112
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	12	41	0	11	40	0	25	46	0	17	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	8	43	43	7	42	42	21	36	36	12	28	28
g / C, Green / Cycle	0.07	0.38	0.38	0.06	0.37	0.37	0.18	0.32	0.32	0.11	0.24	0.24
(v / s)_i Volume / Saturation Flow Rate	0.07	0.38	0.15	0.04	0.24	0.36	0.18	0.16	0.12	0.09	0.21	0.07
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	245	1913	597	214	1866	582	633	1607	502	374	857	383
d1, Uniform Delay [s]	53.19	35.95	26.34	52.89	30.59	36.11	46.65	32.01	30.81	50.36	42.28	35.71
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	13.85	21.28	1.94	3.67	1.91	33.15	9.92	0.24	0.50	5.00	3.51	0.42
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.92	1.00	0.39	0.67	0.67	0.98	0.96	0.50	0.39	0.84	0.89	0.29
d, Delay for Lane Group [s/veh]	67.04	57.24	28.29	56.57	32.50	69.26	56.58	32.25	31.32	55.36	45.79	36.13
Lane Group LOS	E	F	C	E	C	E	E	C	C	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	3.73	21.18	5.02	2.15	9.85	20.86	9.46	6.05	4.37	4.67	10.84	2.62
50th-Percentile Queue Length [ft/ln]	93.30	529.44	125.55	53.69	246.30	521.39	236.52	151.31	109.14	116.81	271.04	65.56
95th-Percentile Queue Length [veh/ln]	6.72	28.79	8.70	3.87	15.00	28.34	14.51	10.09	7.79	8.22	16.24	4.72
95th-Percentile Queue Length [ft/ln]	167.94	719.65	217.42	96.64	374.99	708.62	362.63	252.17	194.80	205.44	406.03	118.02

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	67.04	57.24	28.29	56.57	32.50	69.26	56.58	32.25	31.32	55.36	45.79	36.13
Movement LOS	E	F	C	E	C	E	E	C	C	E	D	D
d_A, Approach Delay [s/veh]	55.31			44.99			41.35			47.40		
Approach LOS	E			D			D			D		
d_I, Intersection Delay [s/veh]	48.01											
Intersection LOS	D											
Intersection V/C	0.948											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			47.03			47.03			47.03		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.359			3.124			3.026		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	643			626			730			591		
d_b, Bicycle Delay [s]	26.45			27.13			23.17			28.53		
I_b,int, Bicycle LOS Score for Intersection	2.869			2.638			2.444			2.541		
Bicycle LOS	C			B			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

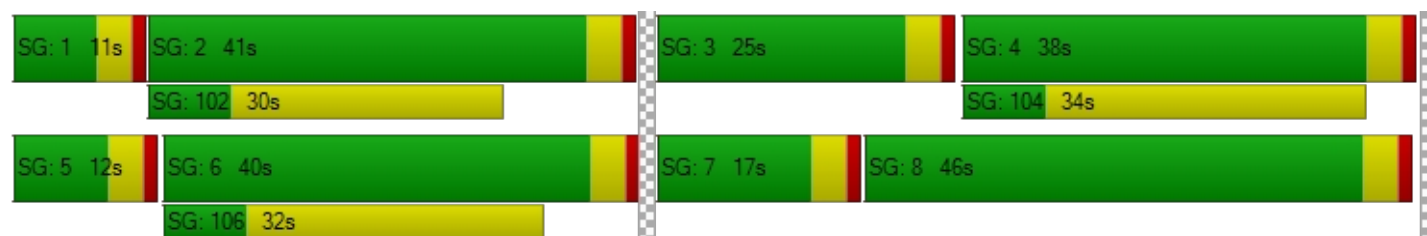

Intersection Level Of Service Report**Intersection 5: Winchester Rd at Winchester Square Drive**

Control Type:	Signalized	Delay (sec / veh):	22.7
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.820

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	32	2186	303	58	1570	15	20	20	28	194	6	148
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	32	2186	303	58	1570	15	20	20	28	194	6	148
Peak Hour Factor	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	8	580	80	15	416	4	5	5	7	51	2	39
Total Analysis Volume [veh/h]	34	2318	321	62	1665	16	21	21	30	206	6	157
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	20	0	11	20	0	0	36	0	0	48	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	5	70	70	6	72	72	6	16	16
g / C, Green / Cycle	0.04	0.61	0.61	0.05	0.62	0.62	0.06	0.14	0.14
(v / s)_i Volume / Saturation Flow Rate	0.02	0.49	0.51	0.03	0.31	0.31	0.04	0.12	0.10
s, saturation flow rate [veh/h]	1781	3560	1759	1781	3560	1861	1719	1783	1589
c, Capacity [veh/h]	73	2173	1074	95	2216	1158	96	253	225
d1, Uniform Delay [s]	53.92	17.10	17.83	53.43	11.89	11.89	53.56	48.11	47.04
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.47	3.23	7.72	7.35	0.80	1.53	11.29	7.30	3.87
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.46	0.80	0.84	0.65	0.50	0.50	0.75	0.84	0.70
d, Delay for Lane Group [s/veh]	58.39	20.33	25.56	60.78	12.69	13.42	64.86	55.41	50.91
Lane Group LOS	E	C	C	E	B	B	E	E	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	1.05	17.23	19.77	1.95	7.57	8.14	2.35	6.42	4.52
50th-Percentile Queue Length [ft/ln]	26.34	430.70	494.17	48.82	189.13	203.61	58.80	160.48	112.98
95th-Percentile Queue Length [veh/ln]	1.90	24.03	27.06	3.52	12.08	12.82	4.23	10.57	8.01
95th-Percentile Queue Length [ft/ln]	47.42	600.87	676.45	87.88	301.90	320.62	105.84	264.36	200.14

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	58.39	21.63	25.56	60.78	12.94	13.42	64.86	64.86	64.86	55.41	55.41	50.91
Movement LOS	E	C	C	E	B	B	E	E	E	E	E	D
d_A, Approach Delay [s/veh]	22.57			14.64			64.86			53.49		
Approach LOS	C			B			E			D		
d_I, Intersection Delay [s/veh]	22.70											
Intersection LOS	C											
Intersection V/C	0.820											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	47.03			0.00			47.03			47.03		
I_p,int, Pedestrian LOS Score for Intersection	3.243			0.000			1.789			2.203		
Crosswalk LOS	C			F			A			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	278			278			557			765		
d_b, Bicycle Delay [s]	42.61			42.61			29.95			21.92		
I_b,int, Bicycle LOS Score for Intersection	3.030			2.518			1.678			2.168		
Bicycle LOS	C			B			A			B		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

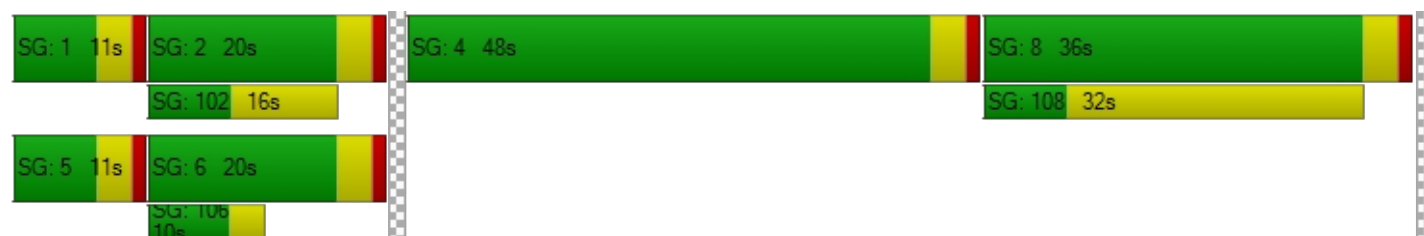

Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	32.2
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.866

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	85	2310	136	128	1442	188	227	56	50	218	55	40
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	85	2310	136	128	1442	188	227	56	50	218	55	40
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	22	589	35	33	368	48	58	14	13	56	14	10
Total Analysis Volume [veh/h]	87	2357	139	131	1471	192	232	57	51	222	56	41
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	59	0	14	62	0	0	11	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	64	64	10	67	67	18	18	12	12	12
g / C, Green / Cycle	0.06	0.54	0.54	0.08	0.56	0.56	0.15	0.15	0.10	0.10	0.10
(v / s)_i Volume / Saturation Flow Rate	0.05	0.46	0.47	0.07	0.31	0.31	0.13	0.06	0.08	0.08	0.03
s, saturation flow rate [veh/h]	1781	3560	1818	1781	3560	1762	1781	1726	1781	1815	1589
c, Capacity [veh/h]	105	1905	972	149	1993	986	266	258	176	179	157
d1, Uniform Delay [s]	55.88	24.11	24.47	54.38	16.91	16.94	49.95	46.34	52.87	52.86	50.07
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	14.87	5.46	11.03	14.60	1.13	2.29	8.69	1.08	7.51	7.31	0.88
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.83	0.86	0.88	0.88	0.56	0.56	0.87	0.42	0.79	0.78	0.26
d, Delay for Lane Group [s/veh]	70.75	29.57	35.49	68.98	18.04	19.23	58.64	47.43	60.38	60.17	50.95
Lane Group LOS	E	C	D	E	B	B	E	D	E	E	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	3.04	20.67	23.23	4.52	9.82	10.08	7.44	3.01	4.43	4.49	1.18
50th-Percentile Queue Length [ft/ln]	76.03	516.72	580.79	112.97	245.57	252.00	185.99	75.34	110.65	112.30	29.55
95th-Percentile Queue Length [veh/ln]	5.47	28.12	31.14	8.00	14.96	15.29	11.91	5.42	7.88	7.97	2.13
95th-Percentile Queue Length [ft/ln]	136.86	703.11	778.41	200.12	374.06	382.17	297.82	135.61	196.91	199.20	53.19

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	70.75	31.36	35.49	68.98	18.33	19.23	58.64	47.43	47.43	60.30	60.17	50.95
Movement LOS	E	C	D	E	B	B	E	D	D	E	E	D
d_A, Approach Delay [s/veh]	32.91			22.13			55.08			59.07		
Approach LOS	C			C			E			E		
d_I, Intersection Delay [s/veh]	32.22											
Intersection LOS	C											
Intersection V/C	0.866											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.224			2.173			2.302		
Crosswalk LOS	F			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	917			967			117			533		
d_b, Bicycle Delay [s]	17.60			16.02			53.20			32.27		
I_b,int, Bicycle LOS Score for Intersection	2.980			2.546			2.121			2.086		
Bicycle LOS	C			B			B			B		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

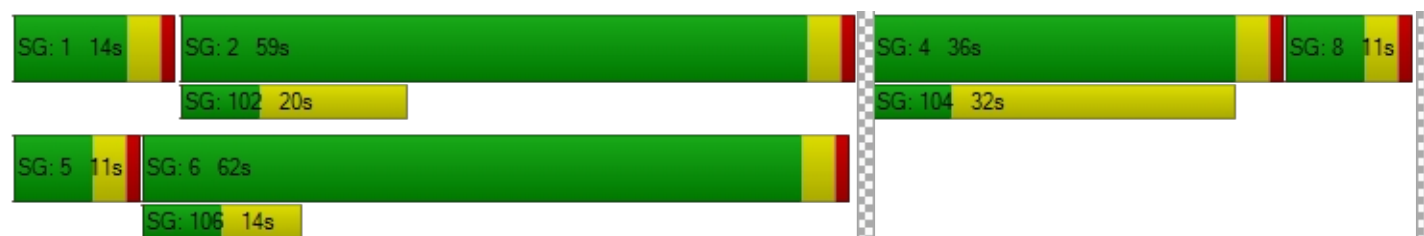

Intersection Level Of Service Report
Intersection 7: Winchester Rd at Nicolas Rd

Control Type:	Signalized	Delay (sec / veh):	27.2
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.839

Intersection Setup

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Base Volume Input [veh/h]	87	2163	414	179	1320	123	96	58	32	383	72	187
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	87	2163	414	179	1320	123	96	58	32	383	72	187
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	22	552	106	46	337	31	24	15	8	98	18	48
Total Analysis Volume [veh/h]	89	2207	422	183	1347	126	98	59	33	391	73	191
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	105
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	29	0	18	36	0	11	38	0	20	47	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	7	0
Pedestrian Clearance [s]	0	18	0	0	9	0	0	27	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	105	105	105	105	105	105	105	105	105	105	105	105
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	54	54	13	60	60	7	8	8	14	15	15
g / C, Green / Cycle	0.06	0.52	0.52	0.12	0.57	0.57	0.07	0.08	0.08	0.13	0.14	0.14
(v / s)_i Volume / Saturation Flow Rate	0.05	0.43	0.27	0.10	0.28	0.28	0.06	0.03	0.02	0.11	0.04	0.12
s, saturation flow rate [veh/h]	1781	5094	1589	1781	3560	1789	1781	1870	1589	3459	1870	1589
c, Capacity [veh/h]	114	2632	821	215	2040	1025	120	144	123	461	268	227
d1, Uniform Delay [s]	48.45	21.67	16.72	45.30	13.22	13.23	48.37	46.22	45.71	44.51	40.16	43.86
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	10.79	3.40	2.29	9.16	0.81	1.61	12.47	1.85	1.16	4.41	0.54	8.05
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.78	0.84	0.51	0.85	0.48	0.48	0.82	0.41	0.27	0.85	0.27	0.84
d, Delay for Lane Group [s/veh]	59.24	25.07	19.01	54.46	14.03	14.84	60.84	48.06	46.87	48.92	40.70	51.91
Lane Group LOS	E	C	B	D	B	B	E	D	D	D	D	D
Critical Lane Group	No	Yes	No	Yes	No	No	Yes	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	2.63	15.36	6.95	5.19	6.68	6.95	2.94	1.54	0.85	5.22	1.72	5.31
50th-Percentile Queue Length [ft/ln]	65.80	383.91	173.84	129.87	167.08	173.81	73.51	38.49	21.26	130.60	43.04	132.84
95th-Percentile Queue Length [veh/ln]	4.74	21.78	11.28	8.93	10.92	11.28	5.29	2.77	1.53	8.97	3.10	9.09
95th-Percentile Queue Length [ft/ln]	118.44	544.57	281.95	223.32	273.07	281.92	132.33	69.29	38.26	224.31	77.48	227.35

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	59.24	25.07	19.01	54.46	14.25	14.84	60.84	48.06	46.87	48.92	40.70	51.91
Movement LOS	E	C	B	D	B	B	E	D	D	D	D	D
d_A, Approach Delay [s/veh]	25.25			18.74			54.45			48.88		
Approach LOS	C			B			D			D		
d_I, Intersection Delay [s/veh]	27.21											
Intersection LOS	C											
Intersection V/C	0.839											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	42.08			42.08			42.08			42.08		
I_p,int, Pedestrian LOS Score for Intersection	3.280			3.179			2.255			2.564		
Crosswalk LOS	C			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	476			610			648			819		
d_b, Bicycle Delay [s]	30.48			25.38			24.00			18.30		
I_b,int, Bicycle LOS Score for Intersection	3.055			2.470			1.873			2.640		
Bicycle LOS	C			B			A			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

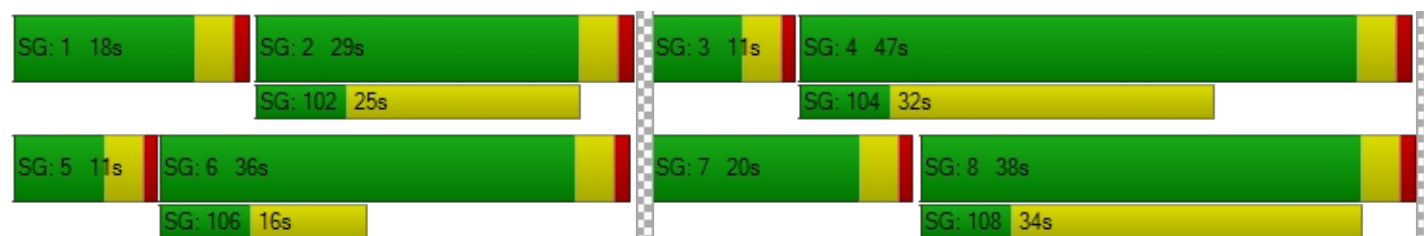

Intersection Level Of Service Report
Intersection 8: Winchester Rd at Margarita Rd

Control Type:	Signalized	Delay (sec / veh):	53.3
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.721

Intersection Setup

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Base Volume Input [veh/h]	375	1655	193	632	1115	140	168	504	154	274	843	857
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	375	1655	193	632	1115	140	168	504	154	274	843	857
Peak Hour Factor	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	96	422	49	161	284	36	43	128	39	70	215	218
Total Analysis Volume [veh/h]	382	1687	197	644	1137	143	171	514	157	279	859	874
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	8	7	4	4
Auxiliary Signal Groups			2,7						5,8			1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	7	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	30	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	1.0	1.0	1.0	1.0
Split [s]	23	40	40	30	47	0	11	20	20	30	39	39
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	22	22	0	20	0	0	0	0	0	28	28
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No	No	No	No	No
Maximum Recall	No	No	No	No	No		No	No	No	No	No	No
Pedestrian Recall	No	No	No	No	No		No	No	No	No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	16	38	55	26	49	49	7	27	47	13	33	63
g / C, Green / Cycle	0.13	0.32	0.46	0.22	0.40	0.40	0.06	0.23	0.39	0.11	0.27	0.52
(v / s)_i Volume / Saturation Flow Rate	0.11	0.33	0.12	0.19	0.24	0.24	0.05	0.14	0.10	0.08	0.24	0.55
s, saturation flow rate [veh/h]	3459	5094	1589	3459	3560	1765	3459	3560	1589	3459	3560	1589
c, Capacity [veh/h]	452	1627	728	749	1443	716	203	802	619	365	968	830
d1, Uniform Delay [s]	50.99	40.85	20.12	45.25	27.92	27.97	55.94	42.10	24.84	52.25	41.93	28.69
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.42	32.52	0.91	3.03	1.79	3.63	9.08	0.86	0.21	3.37	2.98	46.28
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.85	1.04	0.27	0.86	0.59	0.60	0.84	0.64	0.25	0.77	0.89	1.05
d, Delay for Lane Group [s/veh]	55.41	73.37	21.03	48.28	29.71	31.59	65.02	42.96	25.05	55.62	44.91	74.97
Lane Group LOS	E	F	C	D	C	C	E	D	C	E	D	F
Critical Lane Group	No	Yes	No	No	No	No	Yes	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	5.88	20.69	3.60	9.51	9.88	10.24	2.82	6.98	3.08	4.26	12.50	33.28
50th-Percentile Queue Length [ft/ln]	147.04	517.30	90.08	237.67	247.07	255.90	70.49	174.54	76.96	106.48	312.38	832.03
95th-Percentile Queue Length [veh/ln]	9.86	28.84	6.49	14.56	15.04	15.48	5.08	11.31	5.54	7.64	18.29	44.58
95th-Percentile Queue Length [ft/ln]	246.48	720.89	162.15	364.08	375.96	387.08	126.89	282.87	138.53	191.09	457.31	1114.56

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	55.41	73.37	21.03	48.28	30.18	31.59	65.02	42.96	25.05	55.62	44.91	74.97
Movement LOS	E	F	C	D	C	C	E	D	C	E	D	F
d_A, Approach Delay [s/veh]	65.79			36.34			44.10			59.45		
Approach LOS	E			D			D			E		
d_I, Intersection Delay [s/veh]	53.34											
Intersection LOS	D											
Intersection V/C	0.721											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.307			2.918			3.077		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	600			717			267			583		
d_b, Bicycle Delay [s]	29.40			24.70			45.07			30.10		
I_b,int, Bicycle LOS Score for Intersection	2.806			2.618			2.254			3.220		
Bicycle LOS	C			B			B			C		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

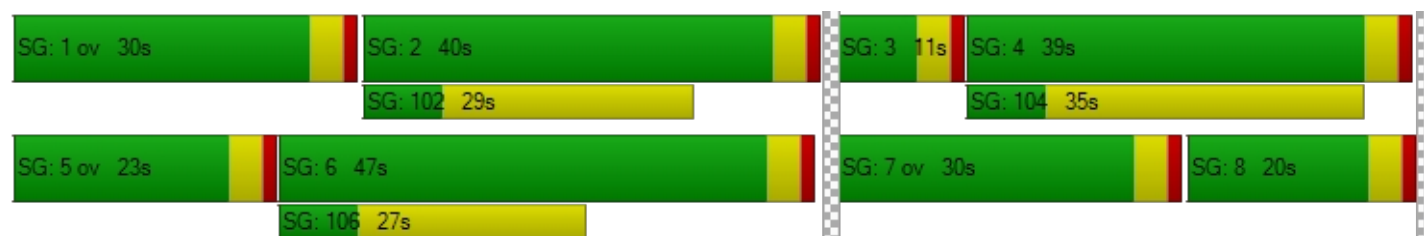

Intersection Level Of Service Report
Intersection 9: Winchester Rd at Ynez Rd

Control Type:	Signalized	Delay (sec / veh):	39.8
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.856

Intersection Setup

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Base Volume Input [veh/h]	476	1779	649	248	1310	185	201	404	321	831	913	509
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	476	1779	649	248	1310	185	201	404	321	831	913	509
Peak Hour Factor	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	121	451	165	63	332	47	51	102	81	211	231	129
Total Analysis Volume [veh/h]	483	1804	658	252	1329	188	204	410	326	843	926	516
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	0	7	4	4
Auxiliary Signal Groups			2,7									1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	0	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	0	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	1.0
Split [s]	26	48	48	15	37	0	13	28	0	29	44	44
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	30	30	0	23	0	0	0	0	0	30	30
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No		No	No	No
Maximum Recall	No	No	No	No	No		No	No		No	No	No
Pedestrian Recall	No	No	No	No	No		No	No		No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	19	48	77	11	40	40	9	20	20	20	25	36	51
g / C, Green / Cycle	0.16	0.40	0.64	0.09	0.34	0.34	0.08	0.16	0.16	0.16	0.21	0.30	0.42
(v / s)_i Volume / Saturation Flow Rate	0.14	0.27	0.41	0.07	0.22	0.22	0.06	0.14	0.14	0.14	0.16	0.26	0.32
s, saturation flow rate [veh/h]	3459	6792	1589	3459	5094	1721	3459	1870	1744	1589	5188	3560	1589
c, Capacity [veh/h]	549	2727	1022	321	1709	577	262	307	286	261	1081	1056	672
d1, Uniform Delay [s]	49.39	29.30	13.05	53.32	34.12	34.13	54.52	48.88	48.88	48.88	44.93	40.15	29.63
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.13	0.13	0.13	0.11	0.11	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.73	1.28	3.12	4.24	2.05	5.93	4.96	8.53	9.08	9.86	1.26	2.50	8.21
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.88	0.66	0.64	0.79	0.66	0.66	0.78	0.86	0.86	0.86	0.78	0.88	0.77
d, Delay for Lane Group [s/veh]	54.13	30.58	16.17	57.56	36.17	40.06	59.47	57.41	57.96	58.74	46.19	42.65	37.84
Lane Group LOS	D	C	B	E	D	D	E	E	E	E	D	D	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	7.43	10.71	10.98	3.91	9.69	10.45	3.21	8.43	7.90	7.26	8.02	13.23	14.04
50th-Percentile Queue Length [ft/ln]	185.73	267.83	274.48	97.79	242.17	261.21	80.28	210.7	197.6	181.5	200.40	330.81	351.06
95th-Percentile Queue Length [veh/ln]	11.90	16.08	16.41	7.04	14.79	15.75	5.78	13.19	12.52	11.68	12.66	19.20	20.19
95th-Percentile Queue Length [ft/ln]	297.49	402.03	410.33	176.02	369.77	393.74	144.5	329.7	312.8	292.0	316.48	479.96	504.70

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	54.13	30.58	16.17	57.56	36.74	40.06	59.47	57.60	58.54	46.19	42.65	37.84
Movement LOS	D	C	B	E	D	D	E	E	E	D	D	D
d_A, Approach Delay [s/veh]	31.22			40.06			58.32			42.87		
Approach LOS	C			D			E			D		
d_I, Intersection Delay [s/veh]	39.75											
Intersection LOS	D											
Intersection V/C	0.856											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	49.50	49.50	49.50
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.399	2.961	3.179
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	733	550	400	667
d_b, Bicycle Delay [s]	24.07	31.54	38.40	26.67
I_b,int, Bicycle LOS Score for Intersection	2.774	2.289	2.335	3.445
Bicycle LOS	C	B	B	C

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

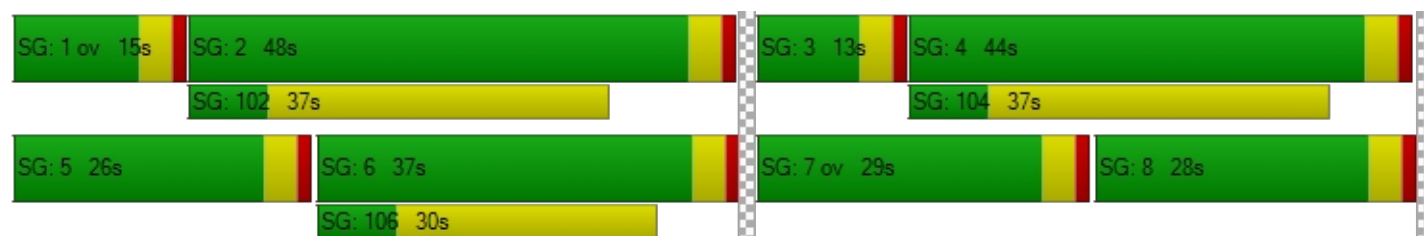

Intersection Level Of Service Report
Intersection 10: Sky Canyon Dr at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	23.4
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.177

Intersection Setup

Name	Sky Canyon Drive		Willows Avenue		Willows Avenue	
Approach	Southbound		Eastbound		Westbound	
Lane Configuration						
Turning Movement	Left	Right	Left	Thru	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00		30.00		30.00	
Grade [%]	0.00		0.00		0.00	
Curb Present	No		No		No	
Crosswalk	Yes		No		No	

Volumes

Name	Sky Canyon Drive		Willows Avenue		Willows Avenue	
Base Volume Input [veh/h]	49	131	33	230	182	45
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	49	131	33	230	182	45
Peak Hour Factor	0.9500	0.9500	0.9500	0.9500	0.9500	0.9500
Other Adjustment Factor	1.0000	1.0000	1.0000	0.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	13	34	9	0	48	12
Total Analysis Volume [veh/h]	52	138	35	0	192	47
Presence of On-Street Parking	No	No	No	No	No	No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing major street [ped/h]	0		0		0	
v_di, Inbound Pedestrian Volume crossing major street [ped/h]	0		0		0	
v_co, Outbound Pedestrian Volume crossing minor street [ped/h]	0		0		0	
v_ci, Inbound Pedestrian Volume crossing minor street [ped/h]	0		0		0	
v_ab, Corner Pedestrian Volume [ped/h]	0		0		0	
Bicycle Volume [bicycles/h]	0		0		0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Split	Split	Protected	Permissive	Permissive	Permissive
Signal Group	1	0	3	8	4	0
Auxiliary Signal Groups						
Lead / Lag	Lead	-	Lead	-	-	-
Minimum Green [s]	7	0	7	7	7	0
Maximum Green [s]	30	0	30	30	30	0
Amber [s]	3.0	0.0	3.0	3.0	3.0	0.0
All red [s]	1.0	0.0	1.0	1.0	1.0	0.0
Split [s]	50	0	11	40	29	0
Vehicle Extension [s]	3.0	0.0	3.0	3.0	3.0	0.0
Walk [s]	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	18	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk	No			No	No	
I1, Start-Up Lost Time [s]	2.0	0.0	2.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	0.0	2.0	2.0	2.0	0.0
Minimum Recall	No		No	No	No	
Maximum Recall	No		No	No	No	
Pedestrian Recall	No		No	No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	R	L	C	C	C
C, Cycle Length [s]	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	10	10	4	72	64	64
g / C, Green / Cycle	0.11	0.11	0.05	0.80	0.71	0.71
(v / s)_i Volume / Saturation Flow Rate	0.03	0.09	0.02	0.00	0.04	0.05
s, saturation flow rate [veh/h]	1781	1589	1781	1870	3560	1694
c, Capacity [veh/h]	199	178	83	1495	2523	1200
d1, Uniform Delay [s]	36.60	38.91	41.75	0.00	4.00	4.01
k, delay calibration	0.11	0.11	0.11	0.50	0.50	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	0.69	7.14	3.38	0.00	0.05	0.11
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.26	0.78	0.42	0.00	0.06	0.07
d, Delay for Lane Group [s/veh]	37.29	46.05	45.13	0.00	4.05	4.12
Lane Group LOS	D	D	D	A	A	A
Critical Lane Group	No	Yes	Yes	No	No	Yes
50th-Percentile Queue Length [veh/ln]	1.07	3.27	0.83	0.00	0.38	0.40
50th-Percentile Queue Length [ft/ln]	26.85	81.86	20.67	0.00	9.56	10.05
95th-Percentile Queue Length [veh/ln]	1.93	5.89	1.49	0.00	0.69	0.72
95th-Percentile Queue Length [ft/ln]	48.33	147.35	37.20	0.00	17.21	18.09

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	37.29	46.05	45.13	0.00	4.06	4.12
Movement LOS	D	D	D	A	A	A
d_A, Approach Delay [s/veh]	43.65		45.13		4.08	
Approach LOS	D		D		A	
d_I, Intersection Delay [s/veh]	23.38					
Intersection LOS	C					
Intersection V/C	0.177					

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	0.0
M_corner, Corner Circulation Area [ft²/ped]	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft²/ped]	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	34.67	0.00	0.00
I_p,int, Pedestrian LOS Score for Intersection	2.028	0.000	0.000
Crosswalk LOS	B	F	F
s_b, Saturation Flow Rate of the bicycle lane [bicycles/h]	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	1022	800	556
d_b, Bicycle Delay [s]	10.76	16.20	23.47
I_b,int, Bicycle LOS Score for Intersection	1.560	1.617	1.691
Bicycle LOS	A	A	A

Sequence

Ring 1	1	3	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	-	-	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

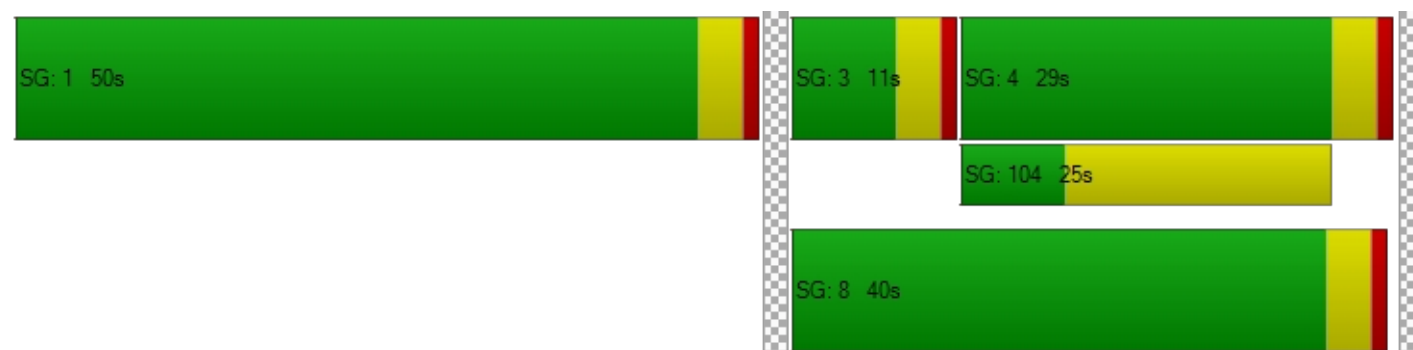

APPENDIX C-II

**EXISTING WITH AMBIENT GROWTH WITH PROJECT
WITH MITIGATION TRAFFIC CONDITIONS**

THIS PAGE LEFT BLANK INTENTIONALLY

APPENDIX C-III

**EXISTING WITH AMBIENT GROWTH WITH PROJECT
WITH CUMULATIVE PROJECTS
TRAFFIC CONDITIONS**

Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	38.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.037

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	61	1746	42	8	2624	98	140	0	161	19	0	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	61	1746	42	8	2624	98	140	0	161	19	0	8
Peak Hour Factor	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	16	467	11	2	702	26	37	0	43	5	0	2
Total Analysis Volume [veh/h]	65	1869	45	9	2809	105	150	0	172	20	0	9
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	62	0	41	92	0	0	17	0	0	17	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	93	93	2	89	89	13	13	13	13
g / C, Green / Cycle	0.05	0.78	0.78	0.02	0.74	0.74	0.11	0.11	0.11	0.11
(v / s)_i Volume / Saturation Flow Rate	0.04	0.51	0.52	0.01	0.79	0.07	0.11	0.00	0.11	0.02
s, saturation flow rate [veh/h]	1781	1870	1855	1781	3560	1589	1406	1870	1589	1377
c, Capacity [veh/h]	93	1451	1439	28	2632	1175	159	203	173	200
d1, Uniform Delay [s]	55.95	6.18	6.23	58.43	15.64	4.36	53.78	0.00	53.44	48.94
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	9.24	2.37	2.45	6.62	38.70	0.15	22.33	0.00	30.89	0.33
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.70	0.66	0.67	0.32	1.07	0.09	0.95	0.00	1.00	0.14
d, Delay for Lane Group [s/veh]	65.18	8.55	8.68	65.04	54.34	4.51	76.12	0.00	84.33	49.27
Lane Group LOS	E	A	A	E	F	A	E	A	F	D
Critical Lane Group	Yes	No	No	No	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	2.17	9.92	10.03	0.32	43.39	0.70	5.51	0.00	6.66	0.82
50th-Percentile Queue Length [ft/ln]	54.37	248.10	250.64	8.04	1084.79	17.51	137.83	0.00	166.41	20.46
95th-Percentile Queue Length [veh/ln]	3.91	15.09	15.22	0.58	57.53	1.26	9.36	0.00	10.89	1.47
95th-Percentile Queue Length [ft/ln]	97.87	377.26	380.46	14.47	1438.24	31.51	234.10	0.00	272.19	36.83

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	65.18	8.61	8.68	65.04	54.34	4.51	76.12	0.00	84.33	49.27	49.27	49.27
Movement LOS	E	A	A	E	F	A	E	A	F	D	D	D
d_A, Approach Delay [s/veh]	10.47			52.58			80.51			49.27		
Approach LOS	B			D			F			D		
d_I, Intersection Delay [s/veh]	38.41											
Intersection LOS	D											
Intersection V/C	1.037											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			0.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			0.00		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.485			2.265			0.000		
Crosswalk LOS	F			C			B			F		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	967			1467			217			217		
d_b, Bicycle Delay [s]	16.02			4.27			47.70			47.70		
I_b,int, Bicycle LOS Score for Intersection	3.192			3.971			2.091			1.607		
Bicycle LOS	C			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd

Control Type:	Signalized	Delay (sec / veh):	53.7
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.147

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	173	1730	1	12	2698	68	104	1	412	1	2	2
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	173	1730	1	12	2698	68	104	1	412	1	2	2
Peak Hour Factor	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	44	439	0	3	684	17	26	0	104	0	1	1
Total Analysis Volume [veh/h]	175	1755	1	12	2736	69	105	1	418	1	2	2
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	18	47	0	54	83	0	0	14	14	0	14	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	14	91	91	2	79	79	10	28	10
g / C, Green / Cycle	0.12	0.79	0.79	0.02	0.69	0.69	0.09	0.24	0.09
(v / s)_i Volume / Saturation Flow Rate	0.10	0.47	0.47	0.01	0.75	0.76	0.13	0.26	0.01
s, saturation flow rate [veh/h]	1781	1870	1870	1781	1870	1854	815	1589	941
c, Capacity [veh/h]	217	1474	1474	35	1283	1272	133	388	120
d1, Uniform Delay [s]	49.14	4.85	4.85	55.60	18.04	18.04	54.13	43.45	48.12
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.46	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.86	1.78	1.78	5.56	54.46	58.13	10.13	65.89	0.14
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.81	0.60	0.60	0.34	1.09	1.10	0.79	1.08	0.04
d, Delay for Lane Group [s/veh]	56.00	6.63	6.63	61.17	72.49	76.17	64.25	109.34	48.26
Lane Group LOS	E	A	A	E	F	F	E	F	D
Critical Lane Group	No	No	No	No	No	Yes	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	5.30	7.12	7.12	0.40	48.55	49.43	3.47	18.02	0.14
50th-Percentile Queue Length [ft/ln]	132.45	177.88	177.92	9.95	1213.82	1235.85	86.66	450.58	3.41
95th-Percentile Queue Length [veh/ln]	9.07	11.49	11.49	0.72	64.89	66.43	6.24	26.08	0.25
95th-Percentile Queue Length [ft/ln]	226.82	287.25	287.29	17.91	1622.30	1660.65	155.98	651.96	6.14

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	56.00	6.63	6.63	61.17	74.28	76.17	64.25	64.25	109.34	48.26	48.26	48.26
Movement LOS	E	A	A	E	F	E	E	E	F	D	D	D
d_A, Approach Delay [s/veh]	11.10			74.27			100.22			48.26		
Approach LOS	B			E			F			D		
d_I, Intersection Delay [s/veh]	53.71											
Intersection LOS	D											
Intersection V/C	1.147											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			47.03			47.03			47.03		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.373			2.202			1.736		
Crosswalk LOS	F			C			B			A		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	748			1374			174			174		
d_b, Bicycle Delay [s]	22.54			5.63			47.93			47.93		
I_b,int, Bicycle LOS Score for Intersection	3.153			3.884			2.424			1.568		
Bicycle LOS	C			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

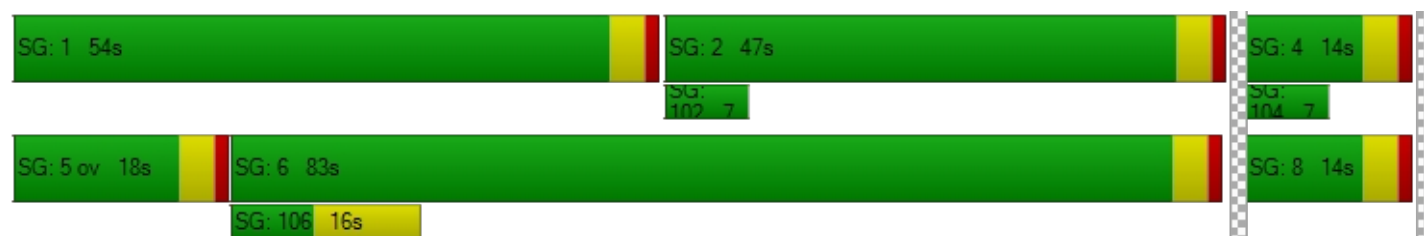

Intersection Level Of Service Report**Intersection 3: Winchester Rd at Robert Trent Jones Pkwy**

Control Type:	Signalized	Delay (sec / veh):	15.2
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.721

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	34	1727	152	300	2795	41	59	34	67	24	7	119
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	34	1727	152	300	2795	41	59	34	67	24	7	119
Peak Hour Factor	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	9	436	38	76	705	10	15	9	17	6	2	30
Total Analysis Volume [veh/h]	34	1743	153	303	2820	41	60	34	68	24	7	120
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	38	0	40	67	0	0	12	0	0	12	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	4	52	52	18	66	66	8	8	8	8	8	8
g / C, Green / Cycle	0.05	0.58	0.58	0.19	0.73	0.73	0.09	0.09	0.09	0.09	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.02	0.35	0.36	0.17	0.53	0.53	0.05	0.02	0.04	0.02	0.00	0.08
s, saturation flow rate [veh/h]	1781	3560	1794	1781	3560	1856	1263	1870	1589	1292	1870	1589
c, Capacity [veh/h]	81	2072	1044	347	2603	1357	82	168	143	119	168	143
d1, Uniform Delay [s]	41.80	12.18	12.21	35.15	6.88	6.93	45.02	37.99	38.97	43.17	37.44	40.35
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	3.38	1.34	2.66	6.83	1.76	3.42	11.80	0.59	2.45	0.83	0.10	12.28
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.42	0.61	0.61	0.87	0.72	0.73	0.73	0.20	0.48	0.20	0.04	0.84
d, Delay for Lane Group [s/veh]	45.17	13.51	14.86	41.98	8.63	10.35	56.82	38.58	41.42	44.00	37.54	52.63
Lane Group LOS	D	B	B	D	A	B	E	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	0.80	7.74	8.24	6.96	8.19	9.29	1.63	0.72	1.51	0.55	0.14	3.07
50th-Percentile Queue Length [ft/ln]	20.10	193.57	205.88	173.93	204.81	232.28	40.87	17.90	37.75	13.76	3.61	76.71
95th-Percentile Queue Length [veh/ln]	1.45	12.31	12.94	11.28	12.89	14.29	2.94	1.29	2.72	0.99	0.26	5.52
95th-Percentile Queue Length [ft/ln]	36.18	307.66	323.54	282.08	322.16	357.25	73.57	32.22	67.96	24.76	6.50	138.08

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	45.17	13.89	14.86	41.98	9.21	10.35	56.82	38.58	41.42	44.00	37.54	52.63
Movement LOS	D	B	B	D	A	B	E	D	D	D	D	D
d_A, Approach Delay [s/veh]	14.52			12.36			46.53			50.56		
Approach LOS	B			B			D			D		
d_I, Intersection Delay [s/veh]	15.22											
Intersection LOS	B											
Intersection V/C	0.721											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	34.67	0.00	34.67	34.67
I_p,int, Pedestrian LOS Score for Intersection	3.302	0.000	2.347	2.424
Crosswalk LOS	C	F	B	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	756	1400	178	178
d_b, Bicycle Delay [s]	17.42	4.05	37.36	37.36
I_b,int, Bicycle LOS Score for Intersection	2.621	3.300	1.693	1.684
Bicycle LOS	B	C	A	A

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

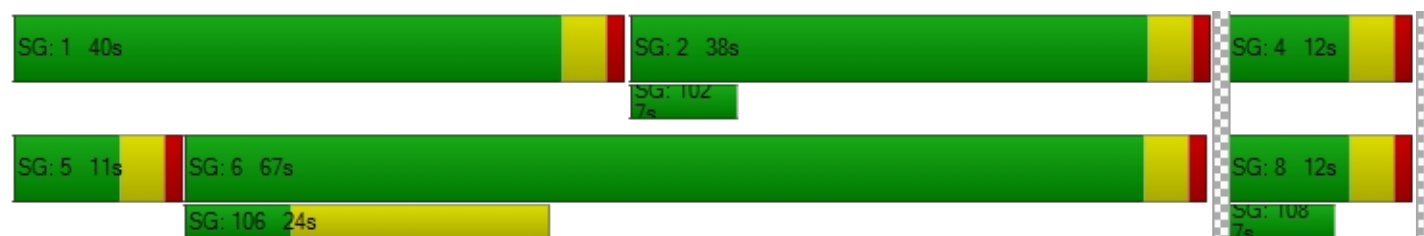

Intersection Level Of Service Report**Intersection 4: Winchester Rd at Murrieta Hot Springs Rd**

Control Type:	Signalized	Delay (sec / veh):	85.8
Analysis Method:	HCM 6th Edition	Level Of Service:	F
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.212

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	189	941	139	240	1837	804	871	546	213	326	679	157
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	189	941	139	240	1837	804	871	546	213	326	679	157
Peak Hour Factor	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	49	246	36	63	481	210	228	143	56	85	178	41
Total Analysis Volume [veh/h]	198	985	146	251	1924	842	912	572	223	341	711	164
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	40	0	15	44	0	27	15	0	50	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	43	43	11	47	47	23	35	35	15	27	27
g / C, Green / Cycle	0.06	0.36	0.36	0.09	0.39	0.39	0.19	0.30	0.30	0.12	0.22	0.22
(v / s)_i Volume / Saturation Flow Rate	0.06	0.19	0.09	0.07	0.38	0.53	0.26	0.11	0.14	0.10	0.20	0.10
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	207	1836	573	309	1987	620	664	1504	469	421	801	358
d1, Uniform Delay [s]	56.32	30.46	27.05	53.70	35.91	36.64	48.54	33.61	34.71	51.38	45.07	40.22
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	20.53	1.13	1.07	5.13	14.00	171.55	170.41	0.16	0.75	3.75	3.56	0.92
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.96	0.54	0.25	0.81	0.97	1.36	1.37	0.38	0.48	0.81	0.89	0.46
d, Delay for Lane Group [s/veh]	76.85	31.59	28.13	58.83	49.91	208.18	218.94	33.77	35.46	55.13	48.63	41.13
Lane Group LOS	E	C	C	E	D	F	F	C	D	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	3.58	7.69	3.13	3.94	20.54	47.25	25.60	4.45	5.45	5.22	10.60	4.29
50th-Percentile Queue Length [ft/ln]	89.55	192.24	78.29	98.55	513.40	1181.29	639.89	111.28	136.16	130.40	264.96	107.27
95th-Percentile Queue Length [veh/ln]	6.45	12.24	5.64	7.10	27.97	70.50	39.17	7.91	9.27	8.96	15.94	7.69
95th-Percentile Queue Length [ft/ln]	161.19	305.93	140.93	177.39	699.20	1762.59	979.35	197.77	231.84	224.04	398.43	192.20

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	76.85	31.59	28.13	58.83	49.91	208.18	218.94	33.77	35.46	55.13	48.63	41.13
Movement LOS	E	C	C	E	D	F	F	C	D	E	D	D
d_A, Approach Delay [s/veh]	37.95			94.83			132.92			49.44		
Approach LOS	D			F			F			D		
d_I, Intersection Delay [s/veh]	85.78											
Intersection LOS	F											
Intersection V/C	1.212											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.413			3.161			3.006		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	600			667			183			567		
d_b, Bicycle Delay [s]	29.40			26.67			49.50			30.82		
I_b,int, Bicycle LOS Score for Intersection	2.291			3.219			2.498			2.563		
Bicycle LOS	B			C			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 5: Winchester Rd at Winchester Square Drive**

Control Type:	Signalized	Delay (sec / veh):	11.5
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.664

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	6	1431	134	49	2355	3	3	5	5	108	2	59
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	6	1431	134	49	2355	3	3	5	5	108	2	59
Peak Hour Factor	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	2	386	36	13	635	1	1	1	1	29	1	16
Total Analysis Volume [veh/h]	6	1544	145	53	2540	3	3	5	5	117	2	64
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	20	0	11	20	0	0	36	0	0	23	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	1	59	59	5	63	63	2	8	8
g / C, Green / Cycle	0.01	0.65	0.65	0.06	0.70	0.70	0.02	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.00	0.32	0.32	0.03	0.47	0.47	0.01	0.07	0.04
s, saturation flow rate [veh/h]	1781	3560	1789	1781	3560	1869	1732	1782	1589
c, Capacity [veh/h]	22	2315	1163	104	2480	1302	40	162	145
d1, Uniform Delay [s]	44.14	8.06	8.07	41.20	7.82	7.82	43.36	39.93	38.83
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.68	0.73	1.45	3.81	1.48	2.79	4.65	6.30	2.12
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.28	0.49	0.49	0.51	0.67	0.67	0.33	0.73	0.44
d, Delay for Lane Group [s/veh]	50.82	8.79	9.52	45.01	9.29	10.61	48.02	46.23	40.95
Lane Group LOS	D	A	A	D	A	B	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	0.17	5.02	5.28	1.24	7.83	8.70	0.33	2.82	1.41
50th-Percentile Queue Length [ft/ln]	4.30	125.45	132.10	31.02	195.71	217.46	8.35	70.46	35.27
95th-Percentile Queue Length [veh/ln]	0.31	8.69	9.05	2.23	12.42	13.54	0.60	5.07	2.54
95th-Percentile Queue Length [ft/ln]	7.74	217.29	226.35	55.83	310.42	338.38	15.04	126.83	63.49

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	50.82	8.99	9.52	45.01	9.74	10.61	48.02	48.02	48.02	46.23	46.23	40.95
Movement LOS	D	A	A	D	A	B	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	9.18			10.46			48.02			44.38		
Approach LOS	A			B			D			D		
d_I, Intersection Delay [s/veh]	11.47											
Intersection LOS	B											
Intersection V/C	0.664											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	34.67			0.00			34.67			34.67		
I_p,int, Pedestrian LOS Score for Intersection	3.200			0.000			1.726			2.065		
Crosswalk LOS	C			F			A			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	356			356			711			422		
d_b, Bicycle Delay [s]	30.42			30.42			18.69			28.01		
I_b,int, Bicycle LOS Score for Intersection	2.492			2.987			1.581			1.862		
Bicycle LOS	B			C			A			A		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

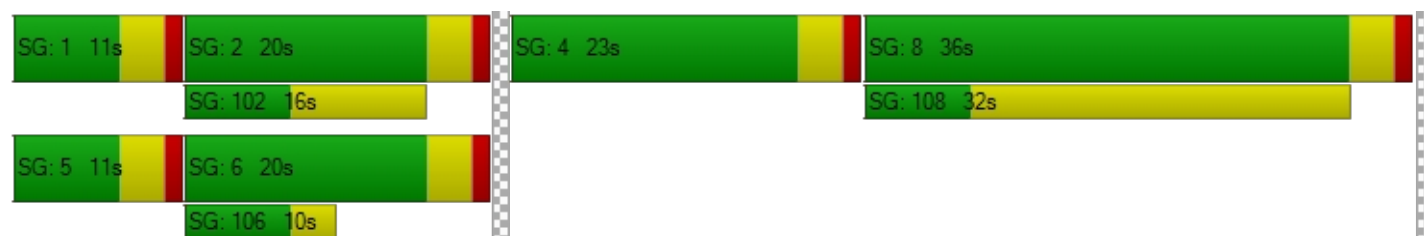

Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	28.3
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.833

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	79	1328	86	86	2085	223	167	30	57	201	54	77
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	79	1328	86	86	2085	223	167	30	57	201	54	77
Peak Hour Factor	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	22	368	24	24	579	62	46	8	16	56	15	21
Total Analysis Volume [veh/h]	88	1474	95	95	2314	248	185	33	63	223	60	85
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	46	0	22	57	0	0	16	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	69	69	8	70	70	15	15	12	12	12
g / C, Green / Cycle	0.06	0.58	0.58	0.07	0.58	0.58	0.12	0.12	0.10	0.10	0.10
(v / s)_i Volume / Saturation Flow Rate	0.05	0.29	0.29	0.05	0.47	0.49	0.10	0.06	0.08	0.08	0.05
s, saturation flow rate [veh/h]	1781	3560	1813	1781	3560	1781	1781	1676	1781	1817	1589
c, Capacity [veh/h]	105	2045	1041	121	2076	1038	220	207	180	183	160
d1, Uniform Delay [s]	55.91	15.36	15.36	55.11	19.85	20.46	51.45	48.90	52.68	52.67	51.27
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	15.63	0.91	1.77	10.70	3.63	8.20	8.31	1.61	7.17	7.00	2.70
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.84	0.51	0.51	0.79	0.81	0.84	0.84	0.46	0.78	0.78	0.53
d, Delay for Lane Group [s/veh]	71.54	16.26	17.13	65.81	23.47	28.66	59.76	50.51	59.85	59.68	53.98
Lane Group LOS	E	B	B	E	C	C	E	D	E	E	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	3.10	8.54	8.95	3.19	18.70	21.18	5.95	2.78	4.48	4.56	2.55
50th-Percentile Queue Length [ft/ln]	77.38	213.46	223.79	79.74	467.59	529.47	148.66	69.38	112.02	113.96	63.86
95th-Percentile Queue Length [veh/ln]	5.57	13.33	13.86	5.74	25.80	28.73	9.95	5.00	7.95	8.06	4.60
95th-Percentile Queue Length [ft/ln]	139.28	333.27	346.46	143.53	644.90	718.15	248.64	124.88	198.81	201.50	114.94

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	71.54	16.52	17.13	65.81	24.87	28.66	59.76	50.51	50.51	59.78	59.68	53.98
Movement LOS	E	B	B	E	C	C	E	D	D	E	E	D
d_A, Approach Delay [s/veh]	19.48			26.69			56.60			58.43		
Approach LOS	B			C			E			E		
d_I, Intersection Delay [s/veh]	28.33											
Intersection LOS	C											
Intersection V/C	0.833											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.221			2.174			2.289		
Crosswalk LOS	F			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	700			883			200			533		
d_b, Bicycle Delay [s]	25.35			18.70			48.60			32.27		
I_b,int, Bicycle LOS Score for Intersection	2.471			3.021			2.023			2.167		
Bicycle LOS	B			C			B			B		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

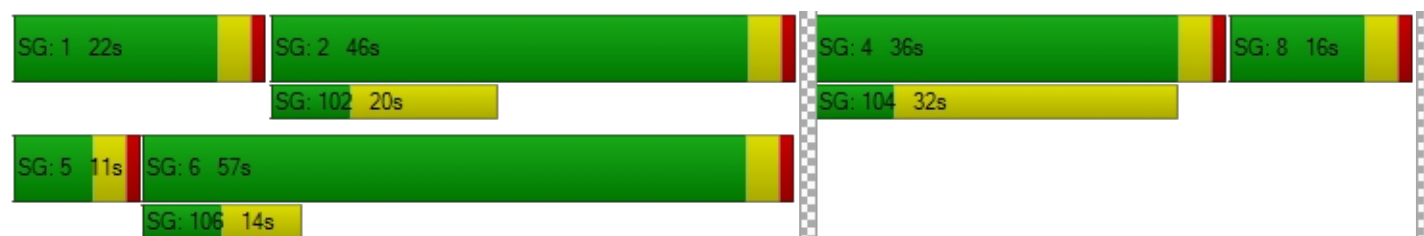

Intersection Level Of Service Report
Intersection 7: Winchester Rd at Nicolas Rd

Control Type:	Signalized	Delay (sec / veh):	49.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.997

Intersection Setup

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Base Volume Input [veh/h]	215	1029	133	182	1905	291	164	87	93	311	252	168
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	215	1029	133	182	1905	291	164	87	93	311	252	168
Peak Hour Factor	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	59	284	37	50	525	80	45	24	26	86	69	46
Total Analysis Volume [veh/h]	237	1135	147	201	2100	321	181	96	103	343	278	185
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	110
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	18	29	0	26	37	0	15	38	0	17	40	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	7	0
Pedestrian Clearance [s]	0	18	0	0	9	0	0	27	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	110	110	110	110	110	110	110	110	110	110	110	110
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	14	50	50	14	50	50	11	17	17	13	19	19
g / C, Green / Cycle	0.13	0.45	0.45	0.13	0.45	0.45	0.10	0.16	0.16	0.12	0.17	0.17
(v / s)_i Volume / Saturation Flow Rate	0.13	0.22	0.09	0.11	0.45	0.47	0.10	0.05	0.06	0.10	0.15	0.12
s, saturation flow rate [veh/h]	1781	5094	1589	1781	3560	1749	1781	1870	1589	3459	1870	1589
c, Capacity [veh/h]	227	2291	715	234	1615	793	179	294	250	403	323	275
d1, Uniform Delay [s]	48.02	21.45	18.37	46.80	29.88	30.09	49.51	41.24	41.84	47.70	44.24	42.62
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	39.27	0.77	0.65	8.82	20.48	41.01	33.86	0.64	1.09	5.13	6.67	2.86
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	1.04	0.50	0.21	0.86	0.99	1.03	1.01	0.33	0.41	0.85	0.86	0.67
d, Delay for Lane Group [s/veh]	87.29	22.22	19.02	55.62	50.36	71.09	83.37	41.88	42.93	52.83	50.91	45.48
Lane Group LOS	F	C	B	E	D	F	F	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	8.68	6.94	2.38	5.94	24.66	29.07	6.59	2.37	2.60	4.88	7.92	4.91
50th-Percentile Queue Length [ft/ln]	217.12	173.43	59.58	148.44	616.62	726.65	164.70	59.23	64.93	122.04	197.91	122.74
95th-Percentile Queue Length [veh/ln]	13.76	11.26	4.29	9.93	32.81	38.90	10.84	4.26	4.67	8.51	12.53	8.54
95th-Percentile Queue Length [ft/ln]	343.92	281.41	107.24	248.35	820.24	972.51	271.01	106.61	116.87	212.63	313.27	213.59

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	87.29	22.22	19.02	55.62	55.28	71.09	83.37	41.88	42.93	52.83	50.91	45.48
Movement LOS	F	C	B	E	E	E	F	D	D	D	D	D
d_A, Approach Delay [s/veh]	32.07			57.25			61.93			50.48		
Approach LOS	C			E			E			D		
d_I, Intersection Delay [s/veh]	49.38											
Intersection LOS	D											
Intersection V/C	0.997											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	44.55			44.55			44.55			44.55		
I_p,int, Pedestrian LOS Score for Intersection	3.230			3.178			2.437			2.553		
Crosswalk LOS	C			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	455			600			618			655		
d_b, Bicycle Delay [s]	32.84			26.95			26.25			24.89		
I_b,int, Bicycle LOS Score for Intersection	2.395			3.002			2.187			2.890		
Bicycle LOS	B			C			B			C		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 8: Winchester Rd at Margarita Rd

Control Type:	Signalized	Delay (sec / veh):	35.5
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.764

Intersection Setup

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Base Volume Input [veh/h]	101	732	135	787	1880	83	83	591	220	198	458	443
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	101	732	135	787	1880	83	83	591	220	198	458	443
Peak Hour Factor	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	27	195	36	209	500	22	22	157	59	53	122	118
Total Analysis Volume [veh/h]	107	779	144	837	2000	88	88	629	234	211	487	471
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	8	7	4	4
Auxiliary Signal Groups			2,7						5,8			1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	7	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	30	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	1.0	1.0	1.0	1.0
Split [s]	11	33	33	37	59	0	11	38	38	12	39	39
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	22	22	0	20	0	0	0	0	0	28	28
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No	No	No	No	No
Maximum Recall	No	No	No	No	No		No	No	No	No	No	No
Pedestrian Recall	No	No	No	No	No		No	No	No	No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	7	40	52	32	65	65	7	24	35	8	26	61
g / C, Green / Cycle	0.06	0.33	0.43	0.26	0.54	0.54	0.06	0.20	0.30	0.07	0.21	0.51
(v / s)_i Volume / Saturation Flow Rate	0.03	0.15	0.09	0.24	0.38	0.39	0.03	0.18	0.15	0.06	0.14	0.30
s, saturation flow rate [veh/h]	3459	5094	1589	3459	3560	1830	3459	3560	1589	3459	3560	1589
c, Capacity [veh/h]	204	1694	688	911	1912	983	194	724	470	233	764	813
d1, Uniform Delay [s]	54.85	31.58	21.21	42.95	20.91	21.20	54.89	46.27	34.92	55.61	42.89	20.35
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.15	0.11	0.11	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	2.08	0.90	0.69	4.29	2.33	4.80	1.66	3.36	1.13	12.42	0.89	3.00
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.52	0.46	0.21	0.92	0.72	0.73	0.45	0.87	0.50	0.91	0.64	0.58
d, Delay for Lane Group [s/veh]	56.92	32.48	21.90	47.25	23.24	25.99	56.55	49.64	36.04	68.03	43.77	23.35
Lane Group LOS	E	C	C	D	C	C	E	D	D	E	D	C
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	1.63	6.08	2.67	12.51	14.56	16.15	1.34	9.38	5.80	3.57	6.67	9.65
50th-Percentile Queue Length [ft/ln]	40.81	151.89	66.69	312.75	363.89	403.74	33.40	234.57	145.05	89.32	166.65	241.21
95th-Percentile Queue Length [veh/ln]	2.94	10.12	4.80	18.31	20.81	22.74	2.40	14.41	9.75	6.43	10.90	14.74
95th-Percentile Queue Length [ft/ln]	73.46	252.95	120.04	457.77	520.31	568.50	60.12	360.15	243.81	160.78	272.51	368.57

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	56.92	32.48	21.90	47.25	24.11	25.99	56.55	49.64	36.04	68.03	43.77	23.35
Movement LOS	E	C	C	D	C	C	E	D	D	E	D	C
d_A, Approach Delay [s/veh]	33.54			30.79			46.93			39.92		
Approach LOS	C			C			D			D		
d_I, Intersection Delay [s/veh]	35.54											
Intersection LOS	D											
Intersection V/C	0.764											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	49.50	49.50	49.50
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.259	2.835	2.995
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	483	917	567	583
d_b, Bicycle Delay [s]	34.50	17.60	30.82	30.10
I_b,int, Bicycle LOS Score for Intersection	2.126	3.168	2.344	2.524
Bicycle LOS	B	C	B	B

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

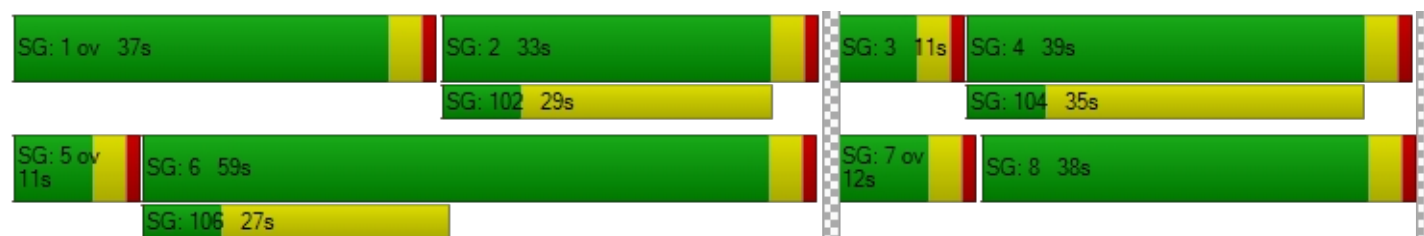

Intersection Level Of Service Report
Intersection 9: Winchester Rd at Ynez Rd

Control Type:	Signalized	Delay (sec / veh):	34.9
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.802

Intersection Setup

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Base Volume Input [veh/h]	274	1195	578	365	1791	76	108	402	450	263	180	139
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	274	1195	578	365	1791	76	108	402	450	263	180	139
Peak Hour Factor	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	74	322	156	98	482	20	29	108	121	71	48	37
Total Analysis Volume [veh/h]	295	1286	622	393	1928	82	116	433	484	283	194	150
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	0	7	4	4
Auxiliary Signal Groups			2,7									1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	0	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	0	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	1.0
Split [s]	16	43	43	20	47	0	11	36	0	16	41	41
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	30	30	0	23	0	0	0	0	0	30	30
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No		No	No	No
Maximum Recall	No	No	No	No	No		No	No		No	No	No
Pedestrian Recall	No	No	No	No	No		No	No		No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	C	R	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	12	48	64	15	51	51	7	24	24	24	12	29	48
g / C, Green / Cycle	0.10	0.42	0.56	0.13	0.45	0.45	0.06	0.21	0.21	0.21	0.10	0.25	0.42
(v / s)_i Volume / Saturation Flow Rate	0.09	0.19	0.39	0.11	0.29	0.29	0.03	0.18	0.18	0.18	0.05	0.05	0.09
s, saturation flow rate [veh/h]	3459	6792	1589	3459	5094	1820	3459	1870	1673	1589	5188	3560	1589
c, Capacity [veh/h]	355	2828	885	457	2271	811	211	388	347	329	547	896	665
d1, Uniform Delay [s]	50.69	24.19	18.60	48.94	24.93	24.95	52.54	44.06	44.06	44.06	48.74	34.10	21.50
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.19	0.19	0.19	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	5.05	0.53	4.66	4.89	1.47	4.07	2.24	9.74	10.78	11.28	0.76	0.12	0.17
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.83	0.45	0.70	0.86	0.65	0.65	0.55	0.86	0.86	0.86	0.52	0.22	0.23
d, Delay for Lane Group [s/veh]	55.74	24.72	23.26	53.83	26.41	29.02	54.78	53.80	54.84	55.35	49.50	34.22	21.67
Lane Group LOS	E	C	C	D	C	C	D	D	D	E	D	C	C
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	No	Yes	Yes	No	No
50th-Percentile Queue Length [veh/ln]	4.41	6.35	12.67	5.83	10.60	11.98	1.70	10.18	9.21	8.80	2.61	2.17	2.63
50th-Percentile Queue Length [ft/ln]	110.31	158.67	316.69	145.63	265.08	299.38	42.39	254.5	230.2	220.0	65.14	54.31	65.85
95th-Percentile Queue Length [veh/ln]	7.86	10.48	18.50	9.78	15.94	17.65	3.05	15.42	14.19	13.67	4.69	3.91	4.74
95th-Percentile Queue Length [ft/ln]	196.43	261.96	462.62	244.59	398.59	441.26	76.30	385.4	354.7	341.6	117.26	97.75	118.54

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	55.74	24.72	23.26	53.83	27.01	29.02	54.78	54.04	55.15	49.50	34.22	21.67
Movement LOS	E	C	C	D	C	C	D	D	E	D	C	C
d_A, Approach Delay [s/veh]	28.46			31.47			54.64			38.11		
Approach LOS	C			C			D			D		
d_I, Intersection Delay [s/veh]	34.90											
Intersection LOS	C											
Intersection V/C	0.802											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			47.03			47.03			47.03		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.364			2.829			2.990		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	678			748			557			643		
d_b, Bicycle Delay [s]	25.11			22.54			29.95			26.45		
I_b,int, Bicycle LOS Score for Intersection	2.468			2.551			2.412			2.077		
Bicycle LOS	B			B			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

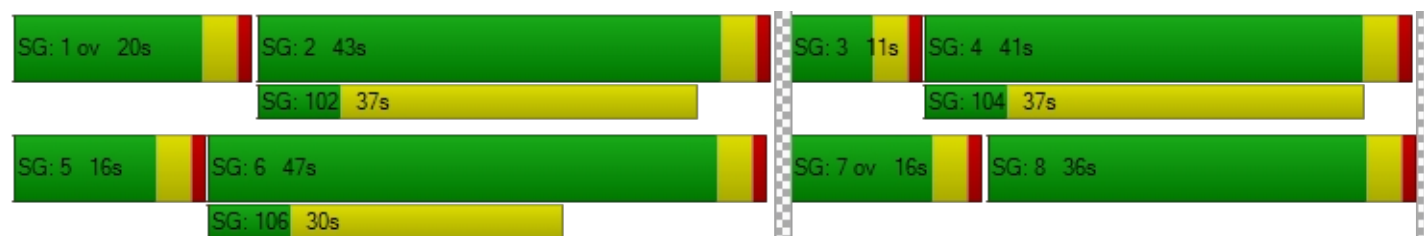

Intersection Level Of Service Report

Intersection 10: Sky Canyon Dr at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	12.5
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.123

Intersection Setup

Name	Sky Canyon Drive		Willows Avenue		Willows Avenue	
Approach	Southbound		Eastbound		Westbound	
Lane Configuration						
Turning Movement	Left	Right	Left	Thru	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00		30.00		30.00	
Grade [%]	0.00		0.00		0.00	
Curb Present	No		No		No	
Crosswalk	Yes		No		No	

Volumes

Name	Sky Canyon Drive		Willows Avenue		Willows Avenue	
Base Volume Input [veh/h]	15	58	17	151	274	20
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	15	58	17	151	274	20
Peak Hour Factor	0.9500	0.9500	0.9500	0.9500	0.9500	0.9500
Other Adjustment Factor	1.0000	1.0000	1.0000	0.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	4	15	4	0	72	5
Total Analysis Volume [veh/h]	16	61	18	0	288	21
Presence of On-Street Parking	No	No	No	No	No	No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing major street [ped/h]	0		0		0	
v_di, Inbound Pedestrian Volume crossing major street [ped/h]	0		0		0	
v_co, Outbound Pedestrian Volume crossing minor street [ped/h]	0		0		0	
v_ci, Inbound Pedestrian Volume crossing minor street [ped/h]	0		0		0	
v_ab, Corner Pedestrian Volume [ped/h]	0		0		0	
Bicycle Volume [bicycles/h]	0		0		0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Split	Split	Protected	Permissive	Permissive	Permissive
Signal Group	1	0	3	8	4	0
Auxiliary Signal Groups						
Lead / Lag	Lead	-	Lead	-	-	-
Minimum Green [s]	7	0	7	7	7	0
Maximum Green [s]	30	0	30	30	30	0
Amber [s]	3.0	0.0	3.0	3.0	3.0	0.0
All red [s]	1.0	0.0	1.0	1.0	1.0	0.0
Split [s]	32	0	12	58	46	0
Vehicle Extension [s]	3.0	0.0	3.0	3.0	3.0	0.0
Walk [s]	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	18	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk	No			No	No	
I1, Start-Up Lost Time [s]	2.0	0.0	2.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	0.0	2.0	2.0	2.0	0.0
Minimum Recall	No		No	No	No	
Maximum Recall	No		No	No	No	
Pedestrian Recall	No		No	No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	R	L	C	C	C
C, Cycle Length [s]	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	6	3	76	69	69
g / C, Green / Cycle	0.07	0.07	0.03	0.84	0.77	0.77
(v / s)_i Volume / Saturation Flow Rate	0.01	0.04	0.01	0.00	0.06	0.06
s, saturation flow rate [veh/h]	1781	1589	1781	1870	3560	1805
c, Capacity [veh/h]	120	107	52	1578	2741	1389
d1, Uniform Delay [s]	39.50	40.71	42.84	0.00	2.53	2.53
k, delay calibration	0.11	0.11	0.11	0.50	0.50	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	0.50	4.66	3.83	0.00	0.05	0.10
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.13	0.57	0.34	0.00	0.08	0.07
d, Delay for Lane Group [s/veh]	40.00	45.37	46.67	0.00	2.59	2.63
Lane Group LOS	D	D	D	A	A	A
Critical Lane Group	No	Yes	Yes	No	Yes	No
50th-Percentile Queue Length [veh/ln]	0.35	1.44	0.44	0.00	0.33	0.35
50th-Percentile Queue Length [ft/ln]	8.67	35.90	11.12	0.00	8.28	8.77
95th-Percentile Queue Length [veh/ln]	0.62	2.58	0.80	0.00	0.60	0.63
95th-Percentile Queue Length [ft/ln]	15.60	64.62	20.02	0.00	14.91	15.78

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	40.00	45.37	46.67	0.00	2.60	2.63
Movement LOS	D	D	D	A	A	A
d_A, Approach Delay [s/veh]	44.26		46.67		2.60	
Approach LOS	D		D		A	
d_I, Intersection Delay [s/veh]	12.50					
Intersection LOS	B					
Intersection V/C	0.123					

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	0.0
M_corner, Corner Circulation Area [ft²/ped]	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft²/ped]	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	34.67	0.00	0.00
I_p,int, Pedestrian LOS Score for Intersection	1.977	0.000	0.000
Crosswalk LOS	A	F	F
s_b, Saturation Flow Rate of the bicycle lane [bicycles/h]	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	622	1200	933
d_b, Bicycle Delay [s]	21.36	7.20	12.80
I_b,int, Bicycle LOS Score for Intersection	1.560	1.589	1.730
Bicycle LOS	A	A	A

Sequence

Ring 1	1	3	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	-	-	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	35.3
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.004

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	211	2862	50	4	2199	136	89	3	129	45	4	11
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	211	2862	50	4	2199	136	89	3	129	45	4	11
Peak Hour Factor	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	55	742	13	1	570	35	23	1	33	12	1	3
Total Analysis Volume [veh/h]	219	2969	52	4	2281	141	92	3	134	47	4	11
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	18	90	0	11	83	0	0	14	0	0	14	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	14	92	92	1	79	79	10	10	10	10
g / C, Green / Cycle	0.12	0.80	0.80	0.01	0.69	0.69	0.09	0.09	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.12	0.81	0.81	0.00	0.64	0.09	0.07	0.00	0.08	0.05
s, saturation flow rate [veh/h]	1781	1870	1859	1781	3560	1589	1398	1870	1589	1284
c, Capacity [veh/h]	217	1497	1488	14	2443	1091	93	163	139	167
d1, Uniform Delay [s]	50.47	11.47	11.47	56.72	15.75	6.21	52.14	47.96	52.30	50.98
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	30.25	25.49	27.17	10.99	8.13	0.24	39.60	0.04	27.99	1.37
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	1.01	1.01	1.02	0.29	0.93	0.13	0.98	0.02	0.97	0.37
d, Delay for Lane Group [s/veh]	80.73	36.96	38.63	67.72	23.88	6.45	91.74	48.01	80.28	52.34
Lane Group LOS	F	F	F	E	C	A	F	D	F	D
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	8.06	36.66	37.14	0.16	25.38	1.18	3.66	0.08	4.92	1.79
50th-Percentile Queue Length [ft/ln]	201.39	916.61	928.43	3.95	634.38	29.42	91.41	2.02	123.09	44.67
95th-Percentile Queue Length [veh/ln]	12.75	47.01	47.83	0.28	33.64	2.12	6.58	0.15	8.56	3.22
95th-Percentile Queue Length [ft/ln]	318.79	1175.18	1195.70	7.10	840.91	52.95	164.54	3.64	214.07	80.40

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	80.73	37.78	38.63	67.72	23.88	6.45	91.74	48.01	80.28	52.34	52.34	52.34
Movement LOS	F	D	D	E	C	A	F	D	F	D	D	D
d_A, Approach Delay [s/veh]	40.70			22.94			84.46			52.34		
Approach LOS	D			C			F			D		
d_I, Intersection Delay [s/veh]	35.27											
Intersection LOS	D											
Intersection V/C	1.004											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			0.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			47.03			47.03			0.00		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.489			2.287			0.000		
Crosswalk LOS	F			C			B			F		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	1496			1374			174			174		
d_b, Bicycle Delay [s]	3.66			5.63			47.93			47.93		
I_b,int, Bicycle LOS Score for Intersection	4.233			3.561			1.937			1.662		
Bicycle LOS	D			D			A			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd

Control Type:	Signalized	Delay (sec / veh):	52.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.106

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	387	3073	2	2	2349	110	104	0	263	0	7	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	387	3073	2	2	2349	110	104	0	263	0	7	8
Peak Hour Factor	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	99	785	1	1	600	28	27	0	67	0	2	2
Total Analysis Volume [veh/h]	395	3139	2	2	2399	112	106	0	269	0	7	8
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	29	98	0	11	80	0	0	11	11	0	11	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	25	100	100	0	76	76	7	36	7
g / C, Green / Cycle	0.21	0.84	0.84	0.00	0.63	0.63	0.06	0.30	0.06
(v / s)_i Volume / Saturation Flow Rate	0.22	0.84	0.84	0.00	0.67	0.68	0.06	0.17	0.01
s, saturation flow rate [veh/h]	1781	1870	1870	1781	1870	1841	1774	1589	1228
c, Capacity [veh/h]	371	1565	1565	8	1183	1165	164	478	102
d1, Uniform Delay [s]	47.48	9.78	9.78	59.54	22.03	22.03	56.51	35.32	53.63
k, delay calibration	0.37	0.50	0.50	0.11	0.50	0.50	0.11	0.21	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	58.13	23.56	23.62	17.66	43.98	49.98	4.20	2.05	0.65
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	1.06	1.00	1.00	0.27	1.06	1.08	0.65	0.56	0.15
d, Delay for Lane Group [s/veh]	105.60	33.34	33.40	77.20	66.01	72.01	60.71	37.38	54.29
Lane Group LOS	F	F	F	E	F	F	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	No	Yes	No
50th-Percentile Queue Length [veh/ln]	17.02	34.57	34.59	0.10	44.57	45.82	3.40	6.89	0.45
50th-Percentile Queue Length [ft/ln]	425.43	864.25	864.68	2.44	1114.25	1145.49	85.08	172.24	11.24
95th-Percentile Queue Length [veh/ln]	24.60	44.36	44.39	0.18	58.49	60.75	6.13	11.19	0.81
95th-Percentile Queue Length [ft/ln]	615.11	1109.03	1109.77	4.40	1462.37	1518.86	153.14	279.86	20.24

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	105.60	33.37	33.40	77.20	68.87	72.01	60.71	60.71	37.38	54.29	54.29	54.29
Movement LOS	F	F	C	E	F	E	E	E	D	D	D	D
d_A, Approach Delay [s/veh]	41.44			69.02			43.97			54.29		
Approach LOS	D			E			D			D		
d_I, Intersection Delay [s/veh]	52.38											
Intersection LOS	D											
Intersection V/C	1.106											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.589			2.243			1.738		
Crosswalk LOS	F			D			B			A		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	1567			1267			117			117		
d_b, Bicycle Delay [s]	2.82			8.07			53.20			53.20		
I_b,int, Bicycle LOS Score for Intersection	4.477			3.633			2.178			1.584		
Bicycle LOS	E			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 3: Winchester Rd at Robert Trent Jones Pkwy**

Control Type:	Signalized	Delay (sec / veh):	48.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.045

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	63	2960	112	171	2323	59	51	38	60	157	61	367
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	63	2960	112	171	2323	59	51	38	60	157	61	367
Peak Hour Factor	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	16	771	29	45	605	15	13	10	16	41	16	96
Total Analysis Volume [veh/h]	66	3083	117	178	2420	61	53	40	63	164	64	382
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	72	0	16	77	0	0	32	0	0	32	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	68	68	12	74	74	28	28	28	28	28	28
g / C, Green / Cycle	0.05	0.57	0.57	0.10	0.61	0.61	0.23	0.23	0.23	0.23	0.23	0.23
(v / s)_i Volume / Saturation Flow Rate	0.04	0.59	0.60	0.10	0.46	0.46	0.06	0.02	0.04	0.13	0.03	0.24
s, saturation flow rate [veh/h]	1781	3560	1836	1781	3560	1847	944	1870	1589	1291	1870	1589
c, Capacity [veh/h]	94	2014	1039	179	2185	1133	60	437	371	300	437	371
d1, Uniform Delay [s]	55.89	26.04	26.04	53.89	16.49	16.61	59.96	36.00	36.68	45.56	36.48	45.96
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.42
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	9.25	31.85	45.62	29.63	2.36	4.62	30.61	0.09	0.21	1.56	0.15	50.58
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.70	1.04	1.06	0.99	0.75	0.75	0.88	0.09	0.17	0.55	0.15	1.03
d, Delay for Lane Group [s/veh]	65.14	57.89	71.66	83.52	18.85	21.22	90.57	36.09	36.90	47.12	36.63	96.54
Lane Group LOS	E	F	F	F	B	C	F	D	D	D	D	F
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	2.21	35.75	40.83	6.83	15.68	17.22	2.12	0.94	1.51	4.69	1.52	16.19
50th-Percentile Queue Length [ft/ln]	55.19	893.72	1020.84	170.85	392.10	430.60	53.11	23.43	37.72	117.17	38.01	404.74
95th-Percentile Queue Length [veh/ln]	3.97	47.15	53.94	11.12	22.18	24.03	3.82	1.69	2.72	8.24	2.74	23.17
95th-Percentile Queue Length [ft/ln]	99.34	1178.77	1348.56	278.03	554.47	600.76	95.60	42.17	67.89	205.93	68.41	579.28

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	65.14	62.29	71.66	83.52	19.63	21.22	90.57	36.09	36.90	47.12	36.63	96.54
Movement LOS	E	F	E	F	B	C	F	D	D	D	D	F
d_A, Approach Delay [s/veh]	62.68			23.94			54.93			76.97		
Approach LOS	E			C			D			E		
d_I, Intersection Delay [s/veh]	48.41											
Intersection LOS	D											
Intersection V/C	1.045											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	49.50			0.00			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	3.665			0.000			2.381			2.498		
Crosswalk LOS	D			F			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	1133			1217			467			467		
d_b, Bicycle Delay [s]	11.27			9.20			35.27			35.27		
I_b,int, Bicycle LOS Score for Intersection	3.356			3.022			1.688			2.063		
Bicycle LOS	C			C			A			B		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 4: Winchester Rd at Murrieta Hot Springs Rd**

Control Type:	Signalized	Delay (sec / veh):	122.5
Analysis Method:	HCM 6th Edition	Level Of Service:	F
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.390

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	291	2039	224	218	1479	927	904	784	241	299	751	178
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	291	2039	224	218	1479	927	904	784	241	299	751	178
Peak Hour Factor	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	77	539	59	58	391	245	239	207	64	79	198	47
Total Analysis Volume [veh/h]	308	2155	237	230	1563	980	956	829	255	316	794	188
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	46	0	11	46	0	25	39	0	24	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	46	46	7	46	46	21	37	37	13	30	30
g / C, Green / Cycle	0.06	0.39	0.39	0.06	0.39	0.39	0.18	0.31	0.31	0.11	0.25	0.25
(v / s)_i Volume / Saturation Flow Rate	0.09	0.42	0.15	0.07	0.31	0.62	0.28	0.16	0.16	0.09	0.22	0.12
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	207	1960	612	207	1960	612	607	1583	494	386	879	392
d1, Uniform Delay [s]	56.47	36.95	26.72	56.47	32.80	36.95	49.53	34.09	33.99	52.17	43.85	38.64
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.12	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	226.07	53.30	1.85	65.15	3.48	278.68	261.13	0.27	0.84	4.32	3.80	0.91
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	1.49	1.10	0.39	1.11	0.80	1.60	1.58	0.52	0.52	0.82	0.90	0.48
d, Delay for Lane Group [s/veh]	282.55	90.25	28.57	121.62	36.28	315.64	310.65	34.36	34.83	56.50	47.65	39.55
Lane Group LOS	F	F	C	F	D	F	F	C	C	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	9.62	28.37	5.22	5.00	13.86	64.85	31.06	6.67	6.22	4.89	11.82	4.84
50th-Percentile Queue Length [ft/ln]	240.58	709.21	130.44	125.08	346.62	1621.15	776.47	166.81	155.47	122.13	295.62	120.99
95th-Percentile Queue Length [veh/ln]	16.31	39.63	8.96	8.94	19.97	100.45	48.28	10.91	10.31	8.51	17.46	8.45
95th-Percentile Queue Length [ft/ln]	407.68	990.73	224.10	223.49	499.28	2511.35	1206.91	272.72	257.72	212.75	436.61	211.19

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	282.55	90.25	28.57	121.62	36.28	315.64	310.65	34.36	34.83	56.50	47.65	39.55
Movement LOS	F	F	C	F	D	F	F	C	C	E	D	D
d_A, Approach Delay [s/veh]	106.78			142.09			163.90			48.63		
Approach LOS	F			F			F			D		
d_I, Intersection Delay [s/veh]	122.55											
Intersection LOS	F											
Intersection V/C	1.390											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.521			3.242			3.055		
Crosswalk LOS	F			D			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	700			700			583			567		
d_b, Bicycle Delay [s]	25.35			25.35			30.10			30.82		
I_b,int, Bicycle LOS Score for Intersection	3.045			3.085			2.682			2.630		
Bicycle LOS	C			C			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 5: Winchester Rd at Winchester Square Drive**

Control Type:	Signalized	Delay (sec / veh):	25.4
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.890

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	32	2489	303	58	1928	15	20	20	28	194	6	148
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	32	2489	303	58	1928	15	20	20	28	194	6	148
Peak Hour Factor	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	8	660	80	15	511	4	5	5	7	51	2	39
Total Analysis Volume [veh/h]	34	2639	321	62	2045	16	21	21	30	206	6	157
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	53	0	11	53	0	0	36	0	0	20	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	5	75	75	6	77	77	6	16	16
g / C, Green / Cycle	0.04	0.63	0.63	0.05	0.64	0.64	0.05	0.13	0.13
(v / s)_i Volume / Saturation Flow Rate	0.02	0.55	0.58	0.03	0.38	0.38	0.04	0.12	0.10
s, saturation flow rate [veh/h]	1781	3560	1772	1781	3560	1863	1719	1783	1589
c, Capacity [veh/h]	72	2232	1110	92	2272	1189	94	238	213
d1, Uniform Delay [s]	56.35	18.38	19.69	55.93	12.68	12.69	56.02	51.13	49.99
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.74	4.96	13.33	8.21	1.16	2.21	12.36	10.75	4.96
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.47	0.87	0.92	0.67	0.60	0.60	0.77	0.89	0.74
d, Delay for Lane Group [s/veh]	61.09	23.34	33.02	64.14	13.84	14.89	68.37	61.88	54.95
Lane Group LOS	E	C	C	E	B	B	E	E	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	1.10	21.86	26.98	2.06	10.35	11.19	2.47	6.97	4.82
50th-Percentile Queue Length [ft/ln]	27.61	546.59	674.62	51.42	258.68	279.64	61.87	174.23	120.58
95th-Percentile Queue Length [veh/ln]	1.99	29.53	35.50	3.70	15.62	16.67	4.45	11.30	8.43
95th-Percentile Queue Length [ft/ln]	49.69	738.30	887.60	92.56	390.56	416.76	111.36	282.46	210.63

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	61.09	25.90	33.02	64.14	14.20	14.89	68.37	68.37	68.37	61.88	61.88	54.95
Movement LOS	E	C	C	E	B	B	E	E	E	E	E	D
d_A, Approach Delay [s/veh]	27.07			15.66			68.37			58.93		
Approach LOS	C			B			E			E		
d_I, Intersection Delay [s/veh]	25.36											
Intersection LOS	C											
Intersection V/C	0.890											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	49.50			0.00			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	3.342			0.000			1.791			2.205		
Crosswalk LOS	C			F			A			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	817			817			533			267		
d_b, Bicycle Delay [s]	21.00			21.00			32.27			45.07		
I_b,int, Bicycle LOS Score for Intersection	3.206			2.727			1.678			2.168		
Bicycle LOS	C			B			A			B		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

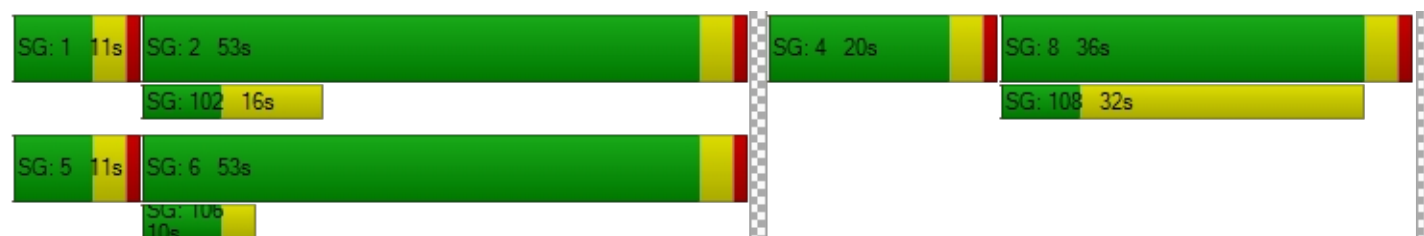

Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	45.9
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.966

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	100	2547	138	162	1733	221	260	56	66	221	55	74
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	100	2547	138	162	1733	221	260	56	66	221	55	74
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	26	650	35	41	442	56	66	14	17	56	14	19
Total Analysis Volume [veh/h]	102	2599	141	165	1768	226	265	57	67	226	56	76
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	12	57	0	15	60	0	0	12	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	8	61	61	11	64	64	20	20	12	12	12
g / C, Green / Cycle	0.07	0.51	0.51	0.09	0.53	0.53	0.17	0.17	0.10	0.10	0.10
(v / s)_i Volume / Saturation Flow Rate	0.06	0.51	0.52	0.09	0.37	0.38	0.15	0.07	0.08	0.08	0.05
s, saturation flow rate [veh/h]	1781	3560	1822	1781	3560	1764	1781	1707	1781	1815	1589
c, Capacity [veh/h]	120	1802	922	164	1891	937	299	286	179	182	160
d1, Uniform Delay [s]	55.39	29.57	29.64	54.49	21.04	21.21	48.84	44.83	52.71	52.71	51.02
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.15	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	15.06	20.64	35.09	33.73	2.21	4.57	11.77	1.03	7.24	7.07	2.19
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.85	1.00	1.02	1.00	0.70	0.71	0.89	0.43	0.78	0.78	0.48
d, Delay for Lane Group [s/veh]	70.45	50.21	64.73	88.22	23.25	25.78	60.62	45.86	59.95	59.78	53.21
Lane Group LOS	E	D	F	F	C	C	E	D	E	E	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	3.56	29.80	34.32	6.50	14.05	14.82	8.72	3.41	4.47	4.54	2.26
50th-Percentile Queue Length [ft/ln]	88.89	744.93	857.99	162.40	351.25	370.56	217.96	85.17	111.80	113.58	56.54
95th-Percentile Queue Length [veh/ln]	6.40	38.75	44.70	10.69	20.20	21.14	13.56	6.13	7.94	8.04	4.07
95th-Percentile Queue Length [ft/ln]	160.00	968.73	1117.39	267.34	504.94	528.41	339.02	153.31	198.50	200.98	101.77

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	70.45	54.68	64.73	88.22	23.88	25.78	60.62	45.86	45.86	59.89	59.78	53.21
Movement LOS	E	D	E	F	C	C	E	D	D	E	E	D
d_A, Approach Delay [s/veh]	55.75			28.99			55.91			58.45		
Approach LOS	E			C			E			E		
d_I, Intersection Delay [s/veh]	45.88											
Intersection LOS	D											
Intersection V/C	0.966											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.318			2.205			2.321		
Crosswalk LOS	F			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	883			933			133			533		
d_b, Bicycle Delay [s]	18.70			17.07			52.27			32.27		
I_b,int, Bicycle LOS Score for Intersection	3.123			2.747			2.201			2.150		
Bicycle LOS	C			B			B			B		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

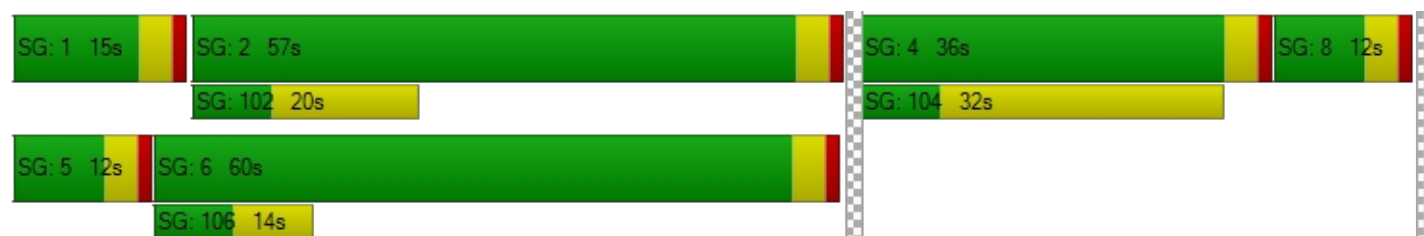

Intersection Level Of Service Report
Intersection 7: Winchester Rd at Nicolas Rd

Control Type:	Signalized	Delay (sec / veh):	36.2
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.948

Intersection Setup

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Base Volume Input [veh/h]	87	2376	416	218	1590	124	98	58	32	386	72	228
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	87	2376	416	218	1590	124	98	58	32	386	72	228
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	22	606	106	56	406	32	25	15	8	98	18	58
Total Analysis Volume [veh/h]	89	2424	424	222	1622	127	100	59	33	394	73	233
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	105
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	34	0	17	40	0	11	38	0	16	43	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	7	0
Pedestrian Clearance [s]	0	18	0	0	9	0	0	27	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	105	105	105	105	105	105	105	105	105	105	105	105
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	51	51	13	58	58	7	13	13	12	18	18
g / C, Green / Cycle	0.06	0.49	0.49	0.12	0.55	0.55	0.07	0.12	0.12	0.11	0.17	0.17
(v / s)_i Volume / Saturation Flow Rate	0.05	0.48	0.27	0.12	0.33	0.33	0.06	0.03	0.02	0.11	0.04	0.15
s, saturation flow rate [veh/h]	1781	5094	1589	1781	3560	1801	1781	1870	1589	3459	1870	1589
c, Capacity [veh/h]	114	2478	773	221	1946	985	120	229	194	397	317	270
d1, Uniform Delay [s]	48.45	26.45	18.91	46.03	16.03	16.07	48.43	41.81	41.35	46.48	37.71	42.46
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	10.79	13.67	2.79	28.81	1.35	2.69	13.63	0.59	0.41	19.22	0.37	8.09
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.78	0.98	0.55	1.00	0.60	0.60	0.83	0.26	0.17	0.99	0.23	0.86
d, Delay for Lane Group [s/veh]	59.24	40.12	21.70	74.83	17.39	18.75	62.06	42.40	41.76	65.69	38.08	50.56
Lane Group LOS	E	D	C	F	B	B	E	D	D	E	D	D
Critical Lane Group	No	Yes	No	Yes	No	No	Yes	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	2.63	21.76	7.58	7.50	9.24	9.77	3.03	1.42	0.79	6.16	1.65	6.44
50th-Percentile Queue Length [ft/ln]	65.80	543.91	189.59	187.61	230.96	244.34	75.85	35.58	19.71	154.09	41.37	160.94
95th-Percentile Queue Length [veh/ln]	4.74	29.41	12.10	12.01	14.22	14.90	5.46	2.56	1.42	10.24	2.98	10.60
95th-Percentile Queue Length [ft/ln]	118.44	735.15	302.50	300.29	355.58	372.51	136.52	64.04	35.48	255.88	74.46	264.96

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	59.24	40.12	21.70	74.83	17.78	18.75	62.06	42.40	41.76	65.69	38.08	50.56
Movement LOS	E	D	C	F	B	B	E	D	D	E	D	D
d_A, Approach Delay [s/veh]	38.04			24.27			52.53			57.78		
Approach LOS	D			C			D			E		
d_I, Intersection Delay [s/veh]	36.22											
Intersection LOS	D											
Intersection V/C	0.948											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	42.08			42.08			42.08			42.08		
I_p,int, Pedestrian LOS Score for Intersection	3.340			3.260			2.256			2.581		
Crosswalk LOS	C			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	571			686			648			743		
d_b, Bicycle Delay [s]	26.79			22.67			24.00			20.74		
I_b,int, Bicycle LOS Score for Intersection	3.175			2.644			1.876			2.715		
Bicycle LOS	C			B			A			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

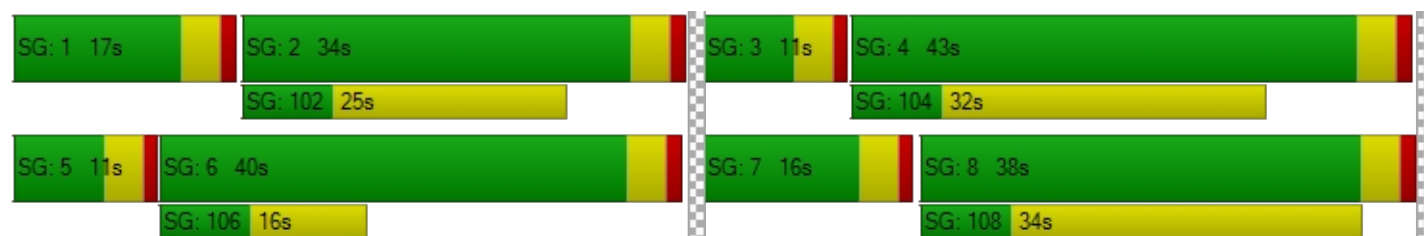

Intersection Level Of Service Report
Intersection 8: Winchester Rd at Margarita Rd

Control Type:	Signalized	Delay (sec / veh):	65.9
Analysis Method:	HCM 6th Edition	Level Of Service:	E
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.798

Intersection Setup

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Base Volume Input [veh/h]	375	1807	203	694	1324	140	168	523	154	283	868	921
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	375	1807	203	694	1324	140	168	523	154	283	868	921
Peak Hour Factor	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	96	460	52	177	337	36	43	133	39	72	221	235
Total Analysis Volume [veh/h]	382	1842	207	707	1350	143	171	533	157	288	885	939
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	8	7	4	4
Auxiliary Signal Groups			2,7						5,8			1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	7	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	30	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	1.0	1.0	1.0	1.0
Split [s]	19	41	41	29	51	0	11	19	19	31	39	39
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	22	22	0	20	0	0	0	0	0	28	28
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No	No	No	No	No
Maximum Recall	No	No	No	No	No		No	No	No	No	No	No
Pedestrian Recall	No	No	No	No	No		No	No	No	No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	15	39	56	25	49	49	7	27	46	13	33	62
g / C, Green / Cycle	0.13	0.32	0.46	0.21	0.41	0.41	0.06	0.23	0.39	0.11	0.28	0.52
(v / s)_i Volume / Saturation Flow Rate	0.11	0.36	0.13	0.20	0.28	0.28	0.05	0.15	0.10	0.08	0.25	0.59
s, saturation flow rate [veh/h]	3459	5094	1589	3459	3560	1780	3459	3560	1589	3459	3560	1589
c, Capacity [veh/h]	433	1646	739	721	1446	723	203	807	612	375	985	824
d1, Uniform Delay [s]	51.63	40.62	19.76	47.28	29.32	29.46	55.94	42.20	25.16	52.03	41.80	28.91
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.03	62.47	0.95	11.76	2.66	5.43	9.08	0.93	0.22	3.32	3.27	77.45
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.88	1.12	0.28	0.98	0.69	0.69	0.84	0.66	0.26	0.77	0.90	1.14
d, Delay for Lane Group [s/veh]	57.66	103.09	20.70	59.03	31.98	34.89	65.02	43.13	25.38	55.35	45.07	106.36
Lane Group LOS	E	F	C	E	C	C	E	D	C	E	D	F
Critical Lane Group	No	Yes	No	No	No	No	Yes	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	6.01	25.48	3.76	11.62	12.15	12.91	2.82	7.27	3.10	4.39	12.94	40.22
50th-Percentile Queue Length [ft/ln]	150.15	637.04	93.93	290.54	303.87	322.85	70.49	181.86	77.56	109.73	323.51	1005.45
95th-Percentile Queue Length [veh/ln]	10.03	36.27	6.76	17.21	17.87	18.81	5.08	11.70	5.58	7.82	18.84	55.96
95th-Percentile Queue Length [ft/ln]	250.64	906.86	169.08	430.32	446.81	470.19	126.89	292.44	139.60	195.62	470.99	1399.00

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	57.66	103.09	20.70	59.03	32.75	34.89	65.02	43.13	25.38	55.35	45.07	106.36
Movement LOS	E	F	C	E	C	C	E	D	C	E	D	F
d_A, Approach Delay [s/veh]	88.94			41.34			44.24			73.72		
Approach LOS	F			D			D			E		
d_I, Intersection Delay [s/veh]	65.88											
Intersection LOS	E											
Intersection V/C	0.798											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	49.50	49.50	49.50
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.367	2.924	3.103
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	617	783	250	583
d_b, Bicycle Delay [s]	28.70	22.20	45.94	30.10
I_b,int, Bicycle LOS Score for Intersection	2.897	2.770	2.270	3.302
Bicycle LOS	C	C	B	C

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

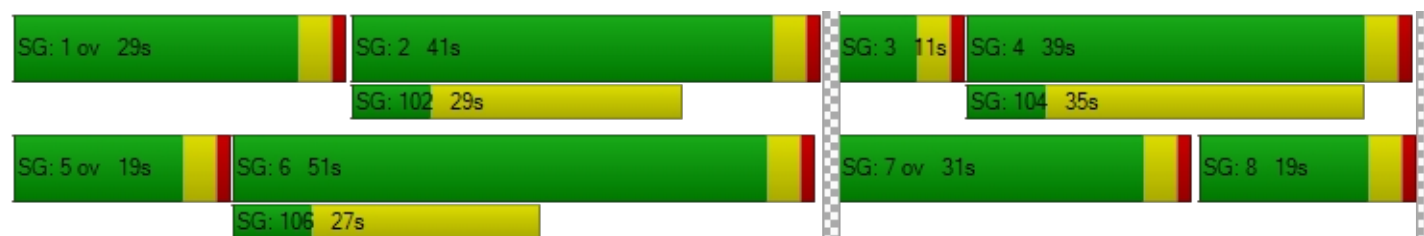

Intersection Level Of Service Report
Intersection 9: Winchester Rd at Ynez Rd

Control Type:	Signalized	Delay (sec / veh):	37.9
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.883

Intersection Setup

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Base Volume Input [veh/h]	476	1937	649	250	1525	185	201	404	321	831	913	514
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	476	1937	649	250	1525	185	201	404	321	831	913	514
Peak Hour Factor	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	121	491	165	63	387	47	51	102	81	211	231	130
Total Analysis Volume [veh/h]	483	1965	658	254	1547	188	204	410	326	843	926	521
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	110
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	0	7	4	4
Auxiliary Signal Groups			2,7									1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	0	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	0	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	1.0
Split [s]	22	44	44	13	35	0	12	28	0	25	41	41
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	30	30	0	23	0	0	0	0	0	30	30
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No		No	No	No
Maximum Recall	No	No	No	No	No		No	No		No	No	No
Pedestrian Recall	No	No	No	No	No		No	No		No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	C	R	L	C	R
C, Cycle Length [s]	110	110	110	110	110	110	110	110	110	110	110	110	110
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	17	45	70	9	36	36	8	19	19	19	21	32	45
g / C, Green / Cycle	0.16	0.40	0.63	0.08	0.33	0.33	0.07	0.18	0.18	0.18	0.19	0.29	0.41
(v / s)_i Volume / Saturation Flow Rate	0.14	0.29	0.41	0.07	0.25	0.25	0.06	0.14	0.14	0.14	0.16	0.26	0.33
s, saturation flow rate [veh/h]	3459	6792	1589	3459	5094	1739	3459	1870	1744	1589	5188	3560	1589
c, Capacity [veh/h]	546	2744	1004	288	1677	573	256	330	308	280	992	1045	656
d1, Uniform Delay [s]	45.42	27.54	12.77	49.99	33.22	33.22	50.19	43.53	43.53	43.53	43.04	37.17	28.25
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.99	1.63	3.34	8.76	3.49	9.68	5.56	4.53	4.84	5.29	2.15	2.75	9.57
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.88	0.72	0.66	0.88	0.77	0.77	0.80	0.80	0.80	0.80	0.85	0.89	0.79
d, Delay for Lane Group [s/veh]	50.41	29.18	16.11	58.75	36.72	42.90	55.75	48.06	48.37	48.82	45.19	39.92	37.81
Lane Group LOS	D	C	B	E	D	D	E	D	D	D	D	D	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	6.80	10.90	10.32	3.80	10.72	11.96	2.96	7.29	6.82	6.26	7.53	12.11	13.43
50th-Percentile Queue Length [ft/ln]	170.08	272.47	258.01	95.02	267.88	299.01	73.93	182.2	170.5	156.3	188.27	302.70	335.77
95th-Percentile Queue Length [veh/ln]	11.08	16.31	15.59	6.84	16.08	17.63	5.32	11.72	11.11	10.36	12.03	17.81	19.44
95th-Percentile Queue Length [ft/ln]	277.02	407.82	389.73	171.04	402.09	440.80	133.0	292.8	277.6	258.9	300.79	445.37	486.03

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	50.41	29.18	16.11	58.75	37.73	42.90	55.75	48.17	48.70	45.19	39.92	37.81
Movement LOS	D	C	B	E	D	D	E	D	D	D	D	D
d_A, Approach Delay [s/veh]	29.71			40.90			49.99			41.38		
Approach LOS	C			D			D			D		
d_I, Intersection Delay [s/veh]	37.88											
Intersection LOS	D											
Intersection V/C	0.883											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			44.55			44.55			44.55		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.432			2.957			3.175		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	727			564			436			673		
d_b, Bicycle Delay [s]	22.27			28.37			33.62			24.22		
I_b,int, Bicycle LOS Score for Intersection	2.841			2.380			2.335			3.449		
Bicycle LOS	C			B			B			C		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

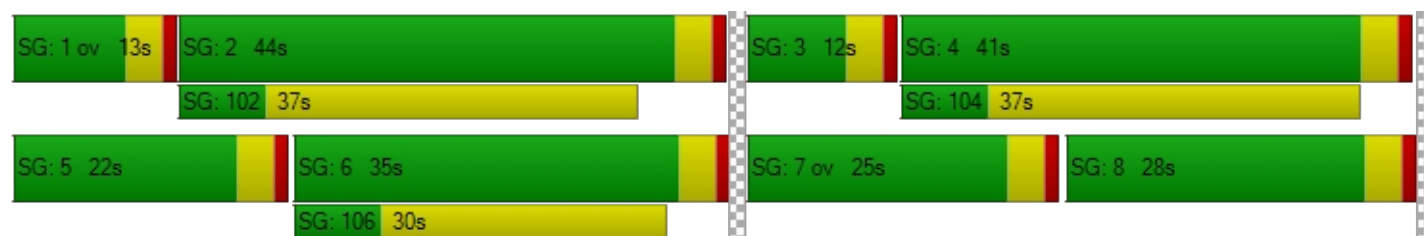

Intersection Level Of Service Report
Intersection 10: Sky Canyon Dr at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	21.9
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.185

Intersection Setup

Name	Sky Canyon Drive		Willows Avenue		Willows Avenue	
Approach	Southbound		Eastbound		Westbound	
Lane Configuration						
Turning Movement	Left	Right	Left	Thru	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00		30.00		30.00	
Grade [%]	0.00		0.00		0.00	
Curb Present	No		No		No	
Crosswalk	Yes		No		No	

Volumes

Name	Sky Canyon Drive		Willows Avenue		Willows Avenue	
Base Volume Input [veh/h]	49	131	33	266	219	45
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	49	131	33	266	219	45
Peak Hour Factor	0.9500	0.9500	0.9500	0.9500	0.9500	0.9500
Other Adjustment Factor	1.0000	1.0000	1.0000	0.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	13	34	9	0	58	12
Total Analysis Volume [veh/h]	52	138	35	0	231	47
Presence of On-Street Parking	No	No	No	No	No	No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing major street [ped/h]	0		0		0	
v_di, Inbound Pedestrian Volume crossing major street [ped/h]	0		0		0	
v_co, Outbound Pedestrian Volume crossing minor street [ped/h]	0		0		0	
v_ci, Inbound Pedestrian Volume crossing minor street [ped/h]	0		0		0	
v_ab, Corner Pedestrian Volume [ped/h]	0		0		0	
Bicycle Volume [bicycles/h]	0		0		0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Split	Split	Protected	Permissive	Permissive	Permissive
Signal Group	1	0	3	8	4	0
Auxiliary Signal Groups						
Lead / Lag	Lead	-	Lead	-	-	-
Minimum Green [s]	7	0	7	7	7	0
Maximum Green [s]	30	0	30	30	30	0
Amber [s]	3.0	0.0	3.0	3.0	3.0	0.0
All red [s]	1.0	0.0	1.0	1.0	1.0	0.0
Split [s]	50	0	11	40	29	0
Vehicle Extension [s]	3.0	0.0	3.0	3.0	3.0	0.0
Walk [s]	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	18	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk	No			No	No	
I1, Start-Up Lost Time [s]	2.0	0.0	2.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	0.0	2.0	2.0	2.0	0.0
Minimum Recall	No		No	No	No	
Maximum Recall	No		No	No	No	
Pedestrian Recall	No		No	No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	R	L	C	C	C
C, Cycle Length [s]	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	10	10	4	72	64	64
g / C, Green / Cycle	0.11	0.11	0.05	0.80	0.71	0.71
(v / s)_i Volume / Saturation Flow Rate	0.03	0.09	0.02	0.00	0.05	0.05
s, saturation flow rate [veh/h]	1781	1589	1781	1870	3560	1716
c, Capacity [veh/h]	199	178	83	1495	2523	1216
d1, Uniform Delay [s]	36.60	38.91	41.75	0.00	4.04	4.04
k, delay calibration	0.11	0.11	0.11	0.50	0.50	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	0.69	7.14	3.38	0.00	0.06	0.12
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.26	0.78	0.42	0.00	0.07	0.08
d, Delay for Lane Group [s/veh]	37.29	46.05	45.13	0.00	4.09	4.17
Lane Group LOS	D	D	D	A	A	A
Critical Lane Group	No	Yes	Yes	No	No	Yes
50th-Percentile Queue Length [veh/ln]	1.07	3.27	0.83	0.00	0.45	0.47
50th-Percentile Queue Length [ft/ln]	26.85	81.86	20.67	0.00	11.21	11.77
95th-Percentile Queue Length [veh/ln]	1.93	5.89	1.49	0.00	0.81	0.85
95th-Percentile Queue Length [ft/ln]	48.33	147.35	37.20	0.00	20.18	21.18

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	37.29	46.05	45.13	0.00	4.11	4.17
Movement LOS	D	D	D	A	A	A
d_A, Approach Delay [s/veh]	43.65		45.13		4.12	
Approach LOS	D		D		A	
d_I, Intersection Delay [s/veh]	21.91					
Intersection LOS	C					
Intersection V/C	0.185					

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	0.0
M_corner, Corner Circulation Area [ft²/ped]	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft²/ped]	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	34.67	0.00	0.00
I_p,int, Pedestrian LOS Score for Intersection	2.028	0.000	0.000
Crosswalk LOS	B	F	F
s_b, Saturation Flow Rate of the bicycle lane [bicycles/h]	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	1022	800	556
d_b, Bicycle Delay [s]	10.76	16.20	23.47
I_b,int, Bicycle LOS Score for Intersection	1.560	1.617	1.713
Bicycle LOS	A	A	A

Sequence

Ring 1	1	3	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	-	-	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

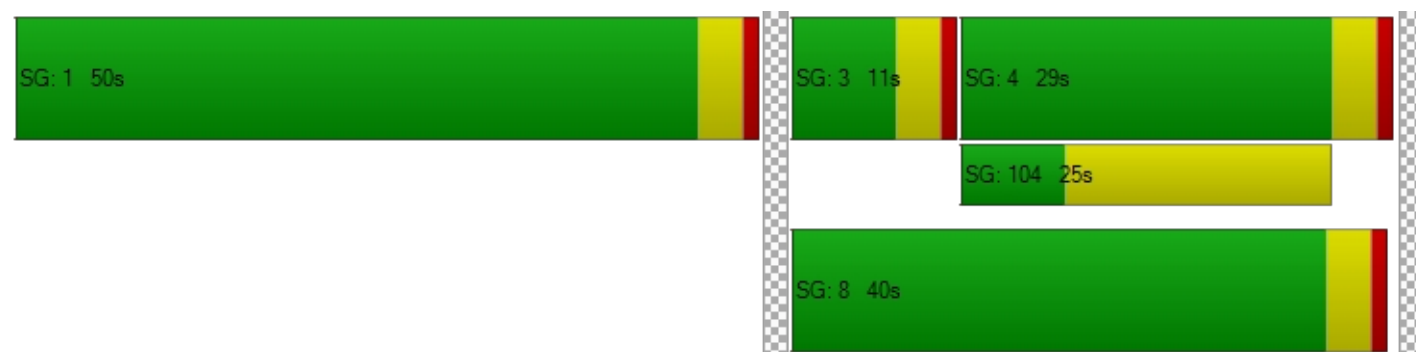

APPENDIX C-IV

**EXISTING WITH AMBIENT GROWTH WITH PROJECT
WITH CUMULATIVE PROJECTS WITH MITIGATION
TRAFFIC CONDITIONS**

Intersection Level Of Service Report**Intersection 4: Winchester Rd at Murrieta Hot Springs Rd**

Control Type:	Signalized	Delay (sec / veh):	38.6
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.914

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	189	941	139	240	1837	804	871	546	213	326	679	157
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	189	941	139	240	1837	804	871	546	213	326	679	157
Peak Hour Factor	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	49	246	36	63	481	210	228	143	56	85	178	41
Total Analysis Volume [veh/h]	198	985	146	251	1924	842	912	572	223	341	711	164
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap
Signal Group	5	2	0	1	6	6	3	8	0	7	4	4
Auxiliary Signal Groups						3,6						1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	7	7	7	0	7	7	7
Maximum Green [s]	30	30	0	30	30	30	30	30	0	30	30	30
Amber [s]	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0
All red [s]	1.0	1.0	0.0	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	1.0
Split [s]	11	40	0	15	44	44	27	19	0	46	38	38
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0
Walk [s]	0	7	0	0	7	7	0	0	0	0	7	7
Pedestrian Clearance [s]	0	27	0	0	29	29	0	0	0	0	27	27
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0
Minimum Recall	No	No		No	No	No	No	No		No	No	No
Maximum Recall	No	No		No	No	No	No	No		No	No	No
Pedestrian Recall	No	No		No	No	No	No	No		No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	7	49	49	11	53	80	23	29	29	15	21	36
g / C, Green / Cycle	0.06	0.41	0.41	0.09	0.44	0.67	0.19	0.24	0.24	0.12	0.17	0.30
(v / s)_i Volume / Saturation Flow Rate	0.06	0.19	0.09	0.07	0.38	0.53	0.18	0.11	0.14	0.10	0.14	0.10
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	5188	5094	1589	3459	5094	1589
c, Capacity [veh/h]	207	2090	652	321	2258	1063	996	1232	385	421	875	474
d1, Uniform Delay [s]	56.32	25.89	23.00	53.30	29.91	14.03	47.59	38.88	40.15	51.39	47.88	33.01
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	20.53	0.77	0.79	4.17	4.31	6.07	3.86	0.27	1.39	3.76	1.88	0.43
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.96	0.47	0.22	0.78	0.85	0.79	0.92	0.46	0.58	0.81	0.81	0.35
d, Delay for Lane Group [s/veh]	76.85	26.66	23.79	57.48	34.22	20.10	51.45	39.15	41.53	55.15	49.76	33.45
Lane Group LOS	E	C	C	E	C	C	D	D	D	E	D	C
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	3.58	6.97	2.84	3.89	17.03	16.37	9.23	4.84	5.96	5.22	6.97	3.82
50th-Percentile Queue Length [ft/ln]	89.55	174.19	70.93	97.31	425.69	409.14	230.85	121.04	148.94	130.43	174.21	95.42
95th-Percentile Queue Length [veh/ln]	6.45	11.30	5.11	7.01	23.80	23.00	14.22	8.45	9.96	8.96	11.30	6.87
95th-Percentile Queue Length [ft/ln]	161.19	282.41	127.68	175.17	594.88	575.01	355.44	211.26	249.02	224.07	282.45	171.75

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	76.85	26.66	23.79	57.48	34.22	20.10	51.45	39.15	41.53	55.15	49.76	33.45
Movement LOS	E	C	C	E	C	C	D	D	D	E	D	C
d_A, Approach Delay [s/veh]	33.82			32.22			46.03			49.07		
Approach LOS	C			C			D			D		
d_I, Intersection Delay [s/veh]	38.58											
Intersection LOS	D											
Intersection V/C	0.914											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.413			3.317			3.100		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	600			667			250			567		
d_b, Bicycle Delay [s]	29.40			26.67			45.94			30.82		
I_b,int, Bicycle LOS Score for Intersection	2.291			3.219			2.498			2.228		
Bicycle LOS	B			C			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 8: Winchester Rd at Margarita Rd

Control Type:	Signalized	Delay (sec / veh):	35.3
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.764

Intersection Setup

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Base Volume Input [veh/h]	101	732	135	787	1880	83	83	591	220	198	458	443
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	101	732	135	787	1880	83	83	591	220	198	458	443
Peak Hour Factor	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	27	195	36	209	500	22	22	157	59	53	122	118
Total Analysis Volume [veh/h]	107	779	144	837	2000	88	88	629	234	211	487	471
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	8	7	4	4
Auxiliary Signal Groups			2,7						5,8			1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	7	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	30	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	1.0	1.0	1.0	1.0
Split [s]	11	33	33	37	59	0	11	37	37	13	39	39
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	22	22	0	20	0	0	0	0	0	28	28
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No	No	No	No	No
Maximum Recall	No	No	No	No	No		No	No	No	No	No	No
Pedestrian Recall	No	No	No	No	No		No	No	No	No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	7	39	52	32	64	64	7	24	35	9	27	62
g / C, Green / Cycle	0.06	0.33	0.43	0.26	0.53	0.53	0.06	0.20	0.29	0.08	0.22	0.52
(v / s)_i Volume / Saturation Flow Rate	0.03	0.11	0.09	0.24	0.38	0.39	0.03	0.18	0.15	0.06	0.14	0.30
s, saturation flow rate [veh/h]	3459	6792	1589	3459	3560	1830	3459	3560	1589	3459	3560	1589
c, Capacity [veh/h]	204	2205	689	911	1884	969	194	722	469	262	792	826
d1, Uniform Delay [s]	54.85	30.93	21.18	42.95	21.62	21.92	54.89	46.33	34.96	54.63	42.04	19.70
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.15	0.11	0.11	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	2.08	0.45	0.69	4.29	2.49	5.13	1.66	3.43	1.13	5.81	0.78	2.85
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.52	0.35	0.21	0.92	0.73	0.74	0.45	0.87	0.50	0.81	0.61	0.57
d, Delay for Lane Group [s/veh]	56.92	31.37	21.86	47.25	24.11	27.04	56.55	49.75	36.09	60.43	42.82	22.56
Lane Group LOS	E	C	C	D	C	C	E	D	D	E	D	C
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	1.63	4.38	2.67	12.51	14.88	16.53	1.34	9.39	5.81	3.35	6.58	9.45
50th-Percentile Queue Length [ft/ln]	40.81	109.61	66.63	312.75	371.99	413.24	33.40	234.84	145.17	83.77	164.59	236.25
95th-Percentile Queue Length [veh/ln]	2.94	7.82	4.80	18.31	21.21	23.20	2.40	14.42	9.76	6.03	10.79	14.49
95th-Percentile Queue Length [ft/ln]	73.46	195.46	119.93	457.77	530.14	579.93	60.12	360.51	243.97	150.79	269.79	362.28

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	56.92	31.37	21.86	47.25	25.04	27.04	56.55	49.75	36.09	60.43	42.82	22.56
Movement LOS	E	C	C	D	C	C	E	D	D	E	D	C
d_A, Approach Delay [s/veh]	32.70			31.45			47.02			37.83		
Approach LOS	C			C			D			D		
d_I, Intersection Delay [s/veh]	35.33											
Intersection LOS	D											
Intersection V/C	0.764											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.325			2.835			2.995		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	483			917			550			583		
d_b, Bicycle Delay [s]	34.50			17.60			31.54			30.10		
I_b,int, Bicycle LOS Score for Intersection	1.984			3.168			2.344			2.524		
Bicycle LOS	A			C			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

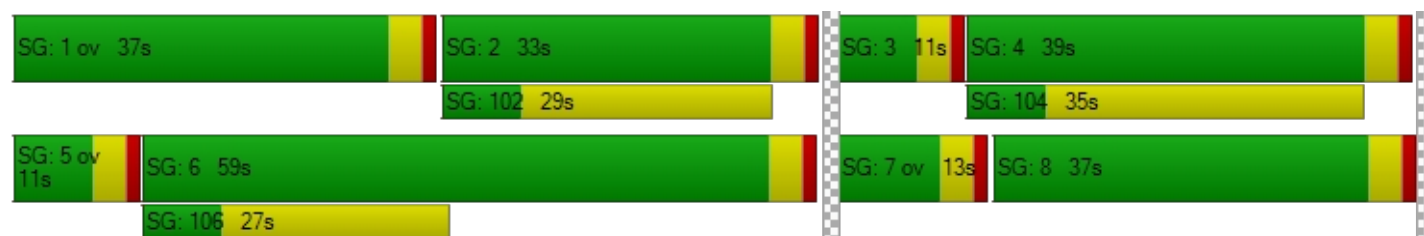

Intersection Level Of Service Report**Intersection 4: Winchester Rd at Murrieta Hot Springs Rd**

Control Type:	Signalized	Delay (sec / veh):	50.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.022

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	291	2039	224	218	1479	927	904	784	241	299	751	178
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	291	2039	224	218	1479	927	904	784	241	299	751	178
Peak Hour Factor	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	77	539	59	58	391	245	239	207	64	79	198	47
Total Analysis Volume [veh/h]	308	2155	237	230	1563	980	956	829	255	316	794	188
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap
Signal Group	5	2	0	1	6	6	3	8	0	7	4	4
Auxiliary Signal Groups						3,6						1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	7	7	7	0	7	7	7
Maximum Green [s]	30	30	0	30	30	30	30	30	0	30	30	30
Amber [s]	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0
All red [s]	1.0	1.0	0.0	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	1.0
Split [s]	14	43	0	11	40	40	23	44	0	17	38	38
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0
Walk [s]	0	7	0	0	7	7	0	0	0	0	7	7
Pedestrian Clearance [s]	0	27	0	0	29	29	0	0	0	0	27	27
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0
Minimum Recall	No	No		No	No	No	No	No		No	No	No
Maximum Recall	No	No		No	No	No	No	No		No	No	No
Pedestrian Recall	No	No		No	No	No	No	No		No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	10	51	51	7	48	71	19	29	29	12	22	33
g / C, Green / Cycle	0.09	0.44	0.44	0.06	0.42	0.62	0.17	0.25	0.25	0.11	0.19	0.29
(v / s)_i Volume / Saturation Flow Rate	0.09	0.42	0.15	0.07	0.31	0.62	0.18	0.16	0.16	0.09	0.16	0.12
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	5188	5094	1589	3459	5094	1589
c, Capacity [veh/h]	305	2250	702	216	2118	980	860	1264	394	377	975	458
d1, Uniform Delay [s]	52.50	31.12	21.10	53.99	28.35	22.10	48.04	38.87	38.77	50.32	44.61	33.07
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	26.38	11.38	1.30	48.04	2.35	28.87	54.52	0.58	1.78	5.03	1.72	0.59
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	1.01	0.96	0.34	1.07	0.74	1.00	1.11	0.66	0.65	0.84	0.81	0.41
d, Delay for Lane Group [s/veh]	78.88	42.49	22.40	102.03	30.70	50.96	102.55	39.46	40.55	55.36	46.33	33.66
Lane Group LOS	F	D	C	F	C	F	F	D	D	E	D	C
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	5.51	20.96	4.41	4.56	12.30	31.74	12.51	7.05	6.62	4.72	7.36	4.32
50th-Percentile Queue Length [ft/ln]	137.84	523.88	110.28	113.90	307.59	793.46	312.84	176.21	165.47	117.96	183.97	107.92
95th-Percentile Queue Length [veh/ln]	9.40	28.46	7.86	8.20	18.06	40.99	19.25	11.40	10.84	8.28	11.81	7.72
95th-Percentile Queue Length [ft/ln]	234.92	711.56	196.40	205.02	451.41	1024.87	481.28	285.06	270.95	207.02	295.19	193.11

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	78.88	42.49	22.40	102.03	30.70	50.96	102.55	39.46	40.55	55.36	46.33	33.66
Movement LOS	F	D	C	F	C	F	F	D	D	E	D	C
d_A, Approach Delay [s/veh]	44.88			43.78			69.16			46.69		
Approach LOS	D			D			E			D		
d_I, Intersection Delay [s/veh]	50.42											
Intersection LOS	D											
Intersection V/C	1.022											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	47.03	47.03	47.03
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.519	3.380	3.142
Crosswalk LOS	F	D	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	678	626	696	591
d_b, Bicycle Delay [s]	25.11	27.13	24.46	28.53
I_b,int, Bicycle LOS Score for Intersection	3.045	3.085	2.682	2.274
Bicycle LOS	C	C	B	B

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 8: Winchester Rd at Margarita Rd

Control Type:	Signalized	Delay (sec / veh):	51.6
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.677

Intersection Setup

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Base Volume Input [veh/h]	375	1807	203	694	1324	140	168	523	154	283	868	921
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	375	1807	203	694	1324	140	168	523	154	283	868	921
Peak Hour Factor	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	96	460	52	177	337	36	43	133	39	72	221	235
Total Analysis Volume [veh/h]	382	1842	207	707	1350	143	171	533	157	288	885	939
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	8	7	4	4
Auxiliary Signal Groups			2,7						5,8			1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	7	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	30	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	1.0	1.0	1.0	1.0
Split [s]	18	33	33	32	47	0	11	36	36	14	39	39
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	22	22	0	20	0	0	0	0	0	28	28
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No	No	No	No	No
Maximum Recall	No	No	No	No	No		No	No	No	No	No	No
Pedestrian Recall	No	No	No	No	No		No	No	No	No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	14	30	44	28	44	44	7	31	49	10	34	66
g / C, Green / Cycle	0.12	0.26	0.38	0.24	0.38	0.38	0.06	0.27	0.42	0.09	0.29	0.57
(v / s)_i Volume / Saturation Flow Rate	0.11	0.27	0.13	0.20	0.28	0.28	0.05	0.15	0.10	0.08	0.25	0.59
s, saturation flow rate [veh/h]	3459	6792	1589	3459	3560	1780	3459	3560	1589	3459	3560	1589
c, Capacity [veh/h]	421	1783	611	842	1368	684	211	953	675	301	1046	909
d1, Uniform Delay [s]	49.86	42.41	25.05	41.38	30.23	30.37	53.34	36.26	21.14	52.28	38.16	24.61
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	7.58	30.32	1.50	2.34	3.37	6.86	7.23	0.52	0.17	15.65	1.98	38.56
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.91	1.03	0.34	0.84	0.72	0.73	0.81	0.56	0.23	0.96	0.85	1.03
d, Delay for Lane Group [s/veh]	57.43	72.73	26.56	43.72	33.60	37.23	60.57	36.78	21.32	67.93	40.15	63.17
Lane Group LOS	E	F	C	D	C	D	E	D	C	E	D	F
Critical Lane Group	No	Yes	No	No	No	No	Yes	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	5.85	16.26	4.25	9.73	12.18	13.05	2.65	6.49	2.73	4.78	11.86	32.62
50th-Percentile Queue Length [ft/ln]	146.21	406.60	106.34	243.29	304.58	326.20	66.28	162.24	68.26	119.58	296.56	815.40
95th-Percentile Queue Length [veh/ln]	9.81	23.33	7.64	14.85	17.91	18.97	4.77	10.67	4.91	8.37	17.51	43.14
95th-Percentile Queue Length [ft/ln]	245.36	583.21	190.90	371.20	447.68	474.29	119.30	266.69	122.87	209.25	437.78	1078.55

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	57.43	72.73	26.56	43.72	34.57	37.23	60.57	36.78	21.32	67.93	40.15	63.17
Movement LOS	E	F	C	D	C	D	E	D	C	E	D	F
d_A, Approach Delay [s/veh]	66.39			37.68			38.68			54.17		
Approach LOS	E			D			D			D		
d_I, Intersection Delay [s/veh]	51.55											
Intersection LOS	D											
Intersection V/C	0.677											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	47.03	47.03	47.03
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.419	2.922	3.101
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	504	748	557	609
d_b, Bicycle Delay [s]	32.16	22.54	29.95	27.83
I_b,int, Bicycle LOS Score for Intersection	2.562	2.770	2.270	3.302
Bicycle LOS	B	C	B	C

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

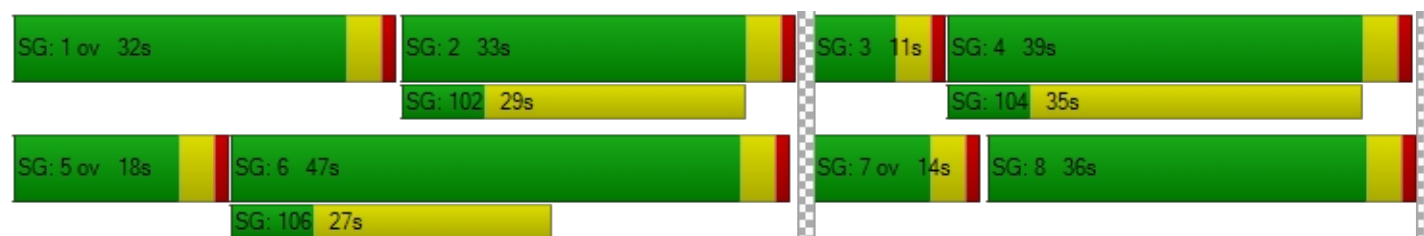

APPENDIX C-V

**CALTRANS EXISTING
WITH CUMULATIVE PROJECTS
TRAFFIC CONDITIONS**

Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	30.0
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.998

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	59	1687	40	8	2521	95	136	0	155	18	0	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	59	1687	40	8	2521	95	136	0	155	18	0	8
Peak Hour Factor	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	16	452	11	2	675	25	36	0	41	5	0	2
Total Analysis Volume [veh/h]	63	1806	43	9	2699	102	146	0	166	19	0	9
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	62	0	41	92	0	0	17	0	0	17	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	93	93	2	89	89	13	13	13	13
g / C, Green / Cycle	0.05	0.78	0.78	0.02	0.74	0.74	0.11	0.11	0.11	0.11
(v / s)_i Volume / Saturation Flow Rate	0.04	0.49	0.50	0.01	0.76	0.06	0.10	0.00	0.10	0.02
s, saturation flow rate [veh/h]	1781	1870	1855	1781	3560	1589	1406	1870	1589	1385
c, Capacity [veh/h]	92	1451	1439	28	2634	1176	160	203	173	201
d1, Uniform Delay [s]	55.94	5.97	6.01	58.43	15.61	4.34	53.57	0.00	53.21	48.84
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	8.72	2.15	2.22	6.62	24.16	0.15	17.42	0.00	23.70	0.31
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.69	0.64	0.64	0.32	1.02	0.09	0.91	0.00	0.96	0.14
d, Delay for Lane Group [s/veh]	64.66	8.12	8.23	65.04	39.77	4.49	70.99	0.00	76.91	49.16
Lane Group LOS	E	A	A	E	F	A	E	A	E	D
Critical Lane Group	Yes	No	No	No	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	2.10	9.24	9.32	0.32	38.08	0.68	5.17	0.00	6.11	0.79
50th-Percentile Queue Length [ft/ln]	52.47	230.98	232.89	8.04	951.88	16.93	129.18	0.00	152.74	19.73
95th-Percentile Queue Length [veh/ln]	3.78	14.22	14.32	0.58	49.32	1.22	8.89	0.00	10.16	1.42
95th-Percentile Queue Length [ft/ln]	94.45	355.61	358.03	14.47	1232.95	30.47	222.37	0.00	254.08	35.51

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	64.66	8.17	8.23	65.04	39.77	4.49	70.99	0.00	76.91	49.16	49.16	49.16
Movement LOS	E	A	A	E	F	A	E	A	E	D	D	D
d_A, Approach Delay [s/veh]	10.03			38.57			74.14			49.16		
Approach LOS	B			D			E			D		
d_I, Intersection Delay [s/veh]	30.04											
Intersection LOS	C											
Intersection V/C	0.998											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			0.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			0.00		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.450			2.261			0.000		
Crosswalk LOS	F			C			B			F		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	967			1467			217			217		
d_b, Bicycle Delay [s]	16.02			4.27			47.70			47.70		
I_b,int, Bicycle LOS Score for Intersection	3.137			3.878			2.074			1.606		
Bicycle LOS	C			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

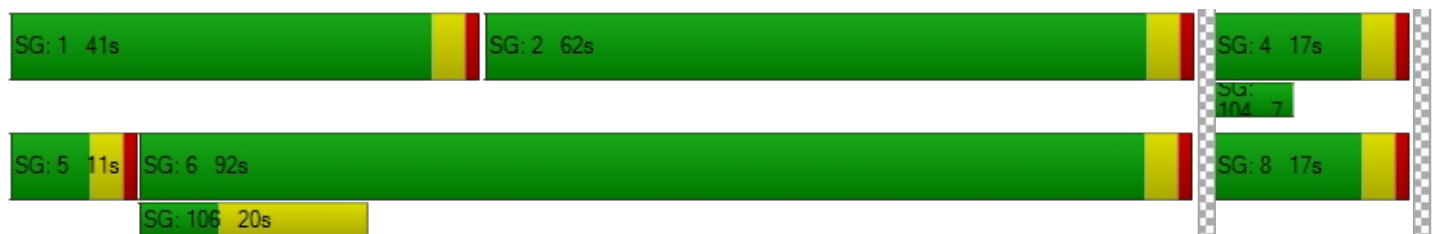

Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd

Control Type:	Signalized	Delay (sec / veh):	44.3
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.099

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	167	1676	1	12	2592	66	101	1	396	1	2	2
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	167	1676	1	12	2592	66	101	1	396	1	2	2
Peak Hour Factor	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	42	425	0	3	657	17	26	0	100	0	1	1
Total Analysis Volume [veh/h]	169	1700	1	12	2629	67	102	1	402	1	2	2
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	18	48	0	53	83	0	0	14	14	0	14	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	14	91	91	2	79	79	10	28	10
g / C, Green / Cycle	0.12	0.79	0.79	0.02	0.69	0.69	0.09	0.24	0.09
(v / s)_i Volume / Saturation Flow Rate	0.09	0.45	0.45	0.01	0.72	0.73	0.13	0.25	0.01
s, saturation flow rate [veh/h]	1781	1870	1870	1781	1870	1854	815	1589	941
c, Capacity [veh/h]	217	1474	1474	35	1283	1272	133	388	120
d1, Uniform Delay [s]	48.96	4.72	4.72	55.60	18.04	18.04	54.03	43.45	48.12
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.43	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	5.91	1.65	1.65	5.56	39.47	42.65	9.04	51.88	0.14
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.78	0.58	0.58	0.34	1.05	1.06	0.77	1.04	0.04
d, Delay for Lane Group [s/veh]	54.87	6.37	6.37	61.17	57.51	60.68	63.07	95.33	48.26
Lane Group LOS	D	A	A	E	F	F	E	F	D
Critical Lane Group	No	No	No	No	No	Yes	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	5.06	6.70	6.70	0.40	43.21	43.95	3.34	16.51	0.14
50th-Percentile Queue Length [ft/ln]	126.39	167.38	167.41	9.95	1080.14	1098.77	83.47	412.84	3.41
95th-Percentile Queue Length [veh/ln]	8.74	10.94	10.94	0.72	56.46	57.77	6.01	23.66	0.25
95th-Percentile Queue Length [ft/ln]	218.58	273.47	273.50	17.91	1411.45	1444.28	150.24	591.59	6.14

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	54.87	6.37	6.37	61.17	59.05	60.68	63.07	63.07	95.33	48.26	48.26	48.26
Movement LOS	D	A	A	E	F	E	E	E	F	D	D	D
d_A, Approach Delay [s/veh]	10.75			59.10			88.75			48.26		
Approach LOS	B			E			F			D		
d_I, Intersection Delay [s/veh]	44.26											
Intersection LOS	D											
Intersection V/C	1.099											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			47.03			47.03			47.03		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.337			2.193			1.736		
Crosswalk LOS	F			C			B			A		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	765			1374			174			174		
d_b, Bicycle Delay [s]	21.92			5.63			47.93			47.93		
I_b,int, Bicycle LOS Score for Intersection	3.102			3.794			2.393			1.568		
Bicycle LOS	C			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 3: Winchester Rd at Robert Trent Jones Pkwy**

Control Type:	Signalized	Delay (sec / veh):	14.6
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.694

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	33	1671	146	289	2684	40	58	33	65	23	7	115
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	33	1671	146	289	2684	40	58	33	65	23	7	115
Peak Hour Factor	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	8	422	37	73	677	10	15	8	16	6	2	29
Total Analysis Volume [veh/h]	33	1686	147	292	2708	40	59	33	66	23	7	116
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	38	0	40	67	0	0	12	0	0	12	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	4	53	53	17	66	66	8	8	8	8	8	8
g / C, Green / Cycle	0.04	0.59	0.59	0.19	0.73	0.73	0.09	0.09	0.09	0.09	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.02	0.34	0.34	0.16	0.51	0.51	0.05	0.02	0.04	0.02	0.00	0.07
s, saturation flow rate [veh/h]	1781	3560	1794	1781	3560	1856	1268	1870	1589	1296	1870	1589
c, Capacity [veh/h]	80	2094	1055	336	2606	1359	82	168	143	120	168	143
d1, Uniform Delay [s]	41.85	11.61	11.63	35.44	6.54	6.60	45.02	37.97	38.92	43.03	37.44	40.24
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	3.37	1.19	2.36	6.84	1.53	2.97	10.96	0.57	2.32	0.76	0.10	10.51
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.41	0.58	0.58	0.87	0.69	0.70	0.72	0.20	0.46	0.19	0.04	0.81
d, Delay for Lane Group [s/veh]	45.22	12.79	13.98	42.28	8.07	9.57	55.98	38.54	41.24	43.79	37.54	50.75
Lane Group LOS	D	B	B	D	A	A	E	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	0.78	7.19	7.62	6.72	7.47	8.44	1.59	0.69	1.46	0.53	0.14	2.91
50th-Percentile Queue Length [ft/ln]	19.54	179.77	190.60	167.95	186.70	211.03	39.86	17.36	36.54	13.14	3.61	72.64
95th-Percentile Queue Length [veh/ln]	1.41	11.59	12.15	10.97	11.95	13.21	2.87	1.25	2.63	0.95	0.26	5.23
95th-Percentile Queue Length [ft/ln]	35.17	289.71	303.81	274.22	298.74	330.16	71.75	31.25	65.77	23.65	6.50	130.75

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	45.22	13.12	13.98	42.28	8.57	9.57	55.98	38.54	41.24	43.79	37.54	50.75
Movement LOS	D	B	B	D	A	A	E	D	D	D	D	D
d_A, Approach Delay [s/veh]	13.76			11.82			46.18			49.02		
Approach LOS	B			B			D			D		
d_I, Intersection Delay [s/veh]	14.60											
Intersection LOS	B											
Intersection V/C	0.694											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	34.67			0.00			34.67			34.67		
I_p,int, Pedestrian LOS Score for Intersection	3.276			0.000			2.346			2.420		
Crosswalk LOS	C			F			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	756			1400			178			178		
d_b, Bicycle Delay [s]	17.42			4.05			37.36			37.36		
I_b,int, Bicycle LOS Score for Intersection	2.586			3.232			1.690			1.680		
Bicycle LOS	B			C			A			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

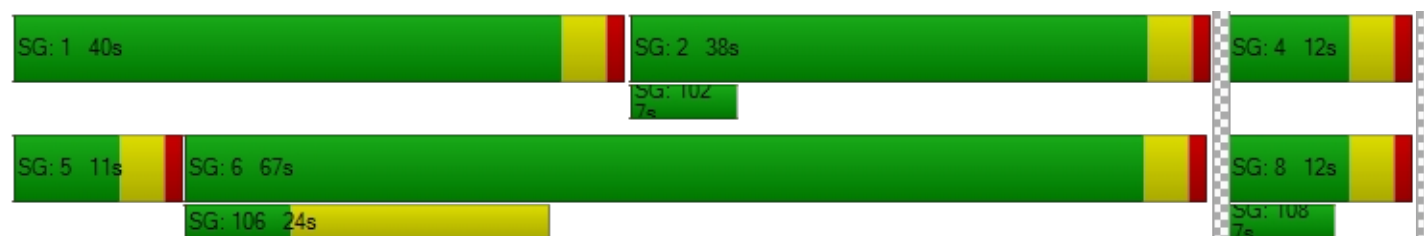

Intersection Level Of Service Report**Intersection 4: Winchester Rd at Murrieta Hot Springs Rd**

Control Type:	Signalized	Delay (sec / veh):	77.8
Analysis Method:	HCM 6th Edition	Level Of Service:	E
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.172

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	170	900	134	232	1755	780	852	526	191	314	654	153
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	170	900	134	232	1755	780	852	526	191	314	654	153
Peak Hour Factor	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	45	236	35	61	459	204	223	138	50	82	171	40
Total Analysis Volume [veh/h]	178	942	140	243	1838	817	892	551	200	329	685	160
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	39	0	15	43	0	28	14	0	52	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	43	43	10	47	47	24	36	36	14	26	26
g / C, Green / Cycle	0.06	0.36	0.36	0.09	0.39	0.39	0.20	0.30	0.30	0.12	0.22	0.22
(v / s)_i Volume / Saturation Flow Rate	0.05	0.18	0.09	0.07	0.36	0.51	0.26	0.11	0.13	0.10	0.19	0.10
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	207	1841	574	302	1981	618	692	1528	477	409	776	347
d1, Uniform Delay [s]	55.98	30.05	26.86	53.82	35.10	36.71	48.04	33.00	33.67	51.61	45.48	40.84
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	10.05	1.02	1.01	5.04	9.13	155.94	132.23	0.14	0.59	3.76	3.53	0.96
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.86	0.51	0.24	0.81	0.93	1.32	1.29	0.36	0.42	0.80	0.88	0.46
d, Delay for Lane Group [s/veh]	66.03	31.07	27.87	58.86	44.23	192.65	180.27	33.15	34.26	55.37	49.01	41.80
Lane Group LOS	E	C	C	E	D	F	F	C	C	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	2.96	7.26	2.98	3.81	18.42	44.44	23.01	4.23	4.76	5.04	10.22	4.22
50th-Percentile Queue Length [ft/ln]	74.06	181.44	74.59	95.37	460.41	1110.93	575.33	105.85	118.97	125.94	255.52	105.51
95th-Percentile Queue Length [veh/ln]	5.33	11.68	5.37	6.87	25.45	65.81	34.89	7.61	8.34	8.72	15.46	7.59
95th-Percentile Queue Length [ft/ln]	133.30	291.90	134.26	171.67	636.36	1645.31	872.20	190.21	208.41	217.96	386.59	189.74

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	66.03	31.07	27.87	58.86	44.23	192.65	180.27	33.15	34.26	55.37	49.01	41.80
Movement LOS	E	C	C	E	D	F	F	C	C	E	D	D
d_A, Approach Delay [s/veh]	35.66			87.30			113.16			49.81		
Approach LOS	D			F			F			D		
d_I, Intersection Delay [s/veh]	77.75											
Intersection LOS	E											
Intersection V/C	1.172											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.393			3.144			2.996		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	583			650			167			567		
d_b, Bicycle Delay [s]	30.10			27.34			50.42			30.82		
I_b,int, Bicycle LOS Score for Intersection	2.253			3.154			2.463			2.528		
Bicycle LOS	B			C			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

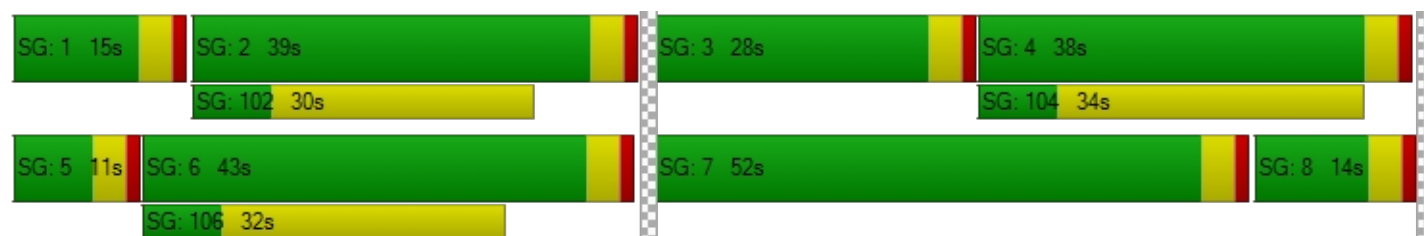

Intersection Level Of Service Report**Intersection 5: Winchester Rd at Winchester Square Drive**

Control Type:	Signalized	Delay (sec / veh):	10.9
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.633

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	6	1360	129	47	2239	3	3	5	5	104	2	57
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	6	1360	129	47	2239	3	3	5	5	104	2	57
Peak Hour Factor	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	2	367	35	13	604	1	1	1	1	28	1	15
Total Analysis Volume [veh/h]	6	1467	139	51	2415	3	3	5	5	112	2	61
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	20	0	11	20	0	0	36	0	0	23	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	1	59	59	5	63	63	2	8	8
g / C, Green / Cycle	0.01	0.66	0.66	0.06	0.70	0.70	0.02	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.00	0.30	0.30	0.03	0.45	0.45	0.01	0.06	0.04
s, saturation flow rate [veh/h]	1781	3560	1788	1781	3560	1869	1732	1782	1589
c, Capacity [veh/h]	22	2330	1170	102	2490	1307	40	157	140
d1, Uniform Delay [s]	44.14	7.70	7.70	41.24	7.34	7.34	43.36	40.08	39.01
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.68	0.65	1.30	3.73	1.26	2.38	4.65	6.31	2.14
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.28	0.46	0.46	0.50	0.64	0.64	0.33	0.73	0.44
d, Delay for Lane Group [s/veh]	50.82	8.35	9.00	44.97	8.60	9.72	48.02	46.39	41.15
Lane Group LOS	D	A	A	D	A	A	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	0.17	4.58	4.82	1.19	7.00	7.76	0.33	2.71	1.35
50th-Percentile Queue Length [ft/ln]	4.30	114.56	120.40	29.84	174.95	193.94	8.35	67.63	33.72
95th-Percentile Queue Length [veh/ln]	0.31	8.09	8.41	2.15	11.34	12.33	0.60	4.87	2.43
95th-Percentile Queue Length [ft/ln]	7.74	202.33	210.37	53.72	283.41	308.14	15.04	121.73	60.70

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	50.82	8.53	9.00	44.97	8.98	9.72	48.02	48.02	48.02	46.39	46.39	41.15
Movement LOS	D	A	A	D	A	A	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	8.73			9.73			48.02			44.56		
Approach LOS	A			A			D			D		
d_I, Intersection Delay [s/veh]	10.90											
Intersection LOS	B											
Intersection V/C	0.633											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	34.67			0.00			34.67			34.67		
I_p,int, Pedestrian LOS Score for Intersection	3.171			0.000			1.726			2.060		
Crosswalk LOS	C			F			A			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	356			356			711			422		
d_b, Bicycle Delay [s]	30.42			30.42			18.69			28.01		
I_b,int, Bicycle LOS Score for Intersection	2.446			2.918			1.581			1.848		
Bicycle LOS	B			C			A			A		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

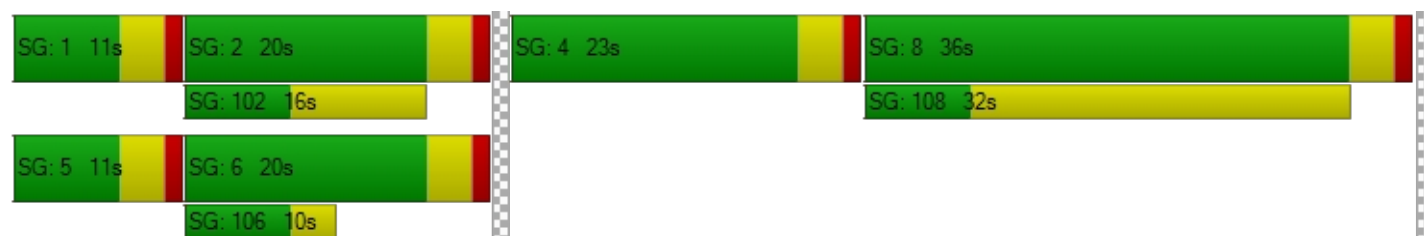

Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	23.4
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.798

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	77	1243	83	45	2017	215	156	23	56	149	43	75
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	77	1243	83	45	2017	215	156	23	56	149	43	75
Peak Hour Factor	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	21	345	23	12	560	60	43	6	16	41	12	21
Total Analysis Volume [veh/h]	85	1380	92	50	2239	239	173	26	62	165	48	83
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	105
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	27	0	30	46	0	0	12	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	105	105	105	105	105	105	105	105	105	105	105
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	62	62	5	61	61	13	13	9	9	9
g / C, Green / Cycle	0.06	0.59	0.59	0.05	0.58	0.58	0.12	0.12	0.08	0.08	0.08
(v / s)_i Volume / Saturation Flow Rate	0.05	0.27	0.27	0.03	0.46	0.47	0.10	0.05	0.06	0.06	0.05
s, saturation flow rate [veh/h]	1781	3560	1811	1781	3560	1781	1781	1663	1781	1820	1589
c, Capacity [veh/h]	110	2107	1072	93	2072	1036	213	199	149	153	133
d1, Uniform Delay [s]	48.56	12.06	12.06	48.58	17.00	17.39	45.10	42.99	46.89	46.88	46.54
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	10.67	0.73	1.44	4.76	3.17	6.89	7.20	1.53	5.97	5.79	4.67
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.77	0.46	0.46	0.54	0.79	0.81	0.81	0.44	0.71	0.70	0.62
d, Delay for Lane Group [s/veh]	59.24	12.80	13.50	53.34	20.17	24.28	52.30	44.53	52.86	52.67	51.21
Lane Group LOS	E	B	B	D	C	C	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	2.51	6.26	6.58	1.40	14.98	16.76	4.80	2.20	2.92	2.97	2.26
50th-Percentile Queue Length [ft/ln]	62.86	156.48	164.44	34.96	374.56	418.99	119.94	55.11	73.12	74.28	56.57
95th-Percentile Queue Length [veh/ln]	4.53	10.36	10.78	2.52	21.33	23.47	8.39	3.97	5.26	5.35	4.07
95th-Percentile Queue Length [ft/ln]	113.16	259.05	269.59	62.92	533.26	586.84	209.75	99.20	131.61	133.71	101.82

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	59.24	13.00	13.50	53.34	21.27	24.28	52.30	44.53	44.53	52.79	52.67	51.21
Movement LOS	E	B	B	D	C	C	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	15.56			22.19			49.68			52.33		
Approach LOS	B			C			D			D		
d_I, Intersection Delay [s/veh]	23.43											
Intersection LOS	C											
Intersection V/C	0.798											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			42.08			42.08			42.08		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.181			2.153			2.251		
Crosswalk LOS	F			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	438			800			152			610		
d_b, Bicycle Delay [s]	32.02			18.90			44.80			25.38		
I_b,int, Bicycle LOS Score for Intersection	2.416			2.950			1.990			2.048		
Bicycle LOS	B			C			A			B		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	28.4
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.965

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	203	2750	48	4	2119	132	87	3	124	43	4	11
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	203	2750	48	4	2119	132	87	3	124	43	4	11
Peak Hour Factor	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	53	713	12	1	550	34	23	1	32	11	1	3
Total Analysis Volume [veh/h]	211	2853	50	4	2198	137	90	3	129	45	4	11
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	18	90	0	11	83	0	0	14	0	0	14	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	14	92	92	1	79	79	10	10	10	10
g / C, Green / Cycle	0.12	0.80	0.80	0.01	0.69	0.69	0.09	0.09	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.12	0.78	0.78	0.00	0.62	0.09	0.06	0.00	0.08	0.05
s, saturation flow rate [veh/h]	1781	1870	1859	1781	3560	1589	1398	1870	1589	1290
c, Capacity [veh/h]	217	1497	1488	14	2443	1091	96	163	139	167
d1, Uniform Delay [s]	50.27	10.22	10.44	56.72	14.78	6.19	52.05	47.96	52.12	50.86
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	22.18	17.07	18.19	10.99	5.84	0.24	29.91	0.04	21.87	1.29
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.97	0.97	0.98	0.29	0.90	0.13	0.94	0.02	0.93	0.36
d, Delay for Lane Group [s/veh]	72.45	27.29	28.63	67.72	20.63	6.43	81.96	48.01	73.98	52.15
Lane Group LOS	E	C	C	E	C	A	F	D	E	D
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	7.36	29.63	30.53	0.16	22.45	1.14	3.36	0.08	4.53	1.72
50th-Percentile Queue Length [ft/ln]	184.05	740.64	763.23	3.95	561.16	28.50	84.07	2.02	113.29	43.12
95th-Percentile Queue Length [veh/ln]	11.81	38.55	39.59	0.28	30.22	2.05	6.05	0.15	8.02	3.10
95th-Percentile Queue Length [ft/ln]	295.29	963.80	989.77	7.10	755.40	51.30	151.33	3.64	200.57	77.61

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	72.45	27.95	28.63	67.72	20.63	6.43	81.96	48.01	73.98	52.15	52.15	52.15
Movement LOS	E	C	C	E	C	A	F	D	E	D	D	D
d_A, Approach Delay [s/veh]	30.97			19.87			76.87			52.15		
Approach LOS	C			B			E			D		
d_I, Intersection Delay [s/veh]	28.44											
Intersection LOS	C											
Intersection V/C	0.965											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			0.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			47.03			47.03			0.00		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.453			2.283			0.000		
Crosswalk LOS	F			C			B			F		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	1496			1374			174			174		
d_b, Bicycle Delay [s]	3.66			5.63			47.93			47.93		
I_b,int, Bicycle LOS Score for Intersection	4.129			3.489			1.926			1.659		
Bicycle LOS	D			C			A			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd

Control Type:	Signalized	Delay (sec / veh):	42.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.071

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	372	2953	2	2	2267	107	101	0	253	0	7	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	372	2953	2	2	2267	107	101	0	253	0	7	8
Peak Hour Factor	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	95	754	1	1	579	27	26	0	65	0	2	2
Total Analysis Volume [veh/h]	380	3016	2	2	2316	109	103	0	258	0	7	8
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	29	98	0	11	80	0	0	11	11	0	11	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	25	100	100	0	76	76	7	36	7
g / C, Green / Cycle	0.21	0.84	0.84	0.00	0.63	0.63	0.06	0.30	0.06
(v / s)_i Volume / Saturation Flow Rate	0.21	0.81	0.81	0.00	0.65	0.66	0.06	0.16	0.01
s, saturation flow rate [veh/h]	1781	1870	1870	1781	1870	1841	1774	1589	1228
c, Capacity [veh/h]	371	1565	1565	8	1183	1165	164	478	102
d1, Uniform Delay [s]	47.48	8.25	8.26	59.54	22.03	22.03	56.41	35.03	53.63
k, delay calibration	0.34	0.50	0.50	0.11	0.50	0.50	0.11	0.19	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	44.80	15.67	15.71	17.66	32.62	37.65	3.89	1.70	0.65
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	1.02	0.96	0.96	0.27	1.02	1.04	0.63	0.54	0.15
d, Delay for Lane Group [s/veh]	92.27	23.93	23.98	77.20	54.64	59.68	60.30	36.73	54.29
Lane Group LOS	F	C	C	E	F	F	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	No	Yes	No
50th-Percentile Queue Length [veh/ln]	15.64	26.62	26.65	0.10	40.83	41.83	3.29	6.52	0.45
50th-Percentile Queue Length [ft/ln]	391.04	665.41	666.27	2.44	1020.86	1045.64	82.32	162.98	11.24
95th-Percentile Queue Length [veh/ln]	22.42	35.08	35.12	0.18	52.46	54.34	5.93	10.71	0.81
95th-Percentile Queue Length [ft/ln]	560.43	876.93	877.93	4.40	1311.43	1358.57	148.17	267.67	20.24

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	92.27	23.95	23.98	77.20	57.04	59.68	60.30	60.30	36.73	54.29	54.29	54.29
Movement LOS	F	C	C	E	E	E	E	E	D	D	D	D
d_A, Approach Delay [s/veh]	31.59			57.18			43.45			54.29		
Approach LOS	C			E			D			D		
d_I, Intersection Delay [s/veh]	42.35											
Intersection LOS	D											
Intersection V/C	1.071											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.543			2.233			1.738		
Crosswalk LOS	F			D			B			A		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	1567			1267			117			117		
d_b, Bicycle Delay [s]	2.82			8.07			53.20			53.20		
I_b,int, Bicycle LOS Score for Intersection	4.363			3.562			2.155			1.584		
Bicycle LOS	E			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 3: Winchester Rd at Robert Trent Jones Pkwy**

Control Type:	Signalized	Delay (sec / veh):	41.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.006

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	61	2842	108	165	2240	58	50	37	58	151	59	354
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	61	2842	108	165	2240	58	50	37	58	151	59	354
Peak Hour Factor	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	16	740	28	43	583	15	13	10	15	39	15	92
Total Analysis Volume [veh/h]	64	2960	113	172	2333	60	52	39	60	157	61	369
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	72	0	16	77	0	0	32	0	0	32	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	68	68	12	74	74	28	28	28	28	28	28
g / C, Green / Cycle	0.05	0.57	0.57	0.10	0.61	0.61	0.23	0.23	0.23	0.23	0.23	0.23
(v / s)_i Volume / Saturation Flow Rate	0.04	0.57	0.58	0.10	0.44	0.44	0.05	0.02	0.04	0.12	0.03	0.23
s, saturation flow rate [veh/h]	1781	3560	1835	1781	3560	1846	958	1870	1589	1296	1870	1589
c, Capacity [veh/h]	93	2014	1038	179	2187	1134	60	437	371	303	437	371
d1, Uniform Delay [s]	55.88	26.04	26.04	53.69	15.98	16.07	59.96	35.98	36.61	45.08	36.42	45.88
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.40
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	8.72	20.09	32.80	22.89	2.07	4.03	28.09	0.09	0.20	1.38	0.14	40.25
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.69	1.00	1.02	0.96	0.72	0.72	0.86	0.09	0.16	0.52	0.14	0.99
d, Delay for Lane Group [s/veh]	64.60	46.13	58.83	76.58	18.05	20.11	88.05	36.07	36.81	46.46	36.56	86.13
Lane Group LOS	E	F	F	E	B	C	F	D	D	D	D	F
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	2.13	32.46	37.13	6.30	14.64	15.99	2.05	0.91	1.43	4.44	1.45	15.04
50th-Percentile Queue Length [ft/ln]	53.28	811.54	928.30	157.46	365.91	399.75	51.31	22.83	35.84	111.00	36.16	375.99
95th-Percentile Queue Length [veh/ln]	3.84	41.81	47.90	10.41	20.91	22.55	3.69	1.64	2.58	7.90	2.60	21.40
95th-Percentile Queue Length [ft/ln]	95.91	1045.30	1197.54	260.35	522.77	563.70	92.37	41.09	64.52	197.39	65.09	535.00

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	64.60	50.19	58.83	76.58	18.72	20.11	88.05	36.07	36.81	46.46	36.56	86.13
Movement LOS	E	D	E	E	B	C	F	D	D	D	D	F
d_A, Approach Delay [s/veh]	50.79			22.63			54.27			70.37		
Approach LOS	D			C			D			E		
d_I, Intersection Delay [s/veh]	41.44											
Intersection LOS	D											
Intersection V/C	1.006											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	49.50			0.00			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	3.623			0.000			2.379			2.491		
Crosswalk LOS	D			F			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	1133			1217			467			467		
d_b, Bicycle Delay [s]	11.27			9.20			35.27			35.27		
I_b,int, Bicycle LOS Score for Intersection	3.285			2.970			1.684			2.044		
Bicycle LOS	C			C			A			B		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 4: Winchester Rd at Murrieta Hot Springs Rd**

Control Type:	Signalized	Delay (sec / veh):	108.3
Analysis Method:	HCM 6th Edition	Level Of Service:	F
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.345

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	257	1943	215	213	1411	906	882	755	211	288	723	174
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	257	1943	215	213	1411	906	882	755	211	288	723	174
Peak Hour Factor	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	68	513	57	56	373	239	233	200	56	76	191	46
Total Analysis Volume [veh/h]	272	2054	227	225	1492	958	932	798	223	304	764	184
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	46	0	11	46	0	25	38	0	25	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	47	47	7	47	47	21	37	37	13	29	29
g / C, Green / Cycle	0.06	0.39	0.39	0.06	0.39	0.39	0.18	0.31	0.31	0.11	0.24	0.24
(v / s)_i Volume / Saturation Flow Rate	0.08	0.40	0.14	0.07	0.29	0.60	0.27	0.16	0.14	0.09	0.21	0.12
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	207	1999	624	207	1999	624	607	1560	487	375	852	380
d1, Uniform Delay [s]	56.47	36.50	25.87	56.47	31.36	36.50	49.53	34.28	33.63	52.34	44.26	39.31
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	149.57	27.57	1.64	56.20	2.59	249.25	243.24	0.26	0.67	4.23	3.68	0.95
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	1.32	1.03	0.36	1.09	0.75	1.54	1.54	0.51	0.46	0.81	0.90	0.48
d, Delay for Lane Group [s/veh]	206.04	64.07	27.51	112.68	33.96	285.75	292.77	34.54	34.30	56.57	47.93	40.26
Lane Group LOS	F	F	C	F	C	F	F	C	C	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	7.43	24.12	4.88	4.75	12.68	60.99	29.55	6.42	5.34	4.70	11.37	4.78
50th-Percentile Queue Length [ft/ln]	185.67	603.11	121.98	118.66	317.07	1524.67	738.81	160.60	133.58	117.43	284.33	119.52
95th-Percentile Queue Length [veh/ln]	12.82	32.83	8.50	8.52	18.52	93.71	45.86	10.58	9.13	8.25	16.90	8.37
95th-Percentile Queue Length [ft/ln]	320.50	820.63	212.54	213.09	463.08	2342.83	1146.52	264.52	228.35	206.29	422.60	209.16

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	206.04	64.07	27.51	112.68	33.96	285.75	292.77	34.54	34.30	56.57	47.93	40.26
Movement LOS	F	F	C	F	C	F	F	C	C	E	D	D
d_A, Approach Delay [s/veh]	75.94			130.75			157.74			48.90		
Approach LOS	E			F			F			D		
d_I, Intersection Delay [s/veh]	108.26											
Intersection LOS	F											
Intersection V/C	1.345											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	49.50	49.50	49.50
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.496	3.220	3.044
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	700	700	567	567
d_b, Bicycle Delay [s]	25.35	25.35	30.82	30.82
I_b,int, Bicycle LOS Score for Intersection	2.964	3.031	2.634	2.593
Bicycle LOS	C	C	B	B

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 5: Winchester Rd at Winchester Square Drive**

Control Type:	Signalized	Delay (sec / veh):	23.0
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.844

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	31	2353	291	56	1821	14	19	19	27	187	6	142
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	31	2353	291	56	1821	14	19	19	27	187	6	142
Peak Hour Factor	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	8	624	77	15	483	4	5	5	7	50	2	38
Total Analysis Volume [veh/h]	33	2495	309	59	1931	15	20	20	29	198	6	151
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	48	0	11	48	0	0	36	0	0	25	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	5	76	76	6	77	77	6	16	16
g / C, Green / Cycle	0.04	0.63	0.63	0.05	0.64	0.64	0.05	0.13	0.13
(v / s)_i Volume / Saturation Flow Rate	0.02	0.52	0.54	0.03	0.36	0.36	0.04	0.11	0.09
s, saturation flow rate [veh/h]	1781	3560	1770	1781	3560	1863	1718	1783	1589
c, Capacity [veh/h]	71	2241	1114	91	2281	1193	92	237	211
d1, Uniform Delay [s]	56.39	17.08	18.05	55.92	12.09	12.09	56.06	50.95	49.86
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.69	3.55	8.92	7.58	1.00	1.90	11.77	8.82	4.44
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.47	0.82	0.86	0.65	0.56	0.56	0.75	0.86	0.71
d, Delay for Lane Group [s/veh]	61.08	20.63	26.97	63.50	13.09	14.00	67.83	59.77	54.30
Lane Group LOS	E	C	C	E	B	B	E	E	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	1.07	19.12	22.64	1.95	9.35	10.09	2.36	6.58	4.60
50th-Percentile Queue Length [ft/ln]	26.81	478.09	565.97	48.67	233.63	252.14	59.05	164.43	115.10
95th-Percentile Queue Length [veh/ln]	1.93	26.30	30.44	3.50	14.36	15.29	4.25	10.78	8.12
95th-Percentile Queue Length [ft/ln]	48.25	657.38	761.04	87.61	358.97	382.35	106.29	269.58	203.07

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	61.08	22.29	26.97	63.50	13.40	14.00	67.83	67.83	67.83	59.77	59.77	54.30
Movement LOS	E	C	C	E	B	B	E	E	E	E	E	D
d_A, Approach Delay [s/veh]	23.25			14.88			67.83			57.45		
Approach LOS	C			B			E			E		
d_I, Intersection Delay [s/veh]	22.95											
Intersection LOS	C											
Intersection V/C	0.844											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	49.50			0.00			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	3.303			0.000			1.789			2.195		
Crosswalk LOS	C			F			A			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	733			733			533			350		
d_b, Bicycle Delay [s]	24.07			24.07			32.27			40.84		
I_b,int, Bicycle LOS Score for Intersection	3.120			2.662			1.673			2.145		
Bicycle LOS	C			B			A			B		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	28.3
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.839

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	97	2397	133	91	1698	214	242	48	64	120	36	72
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	97	2397	133	91	1698	214	242	48	64	120	36	72
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	25	611	34	23	433	55	62	12	16	31	9	18
Total Analysis Volume [veh/h]	99	2446	136	93	1733	218	247	49	65	122	37	73
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	12	24	0	11	23	0	0	44	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	8	66	66	7	65	65	18	18	8	8	8
g / C, Green / Cycle	0.07	0.57	0.57	0.06	0.56	0.56	0.16	0.16	0.07	0.07	0.07
(v / s)_i Volume / Saturation Flow Rate	0.06	0.48	0.49	0.05	0.37	0.37	0.14	0.07	0.04	0.04	0.05
s, saturation flow rate [veh/h]	1781	3560	1821	1781	3560	1766	1781	1699	1781	1821	1589
c, Capacity [veh/h]	124	2034	1040	110	2005	994	286	273	120	123	107
d1, Uniform Delay [s]	52.71	20.21	20.57	53.46	17.31	17.40	47.07	43.45	52.36	52.34	52.45
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	10.89	4.23	8.71	15.99	1.64	3.36	7.64	1.02	5.96	5.74	7.36
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.80	0.83	0.85	0.85	0.65	0.65	0.86	0.42	0.66	0.65	0.68
d, Delay for Lane Group [s/veh]	63.60	24.44	29.28	69.45	18.95	20.76	54.71	44.47	58.31	58.08	59.81
Lane Group LOS	E	C	C	E	B	C	D	D	E	E	E
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	3.19	18.69	21.07	3.15	11.78	12.31	7.47	3.00	2.42	2.45	2.28
50th-Percentile Queue Length [ft/ln]	79.78	467.37	526.75	78.70	294.41	307.86	186.85	75.08	60.51	61.33	56.99
95th-Percentile Queue Length [veh/ln]	5.74	25.79	28.60	5.67	17.40	18.07	11.96	5.41	4.36	4.42	4.10
95th-Percentile Queue Length [ft/ln]	143.60	644.65	714.95	141.66	435.11	451.74	298.94	135.15	108.92	110.40	102.58

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	63.60	25.92	29.28	69.45	19.40	20.76	54.71	44.47	44.47	58.23	58.08	59.81
Movement LOS	E	C	C	E	B	C	D	D	D	E	E	E
d_A, Approach Delay [s/veh]	27.48			21.82			51.48			58.71		
Approach LOS	C			C			D			E		
d_I, Intersection Delay [s/veh]	28.30											
Intersection LOS	C											
Intersection V/C	0.839											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			47.03			47.03			47.03		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.276			2.184			2.267		
Crosswalk LOS	F			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	348			330			696			557		
d_b, Bicycle Delay [s]	39.24			40.07			24.46			29.95		
I_b,int, Bicycle LOS Score for Intersection	3.034			2.684			2.155			1.942		
Bicycle LOS	C			B			B			A		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

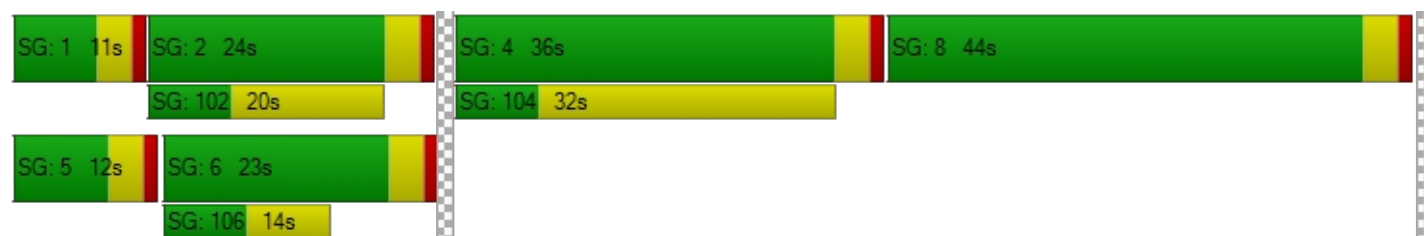

APPENDIX C-VI

**CALTRANS EXISTING WITH PROJECT
WITH CUMULATIVE PROJECTS
TRAFFIC CONDITIONS**

Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	31.2
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.003

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	59	1701	40	8	2538	95	136	0	155	18	0	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	59	1701	40	8	2538	95	136	0	155	18	0	8
Peak Hour Factor	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	16	455	11	2	679	25	36	0	41	5	0	2
Total Analysis Volume [veh/h]	63	1821	43	9	2717	102	146	0	166	19	0	9
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	62	0	41	92	0	0	17	0	0	17	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	93	93	2	89	89	13	13	13	13
g / C, Green / Cycle	0.05	0.78	0.78	0.02	0.74	0.74	0.11	0.11	0.11	0.11
(v / s)_i Volume / Saturation Flow Rate	0.04	0.50	0.50	0.01	0.76	0.06	0.10	0.00	0.10	0.02
s, saturation flow rate [veh/h]	1781	1870	1855	1781	3560	1589	1406	1870	1589	1385
c, Capacity [veh/h]	92	1451	1439	28	2634	1176	160	203	173	201
d1, Uniform Delay [s]	55.94	6.01	6.06	58.43	15.61	4.34	53.57	0.00	53.21	48.84
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	8.72	2.20	2.27	6.62	26.27	0.15	17.42	0.00	23.70	0.31
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.69	0.64	0.65	0.32	1.03	0.09	0.91	0.00	0.96	0.14
d, Delay for Lane Group [s/veh]	64.66	8.21	8.33	65.04	41.88	4.49	70.99	0.00	76.91	49.16
Lane Group LOS	E	A	A	E	F	A	E	A	E	D
Critical Lane Group	Yes	No	No	No	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	2.10	9.39	9.47	0.32	38.85	0.68	5.17	0.00	6.11	0.79
50th-Percentile Queue Length [ft/ln]	52.47	234.79	236.87	8.04	971.16	16.93	129.18	0.00	152.74	19.73
95th-Percentile Queue Length [veh/ln]	3.78	14.42	14.52	0.58	50.52	1.22	8.89	0.00	10.16	1.42
95th-Percentile Queue Length [ft/ln]	94.45	360.44	363.07	14.47	1263.03	30.47	222.37	0.00	254.08	35.51

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	64.66	8.27	8.33	65.04	41.88	4.49	70.99	0.00	76.91	49.16	49.16	49.16
Movement LOS	E	A	A	E	F	A	E	A	E	D	D	D
d_A, Approach Delay [s/veh]	10.11			40.60			74.14			49.16		
Approach LOS	B			D			E			D		
d_I, Intersection Delay [s/veh]	31.17											
Intersection LOS	C											
Intersection V/C	1.003											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			0.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			0.00		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.455			2.261			0.000		
Crosswalk LOS	F			C			B			F		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	967			1467			217			217		
d_b, Bicycle Delay [s]	16.02			4.27			47.70			47.70		
I_b,int, Bicycle LOS Score for Intersection	3.149			3.893			2.074			1.606		
Bicycle LOS	C			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd

Control Type:	Signalized	Delay (sec / veh):	45.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.104

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	167	1690	1	12	2609	66	101	1	396	1	2	2
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	167	1690	1	12	2609	66	101	1	396	1	2	2
Peak Hour Factor	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	42	428	0	3	662	17	26	0	100	0	1	1
Total Analysis Volume [veh/h]	169	1714	1	12	2646	67	102	1	402	1	2	2
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	18	48	0	53	83	0	0	14	14	0	14	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	14	91	91	2	79	79	10	28	10
g / C, Green / Cycle	0.12	0.79	0.79	0.02	0.69	0.69	0.09	0.24	0.09
(v / s)_i Volume / Saturation Flow Rate	0.09	0.46	0.46	0.01	0.73	0.73	0.13	0.25	0.01
s, saturation flow rate [veh/h]	1781	1870	1870	1781	1870	1854	815	1589	941
c, Capacity [veh/h]	217	1474	1474	35	1283	1272	133	388	120
d1, Uniform Delay [s]	48.96	4.75	4.75	55.60	18.04	18.04	54.03	43.45	48.12
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.43	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	5.91	1.68	1.68	5.56	41.67	44.92	9.04	51.88	0.14
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.78	0.58	0.58	0.34	1.06	1.07	0.77	1.04	0.04
d, Delay for Lane Group [s/veh]	54.87	6.43	6.43	61.17	59.71	62.95	63.07	95.33	48.26
Lane Group LOS	D	A	A	E	F	F	E	F	D
Critical Lane Group	No	No	No	No	No	Yes	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	5.06	6.80	6.80	0.40	43.99	44.76	3.34	16.51	0.14
50th-Percentile Queue Length [ft/ln]	126.39	170.00	170.02	9.95	1099.71	1118.91	83.47	412.84	3.41
95th-Percentile Queue Length [veh/ln]	8.74	11.08	11.08	0.72	57.70	59.04	6.01	23.66	0.25
95th-Percentile Queue Length [ft/ln]	218.58	276.91	276.95	17.91	1442.38	1476.05	150.24	591.59	6.14

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	54.87	6.43	6.43	61.17	61.29	62.95	63.07	63.07	95.33	48.26	48.26	48.26
Movement LOS	D	A	A	E	F	E	E	E	F	D	D	D
d_A, Approach Delay [s/veh]	10.78			61.33			88.75			48.26		
Approach LOS	B			E			F			D		
d_I, Intersection Delay [s/veh]	45.42											
Intersection LOS	D											
Intersection V/C	1.104											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			47.03			47.03			47.03		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.343			2.193			1.736		
Crosswalk LOS	F			C			B			A		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	765			1374			174			174		
d_b, Bicycle Delay [s]	21.92			5.63			47.93			47.93		
I_b,int, Bicycle LOS Score for Intersection	3.114			3.808			2.393			1.568		
Bicycle LOS	C			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 3: Winchester Rd at Robert Trent Jones Pkwy**

Control Type:	Signalized	Delay (sec / veh):	14.6
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.698

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	33	1685	146	289	2701	40	58	33	65	23	7	115
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	33	1685	146	289	2701	40	58	33	65	23	7	115
Peak Hour Factor	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	8	425	37	73	681	10	15	8	16	6	2	29
Total Analysis Volume [veh/h]	33	1700	147	292	2726	40	59	33	66	23	7	116
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	38	0	40	67	0	0	12	0	0	12	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	4	53	53	17	66	66	8	8	8	8	8	8
g / C, Green / Cycle	0.04	0.59	0.59	0.19	0.73	0.73	0.09	0.09	0.09	0.09	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.02	0.34	0.35	0.16	0.51	0.51	0.05	0.02	0.04	0.02	0.00	0.07
s, saturation flow rate [veh/h]	1781	3560	1795	1781	3560	1856	1268	1870	1589	1296	1870	1589
c, Capacity [veh/h]	80	2094	1056	336	2606	1359	82	168	143	120	168	143
d1, Uniform Delay [s]	41.85	11.65	11.67	35.44	6.59	6.64	45.02	37.97	38.92	43.03	37.44	40.24
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	3.37	1.21	2.40	6.84	1.56	3.04	10.96	0.57	2.32	0.76	0.10	10.51
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.41	0.59	0.59	0.87	0.70	0.70	0.72	0.20	0.46	0.19	0.04	0.81
d, Delay for Lane Group [s/veh]	45.22	12.86	14.07	42.28	8.15	9.68	55.98	38.54	41.24	43.79	37.54	50.75
Lane Group LOS	D	B	B	D	A	A	E	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	0.78	7.27	7.72	6.72	7.57	8.56	1.59	0.69	1.46	0.53	0.14	2.91
50th-Percentile Queue Length [ft/ln]	19.54	181.87	193.00	167.95	189.30	214.07	39.86	17.36	36.54	13.14	3.61	72.64
95th-Percentile Queue Length [veh/ln]	1.41	11.70	12.28	10.97	12.08	13.36	2.87	1.25	2.63	0.95	0.26	5.23
95th-Percentile Queue Length [ft/ln]	35.17	292.45	306.92	274.22	302.12	334.05	71.75	31.25	65.77	23.65	6.50	130.75

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	45.22	13.20	14.07	42.28	8.66	9.68	55.98	38.54	41.24	43.79	37.54	50.75
Movement LOS	D	B	B	D	A	A	E	D	D	D	D	D
d_A, Approach Delay [s/veh]	13.83			11.88			46.18			49.02		
Approach LOS	B			B			D			D		
d_I, Intersection Delay [s/veh]	14.65											
Intersection LOS	B											
Intersection V/C	0.698											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	34.67			0.00			34.67			34.67		
I_p,int, Pedestrian LOS Score for Intersection	3.280			0.000			2.346			2.420		
Crosswalk LOS	C			F			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	756			1400			178			178		
d_b, Bicycle Delay [s]	17.42			4.05			37.36			37.36		
I_b,int, Bicycle LOS Score for Intersection	2.594			3.242			1.690			1.680		
Bicycle LOS	B			C			A			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

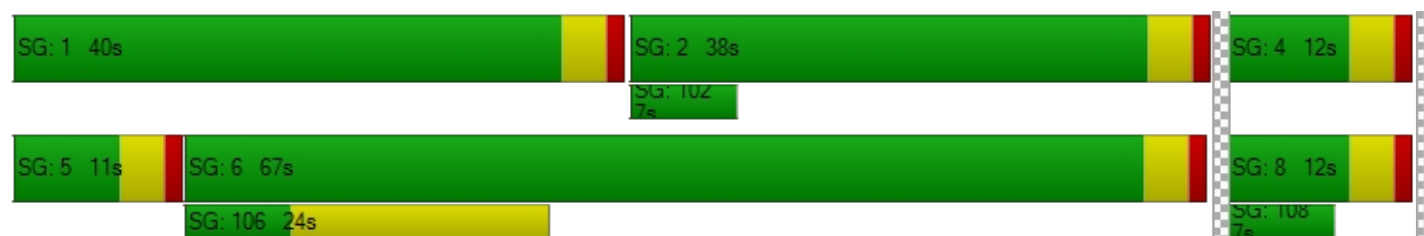

Intersection Level Of Service Report**Intersection 4: Winchester Rd at Murrieta Hot Springs Rd**

Control Type:	Signalized	Delay (sec / veh):	77.9
Analysis Method:	HCM 6th Edition	Level Of Service:	E
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.177

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	184	914	134	232	1772	780	852	526	208	314	654	153
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	184	914	134	232	1772	780	852	526	208	314	654	153
Peak Hour Factor	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	48	239	35	61	464	204	223	138	54	82	171	40
Total Analysis Volume [veh/h]	193	957	140	243	1855	817	892	551	218	329	685	160
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	38	0	16	43	0	28	38	0	28	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	43	43	10	47	47	24	36	36	14	26	26
g / C, Green / Cycle	0.06	0.36	0.36	0.09	0.39	0.39	0.20	0.30	0.30	0.12	0.22	0.22
(v / s)_i Volume / Saturation Flow Rate	0.06	0.19	0.09	0.07	0.36	0.51	0.26	0.11	0.14	0.10	0.19	0.10
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	207	1838	574	304	1981	618	692	1537	480	403	776	347
d1, Uniform Delay [s]	56.24	30.21	26.91	53.76	35.28	36.71	48.04	32.84	33.95	51.81	45.48	40.84
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	16.91	1.06	1.01	4.88	9.94	155.94	132.23	0.14	0.67	4.09	3.53	0.96
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.93	0.52	0.24	0.80	0.94	1.32	1.29	0.36	0.45	0.82	0.88	0.46
d, Delay for Lane Group [s/veh]	73.14	31.27	27.92	58.63	45.23	192.65	180.27	32.98	34.62	55.90	49.01	41.80
Lane Group LOS	E	C	C	E	D	F	F	C	C	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	3.40	7.41	2.99	3.81	18.81	44.44	23.01	4.22	5.24	5.06	10.22	4.22
50th-Percentile Queue Length [ft/ln]	84.95	185.24	74.67	95.17	470.23	1110.93	575.33	105.54	131.10	126.60	255.52	105.51
95th-Percentile Queue Length [veh/ln]	6.12	11.87	5.38	6.85	25.92	65.81	34.89	7.59	9.00	8.75	15.46	7.59
95th-Percentile Queue Length [ft/ln]	152.90	296.85	134.40	171.31	648.04	1645.31	872.20	189.78	225.00	218.86	386.59	189.74

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	73.14	31.27	27.92	58.63	45.23	192.65	180.27	32.98	34.62	55.90	49.01	41.80
Movement LOS	E	C	C	E	D	F	F	C	C	E	D	D
d_A, Approach Delay [s/veh]	37.17			87.66			112.30			49.96		
Approach LOS	D			F			F			D		
d_I, Intersection Delay [s/veh]	77.93											
Intersection LOS	E											
Intersection V/C	1.177											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.396			3.148			2.996		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	567			650			567			567		
d_b, Bicycle Delay [s]	30.82			27.34			30.82			30.82		
I_b,int, Bicycle LOS Score for Intersection	2.269			3.163			2.473			2.528		
Bicycle LOS	B			C			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

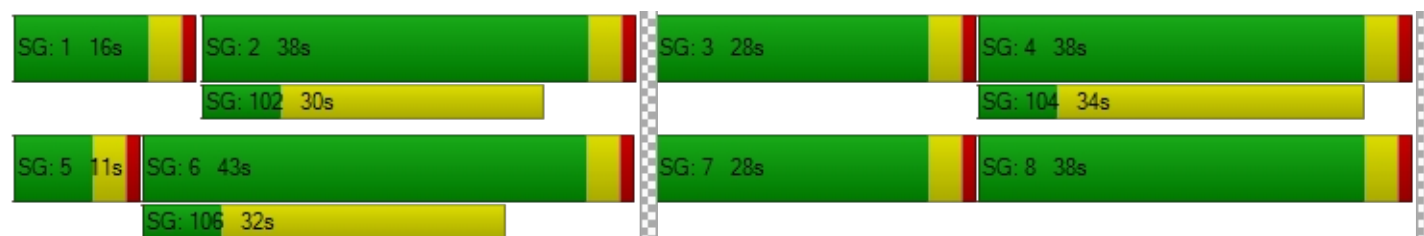

Intersection Level Of Service Report**Intersection 5: Winchester Rd at Winchester Square Drive**

Control Type:	Signalized	Delay (sec / veh):	11.0
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.641

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	6	1388	129	47	2273	3	3	5	5	104	2	57
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	6	1388	129	47	2273	3	3	5	5	104	2	57
Peak Hour Factor	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	2	374	35	13	613	1	1	1	1	28	1	15
Total Analysis Volume [veh/h]	6	1497	139	51	2452	3	3	5	5	112	2	61
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	20	0	11	20	0	0	36	0	0	23	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	1	59	59	5	63	63	2	8	8
g / C, Green / Cycle	0.01	0.66	0.66	0.06	0.70	0.70	0.02	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.00	0.31	0.31	0.03	0.45	0.45	0.01	0.06	0.04
s, saturation flow rate [veh/h]	1781	3560	1790	1781	3560	1869	1732	1782	1589
c, Capacity [veh/h]	22	2330	1171	102	2490	1307	40	157	140
d1, Uniform Delay [s]	44.14	7.76	7.76	41.24	7.43	7.44	43.36	40.08	39.01
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.68	0.68	1.34	3.73	1.31	2.48	4.65	6.31	2.14
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.28	0.47	0.47	0.50	0.65	0.65	0.33	0.73	0.44
d, Delay for Lane Group [s/veh]	50.82	8.44	9.11	44.97	8.74	9.92	48.02	46.39	41.15
Lane Group LOS	D	A	A	D	A	A	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	0.17	4.71	4.95	1.19	7.20	7.99	0.33	2.71	1.35
50th-Percentile Queue Length [ft/ln]	4.30	117.63	123.79	29.84	179.99	199.67	8.35	67.63	33.72
95th-Percentile Queue Length [veh/ln]	0.31	8.26	8.60	2.15	11.60	12.62	0.60	4.87	2.43
95th-Percentile Queue Length [ft/ln]	7.74	206.56	215.02	53.72	290.00	315.55	15.04	121.73	60.70

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	50.82	8.62	9.11	44.97	9.15	9.92	48.02	48.02	48.02	46.39	46.39	41.15
Movement LOS	D	A	A	D	A	A	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	8.82			9.88			48.02			44.56		
Approach LOS	A			A			D			D		
d_I, Intersection Delay [s/veh]	10.99											
Intersection LOS	B											
Intersection V/C	0.641											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	34.67			0.00			34.67			34.67		
I_p,int, Pedestrian LOS Score for Intersection	3.180			0.000			1.726			2.060		
Crosswalk LOS	C			F			A			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	356			356			711			422		
d_b, Bicycle Delay [s]	30.42			30.42			18.69			28.01		
I_b,int, Bicycle LOS Score for Intersection	2.463			2.938			1.581			1.848		
Bicycle LOS	B			C			A			A		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

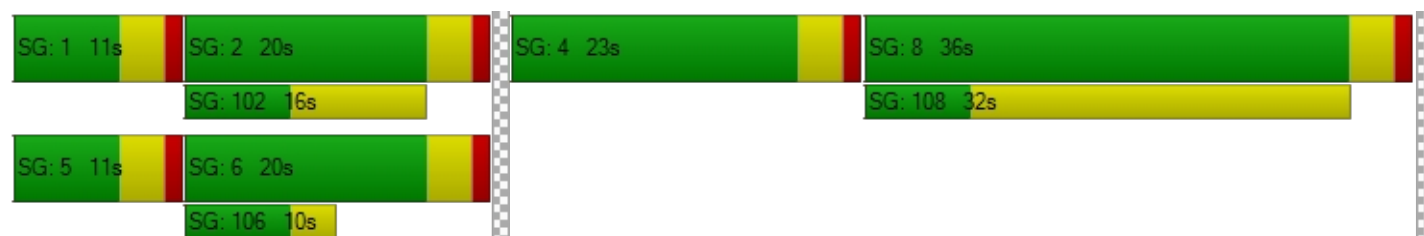

Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	26.5
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.815

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	77	1288	83	85	2011	215	162	29	56	195	52	75
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	77	1288	83	85	2011	215	162	29	56	195	52	75
Peak Hour Factor	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	21	357	23	24	558	60	45	8	16	54	14	21
Total Analysis Volume [veh/h]	85	1430	92	94	2232	239	180	32	62	216	58	83
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	110
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	47	0	16	52	0	0	11	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	110	110	110	110	110	110	110	110	110	110	110
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	62	62	7	63	63	13	13	11	11	11
g / C, Green / Cycle	0.06	0.57	0.57	0.07	0.57	0.57	0.12	0.12	0.10	0.10	0.10
(v / s)_i Volume / Saturation Flow Rate	0.05	0.28	0.28	0.05	0.46	0.47	0.10	0.06	0.08	0.08	0.05
s, saturation flow rate [veh/h]	1781	3560	1813	1781	3560	1780	1781	1675	1781	1817	1589
c, Capacity [veh/h]	109	2009	1023	120	2031	1016	218	205	179	182	160
d1, Uniform Delay [s]	50.94	14.58	14.58	50.54	18.74	19.20	47.16	44.92	48.23	48.22	47.00
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	11.27	0.90	1.76	10.47	3.48	7.66	7.68	1.59	6.46	6.31	2.61
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.78	0.50	0.50	0.78	0.80	0.83	0.83	0.46	0.76	0.76	0.52
d, Delay for Lane Group [s/veh]	62.22	15.48	16.34	61.00	22.23	26.87	54.84	46.51	54.69	54.53	49.61
Lane Group LOS	E	B	B	E	C	C	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	2.65	7.57	7.96	2.89	16.37	18.37	5.26	2.48	3.94	4.01	2.27
50th-Percentile Queue Length [ft/ln]	66.17	189.29	198.94	72.34	409.26	459.36	131.53	61.90	98.47	100.14	56.81
95th-Percentile Queue Length [veh/ln]	4.76	12.08	12.58	5.21	23.01	25.40	9.02	4.46	7.09	7.21	4.09
95th-Percentile Queue Length [ft/ln]	119.11	302.10	314.59	130.21	575.15	635.11	225.57	111.42	177.24	180.25	102.25

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	62.22	15.73	16.34	61.00	23.47	26.87	54.84	46.51	46.51	54.63	54.53	49.61
Movement LOS	E	B	B	E	C	C	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	18.23			25.17			51.98			53.44		
Approach LOS	B			C			D			D		
d_I, Intersection Delay [s/veh]	26.48											
Intersection LOS	C											
Intersection V/C	0.815											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	44.55	44.55	44.55
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.197	2.163	2.281
Crosswalk LOS	F	C	B	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	782	873	127	582
d_b, Bicycle Delay [s]	20.40	17.47	48.22	27.65
I_b,int, Bicycle LOS Score for Intersection	2.443	2.970	2.012	2.149
Bicycle LOS	B	C	B	B

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

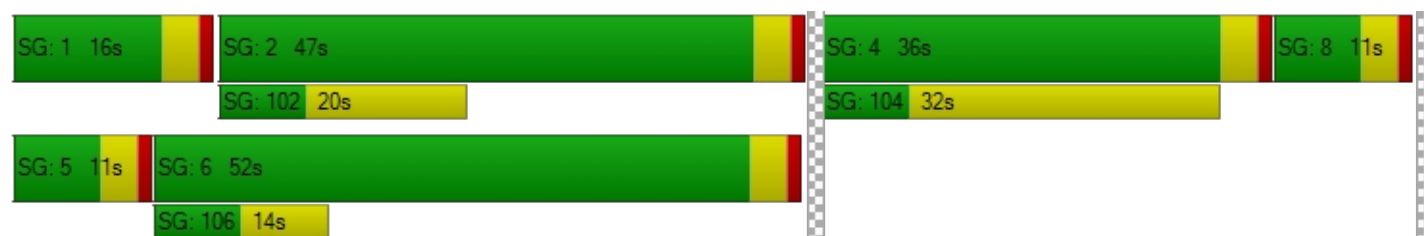

Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	29.8
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.973

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	203	2777	48	4	2143	132	87	3	124	43	4	11
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	203	2777	48	4	2143	132	87	3	124	43	4	11
Peak Hour Factor	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	53	720	12	1	556	34	23	1	32	11	1	3
Total Analysis Volume [veh/h]	211	2881	50	4	2223	137	90	3	129	45	4	11
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	18	90	0	11	83	0	0	14	0	0	14	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	14	92	92	1	79	79	10	10	10	10
g / C, Green / Cycle	0.12	0.80	0.80	0.01	0.69	0.69	0.09	0.09	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.12	0.78	0.79	0.00	0.62	0.09	0.06	0.00	0.08	0.05
s, saturation flow rate [veh/h]	1781	1870	1859	1781	3560	1589	1398	1870	1589	1290
c, Capacity [veh/h]	217	1497	1488	14	2443	1091	96	163	139	167
d1, Uniform Delay [s]	50.27	10.57	10.81	56.72	15.06	6.19	52.05	47.96	52.12	50.86
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	22.18	18.77	20.00	10.99	6.41	0.24	29.91	0.04	21.87	1.29
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.97	0.98	0.98	0.29	0.91	0.13	0.94	0.02	0.93	0.36
d, Delay for Lane Group [s/veh]	72.45	29.34	30.81	67.72	21.48	6.43	81.96	48.01	73.98	52.15
Lane Group LOS	E	C	C	E	C	A	F	D	E	D
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	7.36	31.34	32.32	0.16	23.26	1.14	3.36	0.08	4.53	1.72
50th-Percentile Queue Length [ft/ln]	184.05	783.40	808.09	3.95	581.51	28.50	84.07	2.02	113.29	43.12
95th-Percentile Queue Length [veh/ln]	11.81	40.52	41.65	0.28	31.17	2.05	6.05	0.15	8.02	3.10
95th-Percentile Queue Length [ft/ln]	295.29	1012.91	1041.19	7.10	779.25	51.30	151.33	3.64	200.57	77.61

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	72.45	30.06	30.81	67.72	21.48	6.43	81.96	48.01	73.98	52.15	52.15	52.15
Movement LOS	E	C	C	E	C	A	F	D	E	D	D	D
d_A, Approach Delay [s/veh]	32.92			20.68			76.87			52.15		
Approach LOS	C			C			E			D		
d_I, Intersection Delay [s/veh]	29.81											
Intersection LOS	C											
Intersection V/C	0.973											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			0.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			47.03			47.03			0.00		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.461			2.283			0.000		
Crosswalk LOS	F			C			B			F		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	1496			1374			174			174		
d_b, Bicycle Delay [s]	3.66			5.63			47.93			47.93		
I_b,int, Bicycle LOS Score for Intersection	4.152			3.510			1.926			1.659		
Bicycle LOS	D			D			A			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd

Control Type:	Signalized	Delay (sec / veh):	44.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.078

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	372	2980	2	2	2291	107	101	0	253	0	7	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	372	2980	2	2	2291	107	101	0	253	0	7	8
Peak Hour Factor	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	95	761	1	1	585	27	26	0	65	0	2	2
Total Analysis Volume [veh/h]	380	3044	2	2	2340	109	103	0	258	0	7	8
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	29	98	0	11	80	0	0	11	11	0	11	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	25	100	100	0	76	76	7	36	7
g / C, Green / Cycle	0.21	0.84	0.84	0.00	0.63	0.63	0.06	0.30	0.06
(v / s)_i Volume / Saturation Flow Rate	0.21	0.81	0.81	0.00	0.65	0.67	0.06	0.16	0.01
s, saturation flow rate [veh/h]	1781	1870	1870	1781	1870	1841	1774	1589	1228
c, Capacity [veh/h]	371	1565	1565	8	1183	1165	164	478	102
d1, Uniform Delay [s]	47.48	8.59	8.60	59.54	22.03	22.03	56.41	35.03	53.63
k, delay calibration	0.34	0.50	0.50	0.11	0.50	0.50	0.11	0.19	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	44.80	17.18	17.22	17.66	35.58	40.87	3.89	1.70	0.65
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	1.02	0.97	0.97	0.27	1.03	1.05	0.63	0.54	0.15
d, Delay for Lane Group [s/veh]	92.27	25.77	25.82	77.20	57.61	62.90	60.30	36.73	54.29
Lane Group LOS	F	C	C	E	F	F	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	No	Yes	No
50th-Percentile Queue Length [veh/ln]	15.64	28.26	28.30	0.10	41.81	42.87	3.29	6.52	0.45
50th-Percentile Queue Length [ft/ln]	391.04	706.52	707.47	2.44	1045.23	1071.85	82.32	162.98	11.24
95th-Percentile Queue Length [veh/ln]	22.42	36.98	37.02	0.18	54.05	56.03	5.93	10.71	0.81
95th-Percentile Queue Length [ft/ln]	560.43	924.48	925.57	4.40	1351.20	1400.80	148.17	267.67	20.24

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	92.27	25.79	25.82	77.20	60.13	62.90	60.30	60.30	36.73	54.29	54.29	54.29
Movement LOS	F	C	C	E	E	E	E	E	D	D	D	D
d_A, Approach Delay [s/veh]	33.17			60.27			43.45			54.29		
Approach LOS	C			E			D			D		
d_I, Intersection Delay [s/veh]	44.43											
Intersection LOS	D											
Intersection V/C	1.078											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.553			2.233			1.738		
Crosswalk LOS	F			D			B			A		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	1567			1267			117			117		
d_b, Bicycle Delay [s]	2.82			8.07			53.20			53.20		
I_b,int, Bicycle LOS Score for Intersection	4.386			3.582			2.155			1.584		
Bicycle LOS	E			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 3: Winchester Rd at Robert Trent Jones Pkwy**

Control Type:	Signalized	Delay (sec / veh):	40.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.017

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	61	2869	108	165	2264	58	50	37	58	151	59	354
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	61	2869	108	165	2264	58	50	37	58	151	59	354
Peak Hour Factor	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	16	747	28	43	590	15	13	10	15	39	15	92
Total Analysis Volume [veh/h]	64	2989	113	172	2358	60	52	39	60	157	61	369
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	70	0	15	74	0	0	30	0	0	30	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	66	66	11	71	71	26	26	26	26	26	26
g / C, Green / Cycle	0.05	0.57	0.57	0.10	0.62	0.62	0.23	0.23	0.23	0.23	0.23	0.23
(v / s)_i Volume / Saturation Flow Rate	0.04	0.57	0.58	0.10	0.45	0.45	0.05	0.02	0.04	0.12	0.03	0.23
s, saturation flow rate [veh/h]	1781	3560	1836	1781	3560	1846	958	1870	1589	1296	1870	1589
c, Capacity [veh/h]	96	2040	1052	172	2191	1136	63	423	360	295	423	360
d1, Uniform Delay [s]	53.38	24.45	24.54	51.94	15.34	15.43	57.47	35.14	35.75	44.07	35.56	44.47
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.37
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	7.78	19.23	31.70	32.54	2.13	4.15	23.12	0.09	0.22	1.49	0.15	47.53
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.67	1.00	1.02	1.00	0.72	0.73	0.83	0.09	0.17	0.53	0.14	1.03
d, Delay for Lane Group [s/veh]	61.15	43.68	56.25	84.48	17.46	19.58	80.60	35.23	35.97	45.56	35.72	92.00
Lane Group LOS	E	D	F	F	B	B	F	D	D	D	D	F
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	2.02	30.92	35.71	6.48	14.09	15.44	1.91	0.88	1.38	4.29	1.39	14.90
50th-Percentile Queue Length [ft/ln]	50.56	772.99	892.76	162.12	352.26	386.12	47.84	22.01	34.57	107.28	34.87	372.48
95th-Percentile Queue Length [veh/ln]	3.64	40.04	46.13	10.67	20.25	21.89	3.44	1.58	2.49	7.69	2.51	21.54
95th-Percentile Queue Length [ft/ln]	91.01	1000.98	1153.21	266.78	506.16	547.25	86.11	39.62	62.22	192.21	62.76	538.47

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	61.15	47.70	56.25	84.48	18.15	19.58	80.60	35.23	35.97	45.56	35.72	92.00
Movement LOS	E	D	E	F	B	B	F	D	D	D	D	F
d_A, Approach Delay [s/veh]	48.27			22.59			51.15			73.73		
Approach LOS	D			C			D			E		
d_I, Intersection Delay [s/veh]	40.40											
Intersection LOS	D											
Intersection V/C	1.017											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	47.03			0.00			47.03			47.03		
I_p,int, Pedestrian LOS Score for Intersection	3.629			0.000			2.377			2.489		
Crosswalk LOS	D			F			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	1148			1217			452			452		
d_b, Bicycle Delay [s]	10.44			8.80			34.44			34.44		
I_b,int, Bicycle LOS Score for Intersection	3.301			2.984			1.684			2.044		
Bicycle LOS	C			C			A			B		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 4: Winchester Rd at Murrieta Hot Springs Rd**

Control Type:	Signalized	Delay (sec / veh):	111.3
Analysis Method:	HCM 6th Edition	Level Of Service:	F
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.354

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	284	1970	215	213	1435	906	882	755	235	288	723	174
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	284	1970	215	213	1435	906	882	755	235	288	723	174
Peak Hour Factor	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	75	521	57	56	379	239	233	200	62	76	191	46
Total Analysis Volume [veh/h]	300	2082	227	225	1517	958	932	798	248	304	764	184
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	46	0	11	46	0	25	39	0	24	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	47	47	7	47	47	21	37	37	13	29	29
g / C, Green / Cycle	0.06	0.39	0.39	0.06	0.39	0.39	0.18	0.31	0.31	0.11	0.24	0.24
(v / s)_i Volume / Saturation Flow Rate	0.09	0.41	0.14	0.07	0.30	0.60	0.27	0.16	0.16	0.09	0.21	0.12
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	207	1999	624	207	1999	624	607	1561	487	374	852	380
d1, Uniform Delay [s]	56.47	36.50	25.87	56.47	31.58	36.50	49.53	34.25	34.22	52.38	44.26	39.31
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	208.96	31.97	1.64	56.20	2.77	249.25	243.24	0.26	0.82	4.30	3.68	0.95
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	1.45	1.04	0.36	1.09	0.76	1.54	1.54	0.51	0.51	0.81	0.90	0.48
d, Delay for Lane Group [s/veh]	265.43	68.47	27.51	112.68	34.35	285.75	292.77	34.51	35.05	56.67	47.93	40.26
Lane Group LOS	F	F	C	F	C	F	F	C	D	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	9.13	24.94	4.88	4.75	13.01	60.99	29.55	6.42	6.06	4.70	11.37	4.78
50th-Percentile Queue Length [ft/ln]	228.30	623.48	121.98	118.66	325.15	1524.67	738.81	160.52	151.46	117.55	284.33	119.52
95th-Percentile Queue Length [veh/ln]	15.53	34.12	8.50	8.52	18.92	93.71	45.86	10.58	10.09	8.26	16.90	8.37
95th-Percentile Queue Length [ft/ln]	388.24	853.01	212.54	213.09	473.01	2342.83	1146.52	264.41	252.37	206.45	422.60	209.16

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	265.43	68.47	27.51	112.68	34.35	285.75	292.77	34.51	35.05	56.67	47.93	40.26
Movement LOS	F	F	C	F	C	F	F	C	D	E	D	D
d_A, Approach Delay [s/veh]	87.55			130.08			156.26			48.93		
Approach LOS	F			F			F			D		
d_I, Intersection Delay [s/veh]	111.25											
Intersection LOS	F											
Intersection V/C	1.354											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.502			3.227			3.044		
Crosswalk LOS	F			D			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	700			700			583			567		
d_b, Bicycle Delay [s]	25.35			25.35			30.10			30.82		
I_b,int, Bicycle LOS Score for Intersection	2.995			3.045			2.648			2.593		
Bicycle LOS	C			C			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 5: Winchester Rd at Winchester Square Drive**

Control Type:	Signalized	Delay (sec / veh):	23.2
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.857

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	31	2407	291	56	1869	14	19	19	27	187	6	142
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	31	2407	291	56	1869	14	19	19	27	187	6	142
Peak Hour Factor	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	8	638	77	15	495	4	5	5	7	50	2	38
Total Analysis Volume [veh/h]	33	2552	309	59	1982	15	20	20	29	198	6	151
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	52	0	11	52	0	0	36	0	0	21	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	5	76	76	6	77	77	6	16	16
g / C, Green / Cycle	0.04	0.63	0.63	0.05	0.64	0.64	0.05	0.13	0.13
(v / s)_i Volume / Saturation Flow Rate	0.02	0.53	0.56	0.03	0.37	0.37	0.04	0.11	0.09
s, saturation flow rate [veh/h]	1781	3560	1772	1781	3560	1863	1718	1783	1589
c, Capacity [veh/h]	70	2253	1121	90	2292	1199	91	233	208
d1, Uniform Delay [s]	56.43	17.13	18.21	55.95	12.05	12.05	56.09	51.22	50.13
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.84	3.80	9.79	7.80	1.04	1.99	12.16	10.00	4.81
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.47	0.83	0.88	0.65	0.57	0.57	0.76	0.88	0.73
d, Delay for Lane Group [s/veh]	61.27	20.93	28.01	63.75	13.09	14.04	68.25	61.23	54.94
Lane Group LOS	E	C	C	E	B	B	E	E	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	1.07	19.74	23.73	1.95	9.64	10.41	2.37	6.66	4.63
50th-Percentile Queue Length [ft/ln]	26.86	493.51	593.29	48.78	240.93	260.22	59.24	166.50	115.82
95th-Percentile Queue Length [veh/ln]	1.93	27.03	31.72	3.51	14.73	15.70	4.27	10.89	8.16
95th-Percentile Queue Length [ft/ln]	48.34	675.67	793.02	87.80	368.22	392.49	106.64	272.31	204.07

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	61.27	22.80	28.01	63.75	13.41	14.04	68.25	68.25	68.25	61.23	61.23	54.94
Movement LOS	E	C	C	E	B	B	E	E	E	E	E	D
d_A, Approach Delay [s/veh]	23.80			14.86			68.25			58.55		
Approach LOS	C			B			E			E		
d_I, Intersection Delay [s/veh]	23.24											
Intersection LOS	C											
Intersection V/C	0.857											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	49.50			0.00			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	3.318			0.000			1.789			2.195		
Crosswalk LOS	C			F			A			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	800			800			533			283		
d_b, Bicycle Delay [s]	21.60			21.60			32.27			44.20		
I_b,int, Bicycle LOS Score for Intersection	3.151			2.690			1.673			2.145		
Bicycle LOS	C			B			A			B		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

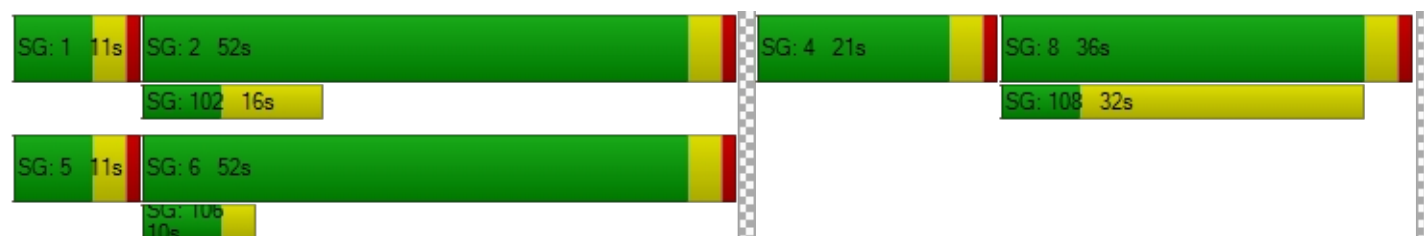

Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	41.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.935

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	97	2461	133	160	1677	214	252	54	64	216	54	72
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	97	2461	133	160	1677	214	252	54	64	216	54	72
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	25	628	34	41	428	55	64	14	16	55	14	18
Total Analysis Volume [veh/h]	99	2511	136	163	1711	218	257	55	65	220	55	73
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	57	0	16	62	0	0	11	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	61	61	12	66	66	20	20	12	12	12
g / C, Green / Cycle	0.06	0.51	0.51	0.10	0.55	0.55	0.16	0.16	0.10	0.10	0.10
(v / s)_i Volume / Saturation Flow Rate	0.06	0.49	0.50	0.09	0.36	0.36	0.14	0.07	0.08	0.08	0.05
s, saturation flow rate [veh/h]	1781	3560	1822	1781	3560	1765	1781	1707	1781	1815	1589
c, Capacity [veh/h]	105	1797	919	179	1945	964	291	278	175	179	156
d1, Uniform Delay [s]	56.28	28.79	29.36	53.46	19.35	19.47	49.13	45.22	52.85	52.84	51.15
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.14	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	28.53	14.86	26.83	15.84	1.78	3.67	11.00	1.05	7.26	7.08	2.16
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.94	0.97	0.99	0.91	0.66	0.67	0.88	0.43	0.78	0.78	0.47
d, Delay for Lane Group [s/veh]	84.81	43.65	56.19	69.30	21.13	23.13	60.13	46.27	60.10	59.92	53.31
Lane Group LOS	F	D	E	E	C	C	E	D	E	E	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	3.82	26.85	31.49	5.65	12.78	13.37	8.40	3.31	4.37	4.43	2.17
50th-Percentile Queue Length [ft/ln]	95.53	671.15	787.33	141.32	319.43	334.36	210.06	82.77	109.13	110.86	54.35
95th-Percentile Queue Length [veh/ln]	6.88	35.34	40.70	9.55	18.64	19.37	13.16	5.96	7.79	7.89	3.91
95th-Percentile Queue Length [ft/ln]	171.95	883.58	1017.42	238.80	465.98	484.30	328.90	148.99	194.80	197.19	97.83

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	84.81	47.50	56.19	69.30	21.63	23.13	60.13	46.27	46.27	60.03	59.92	53.31
Movement LOS	F	D	E	E	C	C	E	D	D	E	E	D
d_A, Approach Delay [s/veh]	49.28			25.50			55.72			58.61		
Approach LOS	D			C			E			E		
d_I, Intersection Delay [s/veh]	41.36											
Intersection LOS	D											
Intersection V/C	0.935											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.295			2.197			2.316		
Crosswalk LOS	F			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	883			967			117			533		
d_b, Bicycle Delay [s]	18.70			16.02			53.20			32.27		
I_b,int, Bicycle LOS Score for Intersection	3.070			2.710			2.182			2.134		
Bicycle LOS	C			B			B			B		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

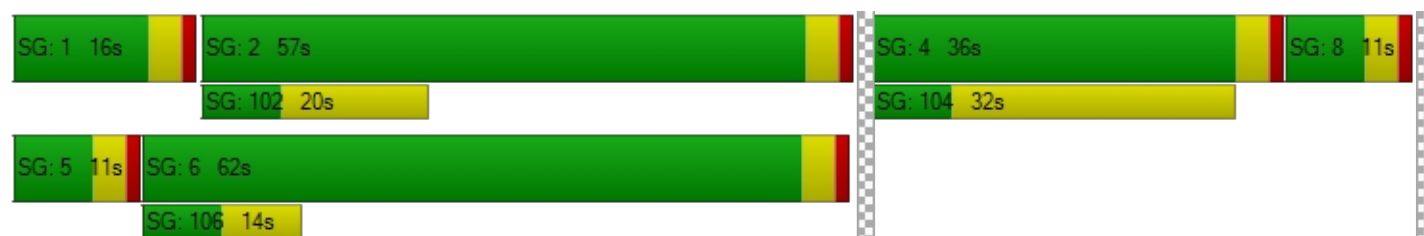

APPENDIX C-VII

**EXISTING WITH AMBIENT GROWTH
WITH CUMULATIVE PROJECTS
TRAFFIC CONDITIONS**

Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	37.0
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.032

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	61	1732	42	8	2607	98	140	0	161	19	0	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	61	1732	42	8	2607	98	140	0	161	19	0	8
Peak Hour Factor	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	16	464	11	2	698	26	37	0	43	5	0	2
Total Analysis Volume [veh/h]	65	1854	45	9	2791	105	150	0	172	20	0	9
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	62	0	41	92	0	0	17	0	0	17	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	93	93	2	89	89	13	13	13	13
g / C, Green / Cycle	0.05	0.78	0.78	0.02	0.74	0.74	0.11	0.11	0.11	0.11
(v / s)_i Volume / Saturation Flow Rate	0.04	0.51	0.51	0.01	0.78	0.07	0.11	0.00	0.11	0.02
s, saturation flow rate [veh/h]	1781	1870	1854	1781	3560	1589	1406	1870	1589	1377
c, Capacity [veh/h]	93	1451	1439	28	2632	1175	159	203	173	200
d1, Uniform Delay [s]	55.95	6.13	6.18	58.43	15.64	4.36	53.78	0.00	53.44	48.94
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	9.24	2.32	2.39	6.62	36.16	0.15	22.33	0.00	30.89	0.33
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.70	0.65	0.66	0.32	1.06	0.09	0.95	0.00	1.00	0.14
d, Delay for Lane Group [s/veh]	65.18	8.44	8.57	65.04	51.80	4.51	76.12	0.00	84.33	49.27
Lane Group LOS	E	A	A	E	F	A	E	A	F	D
Critical Lane Group	Yes	No	No	No	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	2.17	9.76	9.86	0.32	42.46	0.70	5.51	0.00	6.66	0.82
50th-Percentile Queue Length [ft/ln]	54.37	244.00	246.48	8.04	1061.58	17.51	137.83	0.00	166.41	20.46
95th-Percentile Queue Length [veh/ln]	3.91	14.88	15.01	0.58	56.10	1.26	9.36	0.00	10.89	1.47
95th-Percentile Queue Length [ft/ln]	97.87	372.09	375.21	14.47	1402.52	31.51	234.10	0.00	272.19	36.83

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	65.18	8.51	8.57	65.04	51.80	4.51	76.12	0.00	84.33	49.27	49.27	49.27
Movement LOS	E	A	A	E	F	A	E	A	F	D	D	D
d_A, Approach Delay [s/veh]	10.38			50.13			80.51			49.27		
Approach LOS	B			D			F			D		
d_I, Intersection Delay [s/veh]	37.04											
Intersection LOS	D											
Intersection V/C	1.032											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	0.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	49.50	49.50	0.00
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.479	2.265	0.000
Crosswalk LOS	F	C	B	F
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	967	1467	217	217
d_b, Bicycle Delay [s]	16.02	4.27	47.70	47.70
I_b,int, Bicycle LOS Score for Intersection	3.180	3.956	2.091	1.607
Bicycle LOS	C	D	B	A

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd

Control Type:	Signalized	Delay (sec / veh):	52.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.142

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	173	1716	1	12	2681	68	104	1	412	1	2	2
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	173	1716	1	12	2681	68	104	1	412	1	2	2
Peak Hour Factor	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	44	435	0	3	680	17	26	0	104	0	1	1
Total Analysis Volume [veh/h]	175	1740	1	12	2719	69	105	1	418	1	2	2
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	18	47	0	54	83	0	0	14	14	0	14	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	14	91	91	2	79	79	10	28	10
g / C, Green / Cycle	0.12	0.79	0.79	0.02	0.69	0.69	0.09	0.24	0.09
(v / s)_i Volume / Saturation Flow Rate	0.10	0.47	0.47	0.01	0.75	0.75	0.13	0.26	0.01
s, saturation flow rate [veh/h]	1781	1870	1870	1781	1870	1854	815	1589	941
c, Capacity [veh/h]	217	1474	1474	35	1283	1272	133	388	120
d1, Uniform Delay [s]	49.14	4.81	4.81	55.60	18.04	18.04	54.13	43.45	48.12
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.46	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.86	1.74	1.74	5.56	51.99	55.62	10.13	65.89	0.14
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.81	0.59	0.59	0.34	1.09	1.10	0.79	1.08	0.04
d, Delay for Lane Group [s/veh]	56.00	6.56	6.56	61.17	70.03	73.66	64.25	109.34	48.26
Lane Group LOS	E	A	A	E	F	F	E	F	D
Critical Lane Group	No	No	No	No	No	Yes	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	5.30	7.00	7.00	0.40	47.68	48.54	3.47	18.02	0.14
50th-Percentile Queue Length [ft/ln]	132.45	174.96	174.99	9.95	1191.89	1213.60	86.66	450.58	3.41
95th-Percentile Queue Length [veh/ln]	9.07	11.34	11.34	0.72	63.51	65.02	6.24	26.08	0.25
95th-Percentile Queue Length [ft/ln]	226.82	283.42	283.46	17.91	1587.68	1625.47	155.98	651.96	6.14

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	56.00	6.56	6.56	61.17	71.80	73.66	64.25	64.25	109.34	48.26	48.26	48.26
Movement LOS	E	A	A	E	F	E	E	E	F	D	D	D
d_A, Approach Delay [s/veh]	11.07			71.80			100.22			48.26		
Approach LOS	B			E			F			D		
d_I, Intersection Delay [s/veh]	52.43											
Intersection LOS	D											
Intersection V/C	1.142											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			47.03			47.03			47.03		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.367			2.202			1.736		
Crosswalk LOS	F			C			B			A		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	748			1374			174			174		
d_b, Bicycle Delay [s]	22.54			5.63			47.93			47.93		
I_b,int, Bicycle LOS Score for Intersection	3.140			3.870			2.424			1.568		
Bicycle LOS	C			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

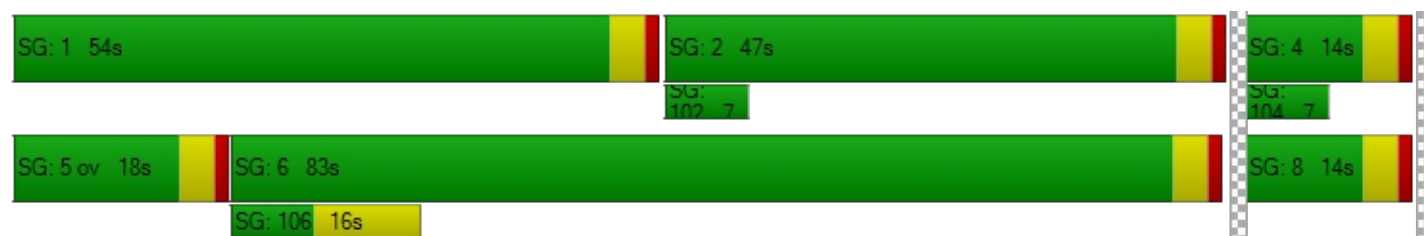

Intersection Level Of Service Report**Intersection 3: Winchester Rd at Robert Trent Jones Pkwy**

Control Type:	Signalized	Delay (sec / veh):	15.2
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.718

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	34	1713	152	300	2778	41	59	34	67	24	7	119
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	34	1713	152	300	2778	41	59	34	67	24	7	119
Peak Hour Factor	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	9	432	38	76	701	10	15	9	17	6	2	30
Total Analysis Volume [veh/h]	34	1729	153	303	2803	41	60	34	68	24	7	120
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	37	0	41	67	0	0	12	0	0	12	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	4	52	52	18	66	66	8	8	8	8	8	8
g / C, Green / Cycle	0.05	0.58	0.58	0.19	0.73	0.73	0.09	0.09	0.09	0.09	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.02	0.35	0.35	0.17	0.52	0.53	0.05	0.02	0.04	0.02	0.00	0.08
s, saturation flow rate [veh/h]	1781	3560	1793	1781	3560	1856	1263	1870	1589	1292	1870	1589
c, Capacity [veh/h]	81	2072	1043	348	2603	1357	82	168	143	119	168	143
d1, Uniform Delay [s]	41.80	12.13	12.16	35.15	6.83	6.89	45.02	37.99	38.97	43.17	37.44	40.35
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	3.38	1.31	2.61	6.81	1.72	3.35	11.80	0.59	2.45	0.83	0.10	12.28
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.42	0.60	0.61	0.87	0.72	0.72	0.73	0.20	0.48	0.20	0.04	0.84
d, Delay for Lane Group [s/veh]	45.17	13.45	14.77	41.96	8.55	10.23	56.82	38.58	41.42	44.00	37.54	52.63
Lane Group LOS	D	B	B	D	A	B	E	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	0.80	7.66	8.14	6.96	8.09	9.16	1.63	0.72	1.51	0.55	0.14	3.07
50th-Percentile Queue Length [ft/ln]	20.10	191.40	203.38	173.88	202.13	229.12	40.87	17.90	37.75	13.76	3.61	76.71
95th-Percentile Queue Length [veh/ln]	1.45	12.19	12.81	11.28	12.75	14.13	2.94	1.29	2.72	0.99	0.26	5.52
95th-Percentile Queue Length [ft/ln]	36.18	304.84	320.32	282.01	318.71	353.24	73.57	32.22	67.96	24.76	6.50	138.08

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	45.17	13.81	14.77	41.96	9.11	10.23	56.82	38.58	41.42	44.00	37.54	52.63
Movement LOS	D	B	B	D	A	B	E	D	D	D	D	D
d_A, Approach Delay [s/veh]	14.45			12.29			46.53			50.56		
Approach LOS	B			B			D			D		
d_I, Intersection Delay [s/veh]	15.17											
Intersection LOS	B											
Intersection V/C	0.718											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	34.67			0.00			34.67			34.67		
I_p,int, Pedestrian LOS Score for Intersection	3.298			0.000			2.347			2.424		
Crosswalk LOS	C			F			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	733			1400			178			178		
d_b, Bicycle Delay [s]	18.05			4.05			37.36			37.36		
I_b,int, Bicycle LOS Score for Intersection	2.613			3.290			1.693			1.684		
Bicycle LOS	B			C			A			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 4: Winchester Rd at Murrieta Hot Springs Rd**

Control Type:	Signalized	Delay (sec / veh):	85.4
Analysis Method:	HCM 6th Edition	Level Of Service:	F
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.207

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	175	927	139	240	1820	804	871	546	196	326	679	157
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	175	927	139	240	1820	804	871	546	196	326	679	157
Peak Hour Factor	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	46	243	36	63	476	210	228	143	51	85	178	41
Total Analysis Volume [veh/h]	183	971	146	251	1906	842	912	572	205	341	711	164
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	40	0	15	44	0	27	14	0	51	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	43	43	11	47	47	23	35	35	15	27	27
g / C, Green / Cycle	0.06	0.36	0.36	0.09	0.39	0.39	0.19	0.30	0.30	0.12	0.22	0.22
(v / s)_i Volume / Saturation Flow Rate	0.05	0.19	0.09	0.07	0.37	0.53	0.26	0.11	0.13	0.10	0.20	0.10
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	207	1836	573	309	1987	620	664	1503	469	421	801	358
d1, Uniform Delay [s]	56.06	30.36	27.05	53.70	35.71	36.64	48.54	33.61	34.26	51.38	45.07	40.22
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	11.81	1.10	1.07	5.13	12.65	171.55	170.41	0.16	0.64	3.75	3.56	0.92
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.89	0.53	0.25	0.81	0.96	1.36	1.37	0.38	0.44	0.81	0.89	0.46
d, Delay for Lane Group [s/veh]	67.88	31.45	28.13	58.83	48.36	208.18	218.94	33.77	34.90	55.13	48.63	41.13
Lane Group LOS	E	C	C	E	D	F	F	C	C	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	3.09	7.55	3.13	3.94	20.02	47.25	25.60	4.45	4.94	5.22	10.60	4.29
50th-Percentile Queue Length [ft/ln]	77.31	188.80	78.29	98.55	500.47	1181.29	639.89	111.28	123.42	130.39	264.96	107.27
95th-Percentile Queue Length [veh/ln]	5.57	12.06	5.64	7.10	27.36	70.50	39.17	7.91	8.58	8.96	15.94	7.69
95th-Percentile Queue Length [ft/ln]	139.16	301.48	140.93	177.39	683.91	1762.59	979.35	197.78	214.52	224.03	398.43	192.20

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	67.88	31.45	28.13	58.83	48.36	208.18	218.94	33.77	34.90	55.13	48.63	41.13
Movement LOS	E	C	C	E	D	F	F	C	C	E	D	D
d_A, Approach Delay [s/veh]	36.21			94.11			133.89			49.44		
Approach LOS	D			F			F			D		
d_I, Intersection Delay [s/veh]	85.45											
Intersection LOS	F											
Intersection V/C	1.207											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.410			3.157			3.006		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	600			667			167			567		
d_b, Bicycle Delay [s]	29.40			26.67			50.42			30.82		
I_b,int, Bicycle LOS Score for Intersection	2.275			3.209			2.489			2.563		
Bicycle LOS	B			C			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 5: Winchester Rd at Winchester Square Drive**

Control Type:	Signalized	Delay (sec / veh):	11.4
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.656

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	6	1403	134	49	2321	3	3	5	5	108	2	59
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	6	1403	134	49	2321	3	3	5	5	108	2	59
Peak Hour Factor	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	2	378	36	13	626	1	1	1	1	29	1	16
Total Analysis Volume [veh/h]	6	1513	145	53	2504	3	3	5	5	117	2	64
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	20	0	11	20	0	0	36	0	0	23	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	1	59	59	5	63	63	2	8	8
g / C, Green / Cycle	0.01	0.65	0.65	0.06	0.70	0.70	0.02	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.00	0.31	0.31	0.03	0.46	0.46	0.01	0.07	0.04
s, saturation flow rate [veh/h]	1781	3560	1787	1781	3560	1869	1732	1782	1589
c, Capacity [veh/h]	22	2315	1162	104	2480	1302	40	162	145
d1, Uniform Delay [s]	44.14	7.99	8.00	41.20	7.72	7.72	43.36	39.93	38.83
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.68	0.71	1.40	3.81	1.41	2.68	4.65	6.30	2.12
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.28	0.48	0.48	0.51	0.66	0.66	0.33	0.73	0.44
d, Delay for Lane Group [s/veh]	50.82	8.70	9.40	45.01	9.13	10.40	48.02	46.23	40.95
Lane Group LOS	D	A	A	D	A	B	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	0.17	4.89	5.14	1.24	7.61	8.45	0.33	2.82	1.41
50th-Percentile Queue Length [ft/ln]	4.30	122.13	128.41	31.02	190.37	211.37	8.35	70.46	35.27
95th-Percentile Queue Length [veh/ln]	0.31	8.51	8.85	2.23	12.14	13.22	0.60	5.07	2.54
95th-Percentile Queue Length [ft/ln]	7.74	212.75	221.34	55.83	303.51	330.59	15.04	126.83	63.49

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	50.82	8.89	9.40	45.01	9.57	10.40	48.02	48.02	48.02	46.23	46.23	40.95
Movement LOS	D	A	A	D	A	B	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	9.09			10.30			48.02			44.38		
Approach LOS	A			B			D			D		
d_I, Intersection Delay [s/veh]	11.37											
Intersection LOS	B											
Intersection V/C	0.656											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	34.67			0.00			34.67			34.67		
I_p,int, Pedestrian LOS Score for Intersection	3.191			0.000			1.726			2.065		
Crosswalk LOS	C			F			A			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	356			356			711			422		
d_b, Bicycle Delay [s]	30.42			30.42			18.69			28.01		
I_b,int, Bicycle LOS Score for Intersection	2.475			2.968			1.581			1.862		
Bicycle LOS	B			C			A			A		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

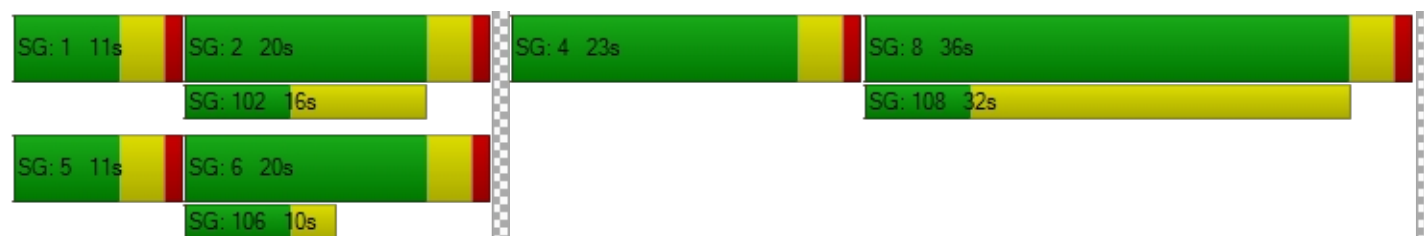

Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	25.1
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.816

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	79	1283	86	46	2091	223	161	24	57	155	45	77
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	79	1283	86	46	2091	223	161	24	57	155	45	77
Peak Hour Factor	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	22	356	24	13	580	62	45	7	16	43	12	21
Total Analysis Volume [veh/h]	88	1424	95	51	2321	248	179	27	63	172	50	85
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	44	0	11	44	0	0	24	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	70	70	6	68	68	14	14	10	10	10
g / C, Green / Cycle	0.06	0.61	0.61	0.05	0.59	0.59	0.12	0.12	0.08	0.08	0.08
(v / s)_i Volume / Saturation Flow Rate	0.05	0.28	0.28	0.03	0.48	0.49	0.10	0.05	0.06	0.06	0.05
s, saturation flow rate [veh/h]	1781	3560	1811	1781	3560	1781	1781	1664	1781	1820	1589
c, Capacity [veh/h]	110	2155	1096	89	2113	1057	216	202	150	153	134
d1, Uniform Delay [s]	53.30	12.50	12.50	53.48	18.15	18.67	49.36	46.94	51.42	51.41	50.97
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	12.58	0.73	1.43	5.75	3.33	7.43	7.80	1.53	6.71	6.52	4.89
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.80	0.47	0.47	0.57	0.80	0.83	0.83	0.44	0.73	0.73	0.63
d, Delay for Lane Group [s/veh]	65.89	13.23	13.93	59.23	21.47	26.11	57.17	48.47	58.14	57.93	55.86
Lane Group LOS	E	B	B	E	C	C	E	D	E	E	E
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	2.89	7.03	7.36	1.59	17.28	19.48	5.48	2.48	3.37	3.43	2.55
50th-Percentile Queue Length [ft/ln]	72.34	175.64	184.08	39.63	431.90	487.06	137.08	62.08	84.32	85.70	63.79
95th-Percentile Queue Length [veh/ln]	5.21	11.37	11.81	2.85	24.09	26.72	9.32	4.47	6.07	6.17	4.59
95th-Percentile Queue Length [ft/ln]	130.22	284.32	295.33	71.34	602.31	668.02	233.08	111.75	151.77	154.26	114.82

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	65.89	13.44	13.93	59.23	22.72	26.11	57.17	48.47	48.47	58.06	57.93	55.86
Movement LOS	E	B	B	E	C	C	E	D	D	E	E	E
d_A, Approach Delay [s/veh]	16.34			23.75			54.26			57.43		
Approach LOS	B			C			D			E		
d_I, Intersection Delay [s/veh]	25.13											
Intersection LOS	C											
Intersection V/C	0.816											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	47.03	47.03	47.03
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.206	2.165	2.260
Crosswalk LOS	F	C	B	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	696	696	348	557
d_b, Bicycle Delay [s]	24.46	24.46	39.24	29.95
I_b,int, Bicycle LOS Score for Intersection	2.443	3.001	2.003	2.066
Bicycle LOS	B	C	B	B

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

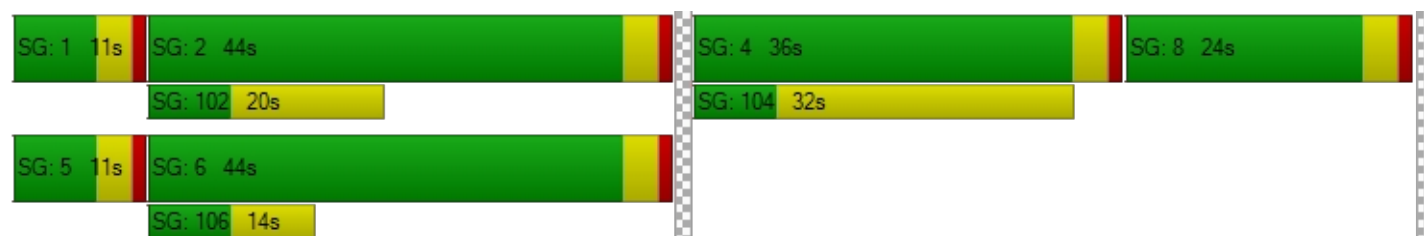

Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	33.9
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.996

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	211	2835	50	4	2175	136	89	3	129	45	4	11
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	211	2835	50	4	2175	136	89	3	129	45	4	11
Peak Hour Factor	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	55	735	13	1	564	35	23	1	33	12	1	3
Total Analysis Volume [veh/h]	219	2941	52	4	2256	141	92	3	134	47	4	11
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	19	90	0	11	82	0	0	14	0	0	14	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	15	92	92	1	78	78	10	10	10	10
g / C, Green / Cycle	0.13	0.80	0.80	0.01	0.68	0.68	0.09	0.09	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.12	0.80	0.81	0.00	0.63	0.09	0.07	0.00	0.08	0.05
s, saturation flow rate [veh/h]	1781	1870	1859	1781	3560	1589	1398	1870	1589	1284
c, Capacity [veh/h]	233	1497	1488	14	2413	1077	93	163	139	167
d1, Uniform Delay [s]	49.53	11.45	11.47	56.72	16.31	6.56	52.14	47.96	52.30	50.98
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	16.45	23.19	24.75	10.99	8.36	0.25	39.60	0.04	27.99	1.37
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.94	1.00	1.01	0.29	0.94	0.13	0.98	0.02	0.97	0.37
d, Delay for Lane Group [s/veh]	65.98	34.64	36.21	67.72	24.66	6.81	91.74	48.01	80.28	52.34
Lane Group LOS	E	C	F	E	C	A	F	D	F	D
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	7.28	35.67	36.13	0.16	25.59	1.22	3.66	0.08	4.92	1.79
50th-Percentile Queue Length [ft/ln]	181.94	891.66	903.35	3.95	639.78	30.52	91.41	2.02	123.09	44.67
95th-Percentile Queue Length [veh/ln]	11.70	45.46	46.25	0.28	33.89	2.20	6.58	0.15	8.56	3.22
95th-Percentile Queue Length [ft/ln]	292.54	1136.52	1156.36	7.10	847.19	54.93	164.54	3.64	214.07	80.40

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	65.98	35.41	36.21	67.72	24.66	6.81	91.74	48.01	80.28	52.34	52.34	52.34
Movement LOS	E	D	D	E	C	A	F	D	F	D	D	D
d_A, Approach Delay [s/veh]	37.51			23.69			84.46			52.34		
Approach LOS	D			C			F			D		
d_I, Intersection Delay [s/veh]	33.86											
Intersection LOS	C											
Intersection V/C	0.996											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			0.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			47.03			47.03			0.00		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.480			2.287			0.000		
Crosswalk LOS	F			C			B			F		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	1496			1357			174			174		
d_b, Bicycle Delay [s]	3.66			5.95			47.93			47.93		
I_b,int, Bicycle LOS Score for Intersection	4.210			3.540			1.937			1.662		
Bicycle LOS	D			D			A			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd

Control Type:	Signalized	Delay (sec / veh):	49.9
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.099

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	387	3046	2	2	2325	110	104	0	263	0	7	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	387	3046	2	2	2325	110	104	0	263	0	7	8
Peak Hour Factor	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	99	778	1	1	594	28	27	0	67	0	2	2
Total Analysis Volume [veh/h]	395	3111	2	2	2375	112	106	0	269	0	7	8
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	29	98	0	11	80	0	0	11	11	0	11	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	25	100	100	0	76	76	7	36	7
g / C, Green / Cycle	0.21	0.84	0.84	0.00	0.63	0.63	0.06	0.30	0.06
(v / s)_i Volume / Saturation Flow Rate	0.22	0.83	0.83	0.00	0.66	0.68	0.06	0.17	0.01
s, saturation flow rate [veh/h]	1781	1870	1870	1781	1870	1841	1774	1589	1228
c, Capacity [veh/h]	371	1565	1565	8	1183	1165	164	478	102
d1, Uniform Delay [s]	47.48	9.51	9.52	59.54	22.03	22.03	56.51	35.32	53.63
k, delay calibration	0.37	0.50	0.50	0.11	0.50	0.50	0.11	0.21	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	58.13	21.47	21.52	17.66	40.62	46.42	4.20	2.05	0.65
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	1.06	0.99	0.99	0.27	1.05	1.07	0.65	0.56	0.15
d, Delay for Lane Group [s/veh]	105.60	30.98	31.04	77.20	62.65	68.45	60.71	37.38	54.29
Lane Group LOS	F	C	C	E	F	F	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	No	Yes	No
50th-Percentile Queue Length [veh/ln]	17.02	32.85	32.90	0.10	43.46	44.66	3.40	6.89	0.45
50th-Percentile Queue Length [ft/ln]	425.43	821.35	822.54	2.44	1086.59	1116.50	85.08	172.24	11.24
95th-Percentile Queue Length [veh/ln]	24.60	42.25	42.31	0.18	56.72	58.90	6.13	11.19	0.81
95th-Percentile Queue Length [ft/ln]	615.11	1056.36	1057.72	4.40	1418.00	1472.54	153.14	279.86	20.24

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	105.60	31.01	31.04	77.20	65.41	68.45	60.71	60.71	37.38	54.29	54.29	54.29
Movement LOS	F	C	C	E	F	E	E	E	D	D	D	D
d_A, Approach Delay [s/veh]	39.41			65.55			43.97			54.29		
Approach LOS	D			E			D			D		
d_I, Intersection Delay [s/veh]	49.90											
Intersection LOS	D											
Intersection V/C	1.099											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.579			2.243			1.738		
Crosswalk LOS	F			D			B			A		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	1567			1267			117			117		
d_b, Bicycle Delay [s]	2.82			8.07			53.20			53.20		
I_b,int, Bicycle LOS Score for Intersection	4.454			3.613			2.178			1.584		
Bicycle LOS	E			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 3: Winchester Rd at Robert Trent Jones Pkwy**

Control Type:	Signalized	Delay (sec / veh):	47.0
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.039

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	63	2933	112	171	2299	59	51	38	60	157	61	367
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	63	2933	112	171	2299	59	51	38	60	157	61	367
Peak Hour Factor	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	16	764	29	45	599	15	13	10	16	41	16	96
Total Analysis Volume [veh/h]	66	3055	117	178	2395	61	53	40	63	164	64	382
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	72	0	16	77	0	0	32	0	0	32	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	68	68	12	74	74	28	28	28	28	28	28
g / C, Green / Cycle	0.05	0.57	0.57	0.10	0.61	0.61	0.23	0.23	0.23	0.23	0.23	0.23
(v / s)_i Volume / Saturation Flow Rate	0.04	0.58	0.60	0.10	0.45	0.46	0.06	0.02	0.04	0.13	0.03	0.24
s, saturation flow rate [veh/h]	1781	3560	1835	1781	3560	1846	944	1870	1589	1291	1870	1589
c, Capacity [veh/h]	94	2014	1038	179	2185	1133	60	437	371	300	437	371
d1, Uniform Delay [s]	55.89	26.04	26.04	53.89	16.35	16.46	59.96	36.00	36.68	45.56	36.48	45.96
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.42
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	9.25	28.94	42.63	29.63	2.28	4.45	30.61	0.09	0.21	1.56	0.15	50.58
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.70	1.03	1.05	0.99	0.74	0.74	0.88	0.09	0.17	0.55	0.15	1.03
d, Delay for Lane Group [s/veh]	65.14	54.98	68.67	83.52	18.63	20.91	90.57	36.09	36.90	47.12	36.63	96.54
Lane Group LOS	E	F	F	F	B	C	F	D	D	D	D	F
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	2.21	34.94	39.96	6.83	15.39	16.87	2.12	0.94	1.51	4.69	1.52	16.19
50th-Percentile Queue Length [ft/ln]	55.19	873.39	999.10	170.85	384.64	421.79	53.11	23.43	37.72	117.17	38.01	404.74
95th-Percentile Queue Length [veh/ln]	3.97	45.86	52.54	11.12	21.82	23.61	3.82	1.69	2.72	8.24	2.74	23.17
95th-Percentile Queue Length [ft/ln]	99.34	1146.45	1313.51	278.03	545.46	590.20	95.60	42.17	67.89	205.93	68.41	579.28

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	65.14	59.35	68.67	83.52	19.37	20.91	90.57	36.09	36.90	47.12	36.63	96.54
Movement LOS	E	F	E	F	B	C	F	D	D	D	D	F
d_A, Approach Delay [s/veh]	59.80			23.74			54.93			76.97		
Approach LOS	E			C			D			E		
d_I, Intersection Delay [s/veh]	46.96											
Intersection LOS	D											
Intersection V/C	1.039											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	49.50			0.00			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	3.657			0.000			2.381			2.498		
Crosswalk LOS	D			F			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	1133			1217			467			467		
d_b, Bicycle Delay [s]	11.27			9.20			35.27			35.27		
I_b,int, Bicycle LOS Score for Intersection	3.341			3.008			1.688			2.063		
Bicycle LOS	C			C			A			B		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report**Intersection 4: Winchester Rd at Murrieta Hot Springs Rd**

Control Type:	Signalized	Delay (sec / veh):	119.2
Analysis Method:	HCM 6th Edition	Level Of Service:	F
Analysis Period:	15 minutes	Volume to Capacity (v/c):	1.381

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	264	2012	224	218	1455	927	904	784	217	299	751	178
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	264	2012	224	218	1455	927	904	784	217	299	751	178
Peak Hour Factor	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	70	532	59	58	385	245	239	207	57	79	198	47
Total Analysis Volume [veh/h]	279	2127	237	230	1538	980	956	829	229	316	794	188
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	46	0	11	46	0	25	38	0	25	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	46	46	7	46	46	21	37	37	13	30	30
g / C, Green / Cycle	0.06	0.39	0.39	0.06	0.39	0.39	0.18	0.31	0.31	0.11	0.25	0.25
(v / s)_i Volume / Saturation Flow Rate	0.08	0.42	0.15	0.07	0.30	0.62	0.28	0.16	0.14	0.09	0.22	0.12
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	207	1960	612	207	1960	612	607	1581	493	387	879	392
d1, Uniform Delay [s]	56.47	36.95	26.72	56.47	32.57	36.95	49.53	34.12	33.38	52.13	43.85	38.64
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.12	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	164.32	47.74	1.85	65.15	3.24	278.68	261.13	0.27	0.68	4.25	3.80	0.91
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	1.35	1.09	0.39	1.11	0.78	1.60	1.58	0.52	0.46	0.82	0.90	0.48
d, Delay for Lane Group [s/veh]	220.79	84.70	28.57	121.62	35.81	315.64	310.65	34.39	34.06	56.38	47.65	39.55
Lane Group LOS	F	F	C	F	D	F	F	C	C	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	7.85	27.36	5.22	5.00	13.52	64.85	31.06	6.68	5.47	4.88	11.82	4.84
50th-Percentile Queue Length [ft/ln]	196.25	683.99	130.44	125.08	337.93	1621.15	776.47	166.91	136.83	122.00	295.62	120.99
95th-Percentile Queue Length [veh/ln]	13.49	38.05	8.96	8.94	19.55	100.45	48.28	10.91	9.31	8.50	17.46	8.45
95th-Percentile Queue Length [ft/ln]	337.35	951.33	224.10	223.49	488.67	2511.35	1206.91	272.85	232.75	212.57	436.61	211.19

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	220.79	84.70	28.57	121.62	35.81	315.64	310.65	34.39	34.06	56.38	47.65	39.55
Movement LOS	F	F	C	F	D	F	F	C	C	E	D	D
d_A, Approach Delay [s/veh]	94.03			142.78			165.49			48.60		
Approach LOS	F			F			F			D		
d_I, Intersection Delay [s/veh]	119.18											
Intersection LOS	F											
Intersection V/C	1.381											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.515			3.235			3.055		
Crosswalk LOS	F			D			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	700			700			567			567		
d_b, Bicycle Delay [s]	25.35			25.35			30.82			30.82		
I_b,int, Bicycle LOS Score for Intersection	3.013			3.071			2.667			2.630		
Bicycle LOS	C			C			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 5: Winchester Rd at Winchester Square Drive

Control Type:	Signalized	Delay (sec / veh):	24.6
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.877

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	32	2435	303	58	1880	15	20	20	28	194	6	148
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	32	2435	303	58	1880	15	20	20	28	194	6	148
Peak Hour Factor	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	8	646	80	15	498	4	5	5	7	51	2	39
Total Analysis Volume [veh/h]	34	2582	321	62	1994	16	21	21	30	206	6	157
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing m	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	53	0	11	53	0	0	36	0	0	20	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	5	75	75	6	77	77	6	16	16
g / C, Green / Cycle	0.04	0.63	0.63	0.05	0.64	0.64	0.05	0.13	0.13
(v / s)_i Volume / Saturation Flow Rate	0.02	0.53	0.56	0.03	0.37	0.37	0.04	0.12	0.10
s, saturation flow rate [veh/h]	1781	3560	1770	1781	3560	1862	1719	1783	1589
c, Capacity [veh/h]	72	2232	1109	92	2272	1188	94	238	213
d1, Uniform Delay [s]	56.35	17.97	19.22	55.93	12.49	12.50	56.02	51.13	49.99
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.74	4.39	11.72	8.21	1.09	2.08	12.36	10.75	4.96
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.47	0.85	0.90	0.67	0.58	0.58	0.77	0.89	0.74
d, Delay for Lane Group [s/veh]	61.09	22.35	30.93	64.14	13.58	14.57	68.37	61.88	54.95
Lane Group LOS	E	C	C	E	B	B	E	E	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	1.10	20.84	25.50	2.06	9.93	10.73	2.47	6.97	4.82
50th-Percentile Queue Length [ft/ln]	27.61	521.10	637.56	51.42	248.36	268.26	61.87	174.23	120.58
95th-Percentile Queue Length [veh/ln]	1.99	28.33	33.78	3.70	15.10	16.10	4.45	11.30	8.43
95th-Percentile Queue Length [ft/ln]	49.69	708.29	844.61	92.56	377.59	402.56	111.36	282.46	210.63

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	61.09	24.61	30.93	64.14	13.92	14.57	68.37	68.37	68.37	61.88	61.88	54.95
Movement LOS	E	C	C	E	B	B	E	E	E	E	E	D
d_A, Approach Delay [s/veh]	25.72			15.43			68.37			58.93		
Approach LOS	C			B			E			E		
d_I, Intersection Delay [s/veh]	24.62											
Intersection LOS	C											
Intersection V/C	0.877											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			0.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	49.50			0.00			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	3.327			0.000			1.791			2.205		
Crosswalk LOS	C			F			A			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	817			817			533			267		
d_b, Bicycle Delay [s]	21.00			21.00			32.27			45.07		
I_b,int, Bicycle LOS Score for Intersection	3.175			2.699			1.678			2.168		
Bicycle LOS	C			B			A			B		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

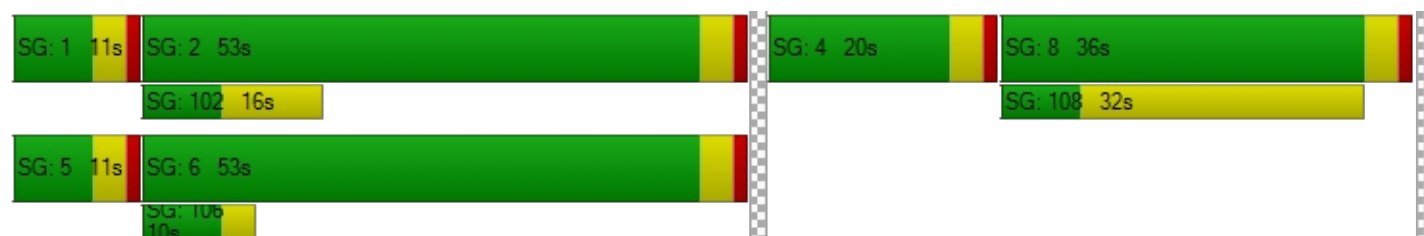

Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	30.7
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.864

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	100	2483	138	93	1754	221	250	50	66	125	37	74
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	100	2483	138	93	1754	221	250	50	66	125	37	74
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	26	633	35	24	447	56	64	13	17	32	9	19
Total Analysis Volume [veh/h]	102	2534	141	95	1790	226	255	51	67	128	38	76
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	12	61	0	12	61	0	0	11	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	8	68	68	8	68	68	20	20	8	8	8
g / C, Green / Cycle	0.07	0.57	0.57	0.07	0.57	0.57	0.16	0.16	0.07	0.07	0.07
(v / s)_i Volume / Saturation Flow Rate	0.06	0.49	0.50	0.05	0.38	0.38	0.14	0.07	0.05	0.05	0.05
s, saturation flow rate [veh/h]	1781	3560	1821	1781	3560	1765	1781	1700	1781	1820	1589
c, Capacity [veh/h]	120	2023	1035	119	2022	1003	290	277	122	125	109
d1, Uniform Delay [s]	55.39	22.08	22.57	55.20	17.99	18.11	49.10	45.21	54.61	54.59	54.70
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.13	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	15.06	5.38	11.22	11.33	1.74	3.58	9.80	1.04	6.33	6.10	7.79
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.85	0.87	0.89	0.80	0.66	0.67	0.88	0.43	0.67	0.67	0.70
d, Delay for Lane Group [s/veh]	70.45	27.46	33.79	66.53	19.73	21.70	58.90	46.25	60.93	60.69	62.49
Lane Group LOS	E	C	C	E	B	C	E	D	E	E	E
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	3.56	21.43	24.50	3.21	12.88	13.51	8.24	3.25	2.65	2.68	2.49
50th-Percentile Queue Length [ft/ln]	88.89	535.75	612.49	80.22	322.02	337.78	205.98	81.34	66.17	67.09	62.13
95th-Percentile Queue Length [veh/ln]	6.40	29.02	32.62	5.78	18.77	19.54	12.95	5.86	4.76	4.83	4.47
95th-Percentile Queue Length [ft/ln]	160.00	725.55	815.43	144.40	469.17	488.48	323.66	146.42	119.10	120.76	111.83

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	70.45	29.40	33.79	66.53	20.22	21.70	58.90	46.25	46.25	60.85	60.69	62.49
Movement LOS	E	C	C	E	C	C	E	D	D	E	E	E
d_A, Approach Delay [s/veh]	31.13			22.46			54.90			61.34		
Approach LOS	C			C			D			E		
d_I, Intersection Delay [s/veh]	30.75											
Intersection LOS	C											
Intersection V/C	0.864											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.301			2.194			2.274		
Crosswalk LOS	F			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	950			950			117			533		
d_b, Bicycle Delay [s]	16.54			16.54			53.20			32.27		
I_b,int, Bicycle LOS Score for Intersection	3.087			2.721			2.175			1.959		
Bicycle LOS	C			B			B			A		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

