Appendix E Energy Analysis



534 Struck AvenueENERGY ANALYSIS CITY OF ORANGE

PREPARED BY:

Haseeb Qureshi hqureshi@urbanxroads.com

Alyssa Barnett abarnett@urbanxroads.com

JANUARY 12, 2023

TABLE OF CONTENTS

ΑF	PEND	F CONTENTS	
	_	EXHIBITS TABLES	
LIS	ST OF A	ABBREVIATED TERMSVE SUMMARY	
	ES.1 ES.2	Summary of Findings Project Requirements	
1	INT	FRODUCTION	8
	1.1 1.2	Site LocationProject Description	
2	EXI	ISTING CONDITIONS	12
	2.12.22.32.4	Overview Electricity Natural Gas Transportation Energy Resources	14 16
3	RE	GULATORY BACKGROUND	22
	3.1 3.2	Federal Regulations California Regulations	
4	PR	OJECT ENERGY DEMANDS AND ENERGY EFFICIENCY MEASURES	26
	4.1 4.2 4.3 4.4	Evaluation Criteria Methodology Construction Energy Demands Operational Energy Demands	26 27 36
5 6		Summary NCLUSIONS FERENCES	42
7		RTIFICATIONS	



APPENDICES

APPENDIX 4.1: CALEEMOD PROJECT CONSTRUCTION EMISSIONS MODEL OUTPUTS APPENDIX 4.2: CALEEMOD PROJECT OPERATIONS EMISSIONS MODEL OUTPUTS

APPENDIX 4.3: EMFAC2021

LIST OF EXHIBITS

EXHIBIT 1-A: LOCATION MAP	9
EXHIBIT 1-B: SITE PLAN	10
LIST OF TABLES	
TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS	6
TABLE 2-1: TOTAL ELECRICITY SYSTEM POWER (CALIFORNIA 2021)	13
TABLE 2-2: SCE 2020 POWER CONTENT MIX	16
TABLE 4-1: CONSTRUCTION DURATION	27
TABLE 4-2: CONSTRUCTION POWER COST	28
TABLE 4-3: CONSTRUCTION ELECTRICITY USAGE	28
TABLE 4-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS	29
TABLE 4-5: CONSTRUCTION EQUIPMENT FUEL CONSUMPTION ESTIMATES	31
TABLE 4-6: CONSTRUCTION TRIPS AND VMT	
TABLE 4-7: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES	33
TABLE 4-8: CONSTRUCTION VENDOR FUEL CONSUMPTION ESTIMATES	34
TABLE 4-9: TOTAL PROJECT-GENERATED TRAFFIC ANNUAL FUEL CONSUMPTION	
TABLE 4-10: ON-SITE CARGO HANDLING EQUIPMENT FUEL CONSUMPTION ESTIMATES	
TABLE 4-11: PROJECT ANNUAL OPERATIONAL ENERGY DEMAND SUMMARY	



LIST OF ABBREVIATED TERMS

% Percent (1) Reference

AGSP Airport Gateway Specific Plan

AQIA 534 Struck Avenue Air Quality Impact Analysis

BACM Best Available Control Measures

BTU British Thermal Units

CalEEMod California Emissions Estimator Model

CAPCOA California Air Pollution Control Officers Association

CARB California Air Resources Board
CCR California Code of Regulations
CEC California Energy Commission

CEQA California Environmental Quality Act

City City of Orange

CPEP Clean Power and Electrification Pathway
CPUC California Public Utilities Commission

DMV Department of Motor Vehicles
EIA Energy Information Administration
EPA Environmental Protection Agency

EMFAC EMissions FACtor

FERC Federal Energy Regulatory Commission

GHG Greenhouse Gas GWh Gigawatt Hour

HHD Heavy-Heavy Duty Trucks
 hp-hr-gal Horsepower Hours Per Gallon
 IEPR Integrated Energy Policy Report
 ISO Independent Service Operator

ISTEA Intermodal Surface Transportation Efficiency Act

ITE Institute of Transportation Engineers

kBTU Thousand-British Thermal Units

kWh Kilowatt Hour
LDA Light Duty Auto
LDT1/LDT2 Light-Duty Trucks

LHD1/LHD2 Light-Heavy Duty Trucks
MDV Medium Duty Trucks

MHD Medium-Heavy Duty Trucks MMcfd Million Cubic Feet Per Day



mpg Miles Per Gallon

MPO Metropolitan Planning Organization

PG&E Pacific Gas and Electric
Project 534 Struck Avenue

PV Photovoltaic

SCAB South Coast Air Basin

SCE Southern California Edison

SDAB San Diego Air Basin

sf Square Feet

SoCalGas Southern California Gas

TEA-21 Transportation Equity Act for the 21st Century

U.S. United States

VMT Vehicle Miles Traveled



This page intentionally left blank



EXECUTIVE SUMMARY

ES.1 SUMMARY OF FINDINGS

The results of this 534 Struck Avenue Energy Analysis is summarized below based on the significance criteria in Section 5 of this report consistent with Appendix G of the CEQA Guidelines (CEQA Guidelines) (1). Table ES-1 shows the findings of significance for potential energy impacts under CEQA.

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS

Amalysis	Report	Significance Findings			
Analysis	Section	Unmitigated	Mitigated		
Energy Impact #1: Would the Project result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation?	5.0	Less Than Significant	n/a		
Energy Impact #2: Would the Project conflict with or obstruct a state or local plan for renewable energy or energy efficiency?	5.0	Less Than Significant	n/a		

ES.2 PROJECT REQUIREMENTS

The Project would be required to comply with regulations imposed by the federal and state agencies that regulate energy use and consumption through various means and programs. Those that are directly and indirectly applicable to the Project and that would assist in the reduction of energy usage include:

- Intermodal Surface Transportation Efficiency Act of 1991 (ISTEA)
- The Transportation Equity Act for the 21st Century (TEA-21
- Integrated Energy Policy Report (IEPR)
- State of California Energy Plan
- California Code Title 24, Part 6, Energy Efficiency Standards
- California Code Title 24, Part 11, California Green Building Standards Code (CALGreen)
- AB 1493 Pavley Regulations and Fuel Efficiency Standards
- California's Renewable Portfolio Standard (RPS)
- Clean Energy and Pollution Reduction Act of 2015 (SB 350)

Consistency with the above regulations is discussed in detail in section 5 of this report.



This page intentionally left blank



1 INTRODUCTION

This report presents the results of the energy analysis prepared by Urban Crossroads, Inc., for the proposed 534 Struck Avenue Project (Project). The purpose of this report is to ensure that energy implication is considered by the City of Orange (Lead Agency), as the lead agency, and to quantify anticipated energy usage associated with construction and operation of the proposed Project, determine if the usage amounts are efficient, typical, or wasteful for the land use type, and to emphasize avoiding or reducing inefficient, wasteful, and unnecessary consumption of energy.

1.1 SITE LOCATION

The proposed 534 Struck Avenue Project is located south of Struck Avenue and east of Batavia Street in the City of Orange, as shown on Exhibit 1-A. Existing uses that surround the Project site includes mostly manufacturing industrial land uses to the west and east, with public-institutional uses to the north and the nearest multi-family residential land uses located northeast of the Project site.

1.2 PROJECT DESCRIPTION

It is our understanding that the Project is proposing to redevelop the site with a 57,900-square foot (sf), 45-foot-tall truck terminal, including 52,900-sf of warehouse space and 5,000-sf of office uses. The site also includes a 5,400-sf maintenance building. The Project would construct 62 passenger car parking stalls (including 3 accessible parking spaces) and 188 trailer parking stalls (for a total of 250 parking stalls) on-site. The building is proposed to include 84 dock doors (cross-dock configuration), as shown on Exhibit 1-B. The Project is anticipated to be constructed in one phase by year 2024.




EXHIBIT 1-A: LOCATION MAP



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS



EXHIBIT 1-B: SITE PLAN

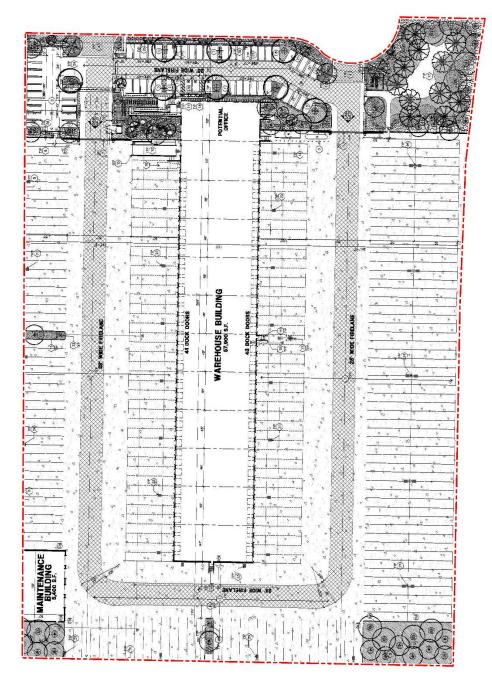





This page intentionally left blank



2 EXISTING CONDITIONS

This section provides an overview of the existing energy conditions in the Project region.

2.1 OVERVIEW

The most recent data for California's estimated total energy consumption and natural gas consumption is from 2020, released by the United States (U.S.) Energy Information Administration's (EIA) California State Profile and Energy Estimates in 2021 and included (2):

- As of 2020, approximately 6,923 trillion British Thermal Unit (BTU) of energy was consumed
- As of 2020, approximately 524 million barrels of petroleum
- As of 2020, approximately 2,075 billion cubic feet of natural gas
- As of 2020, approximately 1 million short tons of coal

The California Energy Commission's (CEC) Transportation Energy Demand Forecast released the 2018-2030 was released in order to support the 2017 Integrated Energy Policy Report. The Transportation energy Demand Forecast 2018-2030 lays out graphs and data supporting CEC's projections of California's future transportation energy demand. The projected inputs consider expected variable changes in fuel prices, income, population, and other variables. Predictions regarding fuel demand included:

- Gasoline demand in the transportation sector is expected to decline from approximately 15.8 billion gallons in 2017 to between 12.3 billion and 12.7 billion gallons in 2030 (3)
- Diesel demand in the transportation sector is expected to rise, increasing from approximately 3.7 billion diesel gallons in 2015 to approximately 4.7 billion in 2030 (3)
- Data from the Department of Energy states that approximately 3.9 billion gallons of diesel fuel were consumed in 2019 (4)

The most recent data provided by the EIA for energy use in California by demand sector is from 2020 and is reported as follows:

- Approximately 34.0% transportation
- Approximately 24.6% industrial
- Approximately 21.8% residential
- Approximately 19.6% commercial (5)

In 2021, total system electric generation for California was 277,764 gigawatt hours (GWh). California's massive electricity in-state generation system generated approximately 194,127 GWh which accounted for approximately 70% of the electricity it uses; the rest was imported from the Pacific Northwest (12%) and the U.S. Southwest (18%) (6). Natural gas is the main source for electricity generation at 50.19% of the total in-state electric generation system power as shown in Table 2-1.



TABLE 2-1: TOTAL ELECRICITY SYSTEM POWER (CALIFORNIA 2021)

Fuel Type	California In-State Generation (GWh)	% of California In- State Generation	Northwest Imports (GWh)	Southwest Imports (GWh)	Total Imports (GWh)	% of Imports	Total California Energy Mix	Total California Power Mix
Coal	303	0.2%	181	7,788	7,969	9.5%	8,272	3.0%
Natural Gas	97,431	50.2%	45	7,880	7,925	9.5%	105,356	379.0%
Oil	37	0.0%	-	-	-	0.0%	37	0.0%
Other (Waste Heat/Petroleum Coke)	382	0.2%	68	15	83	0.1%	465	0.2%
Nuclear	16,477	8.5%	524	8,756	9,281	11.1%	25,758	9.3%
Large Hydro	12,036	6.2%	12,042	1,578	13,620	16.3%	25,656	9.2%
Unspecified	-	0.0%	8,156	10,731	18,887	22.6%	18,887	6.8%
Total Thermal and Non-Renewables	126,666	65.2%	21,017	36,748	57,764	6910.0%	184,431	66.4%
Biomass	5,381	2.8%	864	26	890	1.1%	6,271	2.3%
Geothermal	11,116	5.7%	192	1,906	2,098	2.5%	13,214	4.8%
Small Hydro	2,531	1.3%	304	1	304	0.4%	2,835	1.0%
Solar	33,260	17.1%	220	5,979	6,199	7.4%	39,458	14.2%
Wind	15,173	7.8%	9,976	6,405	16,381	19.6%	31,555	11.4%
Total Renewables	67,461	34.8%	11,555	14,317	25,872	3090.0%	93,333	33.6%
SYSTEM TOTALS	194,127	100.0%	32,572	51,064	83,636	100.0%	277,764	100.0%

Source: CECs 2021 Total System Electric Generation



An updated summary of, and context for energy consumption and energy demands within the State is presented in "U.S. Energy Information Administration, California State Profile and Energy Estimates, Quick Facts" excerpted below (7):

- In 2021, California was the seventh-largest producer of crude oil among the 50 states, and, as of January 2021, it ranked third in crude oil refining capacity.
- California is the largest consumer of jet fuel and second-largest consumer of motor gasoline among the 50 states and, the state accounted for 15% of the nation's jet fuel consumption and 10% of motor gasoline consumption in 2020.
- In 2019, California was the second-largest total energy consumer among the states, but its per capita energy consumption was less than in all other states except Rhode Island, due in part to its mild climate and its energy efficiency programs.
- In 2021, California was the nation's top producer of electricity from solar, geothermal, and biomass energy. The state was fourth in the nation in conventional hydroelectric power generation, down from second in 2019, in part because of drought and increased water demand.
- In 2021, California was the fourth-largest electricity producer in the nation, but the state was also the nation's second-largest consumer of electricity, and in 2020, it received about 30% of its electricity supply from generating facilities outside of California, including imports from Mexico.

As indicated above, California is one of the nation's leading energy-producing states, and California's per capita energy use is among the nation's most efficient. Given the nature of the Project, the remainder of this discussion will focus on the three sources of energy that are most relevant to the Project—namely, electricity, natural gas, and transportation fuel for vehicle trips associated with the uses planned for the Project.

2.2 ELECTRICITY

The usage associated with electricity use were calculated using CalEEMod Version 2022.1. The Southern California region's electricity reliability has been of concern for the past several years due to the planned retirement of aging facilities that depend upon once-through cooling technologies, as well as the June 2013 retirement of the San Onofre Nuclear Generating Station (San Onofre). While the once-through cooling phase-out has been ongoing since the May 2010 adoption of the State Water Resources Control Board's once-through cooling policy, the retirement of San Onofre complicated the situation. California Independent Service Operator (ISO) studies revealed the extent to which the South Coast Air Basin (SCAB) and the San Diego Air Basin (SDAB) region were vulnerable to low-voltage and post-transient voltage instability concerns. A preliminary plan to address these issues was detailed in the 2013 Integrative Energy Policy Report (IEPR) after a collaborative process with other energy agencies, utilities, and air districts (8). Similarly, the subsequent 2021 IEPR's provides information and policy recommendations on advancing a clean, reliable, and affordable energy system.

California's electricity industry is an organization of traditional utilities, private generating companies, and state agencies, each with a variety of roles and responsibilities to ensure that electrical power is provided to consumers. The California ISO is a nonprofit public benefit



corporation and is the impartial operator of the State's wholesale power grid and is charged with maintaining grid reliability, and to direct uninterrupted electrical energy supplies to California's homes and communities. While utilities still own transmission assets, the ISO routes electrical power along these assets, maximizing the use of the transmission system and its power generation resources. The ISO matches buyers and sellers of electricity to ensure that enough power is available to meet demand. To these ends, every five minutes the ISO forecasts electrical demands, accounts for operating reserves, and assigns the lowest cost power plant unit to meet demands while ensuring adequate system transmission capacities and capabilities (9).

Part of the ISO's charge is to plan and coordinate grid enhancements to ensure that electrical power is provided to California consumers. To this end, utilities file annual transmission expansion/modification plans to accommodate the State's growing electrical needs. The ISO reviews and either approves or denies the proposed additions. In addition, and perhaps most importantly, the ISO works with other areas in the western United States electrical grid to ensure that adequate power supplies are available to the State. In this manner, continuing reliable and affordable electrical power is assured to existing and new consumers throughout the State.

Electricity is currently provided to the Project site by Southern California Edison (SCE). SCE provides electric power to more than 15 million persons in 15 counties and in 180 incorporated cities, within a service area encompassing approximately 50,000 square miles. Based on SCE's 2018 Power Content Label Mix, SCE derives electricity from varied energy resources including: fossil fuels, hydroelectric generators, nuclear power plants, geothermal power plants, solar power generation, and wind farms. SCE also purchases from independent power producers and utilities, including out-of-state suppliers (10).

Table 2-2, SCE's specific proportional shares of electricity sources in 2020. As indicated in Table 2-2, the 2020 SCE Power Mix has renewable energy at 30.9% of the overall energy resources. Geothermal resources are at 5.5%, wind power is at 9.4%, large hydroelectric sources are at 3.3%, solar energy is at 15.1%, and coal is at 0% (11).



TABLE 2-2: SCE 2020 POWER CONTENT MIX

Energy Resources	2020 SCE Power Mix
Eligible Renewable	30.9%
Biomass & Waste	0.1%
Geothermal	5.5%
Eligible Hydroelectric	0.8%
Solar	15.1%
Wind	9.4%
Coal	0.0%
Large Hydroelectric	3.3%
Natural Gas	15.2%
Nuclear	8.4%
Other	0.3%
Unspecified Sources of power*	42.0%
Total	100%

^{* &}quot;Unspecified sources of power" means electricity from transactions that are not traceable to specific generation sources

2.3 NATURAL GAS

The following summary of natural gas customers and volumes, supplies, delivery of supplies, storage, service options, and operations is excerpted from information provided by the California Public Utilities Commission (CPUC).

"The CPUC regulates natural gas utility service for approximately 10.8 million customers that receive natural gas from Pacific Gas and Electric (PG&E), Southern California Gas (SoCalGas), San Diego Gas & Electric (SDG&E), Southwest Gas, and several smaller natural gas utilities. The CPUC also regulates independent storage operators: Lodi Gas Storage, Wild Goose Storage, Central Valley Storage and Gill Ranch Storage.

California's natural gas utilities provide service to over 11 million gas meters. SoCalGas and PG&E provide service to about 5.9 million and 4.3 million customers, respectively, while SDG&E provides service to over 800, 000 customers. In 2018, California gas utilities forecasted that they would deliver about 4740 million cubic feet per day (MMcfd) of gas to their customers, on average, under normal weather conditions.

The overwhelming majority of natural gas utility customers in California are residential and small commercials customers, referred to as "core" customers. Larger volume gas customers, like electric generators and industrial customers, are called "noncore" customers. Although very small in number relative to core customers, noncore customers consume about 65% of the natural gas delivered by the state's natural gas utilities, while core customers consume about 35%.



A significant amount of gas (about 19%, or 1131 MMcfd, of the total forecasted California consumption in 2018) is also directly delivered to some California large volume consumers, without being transported over the regulated utility pipeline system. Those customers, referred to as "bypass" customers, take service directly from interstate pipelines or directly from California producers.

SDG&E and Southwest Gas' southern division are wholesale customers of SoCalGas, i.e., they receive deliveries of gas from SoCalGas and in turn deliver that gas to their own customers. (Southwest Gas also provides natural gas distribution service in the Lake Tahoe area.) Similarly, West Coast Gas, a small gas utility, is a wholesale customer of PG&E. Some other wholesale customers are municipalities like the cities of Palo Alto, Long Beach, and Vernon, which are not regulated by the CPUC.

Natural gas from out-of-state production basins is delivered into California via the interstate natural gas pipeline system. The major interstate pipelines that deliver out-of-state natural gas to California gas utilities are Gas Transmission Northwest Pipeline, Kern River Pipeline, Transwestern Pipeline, El Paso Pipeline, Ruby Pipeline, Mojave Pipeline, and Tuscarora. Another pipeline, the North Baja - Baja Norte Pipeline takes gas off the El Paso Pipeline at the California/Arizona border and delivers that gas through California into Mexico. While the Federal Energy Regulatory Commission (FERC) regulates the transportation of natural gas on the interstate pipelines, and authorizes rates for that service, the California Public Utilities Commission may participate in FERC regulatory proceedings to represent the interests of California natural gas consumers.

The gas transported to California gas utilities via the interstate pipelines, as well as some of the California-produced gas, is delivered into the PG&E and SoCalGas intrastate natural gas transmission pipelines systems (commonly referred to as California's "backbone" pipeline system). Natural gas on the utilities' backbone pipeline systems is then delivered to the local transmission and distribution pipeline systems, or to natural gas storage fields. Some large volume noncore customers take natural gas delivery directly off the high-pressure backbone and local transmission pipeline systems, while core customers and other noncore customers take delivery off the utilities' distribution pipeline systems. The state's natural gas utilities operate over 100,000 miles of transmission and distribution pipelines, and thousands more miles of service lines.

Bypass customers take most of their deliveries directly off the Kern/Mojave pipeline system, but they also take a significant amount of gas from California production.

PG&E and SoCalGas own and operate several natural gas storage fields that are located within their service territories in northern and southern California, respectively. These storage fields, and four independently owned storage utilities - Lodi Gas Storage, Wild Goose Storage, Central Valley Storage, and Gill Ranch Storage - help meet peak seasonal and daily natural gas demand and allow California natural gas customers to secure natural gas supplies more efficiently. PG&E is a 25% owner of the Gill Ranch Storage field. These storage fields provide a significant amount of infrastructure capacity to help meet



California's natural gas requirements, and without these storage fields, California would need much more pipeline capacity in order to meet peak gas requirements.

Prior to the late 1980s, California regulated utilities provided virtually all natural gas services to all their customers. Since then, the Commission has gradually restructured the California gas industry in order to give customers more options while assuring regulatory protections for those customers that wish to, or are required to, continue receiving utility-provided services.

The option to purchase natural gas from independent suppliers is one of the results of this restructuring process. Although the regulated utilities procure natural gas supplies for most core customers, core customers have the option to purchase natural gas from independent natural gas marketers, called "core transport agents" (CTA). Contact information for core transport agents can be found on the utilities' web sites. Noncore customers, on the other hand, make natural gas supply arrangements directly with producers or with marketers.

Another option resulting from the restructuring process occurred in 1993, when the Commission removed the utilities' storage service responsibility for noncore customers, along with the cost of this service from noncore customers' transportation rates. The Commission also encouraged the development of independent storage fields, and in subsequent years, all the independent storage fields in California were established. Noncore customers and marketers may now take storage service from the utility or from an independent storage provider (if available), and pay for that service, or may opt to take no storage service at all. For core customers, the Commission assures that the utility has adequate storage capacity set aside to meet core requirements, and core customers pay for that service.

In a 1997 decision, the Commission adopted PG&E's "Gas Accord", which unbundled PG&E's backbone transmission costs from noncore transportation rates. This decision gave customers and marketers the opportunity to obtain pipeline capacity rights on PG&E's backbone transmission pipeline system, if desired, and pay for that service at rates authorized by the Commission. The Gas Accord also required PG&E to set aside a certain amount of backbone transmission capacity in order to deliver gas to its core customers. Subsequent Commission decisions modified and extended the initial terms of the Gas Accord. The "Gas Accord" framework is still in place today for PG&E's backbone and storage rates and services and is now simply referred to as PG&E Gas Transmission and Storage (GT&S).

In a 2006 decision, the Commission adopted a similar gas transmission framework for Southern California, called the "firm access rights" system. SoCalGas and SDG&E implemented the firm access rights (FAR) system in 2008, and it is now referred to as the backbone transmission system (BTS) framework. As under the PG&E backbone transmission system, SoCalGas backbone transmission costs are unbundled from noncore transportation rates. Noncore customers and marketers may obtain, and pay for, firm backbone transmission capacity at various receipt points on the SoCalGas system. A



certain amount of backbone transmission capacity is obtained for core customers to assure meeting their requirements.

Many if not most noncore customers now use a marketer to provide for several of the services formerly provided by the utility. That is, a noncore customer may simply arrange for a marketer to procure its supplies, and obtain any needed storage and backbone transmission capacity, in order to assure that it will receive its needed deliveries of natural gas supplies. Core customers still mainly rely on the utilities for procurement service, but they have the option to take procurement service from a CTA. Backbone transmission and storage capacity is either set aside or obtained for core customers in amounts to assure very high levels of service.

In order properly operate their natural gas transmission pipeline and storage systems, PG&E and SoCalGas must balance the amount of gas received into the pipeline system and delivered to customers or to storage fields. Some of these utilities' storage capacity is dedicated to this service, and under most circumstances, customers do not need to precisely match their deliveries with their consumption. However, when too much or too little gas is expected to be delivered into the utilities' systems, relative to the amount being consumed, the utilities require customers to more precisely match up their deliveries with their consumption. And, if customers do not meet certain delivery requirements, they could face financial penalties. The utilities do not profit from these financial penalties the amounts are then returned to customers as a whole. If the utilities find that they are unable to deliver all the gas that is expected to be consumed, they may even call for a curtailment of some gas deliveries. These curtailments are typically required for just the largest, noncore customers. It has been many years since there has been a significant curtailment of core customers in California." (12)

As indicated in the preceding discussions, natural gas is available from a variety of in-state and out-of-state sources and is provided throughout the state in response to market supply and demand. Complementing available natural gas resources, biogas may soon be available via existing delivery systems, thereby increasing the availability and reliability of resources in total. The CPUC oversees utility purchases and transmission of natural gas to ensure reliable and affordable natural gas deliveries to existing and new consumers throughout the State.

2.4 Transportation Energy Resources

The Project would generate additional vehicle trips with resulting consumption of energy resources, predominantly gasoline and diesel fuel. The Department of Motor Vehicles (DMV) identified 36.2 million registered vehicles in California (13), and those vehicles consume an estimated 17.2 billion gallons of fuel each year¹. Gasoline (and other vehicle fuels) are commercially provided commodities and would be available to the Project patrons and employees via commercial outlets.

_



¹ Fuel consumptions estimated utilizing information from EMFAC2021.

California's on-road transportation system includes 396,616 lane miles, more than 26.6 million passenger vehicles and light trucks, and almost 9.0 million medium- and heavy-duty vehicles (13). While gasoline consumption has been declining since 2008 it is still by far the dominant fuel. California is the second-largest consumer of petroleum products, after Texas, and accounts for 10% of the nation's total consumption. The state is the largest U.S. consumer of motor gasoline and jet fuel, and 85% of the petroleum consumed in California is used in the transportation sector (14).

California accounts for less than 1% of total U.S. natural gas reserves and production. As with crude oil, California's natural gas production has experienced a gradual decline since 1985. In 2019, about 37% of the natural gas delivered to consumers went to the state's industrial sector, and about 28% was delivered to the electric power sector. Natural gas fueled more than two-fifths of the state's utility-scale electricity generation in 2019. The residential sector, where two-thirds of California households use natural gas for home heating, accounted for 22% of natural gas deliveries. The commercial sector received 12% of the deliveries to end users and the transportation sector consumed the remaining 1% (14).



This page intentionally left blank



3 REGULATORY BACKGROUND

Federal and state agencies regulate energy use and consumption through various means and programs. On the federal level, the United States Department of Transportation, the United States Department of Energy, and the United States Environmental Protection Agency (EPA) are three federal agencies with substantial influence over energy policies and programs. On the state level, the CPUC and the CEC are two agencies with authority over different aspects of energy. Relevant federal and state energy-related laws and plans are summarized below.

3.1 FEDERAL REGULATIONS

3.1.1 Intermodal Surface Transportation Efficiency Act of 1991 (ISTEA)

ISTEA promoted the development of inter-modal transportation systems to maximize mobility as well as address national and local interests in air quality and energy. ISTEA contained factors that Metropolitan Planning Organizations (MPOs) were to address in developing transportation plans and programs, including some energy-related factors. To meet the new ISTEA requirements, MPOs adopted explicit policies defining the social, economic, energy, and environmental values guiding transportation decisions.

3.1.2 THE TRANSPORTATION EQUITY ACT FOR THE 21ST CENTURY (TEA-21)

TEA-21 was signed into law in 1998 and builds upon the initiatives established in the ISTEA legislation, discussed above. TEA-21 authorizes highway, highway safety, transit, and other efficient surface transportation programs. TEA-21 continues the program structure established for highways and transit under ISTEA, such as flexibility in the use of funds, emphasis on measures to improve the environment, and focus on a strong planning process as the foundation of good transportation decisions. TEA-21 also provides for investment in research and its application to maximize the performance of the transportation system through, for example, deployment of Intelligent Transportation Systems, to help improve operations and management of transportation systems and vehicle safety.

3.2 CALIFORNIA REGULATIONS

3.2.1 Integrated Energy Policy Report (IEPR)

Senate Bill 1389 (Bowen, Chapter 568, Statutes of 2002) requires the CEC to prepare a biennial integrated energy policy report that assesses major energy trends and issues facing the state's electricity, natural gas, and transportation fuel sectors and provides policy recommendations to conserve resources; protect the environment; ensure reliable, secure, and diverse energy supplies; enhance the state's economy; and protect public health and safety (Public Resources Code § 25301[a]). The CEC prepares these assessments and associated policy recommendations every two years, with updates in alternate years, as part of the Integrated Energy Policy Report.

The 2021 IEPR was adopted February 2022, and continues to work towards improving electricity, natural gas, and transportation fuel energy use in California. The 2021 IEPR provides the results



of the CEC's assessments of a variety of energy issues facing California. Many of these issues will require action if the state is to meet its climate, energy, air quality, and other environmental goals while maintaining reliability and controlling costs. Additionally, the 2021 IEPR provides the results of the CEC's assessments of a variety of energy issues facing California. Many of these issues will require action if the state is to meet its climate, energy, air quality, and other environmental goals while maintaining reliability and controlling costs (15).

3.2.2 STATE OF CALIFORNIA ENERGY PLAN

The CEC is responsible for preparing the State Energy Plan, which identifies emerging trends related to energy supply, demand, conservation, public health and safety, and the maintenance of a healthy economy. The Plan calls for the state to assist in the transformation of the transportation system to improve air quality, reduce congestion, and increase the efficient use of fuel supplies with the least environmental and energy costs. To further this policy, the plan identifies several strategies, including assistance to public agencies and fleet operators and encouragement of urban designs that reduce vehicle miles traveled (VMT) and accommodate pedestrian and bicycle access.

3.2.3 CALIFORNIA CODE TITLE 24, PART 6, ENERGY EFFICIENCY STANDARDS

California Code of Regulations (CCR) Title 24 Part 6: The California Energy Code was first adopted in 1978 in response to a legislative mandate to reduce California's energy consumption.

The standards are updated periodically to allow consideration and possible incorporation of new energy efficient technologies and methods. CCR, Title 24, Part 11: California Green Building Standards Code (CALGreen) is a comprehensive and uniform regulatory code for all residential, commercial, and school buildings that went in effect on August 1, 2009, and is administered by the California Building Standards Commission.

CALGreen is updated on a regular basis, with the most recent approved update consisting of the 2022 California Green Building Code Standards that will be effective on January 1, 2023². The Project would be required to comply with the applicable standards in place at the time plan check submittals are made (16).

3.2.4 AB 1493 PAVLEY REGULATIONS AND FUEL EFFICIENCY STANDARDS

California AB 1493, enacted on July 22, 2002, required CARB to develop and adopt regulations that reduce GHGs emitted by passenger vehicles and light duty trucks. Under this legislation, CARB adopted regulations to reduce GHG emissions from non-commercial passenger vehicles (cars and light-duty trucks). Although aimed at reducing GHG emissions, specifically, a co-benefit of the Pavley standards is an improvement in fuel efficiency and consequently a reduction in fuel consumption.



² The 2022 California Green Building Standard Code will be published July 1, 2022.

3.2.5 CALIFORNIA'S RENEWABLE PORTFOLIO STANDARD (RPS)

First established in 2002 under Senate Bill (SB) 1078, California's Renewable Portfolio Standards (RPS) requires retail sellers of electric services to increase procurement from eligible renewable resources to 33% of total retail sales by 2020 (17).

3.2.6 CLEAN ENERGY AND POLLUTION REDUCTION ACT OF 2015 (SB 350)

In October 2015, the legislature approved, and the Governor signed SB 350, which reaffirms California's commitment to reducing its GHG emissions and addressing climate change. Key provisions include an increase in the renewables portfolio standard (RPS), higher energy efficiency requirements for buildings, initial strategies towards a regional electricity grid, and improved infrastructure for electric vehicle charging stations. Specifically, SB 350 requires the following to reduce statewide GHG emissions:

- Increase the amount of electricity procured from renewable energy sources from 33% to 50% by 2030, with interim targets of 40% by 2024, and 25% by 2027.
- Double the energy efficiency in existing buildings by 2030. This target will be achieved through the California Public Utility Commission (CPUC), the CEC, and local publicly owned utilities.
- Reorganize the Independent System Operator (ISO) to develop more regional electrify transmission markets and to improve accessibility in these markets, which will facilitate the growth of renewable energy markets in the western United States (California Leginfo 2015).



This page intentionally left blank



4 PROJECT ENERGY DEMANDS AND ENERGY EFFICIENCY MEASURES

4.1 EVALUATION CRITERIA

Appendix F of the *State CEQA Guidelines* (18), states that the means of achieving the goal of energy conservation includes the following:

- Decreasing overall per capita energy consumption;
- Decreasing reliance on fossil fuels such as coal, natural gas, and oil; and
- Increasing reliance on renewable energy sources.

In compliance with Appendix G of the *State CEQA Guidelines* (19), this report analyzes the Project's anticipated energy use during construction and operations to determine if the Project would:

- Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation; or
- Conflict with or obstruct a state or local plan for renewable energy or energy efficiency

4.2 METHODOLOGY

Information from the CalEEMod Version 2022.1 outputs for the *534 Struck Avenue Air Quality Impact Analysis* (AQIA) (20) was utilized in this analysis, detailing Project related construction equipment, transportation energy demands, and facility energy demands.

4.2.1 CALEEMOD

In May 2022, the SCAQMD, in conjunction with the California Air Pollution Control Officers Association (CAPCOA) and other California air districts, released the latest version of the CalEEMod Version 2022.1. The purpose of this model is to calculate construction-source and operational-source criteria pollutants and GHG emissions from direct and indirect sources as well as energy usage (21). Accordingly, the latest version of CalEEMod has been used to determine the proposed Project's anticipated transportation and facility energy demands. Outputs from the annual model runs are provided in Appendices 4.1 through 4.2.

4.2.2 EMISSION FACTORS MODEL

On May 2, 2022, the EPA approved the 2021 version of the EMissions FACtor model (EMFAC2021) web database for use in State Implementation Plan and transportation conformity analyses. EMFAC2021 is a mathematical model that was developed to calculate emission rates, fuel consumption, VMT from motor vehicles that operate on highways, freeways, and local roads in California and is commonly used by the CARB to project changes in future emissions from onroad mobile sources (22). This energy study utilizes the different fuel types for each vehicle class from the annual EMFAC2021 emission inventory in order to derive the average vehicle fuel economy which is then used to determine the estimated annual fuel consumption associated with vehicle usage during Project construction and operational activities. For purposes of



analysis, the 2023 and 2024 analysis years were utilized to determine the average vehicle fuel economy used throughout the duration of the Project. Outputs from the EMFAC2021 model run is provided in Appendix 4.3.

4.3 CONSTRUCTION ENERGY DEMANDS

The focus within this section is the energy implications of the construction process, specifically the power cost from on-site electricity consumption during construction of the proposed Project.

4.3.1 CONSTRUCTION POWER COST

The total Project construction power costs is the summation of the products of the area (sf) by the construction duration and the typical power cost.

CONSTRUCTION DURATION

For purposes of analysis, construction of Project is expected to commence in July 2023 and would last through November 2024 (20). The construction schedule utilized in the analysis, shown in Table 4-1, represents a "worst-case" analysis scenario. The duration of construction activity and associated equipment represents a reasonable approximation of the expected construction fleet as required per *CEQA Guidelines* (23).

Construction Activity End Date Start Date Days Demolition 07/04/2023 11/06/2023 90 5 11/07/2023 11/13/2023 Site Preparation Grading 11/14/2023 12/18/2023 25 **Building Construction** 12/19/2023 11/04/2024 230 08/13/2024 11/04/2024 **Paving** 60 09/24/2024 11/04/2024 **Architectural Coating** 30

TABLE 4-1: CONSTRUCTION DURATION

PROJECT CONSTRUCTION POWER COST

The 2022 National Construction Estimator identifies a typical power cost per 1,000 sf of construction per month of \$2.41, which was used to calculate the Project's total construction power cost (24).

As shown on Table 4-2, the total power cost of the on-site electricity usage during the construction of the Project is estimated to be approximately \$16,688.00.



TABLE 4-2: CONSTRUCTION POWER COST

Land Use	Power Cost (per 1,000 SF of construction per month)	Size (1,000 SF)	Construction Duration (months)	Project Construction Power Cost
Office	\$2.41	5.000	16	\$192.80
Warehouse	\$2.41	52.900	16	\$2,039.82
Maintenance Building	\$2.41	5.400	16	\$208.22
Parking	\$2.41	113.498	16	\$4,376.48
Other Asphalt Surfaces	\$2.41	255.982	16	\$9,870.67
	\$16,688.00			

4.3.2 CONSTRUCTION ELECTRICITY USAGE

The total Project construction electricity usage is the summation of the products of the power cost (estimated in Table 4-2) by the utility provider cost per kilowatt hour (kWh) of electricity.

PROJECT CONSTRUCTION ELECTRICITY USAGE

The SCE's general service rate schedule were used to determine the Project's electrical usage. As of October 1, 2022, SCE's general service rate is \$0.14 per kilowatt hours (kWh) of electricity for industrial services (25). As shown on Table 4-3, the total electricity usage from on-site Project construction related activities is estimated to be approximately 121,593 kWh.

TABLE 4-3: CONSTRUCTION ELECTRICITY USAGE

Land Use	Cost per kWh	Project Construction Electricity Usage (kWh)
Office	\$0.14	1,405
Warehouse	\$0.14	14,863
Maintenance Building	\$0.14	1,517
Parking	\$0.14	31,888
Other Asphalt Surfaces	\$0.14	71,920
CONSTRUCTION	121,593	

4.3.3 Construction Equipment Fuel Estimates

Fuel consumed by construction equipment would be the primary energy resource expended over the course of Project construction.



CONSTRUCTION EQUIPMENT

The construction equipment fleet was based on CalEEMod defaults and confirmed with the Project Applicant as being reasonable. It should be noted that the City of Orange has established limits to the hours of operation for construction activity. According to the City, construction activities are allowed from 7:00 a.m. to 8:00 p.m. Monday through Saturday and are prohibited Sundays and federal holidays (26). Consistent with industry standards and typical construction practices, each piece of equipment listed in Table 3-3 will operate up to a total of eight (8) hours per day, or more than two-thirds of the period during which construction activities are allowed pursuant to the code. It should be noted that most pieces of equipment would likely operate for fewer hours per day. A summary of construction equipment assumptions by phase is provided at Table 4-4.

TABLE 4-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS

Construction Activity	Equipment	Amount	Hours Per Day
	Concrete/Industrial Saws	1	8
Demolition	Excavators	3	8
Demolition Site Preparation Grading Building Construction	Rubber Tired Dozers	2	8
Site Dremovation	Rubber Tired Dozers	3	8
Site Preparation	Tractors/Loaders/Backhoes	4	8
	Excavators	1	8
Grading	Graders	1	8
	Rubber Tired Dozers	1	8
	Tractors/Loaders/Backhoes	5	8
	Cranes	1	8
	Forklifts	3	8
Building Construction	Generator Sets	1	8
	Tractors/Loaders/Backhoes	3	8
	Welders	1	8
	Pavers	2	8
Paving	Paving Equipment	2	8
	Rollers	2	8
Architectural Coating	Air Compressors	1	8



PROJECT CONSTRUCTION EQUIPMENT FUEL CONSUMPTION

Project construction activity timeline estimates, construction equipment schedules, equipment power ratings, load factors, and associated fuel consumption estimates are presented in Table 4-5. The aggregate fuel consumption rate for all equipment is estimated at 18.5 horsepower hour per gallon (hp-hr-gal.), obtained from CARB 2018 Emissions Factors Tables and cited fuel consumption rate factors presented in Table D-24 of the Moyer guidelines (27). For the purposes of this analysis, the calculations are based on all construction equipment being diesel-powered, which is consistent with industry standards.

Diesel fuel would be supplied by existing commercial fuel providers serving the Project area and region³. As presented in Table 4-5, Project construction activities would consume an estimated 51,463 gallons of diesel fuel. Project construction would represent a "single-event" diesel fuel demand and would not require ongoing or permanent commitment of diesel fuel resources for this purpose.

-



³ Based on Appendix A of the CalEEMod User's Guide, Construction consists of several types of off-road equipment. Since the majority of the off-road construction equipment used for construction projects are diesel fueled, CalEEMod assumes all of the equipment operates on diesel fuel.

TABLE 4-5: CONSTRUCTION EQUIPMENT FUEL CONSUMPTION ESTIMATES

Construction Activity	Duration (Days)	Equipment	HP Rating	Quantity	Usage Hours	Load Factor	HP- hrs/day	Total Fuel Consumption
		Concrete/Industrial Saws	33	1	8	0.73	193	938
Demolition	90	Excavators	36	3	8	0.38	328	1,597
		Rubber Tired Dozers	367	2	8	0.40	2,349	11,427
Cita Duana anti-	_	Rubber Tired Dozers	367	3	8	0.40	3,523	952
Site Preparation	5	Tractors/Loaders/Backhoes	84	4	8	0.37	995	269
		Excavators	36	1	8	0.38	109	148
Cua din a	25	Graders	148	1	8	0.41	485	656
Grading	25	Rubber Tired Dozers	367	1	8	0.40	1,174	1,587
		Tractors/Loaders/Backhoes	84	5	8	0.37	1,243	1,680
		Cranes	367	1	8	0.29	851	10,585
		Forklifts	82	3	8	0.20	394	4,893
Building Construction	230	Generator Sets	14	1	8	0.74	83	1,030
		Tractors/Loaders/Backhoes	84	3	8	0.37	746	9,274
		Welders	46	1	8	0.45	166	2,059
		Pavers	81	2	8	0.42	544	1,765
Paving	60	Paving Equipment	89	2	8	0.36	513	1,663
		Rollers	36	2	8	0.38	219	710
Architectural Coating	30	Air Compressors	37	1	8	0.48	142	230
			CONSTRUCT	ION FUEL D	EMAND (C	GALLONS DI	IESEL FUEL)	51,463

4.3.4 CONSTRUCTION TRIPS AND VMT

Construction generates on-road vehicle emissions from vehicle usage for workers, vendors, and haul truck commuting to and from the site. The number of workers, vendor, and haul trips are presented below in Table 4-6. It should be noted that for vendor trips, specifically, CalEEMod only assigns vendor trips to the Building Construction phase. Vendor trips would likely occur during all phases of construction. As such, the CalEEMod defaults for vendor trips have been adjusted based on a ratio of the total vendor trips to the number of days of each subphase of activity.

Construction Activity	Worker Trips Per Day	Vendor Trips Per Day	Hauling Trips Per Day
Demolition	15	3	30
Site Preparation	18	1	0
Grading	20	1	24
Building Construction	27	7	0
Paving	15	0	0
Architectural Coating	5	0	0

TABLE 4-6: CONSTRUCTION TRIPS AND VMT

4.3.5 CONSTRUCTION WORKER FUEL ESTIMATES

With respect to estimated VMT for the Project, the construction worker trips (personal vehicles used by workers commuting to the Project from home) would generate an estimated 178,433 VMT during the 16 months of construction (20). Based on CalEEMod methodology, it is assumed that 50% of all construction worker trips are from light-duty-auto vehicles (LDA), 25% are from light-duty-trucks (LDT1⁴), and 25% are from light-duty-trucks (LDT2⁵). Data regarding Project related construction worker trips were based on CalEEMod defaults utilized within the AQIA.

Vehicle fuel efficiencies for LDA, LDT1, and LDT2 were estimated using information generated within the 2021 version of the EMFAC developed by CARB. EMFAC2021 is a mathematical model that was developed to calculate emission rates, fuel consumption, and VMT from motor vehicles that operate on highways, freeways, and local roads in California and is commonly used by the CARB to project changes in future emissions from on-road mobile sources (22). EMFAC2021 was run for the LDA, LDT1, and LDT2 vehicle class within the California sub-area for the 2023 and 2024 calendar years. Data from EMFAC2021 is shown in Appendix 4.3.

As shown in Table 4-7, the estimated annual fuel consumption resulting from Project construction worker trips is 6,338 gallons during full construction of the Project. It should be noted that construction worker trips would represent a "single-event" gasoline fuel demand and would not require ongoing or permanent commitment of fuel resources for this purpose.

_



⁴ Vehicles under the LDT1 category have a gross vehicle weight rating (GVWR) of less than 6,000 lbs. and equivalent test weight (ETW) of less than or equal to 3,750 lbs.

 $^{^{5}}$ Vehicles under the LDT2 category have a GVWR of less than 6,000 lbs. and ETW between 3,751 lbs. and 5,750 lbs.

TABLE 4-7: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES

Year	Construction Activity	Duration (Days)	Worker Trips/Day	Trip Length (miles)	VMT	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)	
				LDA				
	Demolition	90	8	18.5	13,320	31.73	420	
	Site Preparation	5	9	18.5	833	31.73	26	
	Grading	25	10	18.5	4,625	31.73	146	
	Building Construction	9	14	18.5	2,331	31.73	73	
				LDT1				
	Demolition	90	4	18.5	6,660	24.79	269	
2023	Site Preparation	5	5	18.5	463	24.79	19	
	Grading	25	5	18.5	2,313	24.79	93	
	Building Construction	9	7	18.5	1,166	24.79	47	
	LDT2							
	Demolition	90	4	18.5	6,660	24.07	277	
	Site Preparation	5	5	18.5	463	24.07	19	
	Grading	25	5	18.5	2,313	24.07	96	
	Building Construction	9	7	18.5	1,166	24.07	48	
				LDA				
	Building Construction	221	14	18.5	57,239	32.75	1,748	
	Paving	60	8	18.5	8,880	32.75	271	
	Architectural Coating	30	3	18.5	1,665	32.75	51	
	LDT1							
2024	Building Construction	221	7	18.5	28,620	25.26	1,133	
2024	Paving	60	4	18.5	4,440	25.26	176	
	Architectural Coating	30	2	18.5	1,110	25.26	44	
				LDT2				
	Building Construction	221	7	18.5	28,620	24.73	1,157	
	Paving	60	4	18.5	4,440	24.73	180	
	Architectural Coating	30	2	18.5	1,110	24.73	45	
		TO	OTAL CONST	RUCTION V	VORKER FUEL	CONSUMPTION	6,338	



4.3.6 Construction Vendor/Hauling Fuel Estimates

With respect to estimated VMT, the construction vendor trips (vehicles that deliver materials to the site during construction) would generate an estimated 89,052 VMT along area roadways for the Project over the duration of construction activity (20). It is assumed that 50% of all vendor trips are from medium-heavy duty trucks (MHD), 50% of all vendor trips are from heavy-heavy duty trucks (HHD), and 100% of all hauling trips are from HHDs. These assumptions are consistent with the CalEEMod defaults utilized within the within the AQIA (20). Vehicle fuel efficiencies for MHDs and HHDs were estimated using information generated within EMFAC2021. EMFAC2021 was run for the MHD and HHD vehicle classes within the California sub-area for the 2023 and 2024 calendar years. Data from EMFAC2021 is shown in Appendix 4.3.

Based on Table 4-8, it is estimated that 14,614 gallons of fuel will be consumed related to construction vendor trips during full construction of the Project. It should be noted that Project construction vendor trips would represent a "single-event" diesel fuel demand and would not require on-going or permanent commitment of diesel fuel resources for this purpose.

TABLE 4-8: CONSTRUCTION VENDOR FUEL CONSUMPTION ESTIMATES

Year	Construction Activity	Duration (Days)	Vendor Trips/Day	Trip Length (miles)	VMT	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)
				MHD			
	Demolition	90	2	10.2	1,836	7.44	247
	Site Preparation	5	1	10.2	51	7.44	7
	Grading	25	1	10.2	255	7.44	34
	Building Construction	9	4	10.2	367	7.44	49
			Н	HD (Vendo	r)		
2023	Demolition	90	2	10.2	1,836	5.92	310
	Site Preparation	5	1	10.2	51	5.92	9
	Grading	25	1	10.2	255	5.92	43
	Building Construction	9	4	10.2	367	5.92	62
			Н	HD (Haulinį	g)		
	Demolition	90	30	20	54,000	5.92	9,122
	Grading	25	24	20	12,000	5.92	2,027
				MHD			
2024	Building Construction	221	4	10.2	9,017	7.52	1,200
2024			Н	HD (Vendo	r)		
	Building Construction	221	4	10.2	9,017	6.00	1,503
		TO	OTAL CONST	RUCTION V	ENDOR FUEL	CONSUMPTION	14,614

4.3.7 CONSTRUCTION ENERGY EFFICIENCY/CONSERVATION MEASURES

Starting in 2014, CARB adopted the nation's first regulation aimed at cleaning up off-road construction equipment such as bulldozers, graders, and backhoes. These requirements ensure fleets gradually turnover the oldest and dirtiest equipment to newer, cleaner models and prevent fleets from adding older, dirtier equipment. As such, the equipment used for Project construction would conform to CARB regulations and California emissions standards. It should also be noted that there are no unusual Project characteristics or construction processes that would require the use of equipment that would be more energy intensive than is used for comparable activities; or equipment that would not conform to current emissions standards (and related fuel efficiencies). Equipment employed in construction of the Project would therefore not result in inefficient wasteful, or unnecessary consumption of fuel.

Construction contractors would be required to comply with applicable CARB regulation regarding retrofitting, repowering, or replacement of diesel off-road construction equipment. Additionally, CARB has adopted the Airborne Toxic Control Measure to limit heavy-duty diesel motor vehicle idling in order to reduce public exposure to diesel particulate matter and other Toxic Air Contaminants. Compliance with anti-idling and emissions regulations would result in a more efficient use of construction-related energy and the minimization or elimination of wasteful or unnecessary consumption of energy. Idling restrictions and the use of newer engines and equipment would result in less fuel combustion and energy consumption.

Additional construction-source energy efficiencies would occur due to required California regulations and best available control measures (BACM). For example, CCR Title 13, Motor Vehicles, section 2449(d)(3) Idling, limits idling times of construction vehicles to no more than five minutes, thereby precluding unnecessary and wasteful consumption of fuel due to unproductive idling of construction equipment. Section 2449(d)(3) requires that grading plans shall reference the requirement that a sign shall be posted on-site stating that construction workers need to shut off engines at or before five minutes of idling." In this manner, construction equipment operators are required to be informed that engines are to be turned off at or prior to five minutes of idling. Enforcement of idling limitations is realized through periodic site inspections conducted by City building officials, and/or in response to citizen complaints.

A full analysis related to the energy needed to form construction materials is not included in this analysis due to a lack of detailed Project-specific information on construction materials. At this time, an analysis of the energy needed to create Project-related construction materials would be extremely speculative and thus has not been prepared.

In general, construction processes promote conservation and efficient use of energy by reducing raw materials demands, with related reduction in energy demands associated with raw materials extraction, transportation, processing, and refinement. Use of materials in bulk reduces energy demands associated with preparation and transport of construction materials as well as the transport and disposal of construction waste and solid waste in general, with corollary reduced demands on area landfill capacities and energy consumed by waste transport and landfill operations.



4.4 OPERATIONAL ENERGY DEMANDS

Energy consumption in support of or related to Project operations would include transportation fuel demands (fuel consumed by passenger car and truck vehicles accessing the Project site), fuel demands from operational equipment, and facilities energy demands (energy consumed by building operations and site maintenance activities).

4.4.1 TRANSPORTATION FUEL DEMANDS

Energy that would be consumed by Project-generated traffic is a function of total VMT and estimated vehicle fuel economies of vehicles accessing the Project site. The VMT per vehicle class can be determined by evaluated in the vehicle fleet mix and the total VMT. As with worker and vendors trips, operational vehicle fuel efficiencies were estimated using information generated within EMFAC2021 developed by CARB (22). EMFAC2021 was run for the Riverside County area for the 2024 calendar year. Data from EMFAC2021 is shown in Appendix 4.3.

The estimated transportation energy demands are summarized on Table 4-9. As summarized on Table 4-9 the Project would result in a 1,300,864 annual VMT and an estimated annual fuel consumption of 127,584 gallons of fuel.

Average Vehicle Fuel Estimated Annual Fuel Vehicle Type Annual VMT Consumption (gallons) Economy (mpg) 32.75 308,853 9,430 LDA LDT1 25.26 25,964 1,028 24.73 140,851 5,696 LDT2 15.05 78,288 5,203 MDV 15.05 11,709 778 MCY 15.94 86,753 5,442 LHD1 15.05 21,909 1,456 LHD2 7.52 175,418 23,340 MHD 6.00 451,118 75,210 HHD **TOTAL (ALL VEHICLES)** 1,300,864 127,584

TABLE 4-9: TOTAL PROJECT-GENERATED TRAFFIC ANNUAL FUEL CONSUMPTION

4.4.2 On-Site Cargo Handling Equipment Fuel Demands

It is common for industrial buildings to require the operation of exterior cargo handling equipment in the building's truck court areas. For this particular Project, on-site modeled operational equipment includes up to one (1) 175 horsepower (hp), natural gas-powered cargo handling equipment – port tractors operating at 4 hours a day⁶ for 365 days of the year.



⁶ Based on Table II-3, Port and Rail Cargo Handling Equipment Demographics by Type, from CARB's Technology Assessment: Mobile Cargo Handling Equipment document, a single piece of equipment could operate up to 2 hours per day (Total Average Annual Activity divided by Total Number Pieces of Equipment). As such, the analysis conservatively assumes that the tractor/loader/backhoe would operate up to 4 hours per day.

Project operational activity estimates and associated fuel consumption estimates are based on the annual EMFAC2021 offroad emissions for the 2024 operational year and was used to derive the total annual fuel consumption associated on-site equipment. As presented in Table 4-10, Project on-site equipment would consume an estimated 4,642 gallons of natural gas.

TABLE 4-10: ON-SITE CARGO HANDLING EQUIPMENT FUEL CONSUMPTION ESTIMATES

Equipment	Quantity	Usage Hours	Days of Operation	EMFAC2021 Fuel Consumption (gal./yr)	EMFAC2021 Activity (hrs./yr)	Total Fuel Consumption
Cargo Handling Equipment	1	4	365	17,909	5,633	4,642
ON-SITE	CARGO HAN	IDLING EC	UIPMENT FU	EL DEMAND (GA	LLONS FUEL)	4,642

4.4.3 FACILITY ENERGY DEMANDS

Project building operations activities would result in the consumption of natural energy and electricity, which would be supplied to the Project by SoCalGas and SCE. Annual natural gas and electricity demands of the Project are summarized in Table 4-11. As summarized on Table 4-11 the Project would result in 1,220,180 kBTU/year or natural gas and 395,861 kWh/year of electricity.

TABLE 4-11: PROJECT ANNUAL OPERATIONAL ENERGY DEMAND SUMMARY

Land Use	Natural Gas Demand (kBTU/year)	Electricity Demand (kWh/year)
Office		
Warehouse	1,220,180	296,267
Maintenance Building		
Parking	0	99,594
Other Asphalt Surfaces	0	0
TOTAL PROJECT ENERGY DEMAND	1,220,180	395,861

4.4.4 OPERATIONAL ENERGY EFFICIENCY/CONSERVATION MEASURES

Energy efficiency/energy conservation attributes of the Project would be complemented by increasingly stringent state and federal regulatory actions addressing vehicle fuel economies and vehicle emissions standards; and enhanced building/utilities energy efficiencies mandated under California building codes (e.g., Title24, California Green Building Standards Code).

ENHANCED VEHICLE FUEL EFFICIENCIES

Project annual fuel consumption estimates presented previously in Table 4-9 represent likely potential maximums that would occur for the Project. Under subsequent future conditions, average fuel economies of vehicles accessing the Project site can be expected to improve as



older, less fuel-efficient vehicles are removed from circulation, and in response to fuel economy and emissions standards imposed on newer vehicles entering the circulation system.

Enhanced fuel economies realized pursuant to federal and state regulatory actions, and related transition of vehicles to alternative energy sources (e.g., electricity, natural gas, biofuels, hydrogen cells) would likely decrease future gasoline fuel demands per VMT. Location of the Project proximate to regional and local roadway systems tends to reduce VMT within the region, acting to reduce regional vehicle energy demands.

4.5 SUMMARY

4.5.1 CONSTRUCTION ENERGY DEMANDS

The estimated power cost of on-site electricity usage during the construction of the Project is assumed to be approximately \$16,688.00. Additionally, based on the assumed power cost, it is estimated that the total electricity usage during construction, after full Project buildout, is calculated to be approximately 121,593 kWh.

Construction equipment used by the Project would result in single event consumption of approximately 51,463 gallons of diesel fuel. Construction equipment use of fuel would not be atypical for the type of construction proposed because there are no aspects of the Project's proposed construction process that are unusual or energy-intensive, and Project construction equipment would conform to the applicable CARB emissions standards, acting to promote equipment fuel efficiencies.

CCR Title 13, Title 13, Motor Vehicles, section 2449(d)(3) Idling, limits idling times of construction vehicles to no more than 5 minutes, thereby precluding unnecessary and wasteful consumption of fuel due to unproductive idling of construction equipment. BACMs inform construction equipment operators of this requirement. Enforcement of idling limitations is realized through periodic site inspections conducted by City building officials, and/or in response to citizen complaints.

Construction worker trips for full construction of the Project would result in the estimated fuel consumption of 6,338 gallons of fuel. Additionally, fuel consumption from construction vendor trips (MHDs and HHDs) will total approximately 14,614 gallons. Diesel fuel would be supplied by City and regional commercial vendors. Indirectly, construction energy efficiencies and energy conservation would be achieved using bulk purchases, transport and use of construction materials. The 2021 IEPR released by the CEC has shown that fuel efficiencies are getting better within on and off-road vehicle engines due to more stringent government requirements (15). As supported by the preceding discussions, Project construction energy consumption would not be considered inefficient, wasteful, or otherwise unnecessary.

4.5.2 OPERATIONAL ENERGY DEMANDS

TRANSPORTATION ENERGY DEMANDS

Annual vehicular trips and related VMT generated by the operation of the Project would result in a fuel demand of 127,584 gallons of fuel.



Fuel would be provided by current and future commercial vendors. Trip generation and VMT generated by the Project are consistent with other industrial uses of similar scale and configuration, as reflected respectively in the Institute of Transportation Engineers (ITE) Trip Generation Manual (11th Ed., 2021); and CalEEMod. As such, Project operations would not result in excessive and wasteful vehicle trips and VMT, nor excess and wasteful vehicle energy consumption compared to other industrial uses.

It should be noted that the state strategy for the transportation sector for medium and heavy-duty trucks is focused on making trucks more efficient and expediting truck turnover rather than reducing VMT from trucks. This is in contrast to the passenger vehicle component of the transportation sector where both per-capita VMT reductions and an increase in vehicle efficiency are forecasted to be needed to achieve the overall state emissions reductions goals.

Heavy duty trucks involved in goods movements are generally controlled on the technology side and through fleet turnover of older trucks and engines to newer and cleaner trucks and engines. The first battery-electric heavy-heavy duty trucks are being tested this year and SCAQMD is looking to integrate this new technology into large-scale truck operations. The following state strategies reduce GHG emissions from the medium and heavy-duty trucks:

- CARB's Mobile Source Strategy focuses on reducing GHGs through the transition to zero and low emission vehicles and from medium-duty and heavy-duty trucks.
- CARB's Sustainable Freight Action Plan establishes a goal to improve freight efficiency by 25% by 2030, deploy over 100,000 freight vehicles and equipment capable of zero emission operation and maximize both zero and near-zero emission freight vehicles and equipment powered by renewable energy by 2030.
- CARB's Emissions Reduction Plan for Ports and Goods Movement (Goods Movement Plan) in California focuses on reducing heavy-duty truck-related emissions focus on establishment of emissions standards for trucks, fleet turnover, truck retrofits, and restriction on truck idling (CARB 2006). While the focus of Goods Movement Plan is to reduce criteria air pollutant and air toxic emissions, the strategies to reduce these pollutants would also generally have a beneficial effect in reducing GHG emissions.
- CARB's On-Road Truck and Bus Regulation (2010) requires diesel trucks and buses that operate in California to be upgraded to reduce emissions. Newer heavier trucks and buses must meet particulate matter filter requirements beginning January 1, 2012. Lighter and older heavier trucks must be replaced starting January 1, 2015. By January 1, 2023, nearly all trucks and buses will need to have 2010 model year engines or equivalent (28).
- CARB's Heavy-Duty (Tractor-Trailer) GHG Regulation requires SmartWay tractor trailers that include idle-reduction technologies, aerodynamic technologies, and low-rolling resistant tires that would reduce fuel consumption and associated GHG emissions.

The proposed Project would implement project design features that would facilitate the accessibility, parking, and loading of trucks on-site.

Enhanced fuel economies realized pursuant to federal and state regulatory actions, and related transition of vehicles to alternative energy sources (e.g., electricity, natural gas, biofuels, hydrogen cells) would likely decrease future gasoline fuel demands per VMT. Location of the



Project proximate to regional and local roadway systems tends to reduce VMT within the region, acting to reduce regional vehicle energy demands. The Project would implement sidewalks, facilitating and encouraging pedestrian access. Facilitating pedestrian and bicycle access would reduce VMT and associated energy consumption. In compliance with the California Green Building Standards Code and City requirements, the Project would promote the use of bicycles as an alternative mean of transportation by providing short-term and/or long-term bicycle parking accommodations. As supported by the preceding discussions, Project transportation energy consumption would not be considered inefficient, wasteful, or otherwise unnecessary.

ON-SITE CARGO HANDLING EQUIPMENT FUEL DEMANDS

As previously stated, it is common for industrial buildings to require the operation of exterior cargo handling equipment in the building's truck court areas. On-site cargo handling equipment used by the Project would result in approximately 4,642 gallons of natural gas. On-site equipment use of fuel would not be atypical for the type of construction proposed because there are no aspects of the Project's proposed operations that are unusual or energy-intensive, and Project on-site equipment would conform to the applicable CARB emissions standards, acting to promote equipment fuel efficiencies.

FACILITY ENERGY DEMANDS

Project facility operational energy demands are estimated to be: 1,220,180 kBTU/year of natural gas and 395,861 kWh/year of electricity which would be supplied by SoCalGas and SCE. The Project proposes conventional industrial uses reflecting contemporary energy efficient/energy conserving designs and operational programs. The Project does not propose uses that are inherently energy intensive and the energy demands in total would be comparable to other industrial uses of similar scale and configuration.

Lastly, the Project will comply with the applicable Title 24 standards. Compliance itself with applicable Title 24 standards will ensure that the Project energy demands would not be inefficient, wasteful, or otherwise unnecessary.



This page intentionally left blank



5 CONCLUSIONS

5.1 ENERGY IMPACT 1

Would the Project result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation?

As supported by the preceding analyses, Project construction and operations <u>would not result in the inefficient</u>, <u>wasteful</u>, <u>or unnecessary consumption of energy</u>. The Project would therefore not cause or result in the need for additional energy producing or transmission facilities. The Project would not engage in wasteful or inefficient uses of energy and aims to achieve energy conservations goals within the State of California.

5.2 ENERGY IMPACT 2

Would the Project conflict with or obstruct a state or local plan for renewable energy or energy efficiency?

The Project's consistency with the applicable state and local plans is discussed below.

CONSISTENCY WITH ISTEA

Transportation and access to the Project site is provided by the local and regional roadway systems. The Project would not interfere with, nor otherwise obstruct intermodal transportation plans or projects that may be realized pursuant to the ISTEA because SCAG is not planning for intermodal facilities on or through the Project site.

CONSISTENCY WITH TEA-21

The Project site is located along major transportation corridors with proximate access to the Interstate freeway system. The site selected for the Project facilitates access, acts to reduce vehicle miles traveled, takes advantage of existing infrastructure systems, and promotes land use compatibilities through collocation of similar uses. The Project supports the strong planning processes emphasized under TEA-21. The Project is therefore consistent with, and would not otherwise interfere with, nor obstruct implementation of TEA-21.

CONSISTENCY WITH IEPR

Electricity would be provided to the Project by SCE. SCE's *Clean Power and Electrification Pathway* (CPEP) white paper builds on existing state programs and policies. As such, the Project is consistent with, and would not otherwise interfere with, nor obstruct implementation the goals presented in the 2021 IEPR.

Additionally, the Project will comply with the applicable Title 24 standards which would ensure that the Project energy demands would not be inefficient, wasteful, or otherwise unnecessary. As such, development of the proposed Project would support the goals presented in the 2021 IEPR.



CONSISTENCY WITH STATE OF CALIFORNIA ENERGY PLAN

The Project site is located along major transportation corridors with proximate access to the Interstate freeway system. The site selected for the Project facilitates access and takes advantage of existing infrastructure systems. The Project therefore supports urban design and planning processes identified under the State of California Energy Plan, is consistent with, and would not otherwise interfere with or obstruct, implementation of the State of California Energy Plan.

CONSISTENCY WITH CALIFORNIA CODE TITLE 24, PART 6, ENERGY EFFICIENCY STANDARDS

The 2022 version of Title 24 was adopted by the CEC and will become effective on January 1, 2023. As the Project building construction is anticipated in 2024, it is presumed that the Project would be required to comply with the Title 24 standards in place at that time. Therefore, the Project is would not result in a significant impact on energy resources (16). The proposed Project would be subject to Title 24 standards.

CONSISTENCY WITH CALIFORNIA CODE TITLE 24, PART 11, CALGREEN

As previously stated, CCR, Title 24, Part 11: CALGreen is a comprehensive and uniform regulatory code for all residential, commercial, and school buildings that went in effect on January 1, 2009, and is administered by the California Building Standards Commission. CALGreen is updated on a regular basis, with the most recent approved update consisting of the 2022 California Green Building Code Standards that were published on July 1, 2022 and will become effective on January 1, 2023. The Project would be required to comply with the applicable standards in place at the time plan check submittals are made.

CONSISTENCY WITH AB 1493

AB 1493 is not applicable to the Project as it is a statewide measure establishing vehicle emissions standards. No feature of the Project would interfere with implementation of the requirements under AB 1493.

CONSISTENCY WITH RPS

California's RPS is not applicable to the Project as it is a statewide measure that establishes a renewable energy mix. No feature of the Project would interfere with implementation of the requirements under RPS.

CONSISTENCY WITH SB 350

The proposed Project would use energy from SCE, which have committed to diversify their portfolio of energy sources by increasing energy from wind and solar sources. No feature of the Project would interfere with implementation of SB 350. Additionally, the Project would be designed and constructed to implement the energy efficiency measures for new industrial developments and would include several measures designed to reduce energy consumption.

As shown above, the Project would not conflict with any of the state or local plans. As such, a less than significant impact is expected.



This page intentionally left blank



6 REFERENCES

- 1. Association of Environmental Professionals. 2020 CEQA California Environmental Quality Act. 2020.
- 2. **Administration, U.S. Energy Information.** California State Profile and Energy Estimates. [Online] https://www.eia.gov/state/data.php?sid=CA#ConsumptionExpenditures.
- 3. California Energy Commission. Transportation Energy Demand Forecast 2018-2030. 2018.
- 4. **U.S. Department of Energy.** Alternate Fuels Data Center. *U.S. Department of Energy.* [Online] https://afdc.energy.gov/states/ca.
- 5. **U.S. Energy Information Administration.** California Energy Consumption by End-Use Sector. *California State Profile and Energy Estimates.* [Online] https://www.eia.gov/state/?sid=CA#tabs-2.
- 6. California Energy Commission. 2021 Total System Electric Generation. CA.gov. [Online] https://www.energy.ca.gov/data-reports/energy-almanac/california-electricity-data/2021-total-system-electric-generation#:~:text=Total%20generation%20for%20California%20was,from%2090%2C208%20GWh%20in%202020)...
- 7. **U.S. Energy Information Administration.** California State Profile and Energy Estimates. [Online] https://www.eia.gov/state/?sid=CA.
- 8. California Energy Commission. 2013 Integrated Energy Policy Report. 2013.
- 9. **California ISO.** Understanding the ISO. [Online] http://www.caiso.com/about/Pages/OurBusiness/UnderstandingtheISO/default.aspx.
- 10. Southern California Edison. Southern California Edison's Service Area. [Online] https://download.newsroom.edison.com/create_memory_file/?f_id=5cc32d492cfac24d21aecf4c &content_verified=True.
- 11. Southern Californai Edison. 2019 Power Content Label. *Southern California Edison*. [Online] https://www.sce.com/sites/default/files/inline-files/SCE_2019PowerContentLabel.pdf.
- 12. California Public Utilities Commission. Natural Gas and California. [Online] https://www.cpuc.ca.gov/industries-and-topics/natural-gas/natural-gas-and-california.
- 13. Department of Motor Vehicles. State of California Department of Motor Vehicles Statistics For Publication January Through December 2021. 2021.
- 14. U.S. Energy Information Administration. California Analysis. *Energy Information Administration*. [Online] https://www.eia.gov/beta/states/states/ca/analysis.
- 15. California Energy Commission Staff. 2021 Integrated Energy Policy Report Update. [Online] 2021. https://www.energy.ca.gov/data-reports/reports/integrated-energy-policy-report/2021-integrated-energy-policy-report.
- 16. The California Energy Commission. 2022 Building Energy Efficiency Standards. *California Energy Commission*. [Online] 2022. https://www.energy.ca.gov/programs-and-topics/programs/building-energy-efficiency-standards/2022-building-energy-efficiency.
- 17. California Energy Commission. Renewables Portfolio Standard (RPS). [Online] 2002. http://www.energy.ca.gov/portfolio/.
- 18. State of California. California Environmental Quality Act Guideline, California Public Resources Code, Title 14, Division 6, Chapter 3,.



- 19. Association of Environmental Professionals. 2019 CEQA California Environmental Quality Act. 2019.
- 20. Urban Crossroads, Inc. 534 Struck Avenue Air Quality Impact Analysis. 2022.
- 21. California Air Pollution Control Officers Association (CAPCOA). California Emissions Estimator Model (CalEEMod). [Online] May 2022. www.caleemod.com.
- 22. California Department of Transportation. EMFAC Software. [Online] http://www.dot.ca.gov/hq/env/air/pages/emfac.htm.
- 23. State of California. 2019 CEQA California Environmental Quality Act. 2019.
- 24. Pray, Richard. 2022 National Construction Estimator. Carlsbad: Craftsman Book Company, 2022.
- 25. Southern California Edison. Schedule GS-1 General Service. *Regulatory Information Rates Pricing*. [Online] https://www.sce.com/regulatory/tariff-books/rates-pricing-choices.
- 26. City of Orange. Construction Hours. *City of Orange*. [Online] https://www.cityoforange.org/281/Construction-Hours.
- 27. California Air Resources Board. *Methods to Find the Cost-Effectiveness of Funding Air Quality Projects For Evaluating Motor Vehicle Registration Fee Projects And Congestion Mitigation and Air Quality Improvement (CMAQ) Projects, Emission Factor Tables.* 2018.
- 28. —. Truck and Bus Regulation. [Online] https://ww2.arb.ca.gov/our-work/programs/truck-and-bus-regulation.



This page intentionally left blank



7 CERTIFICATIONS

The contents of this energy analysis report represent an accurate depiction of the environmental impacts associated with the proposed 534 Struck Avenue. The information contained in this energy analysis report is based on the best available data at the time of preparation. If you have any questions, please contact me directly at hquestions, please contact me directly at hquestions, please contact me directly at hquestions.

Haseeb Qureshi
Associate Principal
Urban Crossroads, Inc.
hqureshi@urbanxroads.com

EDUCATION

Master of Science in Environmental Studies California State University, Fullerton • May 2010

Bachelor of Arts in Environmental Analysis and Design University of California, Irvine • June 2006

PROFESSIONAL AFFILIATIONS

AEP – Association of Environmental Planners AWMA – Air and Waste Management Association ASTM – American Society for Testing and Materials

PROFESSIONAL CERTIFICATIONS

Planned Communities and Urban Infill – Urban Land Institute • June 2011
Indoor Air Quality and Industrial Hygiene – EMSL Analytical • April 2008
Principles of Ambient Air Monitoring – California Air Resources Board • August 2007
AB2588 Regulatory Standards – Trinity Consultants • November 2006
Air Dispersion Modeling – Lakes Environmental • June 2006



This page intentionally left blank



APPENDIX 4.1:

CALEEMOD PROJECT CONSTRUCTION EMISSIONS MODEL OUTPUTS



534 Struck Avenue (Construction) Detailed Report

Table of Contents

- 1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
- 2. Emissions Summary
 - 2.1. Construction Emissions Compared Against Thresholds
 - 2.2. Construction Emissions by Year, Unmitigated
- 3. Construction Emissions Details
 - 3.1. Demolition (2023) Unmitigated
 - 3.3. Site Preparation (2023) Unmitigated
 - 3.5. Grading (2023) Unmitigated
 - 3.7. Building Construction (2023) Unmitigated
 - 3.9. Building Construction (2024) Unmitigated
 - 3.11. Paving (2024) Unmitigated

- 3.13. Architectural Coating (2024) Unmitigated
- 4. Operations Emissions Details
 - 4.10. Soil Carbon Accumulation By Vegetation Type
 - 4.10.1. Soil Carbon Accumulation By Vegetation Type Unmitigated
 - 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type Unmitigated
 - 4.10.3. Avoided and Sequestered Emissions by Species Unmitigated
- 5. Activity Data
 - 5.1. Construction Schedule
 - 5.2. Off-Road Equipment
 - 5.2.1. Unmitigated
 - 5.3. Construction Vehicles
 - 5.3.1. Unmitigated
 - 5.4. Vehicles
 - 5.4.1. Construction Vehicle Control Strategies
 - 5.5. Architectural Coatings
 - 5.6. Dust Mitigation
 - 5.6.1. Construction Earthmoving Activities

- 5.6.2. Construction Earthmoving Control Strategies
- 5.7. Construction Paving
- 5.8. Construction Electricity Consumption and Emissions Factors
- 5.18. Vegetation
 - 5.18.1. Land Use Change
 - 5.18.1.1. Unmitigated
 - 5.18.1. Biomass Cover Type
 - 5.18.1.1. Unmitigated
 - 5.18.2. Sequestration
 - 5.18.2.1. Unmitigated
- 6. Climate Risk Detailed Report
 - 6.1. Climate Risk Summary
 - 6.2. Initial Climate Risk Scores
 - 6.3. Adjusted Climate Risk Scores
 - 6.4. Climate Risk Reduction Measures
- 7. Health and Equity Details
 - 7.1. CalEnviroScreen 4.0 Scores

- 7.2. Healthy Places Index Scores
- 7.3. Overall Health & Equity Scores
- 7.4. Health & Equity Measures
- 7.5. Evaluation Scorecard
- 7.6. Health & Equity Custom Measures
- 8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	534 Struck Avenue (Construction)
Lead Agency	_
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	1.80
Precipitation (days)	18.2
Location	33.804851303573265, -117.85840053374626
County	Orange
City	Orange
Air District	South Coast AQMD
Air Basin	South Coast
TAZ	5705
EDFZ	7
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)		Special Landscape Area (sq ft)	Population	Description
Unrefrigerated Warehouse-No Rail	63.3	1000sqft	1.45	63,300	0.00	0.00	_	_
Parking Lot	250	Space	2.61	0.00	0.00	0.00	_	_

Other Asphalt	256	1000sqft	5.88	0.00	0.00	0.00	_	_
Surfaces								

1.3. User-Selected Emission Reduction Measures by Emissions Sector

No measures selected

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	-	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_
Unmit.	0.94	14.5	19.3	31.0	0.05	0.25	2.40	2.63	0.24	0.45	0.67	_	5,890	5,890	0.34	0.39	5.65	6,020
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	0.94	14.5	19.4	30.6	0.05	0.25	5.35	5.45	0.24	2.68	2.78	_	5,881	5,881	0.34	0.39	0.15	6,005
Average Daily (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	0.41	1.53	7.76	12.8	0.02	0.09	0.85	0.92	0.09	0.22	0.29	_	2,242	2,242	0.11	0.12	0.78	2,258
Annual (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	0.08	0.28	1.42	2.33	< 0.005	0.02	0.15	0.17	0.02	0.04	0.05	_	371	371	0.02	0.02	0.13	374

2.2. Construction Emissions by Year, Unmitigated

		Year	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
--	--	------	-----	-----	-----	----	-----	-------	-------	-------	--------	--------	--------	------	-------	------	-----	-----	---	------

Daily - Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2023	0.72	0.52	14.8	20.4	0.05	0.23	2.40	2.63	0.22	0.45	0.67	_	5,890	5,890	0.34	0.39	5.65	6,020
2024	0.94	14.5	19.3	31.0	0.04	0.25	0.67	0.93	0.24	0.16	0.40	_	5,184	5,184	0.20	0.09	3.22	5,218
Daily - Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_
2023	0.75	0.71	15.0	29.3	0.05	0.23	5.35	5.45	0.22	2.68	2.78	_	5,881	5,881	0.34	0.39	0.15	6,005
2024	0.94	14.5	19.4	30.6	0.04	0.25	0.67	0.93	0.24	0.16	0.40	_	5,153	5,153	0.20	0.09	0.08	5,185
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2023	0.25	0.19	5.20	7.51	0.02	0.07	0.85	0.92	0.07	0.22	0.29	_	1,990	1,990	0.11	0.12	0.78	2,029
2024	0.41	1.53	7.76	12.8	0.02	0.09	0.28	0.38	0.09	0.07	0.16	_	2,242	2,242	0.09	0.04	0.62	2,258
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2023	0.05	0.04	0.95	1.37	< 0.005	0.01	0.15	0.17	0.01	0.04	0.05	_	329	329	0.02	0.02	0.13	336
2024	0.08	0.28	1.42	2.33	< 0.005	0.02	0.05	0.07	0.02	0.01	0.03	<u> </u>	371	371	0.01	0.01	0.10	374

3. Construction Emissions Details

3.1. Demolition (2023) - Unmitigated

				<i>J</i> ,					J ,									
Location	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.41	11.9	18.2	0.03	0.20	_	0.20	0.19	_	0.19	_	3,425	3,425	0.14	0.03	_	3,437

Dam - 1:4:							4.04	4.04		0.05	0.05							
Demolitio n		_	_		_		1.64	1.64		0.25	0.25	_			_	_		
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.41	11.9	18.2	0.03	0.20	_	0.20	0.19	_	0.19	_	3,425	3,425	0.14	0.03	_	3,437
Demolitio n	_	_	_	-	_	_	1.64	1.64	_	0.25	0.25	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	-	_	_	_	-	-	_	_	_	-	_	_	_	_	-	_
Off-Road Equipmen		0.10	2.94	4.48	0.01	0.05	_	0.05	0.05	_	0.05	_	845	845	0.03	0.01	_	847
Demolitio n	_	_	_	-	_	_	0.40	0.40	_	0.06	0.06	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.02	0.54	0.82	< 0.005	0.01	_	0.01	0.01	_	0.01	_	140	140	0.01	< 0.005	_	140
Demolitio n	_	_	_	-	_	_	0.07	0.07	_	0.01	0.01	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_	-	_	-
Worker	0.07	0.06	0.06	0.98	0.00	0.00	0.01	0.01	0.00	0.00	0.00	_	207	207	0.01	0.01	0.92	211

Vendor	0.01	< 0.005	0.11	0.05	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	_	98.4	98.4	0.01	0.01	0.26	103
Hauling	0.23	0.04	2.75	1.19	0.01	0.03	0.15	0.17	0.03	0.05	0.08	_	2,159	2,159	0.18	0.34	4.46	2,270
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.06	0.06	0.07	0.84	0.00	0.00	0.01	0.01	0.00	0.00	0.00	_	197	197	0.01	0.01	0.02	200
Vendor	0.01	< 0.005	0.11	0.06	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	_	98.4	98.4	0.01	0.01	0.01	103
Hauling	0.23	0.04	2.84	1.20	0.01	0.03	0.15	0.17	0.03	0.05	0.08	_	2,160	2,160	0.18	0.34	0.12	2,266
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.02	0.01	0.02	0.22	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	-	49.3	49.3	< 0.005	< 0.005	0.10	50.0
Vendor	< 0.005	< 0.005	0.03	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	24.3	24.3	< 0.005	< 0.005	0.03	25.3
Hauling	0.06	0.01	0.71	0.29	< 0.005	0.01	0.04	0.04	0.01	0.01	0.02	_	533	533	0.05	0.08	0.48	559
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	8.17	8.17	< 0.005	< 0.005	0.02	8.28
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	4.02	4.02	< 0.005	< 0.005	< 0.005	4.19
Hauling	0.01	< 0.005	0.13	0.05	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	_	88.2	88.2	0.01	0.01	0.08	92.6

3.3. Site Preparation (2023) - Unmitigated

Location	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.64	14.7	28.3	0.05	0.10	_	0.10	0.10	_	0.10	_	5,295	5,295	0.21	0.04	_	5,314

Dust From Material Movemen	 ::	_	_	_	_	_	5.11	5.11	_	2.63	2.63	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.01	0.20	0.39	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	72.5	72.5	< 0.005	< 0.005	_	72.8
Dust From Material Movemen	<u> </u>	_		_	_	_	0.07	0.07	_	0.04	0.04		_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		< 0.005	0.04	0.07	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	12.0	12.0	< 0.005	< 0.005	_	12.1
Dust From Material Movemen	<u> </u>	_	_	_	_	_	0.01	0.01	_	0.01	0.01	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.08	0.07	0.09	1.01	0.00	0.00	0.01	0.01	0.00	0.00	0.00	_	237	237	0.01	0.01	0.03	240
Vendor	< 0.005	< 0.005	0.04	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	32.8	32.8	< 0.005	< 0.005	< 0.005	34.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	3.29	3.29	< 0.005	< 0.005	0.01	3.33
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	0.45	0.45	< 0.005	< 0.005	< 0.005	0.47
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	0.54	0.54	< 0.005	< 0.005	< 0.005	0.55
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	0.07	0.07	< 0.005	< 0.005	< 0.005	0.08
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

3.5. Grading (2023) - Unmitigated

Location	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	-
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.48	12.6	21.8	0.03	0.10	_	0.10	0.09	_	0.09	_	3,539	3,539	0.14	0.03	_	3,551
Dust From Material Movemen	_	_	_	_	_	_	1.84	1.84	_	0.89	0.89	_	_	_	_	_		_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.03	0.87	1.49	< 0.005	0.01	_	0.01	0.01	_	0.01	_	242	242	0.01	< 0.005	_	243

Dust	_	_	_	_	_	_	0.13	0.13	_	0.06	0.06	_	_	_	_	_	_	_
From Material Movemen	ţ																	
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.01	0.16	0.27	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	40.1	40.1	< 0.005	< 0.005	_	40.3
Dust From Material Movemen	_	_	_	_	_	_	0.02	0.02	_	0.01	0.01	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	-	_	_	_	-	-	_	_	_	_	_	_	_	_	_	_	_
Worker	0.09	0.08	0.10	1.12	0.00	0.00	0.02	0.02	0.00	0.00	0.00	_	263	263	0.01	0.01	0.03	266
Vendor	< 0.005	< 0.005	0.04	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	32.8	32.8	< 0.005	< 0.005	< 0.005	34.2
Hauling	0.18	0.03	2.28	0.96	0.01	0.02	0.12	0.14	0.02	0.04	0.06	_	1,728	1,728	0.15	0.27	0.09	1,813
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.01	0.01	0.01	0.08	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	18.3	18.3	< 0.005	< 0.005	0.04	18.5
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	2.25	2.25	< 0.005	< 0.005	< 0.005	2.34
Hauling	0.01	< 0.005	0.16	0.07	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	_	118	118	0.01	0.02	0.11	124
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	3.02	3.02	< 0.005	< 0.005	0.01	3.07
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	0.37	0.37	< 0.005	< 0.005	< 0.005	0.39

Hauling	< 0.005	< 0.005	0.03	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	 19.6	19.6	< 0.005	< 0.005	0.02	20.6

3.7. Building Construction (2023) - Unmitigated

	TOG	ROG	NOx	ily, ton/yi	SO2	PM10E	PM10D	PM10T		PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
	100	RUG	NOX	CO	302	PIVITUE	PIVITUD	PIVITOT	PIVIZ.5E	PIVIZ.5D	PIVIZ.51	BCUZ	INDCUZ	0021	СП4	INZU	K	COZE
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)		_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.45	10.3	16.2	0.03	0.13	_	0.13	0.12	_	0.12	_	2,630	2,630	0.11	0.02	_	2,639
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.01	0.26	0.41	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	66.9	66.9	< 0.005	< 0.005	_	67.1
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		< 0.005	0.05	0.08	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	11.1	11.1	< 0.005	< 0.005	_	11.1
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_	-	_	_

Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.12	0.10	0.13	1.52	0.00	0.00	0.02	0.02	0.00	0.00	0.00	_	355	355	0.02	0.01	0.04	360
Vendor	0.02	0.01	0.26	0.13	< 0.005	< 0.005	0.01	0.02	< 0.005	< 0.005	0.01	_	230	230	0.01	0.03	0.02	239
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	9.16	9.16	< 0.005	< 0.005	0.02	9.29
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	5.84	5.84	< 0.005	< 0.005	0.01	6.09
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	1.52	1.52	< 0.005	< 0.005	< 0.005	1.54
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	0.97	0.97	< 0.005	< 0.005	< 0.005	1.01
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

3.9. Building Construction (2024) - Unmitigated

									DMO SE			DOOG	NDCCO	ОООТ	0114	NICO	Б	000-
Location	IOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmer		0.45	10.3	16.2	0.03	0.12	_	0.12	0.12	_	0.12	_	2,630	2,630	0.11	0.02	_	2,639
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Off-Road Equipmen		0.45	10.3	16.2	0.03	0.12	_	0.12	0.12	_	0.12	_	2,630	2,630	0.11	0.02	_	2,639
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	-	_	_	_	_	_	_	_	_	_	_	-	_	_	_
Off-Road Equipmen		0.27	6.22	9.80	0.02	0.08	_	0.08	0.07	_	0.07	_	1,591	1,591	0.06	0.01	_	1,596
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.05	1.13	1.79	< 0.005	0.01	_	0.01	0.01	_	0.01	_	263	263	0.01	< 0.005	_	264
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.11	0.10	0.11	1.62	0.00	0.00	0.02	0.02	0.00	0.00	0.00	_	366	366	< 0.005	0.01	1.50	371
Vendor	0.02	0.01	0.24	0.12	< 0.005	< 0.005	0.01	0.02	< 0.005	< 0.005	0.01	_	227	227	0.01	0.03	0.61	237
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.11	0.10	0.12	1.40	0.00	0.00	0.02	0.02	0.00	0.00	0.00	_	348	348	0.01	0.01	0.04	352
Vendor	0.02	0.01	0.25	0.12	< 0.005	< 0.005	0.01	0.02	< 0.005	< 0.005	0.01	_	227	227	0.01	0.03	0.02	236
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily		_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.07	0.06	0.07	0.89	0.00	0.00	0.01	0.01	0.00	0.00	0.00	_	213	213	< 0.005	0.01	0.39	216
Vendor	0.01	< 0.005	0.15	0.07	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	_	137	137	0.01	0.02	0.16	143

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.01	0.01	0.01	0.16	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	35.3	35.3	< 0.005	< 0.005	0.06	35.8
Vendor	< 0.005	< 0.005	0.03	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	22.7	22.7	< 0.005	< 0.005	0.03	23.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

3.11. Paving (2024) - Unmitigated

Location	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_
Off-Road Equipment		0.23	7.21	10.6	0.01	0.09	_	0.09	0.08	_	0.08	_	1,512	1,512	0.06	0.01	_	1,517
Paving	_	0.37	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipment		0.23	7.21	10.6	0.01	0.09	_	0.09	0.08	_	0.08	_	1,512	1,512	0.06	0.01	_	1,517
Paving	_	0.37	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipment		0.04	1.18	1.74	< 0.005	0.01	_	0.01	0.01	_	0.01	_	248	248	0.01	< 0.005	_	249
Paving		0.06	_	_	_		_	_	_	_	_	_	_	_	_	_	_	_

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmer		0.01	0.22	0.32	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	-	41.1	41.1	< 0.005	< 0.005	_	41.3
Paving	_	0.01	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.06	0.06	0.06	0.90	0.00	0.00	0.01	0.01	0.00	0.00	0.00	_	203	203	< 0.005	0.01	0.83	206
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.06	0.06	0.07	0.78	0.00	0.00	0.01	0.01	0.00	0.00	0.00	_	193	193	< 0.005	0.01	0.02	196
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	-	_	_	_	_	_	_	_	_	_	_	-	_	-	_	-	-	_
Worker	0.01	0.01	0.01	0.13	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	32.2	32.2	< 0.005	< 0.005	0.06	32.7
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	5.34	5.34	< 0.005	< 0.005	0.01	5.41
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

3.13. Architectural Coating (2024) - Unmitigated

Location	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.03	1.43	1.28	< 0.005	0.04	_	0.04	0.04	_	0.04	_	178	178	0.01	< 0.005	_	179
Architect ural Coatings	_	13.2	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.03	1.43	1.28	< 0.005	0.04	_	0.04	0.04	_	0.04	_	178	178	0.01	< 0.005	_	179
Architect ural Coatings	_	13.2	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		< 0.005	0.12	0.11	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	14.6	14.6	< 0.005	< 0.005	_	14.7
Architect ural Coatings	_	1.09	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-
Off-Road Equipmen		< 0.005	0.02	0.02	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	2.42	2.42	< 0.005	< 0.005	_	2.43
Architect ural Coatings	_	0.20	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.02	0.02	0.02	0.30	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	67.8	67.8	< 0.005	< 0.005	0.28	68.8
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.02	0.02	0.02	0.26	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	64.5	64.5	< 0.005	< 0.005	0.01	65.2
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	5.37	5.37	< 0.005	< 0.005	0.01	5.44
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	0.89	0.89	< 0.005	< 0.005	< 0.005	0.90
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

4. Operations Emissions Details

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetatio n						PM10E				PM2.5D		BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Annual	_	_	_		_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Species	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T				BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	-	-	_	_	_	_	_	-	-	-	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	-	-	_	_	-	_	_	_	-	-	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	-	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	-	-	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Annual	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_		_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_		_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_		_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_		_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Demolition	Demolition	7/4/2023	11/6/2023	5.00	90.0	_
Site Preparation	Site Preparation	11/7/2023	11/13/2023	5.00	5.00	_
Grading	Grading	11/14/2023	12/18/2023	5.00	25.0	_
Building Construction	Building Construction	12/19/2023	11/4/2024	5.00	230	_
Paving	Paving	8/13/2024	11/4/2024	5.00	60.0	_
Architectural Coating	Architectural Coating	9/24/2024	11/4/2024	5.00	30.0	_

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Demolition	Concrete/Industrial Saws	Diesel	Tier 4 Interim	1.00	8.00	33.0	0.73

Demolition	Excavators	Diesel	Tier 4 Interim	3.00	8.00	36.0	0.38
Demolition	Rubber Tired Dozers	Diesel	Tier 4 Interim	2.00	8.00	367	0.40
Site Preparation	Rubber Tired Dozers	Diesel	Tier 4 Interim	3.00	8.00	367	0.40
Site Preparation	Tractors/Loaders/Backh oes	Diesel	Tier 4 Interim	4.00	8.00	84.0	0.37
Grading	Excavators	Diesel	Tier 4 Interim	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Tier 4 Interim	1.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Tier 4 Interim	1.00	8.00	367	0.40
Grading	Tractors/Loaders/Backh oes	Diesel	Tier 4 Interim	5.00	8.00	84.0	0.37
Building Construction	Cranes	Diesel	Tier 4 Interim	1.00	8.00	367	0.29
Building Construction	Forklifts	Diesel	Tier 4 Interim	3.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Tier 4 Interim	1.00	8.00	14.0	0.74
Building Construction	Tractors/Loaders/Backh oes	Diesel	Tier 4 Interim	3.00	8.00	84.0	0.37
Building Construction	Welders	Diesel	Tier 4 Interim	1.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Tier 4 Interim	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Tier 4 Interim	2.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Tier 4 Interim	2.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Tier 4 Interim	1.00	8.00	37.0	0.48

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Demolition	_	_	_	_
Demolition	Worker	15.0	18.5	LDA,LDT1,LDT2
Demolition	Vendor	3.00	10.2	HHDT,MHDT

Demolition	Hauling	30.0	20.0	HHDT
Demolition	Onsite truck	0.00	0.00	HHDT
Site Preparation	_	_	_	_
Site Preparation	Worker	18.0	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	1.00	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	0.00	0.00	HHDT
Grading	_	_	_	_
Grading	Worker	20.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	1.00	10.2	HHDT,MHDT
Grading	Hauling	24.0	20.0	HHDT
Grading	Onsite truck	0.00	0.00	HHDT
Building Construction	_	_	_	_
Building Construction	Worker	27.0	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	7.00	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	0.00	0.00	HHDT
Paving	_	_	_	_
Paving	Worker	15.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	0.00	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	0.00	0.00	HHDT
Architectural Coating	_	_	_	_
Architectural Coating	Worker	5.00	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	0.00	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	0.00	0.00	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	0.00	0.00	94,950	31,650	22,180

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (Cubic Yards)	Material Exported (Cubic Yards)	Acres Graded (acres)	Material Demolished (Ton of Debris)	Acres Paved (acres)
Demolition	0.00	0.00	0.00	10,905	_
Site Preparation	0.00	0.00	7.50	0.00	_
Grading	3,799	1,000	25.0	0.00	_
Paving	0.00	0.00	0.00	0.00	8.49

5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	3	74%	74%
Water Demolished Area	2	36%	36%

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
Land Use	Alea Faveu (acres)	76 Aspirali

Unrefrigerated Warehouse-No Rail	0.00	0%
Parking Lot	2.61	100%
Other Asphalt Surfaces	5.88	100%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2023	0.00	532	0.03	< 0.005
2024	0.00	532	0.03	< 0.005

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres
vegetation Land Ose Type	vegetation our type	Illitial Acres	i ilidi Adica

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	10.5	annual days of extreme heat
Extreme Precipitation	4.00	annual days with precipitation above 20 mm
Sea Level Rise	0.00	meters of inundation depth
Wildfire	0.00	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider different increments of sea level rise coupled with extreme storm events. Users may select from four model simulations to view the range in potential inundation depth for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 50 meters (m) by 50 m, or about 164 feet (ft) by 164 ft.

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A

Snowpack	N/A	N/A	N/A	N/A
Air Quality	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack	N/A	N/A	N/A	N/A
Air Quality	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator Result for Project Census Tract

Exposure Indicators	_
AQ-Ozone	53.7
AQ-PM	82.8
AQ-DPM	73.9
Drinking Water	54.8
Lead Risk Housing	80.7
Pesticides	19.7
Toxic Releases	99.4
Traffic	36.7
Effect Indicators	_
CleanUp Sites	99.4
Groundwater	69.8
Haz Waste Facilities/Generators	99.2
Impaired Water Bodies	0.00
Solid Waste	92.9
Sensitive Population	_
Asthma	29.8
Cardio-vascular	33.7
Low Birth Weights	12.4
Socioeconomic Factor Indicators	_
Education	90.2
Housing	68.1
Linguistic	79.0
Poverty	77.3
Unemployment	47.0

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator Index score is 100. A high score (i.e., greater than 50) ref	Result for Project Census Tract
Economic	
Above Poverty	21.77595278
Employed	57.44899269
Median HI	51.13563454
Education	_
Bachelor's or higher	35.41639933
High school enrollment	25.49724111
Preschool enrollment	91.3383806
Transportation	_
Auto Access	76.73553189
Active commuting	75.70896959
Social	_
2-parent households	64.16014372
Voting	14.57718465
Neighborhood	_
Alcohol availability	21.66046452
Park access	33.44026691
Retail density	93.55832157
Supermarket access	69.35711536
Tree canopy	10.31695111
Housing	_
Homeownership	28.53843193
Housing habitability	23.18747594
Low-inc homeowner severe housing cost burden	95.8937508
Low-inc renter severe housing cost burden	42.83331195
Uncrowded housing	1.552675478

_
6.505838573
75.7
72.6
75.3
80.0
27.9
63.8
33.2
47.0
27.4
58.3
94.1
70.7
21.9
64.9
37.0
59.3
27.6
58.2
_
21.6
18.3
22.8
_
0.0
0.0

Children	7.8
Elderly	96.9
English Speaking	14.4
Foreign-born	71.1
Outdoor Workers	10.3
Climate Change Adaptive Capacity	_
Impervious Surface Cover	4.8
Traffic Density	41.8
Traffic Access	56.5
Other Indices	_
Hardship	88.2
Other Decision Support	_
2016 Voting	48.6

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	76.0
Healthy Places Index Score for Project Location (b)	44.0
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	Yes
Project Located in a Low-Income Community (Assembly Bill 1550)	Yes
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification
Land Use	Total Project area is 9.94 acres
Construction: Construction Phases	Construction anticipated to end in 2024
Construction: Off-Road Equipment	Equipment based on previous study
Construction: Trips and VMT	Vendor Trips adjusted based on CalEEMod defaults for Building Construction and number of days for Demolition, Site Preparation, Grading, and Building Construction
Construction: Architectural Coatings	Rule 1113

This page intentionally left blank



APPENDIX 4.2:

CALEEMOD PROJECT OPERATIONS EMISSIONS MODEL OUTPUTS



534 Struck Avenue (Operations) Detailed Report

Table of Contents

- 1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
- 2. Emissions Summary
 - 2.4. Operations Emissions Compared Against Thresholds
 - 2.5. Operations Emissions by Sector, Unmitigated
- 4. Operations Emissions Details
 - 4.1. Mobile Emissions by Land Use
 - 4.1.1. Unmitigated
 - 4.2. Energy
 - 4.2.1. Electricity Emissions By Land Use Unmitigated
 - 4.2.3. Natural Gas Emissions By Land Use Unmitigated
 - 4.3. Area Emissions by Source

- 4.3.2. Unmitigated
- 4.4. Water Emissions by Land Use
 - 4.4.2. Unmitigated
- 4.5. Waste Emissions by Land Use
 - 4.5.2. Unmitigated
- 4.6. Refrigerant Emissions by Land Use
 - 4.6.1. Unmitigated
- 4.7. Offroad Emissions By Equipment Type
 - 4.7.1. Unmitigated
- 4.8. Stationary Emissions By Equipment Type
 - 4.8.1. Unmitigated
- 4.9. User Defined Emissions By Equipment Type
 - 4.9.1. Unmitigated
- 4.10. Soil Carbon Accumulation By Vegetation Type
 - 4.10.1. Soil Carbon Accumulation By Vegetation Type Unmitigated
 - 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type Unmitigated
 - 4.10.3. Avoided and Sequestered Emissions by Species Unmitigated

- 5. Activity Data
 - 5.9. Operational Mobile Sources
 - 5.9.1. Unmitigated
 - 5.10. Operational Area Sources
 - 5.10.1. Hearths
 - 5.10.1.1. Unmitigated
 - 5.10.2. Architectural Coatings
 - 5.10.3. Landscape Equipment
 - 5.11. Operational Energy Consumption
 - 5.11.1. Unmitigated
 - 5.12. Operational Water and Wastewater Consumption
 - 5.12.1. Unmitigated
 - 5.13. Operational Waste Generation
 - 5.13.1. Unmitigated
 - 5.14. Operational Refrigeration and Air Conditioning Equipment
 - 5.14.1. Unmitigated
 - 5.15. Operational Off-Road Equipment

- 5.15.1. Unmitigated
- 5.16. Stationary Sources
 - 5.16.1. Emergency Generators and Fire Pumps
 - 5.16.2. Process Boilers
- 5.17. User Defined
- 5.18. Vegetation
 - 5.18.1. Land Use Change
 - 5.18.1.1. Unmitigated
 - 5.18.1. Biomass Cover Type
 - 5.18.1.1. Unmitigated
 - 5.18.2. Sequestration
 - 5.18.2.1. Unmitigated
- 6. Climate Risk Detailed Report
 - 6.1. Climate Risk Summary
 - 6.2. Initial Climate Risk Scores
 - 6.3. Adjusted Climate Risk Scores
 - 6.4. Climate Risk Reduction Measures

- 7. Health and Equity Details
 - 7.1. CalEnviroScreen 4.0 Scores
 - 7.2. Healthy Places Index Scores
 - 7.3. Overall Health & Equity Scores
 - 7.4. Health & Equity Measures
 - 7.5. Evaluation Scorecard
 - 7.6. Health & Equity Custom Measures
- 8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	534 Struck Avenue (Operations)
Lead Agency	_
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	1.80
Precipitation (days)	18.2
Location	33.804851303573265, -117.85840053374626
County	Orange
City	Orange
Air District	South Coast AQMD
Air Basin	South Coast
TAZ	5705
EDFZ	7
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description
Unrefrigerated Warehouse-No Rail	63.3	1000sqft	1.45	63,300	0.00	0.00	_	_
User Defined Industrial	63.3	User Defined Unit	0.00	0.00	0.00	0.00	_	_

Parking Lot	250	Space	2.61	0.00	0.00	0.00	_	_
Other Asphalt Surfaces	256	1000sqft	5.88	0.00	0.00	0.00	_	_

1.3. User-Selected Emission Reduction Measures by Emissions Sector

No measures selected

2. Emissions Summary

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	2.04	2.95	9.96	14.4	0.09	0.14	1.80	1.94	0.14	0.39	0.53	60.1	10,708	10,768	6.74	1.31	93.6	11,420
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	1.54	2.49	10.3	11.1	0.09	0.14	1.80	1.94	0.13	0.39	0.52	60.1	10,629	10,690	6.75	1.31	65.3	11,314
Average Daily (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	
Unmit.	1.47	2.56	7.74	10.2	0.07	0.11	1.32	1.43	0.11	0.28	0.39	60.1	8,025	8,085	6.59	0.98	73.7	8,615
Annual (Max)	-	_	_	_	_	-	_	_	_	_	-	_	-	_	_	_	_	_
Unmit.	0.27	0.47	1.41	1.86	0.01	0.02	0.24	0.26	0.02	0.05	0.07	9.95	1,329	1,339	1.09	0.16	12.2	1,426

2.5. Operations Emissions by Sector, Unmitigated

Sector	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	всо2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	1.51	0.91	9.61	11.3	0.09	0.11	1.80	1.91	0.11	0.39	0.50	_	9,832	9,832	0.58	1.23	29.1	10,243
Area	0.49	2.02	0.02	2.75	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	11.3	11.3	< 0.005	< 0.005	_	11.7
Energy	0.04	0.02	0.33	0.28	< 0.005	0.02	_	0.02	0.02	_	0.02	_	769	769	0.07	0.01	_	772
Water	_	_	_	_	_	_	_	_	_	_	_	28.1	95.2	123	2.89	0.07	_	216
Waste	_	_	_	_	_	_	_	-	_	_	_	32.1	0.00	32.1	3.21	0.00	_	112
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-	64.5	64.5
Total	2.04	2.95	9.96	14.4	0.09	0.14	1.80	1.94	0.14	0.39	0.53	60.1	10,708	10,768	6.74	1.31	93.6	11,420
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	1.50	0.90	10.0	10.8	0.09	0.12	1.80	1.91	0.11	0.39	0.50	_	9,765	9,765	0.59	1.24	0.75	10,149
Area	_	1.57	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Energy	0.04	0.02	0.33	0.28	< 0.005	0.02	_	0.02	0.02	_	0.02	_	769	769	0.07	0.01	_	772
Water	_	_	_	_	_	_	<u> </u>	_	_	_	_	28.1	95.2	123	2.89	0.07	_	216
Waste	_	_	_	_	_	_	_	_	_	_	_	32.1	0.00	32.1	3.21	0.00	_	112
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	64.5	64.5
Total	1.54	2.49	10.3	11.1	0.09	0.14	1.80	1.94	0.13	0.39	0.52	60.1	10,629	10,690	6.75	1.31	65.3	11,314
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	1.10	0.66	7.40	8.03	0.07	0.08	1.32	1.40	0.08	0.28	0.36	_	7,153	7,153	0.43	0.90	9.18	7,442
Area	0.34	1.88	0.02	1.89	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	7.75	7.75	< 0.005	< 0.005	_	7.98
Energy	0.04	0.02	0.33	0.28	< 0.005	0.02	_	0.02	0.02	_	0.02	_	769	769	0.07	0.01	_	772
Water	_	_	_	_	_	_	_	_	_	_	_	28.1	95.2	123	2.89	0.07	_	216
Waste	_	_	_	_	_	_	_	_	_	_	_	32.1	0.00	32.1	3.21	0.00	_	112
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	64.5	64.5

Total	1.47	2.56	7.74	10.2	0.07	0.11	1.32	1.43	0.11	0.28	0.39	60.1	8,025	8,085	6.59	0.98	73.7	8,615
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	0.20	0.12	1.35	1.47	0.01	0.02	0.24	0.26	0.01	0.05	0.07	_	1,184	1,184	0.07	0.15	1.52	1,232
Area	0.06	0.34	< 0.005	0.34	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	1.28	1.28	< 0.005	< 0.005	_	1.32
Energy	0.01	< 0.005	0.06	0.05	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	127	127	0.01	< 0.005	_	128
Water	_	_	_	_	_	_	_	_	_	_	_	4.64	15.8	20.4	0.48	0.01	_	35.8
Waste	_	_	_	_	_	_	_	_	_	_	_	5.31	0.00	5.31	0.53	0.00	_	18.6
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	10.7	10.7
Total	0.27	0.47	1.41	1.86	0.01	0.02	0.24	0.26	0.02	0.05	0.07	9.95	1,329	1,339	1.09	0.16	12.2	1,426

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.74	0.68	0.38	6.67	0.01	0.01	0.08	0.08	0.01	0.02	0.03		1,504	1,504	0.06	0.04	5.98	1,523
User Defined Industrial	0.77	0.22	9.24	4.65	0.08	0.11	0.59	0.70	0.10	0.19	0.29	_	8,329	8,329	0.52	1.19	23.1	8,720
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Total	1.51	0.91	9.61	11.3	0.09	0.11	0.67	0.78	0.11	0.22	0.32	_	9,832	9,832	0.58	1.23	29.1	10,243
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.74	0.68	0.42	6.15	0.01	0.01	0.08	0.08	0.01	0.02	0.03	_	1,434	1,434	0.06	0.04	0.16	1,449
User Defined Industrial	0.76	0.22	9.59	4.69	0.08	0.11	0.59	0.70	0.10	0.19	0.29	_	8,331	8,331	0.52	1.19	0.60	8,700
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	0.00	0.00	0.00	0.00
Total	1.50	0.90	10.0	10.8	0.09	0.12	0.67	0.78	0.11	0.22	0.32	_	9,765	9,765	0.59	1.24	0.75	10,149
Annual	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.10	0.09	0.06	0.84	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	_	176	176	0.01	0.01	0.31	178
User Defined Industrial	0.10	0.03	1.29	0.62	0.01	0.01	0.08	0.09	0.01	0.03	0.04	_	1,008	1,008	0.06	0.14	1.21	1,054
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.20	0.12	1.35	1.47	0.01	0.02	0.09	0.10	0.01	0.03	0.04		1,184	1,184	0.07	0.15	1.52	1,232

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	-	_	_	_	_	_	_	-	-	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	283	283	0.03	< 0.005	_	285
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	-	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	_	95.1	95.1	0.01	< 0.005	_	95.7
Other Asphalt Surfaces	_	_	_	-	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	_	378	378	0.04	< 0.005	_	380
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	283	283	0.03	< 0.005	_	285
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00

Parking Lot	_	_	_	_	_	_	_	_	_	_	_	_	95.1	95.1	0.01	< 0.005	_	95.7
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_		_	_	_	378	378	0.04	< 0.005	_	380
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail		_	_	_	_		_			_	_		46.9	46.9	< 0.005	< 0.005	_	47.1
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	_	15.7	15.7	< 0.005	< 0.005	_	15.8
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	_	62.6	62.6	0.01	< 0.005	_	63.0

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.04	0.02	0.33	0.28	< 0.005	0.02		0.02	0.02	_	0.02	_	391	391	0.03	< 0.005	_	392

User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	-	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Total	0.04	0.02	0.33	0.28	< 0.005	0.02	_	0.02	0.02	_	0.02	_	391	391	0.03	< 0.005	_	392
Daily, Winter (Max)	_	_	_	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.04	0.02	0.33	0.28	< 0.005	0.02	_	0.02	0.02	-	0.02	_	391	391	0.03	< 0.005	_	392
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	-	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Total	0.04	0.02	0.33	0.28	< 0.005	0.02	_	0.02	0.02	_	0.02	_	391	391	0.03	< 0.005	_	392
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	<u> </u>
Unrefrige rated Warehou se-No Rail	0.01	< 0.005	0.06	0.05	< 0.005	< 0.005	_	< 0.005	< 0.005	-	< 0.005	_	64.7	64.7	0.01	< 0.005	_	64.9
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00

Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Total	0.01	< 0.005	0.06	0.05	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	64.7	64.7	0.01	< 0.005	_	64.9

4.3. Area Emissions by Source

4.3.2. Unmitigated

Source	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	-
Consum er Products	_	1.38	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings	_	0.19	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Landsca pe Equipme nt	0.49	0.45	0.02	2.75	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	11.3	11.3	< 0.005	< 0.005	_	11.7
Total	0.49	2.02	0.02	2.75	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	11.3	11.3	< 0.005	< 0.005	_	11.7
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	1.38	_	_	_	_	_		_	_	_	_		_			_	_

Architect ural Coatings	_	0.19	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	1.57	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	0.25	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings	_	0.03	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Landsca pe Equipme nt	0.06	0.06	< 0.005	0.34	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	1.28	1.28	< 0.005	< 0.005	_	1.32
Total	0.06	0.34	< 0.005	0.34	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	1.28	1.28	< 0.005	< 0.005	_	1.32

4.4. Water Emissions by Land Use

4.4.2. Unmitigated

Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	28.1	95.2	123	2.89	0.07	_	216
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00

Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	28.1	95.2	123	2.89	0.07	_	216
Daily, Winter (Max)	_	_	-	_	_	_	_	_	_	_	_	_	_	-	_	_	_	-
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	28.1	95.2	123	2.89	0.07	_	216
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_		_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	28.1	95.2	123	2.89	0.07	_	216
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	4.64	15.8	20.4	0.48	0.01	_	35.8
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00

Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	4.64	15.8	20.4	0.48	0.01	_	35.8

4.5. Waste Emissions by Land Use

4.5.2. Unmitigated

Land Use	TOG	ROG	NOx	CO	SO2	PM10E			PM2.5E			BCO2	NBCO2	СО2Т	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	-	_	_	_	_	_	_	_	_	32.1	0.00	32.1	3.21	0.00	_	112
User Defined Industrial	_	_	-	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	-	0.00
Parking Lot	_	_	_	_	_	-	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	_	_	-	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	-	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	32.1	0.00	32.1	3.21	0.00	_	112
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	32.1	0.00	32.1	3.21	0.00	_	112
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	-	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	-	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	32.1	0.00	32.1	3.21	0.00	_	112
Annual	_	_	_	_	_	_	_	_	_	_	-	<u> </u>	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	5.31	0.00	5.31	0.53	0.00	_	18.6
User Defined Industrial	_	_	-	_	_	_	_	-	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	-	-	_	-	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	-	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	5.31	0.00	5.31	0.53	0.00	_	18.6

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	64.5	64.5
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	64.5	64.5
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	-	_	_	_	_	_	_	_	_	-	64.5	64.5
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	64.5	64.5
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	10.7	10.7
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	10.7	10.7

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Equipme	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
nt																		
Туре																		

Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	<u> </u>	_	<u> </u>	_	_	_	<u> </u>	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

				<i>J</i> ,					<u>, , , , , , , , , , , , , , , , , , , </u>									
Equipme nt Type	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipme nt Type	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetatio n	TOG	ROG		со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_		_		_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Total	_	_	_	_	_	_	_	 _	_	_	_	_	 _	_	 _
iotai															

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG				PM10E				PM2.5D		BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG		со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_	_	_
Subtotal	_		_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	<u> </u>
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_		_	_		_	_	_	_	_	_	_	_	
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_		_	_		_	_	_	_	_	_	_	_	
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_		_
Subtotal	_	_	_	_	_		_	_		_	_	_	_	_	_	_	_	
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_

5. Activity Data

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Unrefrigerated Warehouse-No Rail	218	18.4	7.37	58,128	2,119	179	71.7	565,665
User Defined Industrial	174	14.7	5.90	46,503	2,755	233	93.2	735,199
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
0	0.00	94,950	31,650	22,180

5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	250

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Unrefrigerated Warehouse-No Rail	296,267	349	0.0330	0.0040	1,220,180
User Defined Industrial	0.00	349	0.0330	0.0040	0.00
Parking Lot	99,594	349	0.0330	0.0040	0.00
Other Asphalt Surfaces	0.00	349	0.0330	0.0040	0.00

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Unrefrigerated Warehouse-No Rail	14,638,125	0.00
User Defined Industrial	0.00	0.00
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Unrefrigerated Warehouse-No Rail	59.5	0.00
User Defined Industrial	0.00	0.00
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Unrefrigerated Warehouse-No Rail	Cold storage	User Defined	150	7.50	7.50	7.50	25.0

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

Equipment Type Fuel Type Engine Tier Number per Day Hours Per D	Day Horsepower Load Factor
---	----------------------------

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
- qa.po , p o	. 4.5	. tannos, por Day		110010 por 1001		

5.16.2. Process Boilers

Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)
----------------	-----------	--------	--------------------------	------------------------------	------------------------------

5.17. User Defined

Equipment Type	Fuel Type
_	_

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

 Vegetation Land Use Type
 Vegetation Soil Type
 Initial Acres
 Final Acres

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type Initial Acres Final Acres

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type Number Electricity Saved (kWh/year) Natural Gas Saved (btu/year)

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	10.5	annual days of extreme heat
Extreme Precipitation	4.00	annual days with precipitation above 20 mm
Sea Level Rise	0.00	meters of inundation depth
Wildfire	0.00	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi. Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about 3/4 an inch of rain, which would be light to moderate rainfall if received over a full

day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider different increments of sea level rise coupled with extreme storm events. Users may select from four model simulations to view the range in potential inundation depth for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 50 meters (m) by 50 m, or about 164 feet (ft) by 164 ft.

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack	N/A	N/A	N/A	N/A
Air Quality	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A
Flooding	N/A	N/A	N/A	N/A

Drought	N/A	N/A	N/A	N/A
Snowpack	N/A	N/A	N/A	N/A
Air Quality	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	_
AQ-Ozone	53.7
AQ-PM	82.8
AQ-DPM	73.9
Drinking Water	54.8
Lead Risk Housing	80.7
Pesticides	19.7
Toxic Releases	99.4
Traffic	36.7
Effect Indicators	_
CleanUp Sites	99.4
Groundwater	69.8
Haz Waste Facilities/Generators	99.2

Impaired Water Bodies	0.00
Solid Waste	92.9
Sensitive Population	
Asthma	29.8
Cardio-vascular	33.7
Low Birth Weights	12.4
Socioeconomic Factor Indicators	_
Education	90.2
Housing	68.1
Linguistic	79.0
Poverty	77.3
Unemployment	47.0

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	_
Above Poverty	21.77595278
Employed	57.44899269
Median HI	51.13563454
Education	_
Bachelor's or higher	35.41639933
High school enrollment	25.49724111
Preschool enrollment	91.3383806
Transportation	_
Auto Access	76.73553189
Active commuting	75.70896959

_
64.16014372
14.57718465
_
21.66046452
33.44026691
93.55832157
69.35711536
10.31695111
_
28.53843193
23.18747594
95.8937508
42.83331195
1.552675478
_
6.505838573
75.7
72.6
75.3
80.0
27.9
63.8
33.2
47.0
27.4
58.3

Physically Disabled	94.1
Heart Attack ER Admissions	70.7
Mental Health Not Good	21.9
Chronic Kidney Disease	64.9
Obesity	37.0
Pedestrian Injuries	59.3
Physical Health Not Good	27.6
Stroke	58.2
Health Risk Behaviors	_
Binge Drinking	21.6
Current Smoker	18.3
No Leisure Time for Physical Activity	22.8
Climate Change Exposures	_
Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	7.8
Elderly	96.9
English Speaking	14.4
Foreign-born	71.1
Outdoor Workers	10.3
Climate Change Adaptive Capacity	_
Impervious Surface Cover	4.8
Traffic Density	41.8
Traffic Access	56.5
Other Indices	_
Hardship	88.2
Other Decision Support	_

2016 Voting	48.6

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	76.0
Healthy Places Index Score for Project Location (b)	44.0
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	Yes
Project Located in a Low-Income Community (Assembly Bill 1550)	Yes
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification						
Land Use	Total Project area is 9.94 acres						
Operations: Vehicle Data	Trip characteristics based on information provided in the Traffic analysis						
Operations: Fleet Mix	Passenger Car Mix estimated based on the CalEEMod default fleet mix and the ratio of the vehicle classes (LDA, LDT1, LDT2, MDV, & MCY). Truck Mix based on information in the Traffic analysis						
Operations: Refrigerants	Per 17 CCR 95371, new refrigeration equipment containing >50 lbs of refrigerant in new facilities is prohibited from utilizing refrigerants with a GWP of 150 or greater as of 1 Jan 2022						

b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Operations: Energy Use Natural gas will not be used

This page intentionally left blank



APPENDIX 4.3:

EMFAC2021



EMFAC2017 (v1.0.2) Emissions Inventory

Region Type: County Region: ORANGE Calendar Year: 2021 Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/day for VMT, trips/day for Trips, tons/day for Emissions, 1000 gallons/day for Fuel Consumption. Note 'day' in the unit is operation day.

Region	CalYr	VehClass	MdlYr	Speed	Fuel	Population	VMT	Fuel_Consumption	Fuel_Consumption	Total Fuel	VMT	Total VMT	Miles per Gallon	Vehicle Class
ORANGE	2021	HHDT	Aggregated	Aggregated	GAS	9.817535344	1000.457735	0.234511054	234.5110538	202998.2152	1000.457735	1259613.5	6.21	HHDT
ORANGE	2021	HHDT	Aggregated	Aggregated	DSL	10769.38522	1223413.181	186.9378692	186937.8692		1223413.181			
ORANGE	2021	HHDT	Aggregated	Aggregated	NG	864.7854825	35199.86136	15.825835	15825.835		35199.86136			
ORANGE	2021	LDA	Aggregated	Aggregated	GAS	1272194.252	49395344.62	1598.252893	1598252.893	1608097.773	49395344.62	50842925.48	31.62	LDA
ORANGE	2021	LDA	Aggregated	Aggregated	DSL	11968.50216	478206.5743	9.844879983	9844.879983		478206.5743			
ORANGE	2021	LDA	Aggregated	Aggregated	ELEC	24402.3541	969374.2917	0	0		969374.2917			
ORANGE	2021	LDT1	Aggregated	Aggregated	GAS	138088.6679	5154285.362	193.6872161	193687.2161	193729.9205	5154285.362	5185184.938	26.77	LDT1
ORANGE	2021	LDT1	Aggregated	Aggregated	DSL	52.53006429	1053.207272	0.042704415	42.70441488		1053.207272			
ORANGE	2021	LDT1	Aggregated	Aggregated	ELEC	736.4099521	29846.36824	0	0		29846.36824			
ORANGE	2021	LDT2	Aggregated	Aggregated	GAS	451361.7314	16989288.78	697.086435	697086.435	700420.407	16989288.78	17219505.05	24.58	LDT2
ORANGE	2021	LDT2	Aggregated	Aggregated	DSL	2682.916665	117528.5037	3.333972	3333.972		117528.5037			
ORANGE	2021	LDT2	Aggregated	Aggregated	ELEC	3387.284773	112687.7678	0	0		112687.7678			
ORANGE	2021	LHDT1	Aggregated	Aggregated	GAS	36469.93186	1349254.713	127.7637745	127763.7745	172059.0136	1349254.713	2293068.782	13.33	LHDT1
ORANGE	2021	LHDT1	Aggregated	Aggregated	DSL	22847.66428	943814.0687	44.29523914	44295.23914		943814.0687			
ORANGE	2021	LHDT2	Aggregated	Aggregated	GAS	6432.280162	228273.1716	24.87376132	24873.76132	43605.9843	228273.1716	588360.6777	13.49	LHDT2
ORANGE	2021	LHDT2	Aggregated	Aggregated	DSL	8869.193114	360087.5062	18.73222298	18732.22298		360087.5062			
ORANGE	2021	MCY	Aggregated	Aggregated	GAS	57618.81526	414997.9139	11.16260839	11162.60839	11162.60839	414997.9139	414997.9139	37.18	MCY
ORANGE	2021	MDV	Aggregated	Aggregated	GAS	313061.5155	11280043.77	570.838295	570838.295	580878.7289	11280043.77	11596769.05	19.96	MDV
ORANGE	2021	MDV	Aggregated	Aggregated	DSL	6526.199201	268374.8474	10.04043389	10040.43389		268374.8474			
ORANGE	2021	MDV	Aggregated	Aggregated	ELEC	1390.884605	48350.43346	0	0		48350.43346			
ORANGE	2021	MH	Aggregated	Aggregated	GAS	6951.392672	65646.83572	12.77547607	12775.47607	15527.60032	65646.83572	94187.84905	6.07	MH
ORANGE	2021	MH	Aggregated	Aggregated	DSL	2962.130067	28541.01333	2.752124257	2752.124257		28541.01333			
ORANGE	2021	MHDT	Aggregated	Aggregated	GAS	7541.153449	404522.6567	79.97840237	79978.40237	252941.4198	404522.6567	2224807.133	8.80	MHDT
ORANGE	2021	MHDT	Aggregated	Aggregated	DSL	28151.45987	1820284.477	172.9630175	172963.0175		1820284.477			
ORANGE	2021	OBUS	Aggregated	Aggregated	GAS	1004.319594	44567.4328	8.791910485	8791.910485	14379.47907	44567.4328	91201.87465	6.34	OBUS
ORANGE	2021	OBUS	Aggregated	Aggregated	DSL	626.2060636	46634.44185	5.587568583	5587.568583		46634.44185			
ORANGE	2021	SBUS	Aggregated	Aggregated	GAS	502.9339776	21212.30254	2.332297057	2332.297057	7855.047048	21212.30254	62076.96312	7.90	SBUS
ORANGE	2021	SBUS	Aggregated	Aggregated	DSL	1306.944821	40864.66059	5.52274999	5522.74999		40864.66059			
ORANGE	2021	UBUS	Aggregated	Aggregated	GAS	211.0170233	19935.56685	5.41802309	5418.02309	27094.02306	19935.56685	105939.2204	3.91	UBUS
ORANGE	2021	UBUS	Aggregated	Aggregated	DSL	0	0	0	0		0			
ORANGE	2021	UBUS	Aggregated	Aggregated	NG	742.5582597	86003.65359	21.67599997	21675.99997		86003.65359			

EMFAC2017 (v1.0.2) Emissions Inventory

Region Type: County Region: ORANGE Calendar Year: 2022 Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/day for VMT, trips/day for Trips, tons/day for Emissions, 1000 gallons/day for Fuel Consumption. Note 'day' in the unit is operation day.

Region		VehClass	MdlYr	Speed	Fuel	Population	VMT	Fuel_Consumption	Fuel_Consumption	Total Fuel	VMT	Total VMT	Miles per Gallon	Vehicle Class
ORANGE	2022	HHDT	Aggregated	Aggregated	GAS	9.612146044	1076.873786	0.244872884	244.8728842	202428.8278	1076.873786	1289637.417	6.37	HHDT
ORANGE	2022	HHDT	Aggregated	Aggregated	DSL	10986.32288	1250867.755	185.4812977	185481.2977		1250867.755			
ORANGE	2022	HHDT	Aggregated	Aggregated	NG	925.5580333	37692.78896	16.70265719	16702.65719		37692.78896			
ORANGE	2022	LDA	Aggregated	Aggregated	GAS	1295599.689	49671089.81	1564.655171	1564655.171	1574716.958	49671089.81	51320578.49	32.59	LDA
ORANGE	2022	LDA	Aggregated	Aggregated	DSL	12739.0078	501185.1456	10.06178735	10061.78735		501185.1456			
ORANGE	2022	LDA	Aggregated	Aggregated	ELEC	28393.86772	1148303.54	0	0		1148303.54			
ORANGE	2022	LDT1	Aggregated	Aggregated	GAS	142048.7173	5238638.572	192.1032237	192103.2237	192143.5101	5238638.572	5282915.72	27.49	LDT1
ORANGE	2022	LDT1	Aggregated	Aggregated	DSL	49.5183793	1010.879054	0.040286436	40.28643644		1010.879054			
ORANGE	2022	LDT1	Aggregated	Aggregated	ELEC	1032.066464	43266.26956	0	0		43266.26956			
ORANGE	2022	LDT2	Aggregated	Aggregated	GAS	455350.0099	16909367.12	671.2853684	671285.3684	674733.28	16909367.12	17177985.15	25.46	LDT2
ORANGE	2022	LDT2	Aggregated	Aggregated	DSL	2933.773502	124887.9477	3.447911648	3447.911648		124887.9477			
ORANGE	2022	LDT2	Aggregated	Aggregated	ELEC	4402.869216	143730.0815	0	0		143730.0815			
ORANGE	2022	LHDT1	Aggregated	Aggregated	GAS	36147.86941	1319671.421	123.791382	123791.382	169053.011	1319671.421	2297914.879	13.59	LHDT1
ORANGE	2022	LHDT1	Aggregated	Aggregated	DSL	24040.18403	978243.4579	45.2616289	45261.6289		978243.4579			
ORANGE	2022	LHDT2	Aggregated	Aggregated	GAS	6433.829843	225103.3004	24.30747932	24307.47932	43522.48914	225103.3004	599723.4727	13.78	LHDT2
ORANGE	2022	LHDT2	Aggregated	Aggregated	DSL	9390.080241	374620.1723	19.21500982	19215.00982		374620.1723			
ORANGE	2022	MCY	Aggregated	Aggregated	GAS	59324.20714	421008.6598	11.33048778	11330.48778	11330.48778	421008.6598	421008.6598	37.16	MCY
ORANGE	2022	MDV	Aggregated	Aggregated	GAS	313214.6089	11130322.04	546.4436615	546443.6615	556687.9908	11130322.04	11485665.09	20.63	MDV
ORANGE	2022	MDV	Aggregated	Aggregated	DSL	7004.701757	281488.2471	10.24432923	10244.32923		281488.2471			
ORANGE	2022	MDV	Aggregated	Aggregated	ELEC	2172.991185	73854.79623	0	0		73854.79623			
ORANGE	2022	MH	Aggregated	Aggregated	GAS	6865.363572	65025.63092	12.47967279	12479.67279	15203.18282	65025.63092	93555.23218	6.15	MH
ORANGE	2022	MH	Aggregated	Aggregated	DSL	3020.855236	28529.60126	2.723510025	2723.510025		28529.60126			
ORANGE	2022	MHDT	Aggregated	Aggregated	GAS	7524.246571	390927.133	76.68639152	76686.39152	247870.0222	390927.133	2253141.475	9.09	MHDT
ORANGE	2022	MHDT	Aggregated	Aggregated	DSL	28402.72547	1862214.342	171.1836306	171183.6306		1862214.342			
ORANGE	2022	OBUS	Aggregated	Aggregated	GAS	1010.920693	44124.77606	8.575575308	8575.575308	14116.48097	44124.77606	91790.72716	6.50	OBUS
ORANGE	2022	OBUS	Aggregated	Aggregated	DSL	628.0129908	47665.95109	5.540905659	5540.905659		47665.95109			
ORANGE	2022	SBUS	Aggregated	Aggregated	GAS	529.8434458	22060.40853	2.405828386	2405.828386	7765.2105	22060.40853	62139.76172	8.00	SBUS
ORANGE	2022	SBUS	Aggregated	Aggregated	DSL	1279.904224	40079.35319	5.359382114	5359.382114		40079.35319			
ORANGE	2022	UBUS	Aggregated	Aggregated	GAS	212.2694682	20053.89001	5.427673939	5427.673939	27831.12442	20053.89001	106567.9993	3.83	UBUS
ORANGE	2022	UBUS	Aggregated	Aggregated	DSL	0	0	0	0		0			
ORANGE	2022	UBUS	Aggregated	Aggregated	NG	746.9655502	86514.10928	22.40345048	22403.45048		86514.10928			

This page intentionally left blank

