
TTM 20398 SINGLE FAMILY RESIDENTIAL PROJECT AIR QUALITY AND GREENHOUSE GAS IMPACT STUDY City of Adelanto, California





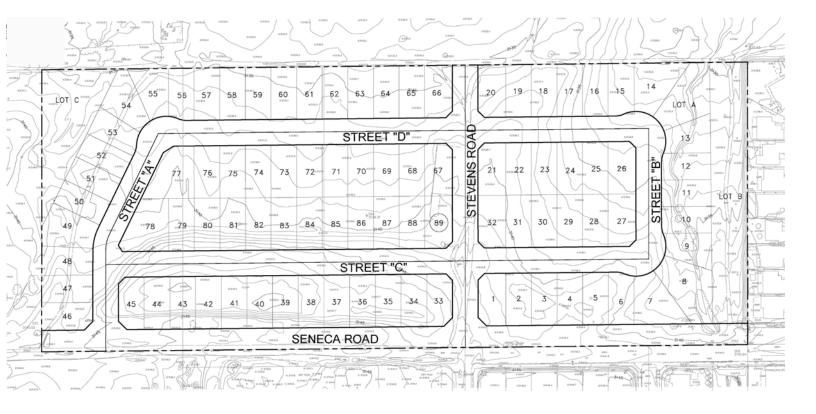

traffic engineering & design transportation planning parking acoustical engineering air quality & ghg

TTM 20398 SINGLE FAMILY RESIDENTIAL PROJECT AIR QUALITY AND GREENHOUSE IMPACT STUDY City of Adelanto, California

Prepared for:

Mr. Andrew Pham T.K.P. Family LP 16 Via Coralle Newport Beach, CA 92657

Prepared by:

RK ENGINEERING GROUP, INC. 4000 Westerly Place, Suite 280 Newport Beach, CA 92660

Bryan Estrada, AICP, PTP Darshan Shivaiah, M.S

July 27, 2021

rk16772.doc JN:2967-2021-02

Table of Contents

1.0	 Introduction 1.1 Site Location 1.2 Project Description 1.3 Sensitive Receptors 1.4 Summary of Analysis Results 1.5 Recommended Project Design Features Air Quality Setting 2.1 Description of Air Pollutants 	1-1 1-1 1-2 1-3 1-4
2.0	 Project Description Sensitive Receptors Summary of Analysis Results Recommended Project Design Features Air Quality Setting	1-1 1-2 1-3 1-4
2.0	 Sensitive Receptors Summary of Analysis Results Recommended Project Design Features Air Quality Setting 	1-2 1-3 1-4
2.0	 Summary of Analysis Results Recommended Project Design Features Air Quality Setting 	1-3 1-4
2.0	1.5 Recommended Project Design FeaturesAir Quality Setting	1-4
2.0	Air Quality Setting	
2.0		2-1
	2.1 Description of Air Pollutants	
		2-1
	2.2 Federal and State Ambient Air Quality Standards	2-4
	2.3 Attainment Status	2-6
	2.4 Mojave Desert Air Quality Management District (MDAQMD)	2-7
	2.5 Local Climate and Meteorology	2-9
	2.6 Local Air Quality	2-10
3.0	Global Climate Change Setting	3-1
	3.1 Greenhouse Gases	3-2
	3.2 GHG Regulatory Setting – State of California	3-3
	3.3 GHG Emissions Inventory	3-4
4.0	Modeling Parameters and Assumptions	4-1
	4.1 Construction Assumptions	4-1
	4.2 Operational Assumptions	4-2
	4.2.1 Mobile Source Emissions	4-2
	4.2.2 Energy Source Emissions	4-3
	4.2.3 Area Source Emissions	4-5
	4.2.4 Other Sources of Operational Emissions	4-5
5.0	Significance Thresholds	5-1
6.0	Air Quality Impact Analysis	6-1
	6.1 Criteria Air Pollutant Emissions	6-1
	6.1.1 Construction Air Quality Emissions	6-1
	6.1.2 Operational Air Quality Emissions	6-2
	6.2 Fugitive Dust Control	6-3
	6.3 Toxic Air Contaminants	6-4
	6.4 Odors	6-5
7.0	Greenhouse Gas Impact Analysis	7-1
	7.1 Greenhouse Gas Emissions - Construction	7-1
	7.2 Greenhouse Gas Emissions - Operation	7-2
	RK	enginee graun ir

List of Attachments

<u>Exhibits</u>

Location Map	А
Site Plan	В

<u>Tables</u>

Land Use Summary	1
CEQA Air Quality Impact Criteria	2
CEQA GHG Impact Criteria	3
Federal and State Ambient Air Quality Standards (AAQS)	4
MDAQMD Attainment Designation	5
Meteorological Summary	6
Local Air Quality	7
Global Warming Potential of Greenhouse Gases	8
GHG Emissions Inventory	9
Operational Vehicle Miles Traveled	10
Operational Vehicle Mix	11
Electricity and Natural Gas Usage	12
Operational Water Usage and Waste Generation	13
MDAQMD Significant Emissions Thresholds	14
Annual Construction Air Quality Emissions (tons/year)	15
Daily Construction Air Quality Emissions (lbs./day)	16
Annual Operational Air Quality Emission (tons/year)	17
Daily Operational Air Quality Emissions (lbs./year)	18
Annual Construction Greenhouse Gas Emissions	19
Daily Construction Greenhouse Gas Emissions	20
Annual Operational Greenhouse Gas Emissions	21
Daily Operational Greenhouse Gas Emissions	22

Appendices

CalEEMod Emission Reports A



1.0 Introduction

The purpose of this air quality and greenhouse gas (GHG) analysis is to determine whether the estimated criteria air pollutants and greenhouse gas emissions generated from the construction and operation of the proposed TTM 20398 Single Family Residential Development Project (hereinafter referred to as project) would cause significant impacts to air resources.

This assessment was conducted within the context of the California Environmental Quality Act (CEQA, California Public Resources Code Sections 21000, et seq.). The methodology follows the California Air Resources Board (CARB), the Mojave Desert Air Quality Management District (MDAQMD), and City of Adelanto recommendations for quantification of emissions and evaluation of potential impacts.

1.1 <u>Site Location</u>

The project site is located north side of Seneca Road, west of Aster Road in the City of Adelanto. The project site is bounded by residential uses to the north, south, and west and vacant land use to the west.

The project site is located within the Mojave Desert Valley Air Quality Management District (MDAQMD) and the Mojave Desert Air Basin (MDAB). The nearest ambient air quality monitoring station is the Victorville – 14306 Park Avenue station, in the City of Victorville.

The project location map is provided in Exhibit A.

1.2 Project Description

The project proposes to construct and operate 89 dwelling units of single family detached homes on an approximately 23.12 acre vacant site. The project is expected to improve approximately 7.1 acres of on-site and off-site street improvements as part of the project. The site plan used for this analysis, provided by the UNITED ENGINEERING GROUP, is illustrated in Exhibit B.

Table 1 summarizes the proposed project land uses.



Land Use	Quantity	Metric ¹
Single Family Homes	89	DU
On-Site / Off-Site Street Improvements	7.1	Acres

Table 1 Land Use Summary

¹ DU – Dwelling Units; S.F – Square Feet.

The project site is currently vacant and requires no demolition. The project site is expected to import approximately 43,337 cubic yards of earthwork material during grading phase.

Construction of the project is estimated to begin in the year 2022 and last approximately 21 months. Construction activities are expected to consist of site preparation, grading, building construction, paving, and architectural coating. The project is expected to be complete and operational in the year 2025.

1.3 <u>Sensitive Receptors</u>

Sensitive receptors are considered land uses or other types of population groups that are more sensitive to air pollution exposure. Sensitive population groups include children, the elderly, the acutely and chronically ill, and those with cardio-respiratory diseases.

Several sensitive land use areas are present surrounding the project site, including;

- Existing residential dwelling units along Clydesdale Street, adjacent to the project site to the east (less than 25 meters).
- Existing residential dwelling units located across Seneca Road, approximately 100 feet from the project site to the south (less than 25 meters).



1.4 <u>Summary of Analysis Results</u>

Table 2 provides a summary of the CEQA air quality impact analysis results.

	CEQA Air Quality Impact Criteria					
	Air Quality Impact Criteria	Potentially Significant	Potentially Significant Unless Mitigated	Less Than Significant Impact	No Impact	
Wc	uld the project:					
a)	Conflict with, or obstruct implementation of, the applicable air quality plan?			х		
c)	Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable Federal or State ambient air quality standard?			х		
d)	Expose sensitive receptors to substantial pollutant concentrations?			х		
e)	Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people?			х		

Table 2				
CEQA Air Quality Impact Criteria				

Table 3 provides a summary of the CEQA GHG impact criteria analysis results.

Table 3 CEQA GHG Impact Criteria

GHG Impact Criteria		Potentially Significant	Potentially Significant Unless Mitigated	Less Than Significant Impact	No Impact
Wo	uld the project:				
a)	Generate greenhouse gas emissions, either directly or indirectly, that may have a significant impact on the environment?			х	
b)	Conflict with an applicable plan, policy, or regulation adopted for the purpose of reducing emissions of greenhouse gases?			х	

1.5 <u>Recommended Project Design Features</u>

The following recommended project design features include standard rules, requirements, and best practices for reducing air quality and GHG emissions. Design features are assumed to be included as part of the conditions of the project and are not typically considered mitigation under CEQA.

Construction Design Features:

- **DF-1** Prepare and submit a Construction Management Plan to the City of Adelanto that demonstrates the ability to implement all construction design features described herein, prior to the start of construction.
- **DF-2** Follow the MDAQMD rules and requirements with regards to fugitive dust control, which includes, but is not limited to the following:
 - 1. All active construction areas shall be watered two (2) times daily.
 - 2. Speed on unpaved roads shall be reduced to less than 15 mph.
 - 3. Any visible dirt deposition on any public roadway shall be swept or washed at the site access points within 30 minutes.
 - 4. Any on-site stockpiles of debris, dirt or other dusty material shall be covered or watered twice daily.
 - 5. All operations on any unpaved surface shall be suspended if winds exceed 15 mph.
 - 6. Access points shall be washed or swept daily.
 - 7. Construction sites shall be sandbagged for erosion control.
 - 8. Apply nontoxic chemical soil stabilizers according to manufacturers' specifications to all inactive construction areas (previously graded areas inactive for 10 days or more).
 - 9. Cover all trucks hauling dirt, sand, soil, or other loose materials, and maintain at least 2 feet of freeboard space in accordance with the requirements of California Vehicle Code (CVC) section 23114.
 - 10. Pave or gravel construction access roads at least 100 feet onto the site from the main road and use gravel aprons at truck exits.
 - 11. Replace the ground cover of disturbed areas as quickly possible.

- 12. A construction management plan with fugitive dust control measures should be prepared and submitted to City of Adelanto prior to the start of construction.
- **DF-3** All construction equipment should have Tier 4 low emission "clean diesel" engines (OEM or retrofit) that include diesel oxidation catalysts and diesel particulate filters that meet the latest CARB best available control technology.
- **DF-4** Construction equipment should be maintained in proper tune.
- **DF-5** All construction vehicles should be prohibited from excessive idling. Excessive idling is defined as five (5) minutes or longer.
- **DF-6** Minimize the simultaneous operation of multiple construction equipment units.
- **DF-7** The use of heavy construction equipment and earthmoving activity should be suspended during Air Alerts when the Air Quality Index reaches the "Unhealthy" level.
- **DF-8** Establish an electricity supply to the construction site and use electric powered equipment instead of diesel-powered equipment or generators, where feasible.
- **DF-9** Establish staging areas for the construction equipment that are as distant as possible from adjacent sensitive receptors (residential land uses).
- **DF-10** Use haul trucks with on-road engines instead of off-road engines for on-site hauling.

Operational Design Features

- **DF-11** Comply with the mandatory requirements of California Building Standards Code Title 24 Part 6 (Energy Code) and Title 24 Part 11 (CAL Green), including the installation of rooftop solar panels, community solar panels, and/or other sources of on-site renewable energy capable of meeting the required Energy Design Ratings for residential dwellings.
- **DF-12** Implement water conservation strategies, including low flow fixtures and toilets, water efficient irrigation systems, drought tolerant/native landscaping, and reduce the amount of turf.
- **DF-13** Participate in the local waste management recycling and composting programs for residential uses.



- **DF-14** Provide the necessary infrastructure to support electric vehicle charging, such as dedicated circuits for in-garage charging, as required by the Building Code.
- **DF-15** The homeowner's association should encourage residents and landscape maintenance crews to use electric landscaping equipment, such as lawn mowers and leaf blowers, wherever feasible.
- **DF-16** No wood burning fireplaces will be installed in any residential dwelling.



2.0 Air Quality Setting

The Federal Clean Air Act (§ 7602) defines air pollution as any agent or combination of such agents, including any physical, chemical, biological, or radioactive substance which is emitted into or otherwise enters the ambient air. Household combustion devices, motor vehicles, industrial facilities and forest fires are common sources of air pollution. Air pollution can cause disease, allergies and death. It affects soil, water, crops, vegetation, manmade materials, animals, wildlife, weather, visibility, and climate. It can also cause damage to and deterioration of property, present hazards to transportation, and negatively impact the economy.¹

This section provides background information on criteria air pollutants, the applicable federal, state and local regulations concerning air pollution, and the existing physical setting of the project within the context of local air quality.

2.1 <u>Description of Air Pollutants</u>.

The following section describes the air pollutants of concern related to the project. Criteria air pollutants are defined as those pollutants for which the federal and state governments have established air quality standards for outdoor or ambient concentrations to protect public health.

• **Carbon Monoxide (CO)** is a colorless, odorless, toxic gas produced by incomplete combustion of carbon-containing fuels (e.g., gasoline, diesel fuel, and biomass). Sources include motor vehicle exhaust, industrial processes (metals processing and chemical manufacturing), residential wood burning, and natural sources. CO is somewhat soluble in water; therefore, rainfall and fog can suppress CO conditions. CO enters the body through the lungs, dissolves in the blood, and competes with oxygen, often replacing it in the blood, thus reducing the blood's ability to transport oxygen to vital organs in the body. The ambient air quality standard for carbon monoxide is intended to protect persons whose medical condition already compromises their circulatory system's ability to deliver oxygen. These medical conditions include certain heart ailments, chronic lung diseases, and anemia. Persons with these conditions have reduced exercise capacity even when exposed to relatively low levels of CO. Fetuses are at risk because their blood has an even greater affinity to bind with CO. Smokers are also at risk from ambient CO levels because smoking increases the background level of CO in their blood.



¹ Federal Clean Air Act. 42 U.S.C. §7401 et seq. (1970)

- Nitrogen Dioxide (NO₂) is a byproduct of fuel combustion. The principal form of nitrogen oxide produced by combustion is nitric oxide (NO), but NO reacts quickly to form NO₂, creating the mixture of NO and NO₂ commonly called NO_x. NO₂ acts as an acute irritant and, in equal concentrations, is more injurious than NO. At atmospheric concentrations, however, NO₂ is only potentially irritating. There is some indication of a relationship between NO₂ and chronic pulmonary fibrosis. Some increase in bronchitis in young children has also been observed at concentrations below 0.3 parts per million (ppm). NO₂ absorbs blue light which results in a brownish red cast to the atmosphere and reduced visibility. Although NO₂ concentrations have not exceeded national standards since 1991 and the state hourly standard since 1993, NO_x emissions remain of concern because of their contribution to the formation of O₃ and particulate matter.
- **Ozone (O₃)** is one of a number of substances called photochemical oxidants that are formed when volatile organic compounds (VOC) and NO_x react in the presence of ultraviolet sunlight. O₃ concentrations in the South Coast basin are typically among the highest in the nation, and the damaging effects of photochemical smog, which is a popular name for a number of oxidants in combination, are generally related to the concentrations of O₃. Individuals exercising outdoors, children, and people with preexisting lung disease, such as asthma and chronic pulmonary lung disease, are considered to be the subgroups most susceptible to O₃ effects. Short-term exposures (lasting for a few hours) to O₃ at levels typically observed in southern California can result in breathing pattern changes, reduction of breathing capacity, increased susceptibility to infections, inflammation of the lung tissue, and some immunological changes. In recent years, a correlation between elevated ambient O₃ levels and increases in daily hospital admission rates, as well as mortality, has also been reported.
- Fine Particulate Matter (PM₁₀) consists of extremely small suspended particles or droplets 10 microns or smaller in diameter that can lodge in the lungs, contributing to respiratory problems. PM₁₀ arises from such sources as re-entrained road dust, diesel soot, combustion products, tire and brake abrasion, construction operations, and fires. It is also formed in the atmosphere from NO_x and SO₂ reactions with ammonia. PM₁₀ scatters light and significantly reduces visibility. Inhalable particulates pose a serious health hazard, alone or in combination with other pollutants. More than half of the smallest particles inhaled will be deposited in the lungs and can cause permanent lung damage. Inhalable particulates can also have a damaging effect on health by interfering with the body's mechanism for clearing the respiratory tract or by acting as a carrier of an absorbed toxic substance.



- Ultra-Fine Particulate Matter (PM_{2.5}) is defined as particulate matter with a diameter less than 2.5 microns and is a subset of PM₁₀. PM_{2.5} consists mostly of products from the reaction of NO_x and SO₂ with ammonia, secondary organics, finer dust particles, and the combustion of fuels, including diesel soot. PM_{2.5} can cause exacerbation of symptoms in sensitive patients with respiratory or cardiovascular disease, declines in pulmonary function growth in children, and increased risk of premature death from heart or lung diseases in the elderly. Daily fluctuations in PM_{2.5} levels have been related to hospital admissions for acute respiratory conditions, school absences, and increased medication use in children and adults with asthma.
- **Sulfur dioxide (SO₂)** is a colorless, pungent gas formed primarily by the combustion of sulfur-containing fossil fuels. Health effects include acute respiratory symptoms and difficulty in breathing for children. Individuals with asthma may experience constriction of airways with exposure to SO₂. SO₂ is a precursor to sulfate and PM₁₀.
- Lead (Pb) is a toxic heavy metal that can be emitted into the air through some industrial processes, burning of leaded gasoline and past use of lead-based consumer products. Lead is a neurotoxin that accumulates in soft tissues and bones, damages the nervous system, and causes blood disorders. It is particularly problematic in children, in that permanent brain damage may result, even if blood levels are promptly normalized with treatment. Concentrations of lead once exceeded the state and federal air quality standards by a wide margin, but as a result of the removal of lead from motor vehicle gasoline, ambient air quality standards for lead have not been exceeded since 1982. Though special monitoring sites immediately downwind of lead sources recorded localized violations of the state standard in 1994, no violations have been recorded since. Consequently, the Mojave Desert basin is designated as an attainment area for lead by both the USEPA and CARB. This report does not analyze lead emissions from the project, as it is not expected to emit lead in any significant measurable quantity.
- Volatile Organic Compounds (VOC), are transformed into organic aerosols in the atmosphere, contributing to higher PM₁₀ and lower visibility levels. Sources of VOCs include combustion engines, and evaporative emissions associated with fuel, paints and solvents, asphalt paving, and the use of household consumer products such as aerosols. Although health-based standards have not been established for VOCs, health effects can occur from exposures to high concentrations of VOC. Some hydrocarbon components classified as VOC emissions are hazardous air pollutants. Benzene, for example, is a hydrocarbon component of VOC emissions that are known to be a human carcinogen. The term reactive organic gases (ROG) are often used interchangeably with VOC.



• **Toxic Air Contaminants (TACs)** are defined as air pollutants which may cause or contribute to an increase in mortality or serious illness, or which may pose a hazard to human health, and for which there is no concentration that does not present some risk. This contrasts with the criteria pollutants, in that there is no threshold level for TAC exposure below which adverse health impacts are not expected to occur. The majority of the estimated health risk from TACs can be attributed to a relatively few compounds, the most common being diesel particulate matter (DPM) from diesel engine exhaust. In addition to DPM, benzene and 1,3-butadiene are also significant contributors to overall ambient public health risk in California.

2.2 Federal and State Ambient Air Quality Standards

The Federal Clean Air Act, which was last amended in 1990, requires the EPA to set National Ambient Air Quality Standards (NAAQS) for criteria pollutants considered harmful to public health and the environment. The State of California has also established additional and more stringent California Ambient Air Quality Standards (CAAQS) in addition to the seven criteria pollutants designated by the federal government.

AAQS are designed to protect the health and welfare of the populace with a reasonable margin of safety. The standards are divided into two categories, primary standards and secondary standards. Primary standards are implemented to provide protection for the "sensitive" populations such as those with asthma, or the children and elderly. Secondary standards are to provide protection against visible pollution as well as damage to the surrounding environment, including animals, crops, and buildings.

Table 4 shows the Federal and State Ambient Air Quality Standards.



Federal and State Ambient Air Quality Standards (AAQS)							
Air Pollutant	Averaging Time ²	Federal Standard (NAAQS) ²	California Standard (CAAQS) ²				
Ozone	1 Hour		0.09 ppm				
Ozone	8 Hour	0.070 ppm	0.070 ppm				
Carbon Monoxide	1 Hour	35 ppm	20 ppm				
(CO)	8 Hour	9 ppm	9 ppm				
Nitrogen Dioxide	1 Hour	0.100 ppm	0.18 ppm				
(NO ₂)	Annual	0.053 ppm	0.030 ppm				
Sulfur Dioxide	1 Hour	0.075 ppm	0.25 ppm				
(SO ₂)	3 Hour	0.5 ppm ³					
	24 Hour		0.04 ppm				
Particulate Matter	24 Hour	150 <i>µ</i> g/m³	50 μg/m³				
(PM ₁₀)	Mean		20 µg/m³				
Particulate Matter	24 Hour	35 μg/m³					
(PM2.5)	Annual	12 μg/m³	12 μg/m³				
	30-day		1.5 <i>μ</i> g/m				
Lead	Quarter	1.5 μg/m					
	3-month average	0.15 <i>µ</i> g/m					
Visibility reducing particles	8 Hour		0.23/km extinction coefficient. (10-mile visibility standard)				
Sulfates	24 Hour		25 µg/m				
Vinyl chloride	24 Hour		0.01 ppm				
Hydrogen sulfide	24 Hour		0.03 ppm				
	•		•				

Table 4Federal and State Ambient Air Quality Standards (AAQS)1

¹ Source: USEPA: https://www.epa.gov/criteria-air-pollutants/naaqs-table and CARB: https://ww2.arb.ca.gov/resources/california-ambient-air-quality-standards

² ppm = parts per million of air, by volume; μ g/m³ = micrograms per cubic meter; Annual = Annual Arithmetic Mean; 30-day = 30-day average; Quarter = Calendar quarter.

³ Secondary standards

Several pollutants listed in Table 4 are not addressed in this analysis. Lead is not included because the project is not anticipated to emit lead. Visibility-reducing particles are not explicitly addressed in this analysis because particulate matter is addressed. The project is not expected to generate or be exposed to vinyl chloride because proposed project uses do not utilize the chemical processes that create this pollutant and there are no such uses in the project vicinity. The proposed project is not expected to cause exposure to hydrogen sulfide because it would not generate hydrogen sulfide in any substantial quantity.

2.3 <u>Attainment Status</u>

The Clean Air Act requires states to prepare a State Implementation Plan (SIP) to ensure air quality meets the NAAQS. The California Air Resources Board (CARB) provides designations of attainment for air basins where AAQS are either met or exceeded. If the AAQS are met, the area is designated as being in "attainment", if the air pollutant concentrations exceed the AAQS, than the area is designated as being "nonattainment". If there is inadequate or inconclusive data to make a definitive attainment designation, the area is considered "unclassified."

National nonattainment areas are further designated as marginal, moderate, serious, severe, or extreme as a function of deviation from standards. Each standard has a different definition, or 'form' of what constitutes attainment, based on specific air quality statistics. For example, the Federal 8-hour CO standard is not to be exceeded more than once per year; therefore, an area is in attainment of the CO standard if no more than one 8-hour ambient air monitoring values exceeds the threshold per year. In contrast, the federal annual PM_{2.5} standard is met if the three-year average of the annual average PM_{2.5} concentration is less than or equal to the standard.

When a state submits a request to the EPA to re-designate a nonattainment area to attainment, the Clean Air Act (CAA) section 175A(a) requires that the state (or states, if the area is a multi-state area) submit a maintenance plan ensuring the area can maintain the air quality standard for which the area is to be re-designated for at least 10 years following the effective date of re-designation.

Table 5 lists the attainment status for the criteria pollutants in the MDAQMD.



Ambient Air Quality Standard	MDAQMD				
One-hour Ozone (Federal) – standard has been revoked, this is historical information only Eight-hour Ozone (Federal 84 ppb (1997))	Proposed attainment in 2014; historical classification Severe-17 (portion of MDAQMD outside of Southeast Desert Modified AQMA is unclassified/attainment) Subpart 2 Nonattainment; classified Severe-15 (Portion of MDAQMD outside of Western Mojave Desert Ozone Nonattainment Area is unclassifiable/attainment)				
Eight-hour Ozone (Federal 75 ppb (2008))	Nonattainment, classified Severe-15				
Eight-hour Ozone (Federal 70 ppb (2015))	Expected nonattainment; classification to be determined				
Ozone (State)	Nonattainment; classified Moderate				
PM10 24-hour (Federal)	Nonattainment; classified Moderate (portion of MDAQMD in Riverside County is unclassifiable/attainment)				
PM2.5 Annual (Federal)	Unclassified/attainment				
PM2.5 24-hour (Federal)	Unclassified/attainment				
PM2.5 (State)	Nonattainment (portion of MDAQMD outside of Western Mojave Desert Ozone Nonattainment Area is unclassified/attainment)				
PM10 (State)	Nonattainment				
Carbon Monoxide (State and Federal)	Unclassifiable/Attainment				
Nitrogen Dioxide (State and Federal)	Unclassifiable/Attainment				
Sulfur Dioxide (State and Federal)	Attainment/unclassified				
Lead (State and Federal)	Unclassifiable/Attainment				
Particulate Sulfate (State)	Attainment				
Hydrogen Sulfide (State)	Unclassified (Searles Valley Planning Area is nonattainment)				
Visibility Reducing Particles (State)	Unclassified				

Table 5MDAQMD Attainment Designation1

¹ Source: MDAQMD CEQA and Federal Conformity Guidelines, August 2016.

2.4 Mojave Desert Air Quality Management District (MDAQMD)²

Air districts have the primary responsibility to control air pollution from all sources other than those directly emitted from motor vehicles, which are the responsibility of the CARB and the EPA. Air districts adopt and enforce rules and regulations to achieve State and Federal ambient air quality standards and enforce applicable State and Federal law.

The MDAQMD has jurisdiction over the desert portion of San Bernardino County and the far eastern end of Riverside County. This region includes the incorporated communities of

² <u>https://www.mdaqmd.ca.gov/</u>

Adelanto, Apple Valley, Barstow, Blythe, Hesperia, Needles, Twentynine Palms, Victorville, and Yucca Valley. This region also includes the National Training Center at Fort Irwin, the Marine Corps Air Ground Combat Center, the Marine Corps Logistics Base, the eastern portion of Edwards Air Force Base, and a portion of the China Lake Naval Air Weapons Station.

The MDAQMD has prepared CEQA and Federal Conformity guidelines to provide direction on the preferred analysis approach in preparing environmental analysis or document review. The guidelines characterize the topography and climate of the Basin, defines cumulative impacts, and provide emission thresholds for construction and operation.

The MDAQMD adopted the Ozone Attainment Plan in 2014 to develop the methods and reduction measures to ensure applicable ozone attainment goals and standards are met for the area. The attainment plan focuses on pollutants including NOX and VOCs.

The Mojave Desert Air Quality Management District maintains a set of Rules & Regulations to improve and maintain healthy air quality for the entire population within our jurisdiction. The district maintains a set of Rules and Regulations to improve air quality and maintain good air quality (www.mdaqmd.ca.gov), including the following rules:³

- **MDAQMD Rule 402**. A person shall not discharge from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance or annoyance to any considerable number of persons or to the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property.
- **MDAQMD Rule 403**, MDAQMD Rule 403 governs emissions of fugitive dust. The rule states the following:
 - a) A person shall not cause or allow the emissions of fugitive dust from any transport, handling, construction or storage activity so that the presence of such dust remains visible in the atmosphere beyond the property line of the emission source.
 - A person shall take every reasonable precaution to minimize fugitive dust emissions from wrecking, excavation, grading, clearing of land and solid waste disposal operations.



³ <u>https://www.mdaqmd.ca.gov/rules/rule-book</u>

- A person shall not cause or allow particulate matter to exceed 100 micrograms per cubic meter when determined as the difference between upwind and downwind samples collected on high volume samplers at the property line for a minimum of five hours.
- A person shall take every reasonable precaution to prevent visible particulate matter from being deposited upon public roadways as a direct result of their operations. Reasonable precautions shall include, but are not limited to, the removal of particulate matter from equipment prior to movement on paved streets or the prompt removal of any material from paved streets onto which such material has been deposited.
- Subsections (a) and (c) shall not be applicable when the wind speed instantaneously exceeds 40 kilometers (25 miles) per hour, or when the average wind speed is greater than 24 kilometers (15 miles) per hour. The average wind speed determination shall be on a 15- minute average at the nearest official air-monitoring station or by wind instrument located at the site being checked.
- **MDAQMD Rule 1303**. Rule 1303 indicates that any Permit Unit or Modified Permit Unit that has the potential to emit more than 25 pounds per day of any nonattainment pollutant shall be equipped with Best Available Control Technology. The rule also indicates that any new or modified Facility with the potential to emit more than 25 tons per year of any nonattainment pollutant shall be equipped with Best Available Control Technology. The rule also indicates that any new or modified facility with emissions greater than the following shall obtain offsets as specified in Rule 1304:
 - Hydrogen sulfide 10 tons per year;
 - PM10 15 tons per year;
 - NOx 25 tons per year;
 - SOx 25 tons per year; and
 - Reactive organic compounds 25 tons per year.

The proposed Project will comply with all applicable MDAQMD rules during both the operational and construction phases of the Project.

2.5 Local Climate and Meteorology

The project site is located within the Mojave Desert Air Basin (MDAB), which includes the desert portions of Los Angeles and San Bernardino Counties, the eastern desert portion of Kern County, and the northeastern desert portion of Riverside County. The MDAB is classified as a dry-hot desert climate (BWh), with portions classified as dry-very hot desert (BWhh), to indicate at least three months have maximum average temperatures over 100.4° F. Prevailing winds in the MDAB are out of the west and southwest. The MDAB primarily contains pollutants from other air basins, dust raised by construction, travel on unpaved roads, and paved roads with silty debris.

The weather station closest to the project site is a National Weather Service Cooperative weather station located at Adelanto station, (040024). Climatological data from the National Weather Service at this station is summarized in Table 6. Due to the insufficient data available in the Adelanto station, temperature averages are obtained from Victorville Station (049325).

Meteorological Summary ¹							
Manth	Ave	Mean Precipitation					
Month	Max.	Min.	Mean	– (inches) Max.			
January	58.8	29.8	44.3	0.50			
February	62.1	33.1	47.6	0.58			
March	67.0	36.6	51.8	0.30			
April	74.2	41.5	57.9	0.22			
May	82.7	47.9	65.3	0.07			
June	91.6	54.3	72.9	0.05			
July	98.1	60.8	79.5	0.10			
August	97.2	60.2	78.7	0.19			
September	91.3	54.1	72.7	0.47			
October	80.2	44.4	62.3	0.16			
November	67.3	34.5	50.9	0.56			
December	59.4	29.2	44.2	0.44			
Annual	77.5	43.9	60.7	3.64			

Table 6 Meteorological Summarv

¹ Source: Western Regional Climate Center 2012. Temperature averages are derived from measurements recorded between 1917 and 2012 at Victorville Station, (049325) and precipitation averages are recorded between 1959 and 1977 at Adelanto Station (040024).



2.6 Local Air Quality

CARB sets State air quality standards and monitors ambient air quality at approximately 250 air monitoring stations across the State. Air quality monitoring stations usually measure pollutant concentrations 10 feet above ground level; therefore, air quality is often referred to in terms of ground-level concentrations. Ambient air pollutant concentrations in the Basin are measured at ten air quality-monitoring stations operated by the CARB and AVAQMD.

The project is located within the Division Street monitoring station area and is located at Victorville – 14306 Park Avenue station is one of the stations in the MDAB and is located within the City of Victorville.

Table 7 summarizes the published air quality monitoring data from 2017 through 2019, which is the most recent 3-year period available. These pollutant levels were used to comprise a "background" for the project location and existing local air quality. Criteria pollutants such as carbon monoxide and sulfur dioxide has not been monitored at the Victorville – 14306 Park Avenue station.



Air Pollutant Location	Averaging Time	Local Air Quality	2017	2018	2019
		Max 1-Hour (ppm)			
Carbon	1 Hour	Exceeded State Standard (20 ppm)			
Monoxide		Exceeded National Standard (35 ppm)			
 Victorville-14306		Max 8 Hour (ppm)			
Park Avenue	8 Hour	Exceeded State Standard (9 ppm)			
		Exceeded National Standard (9 ppm)			
	1 Hour	Max 1-Hour (ppm)	0.088	0.107	0.104
Ozone	I HOUI	Days > State Standard (0.10 ppm)	0	5	3
 Victorville-14306		Max 8 Hour (ppm)	0.082	0.097	0.082
Park Avenue	8 Hour	Days $>$ State Standard (0.07 ppm)	19	56	34
		Days >National Standard (0.070 ppm)	17	55	29
	1	Max 1-Hour (ppm)	0.061	0.057	0.055
Nitrogen Dioxide	1 Hour	Exceeded State Standard (0.06 ppm)	Yes	No	No
 Victorville-14306		Annual Average (ppm)	0.012	0.011	0.011
Park Avenue		Exceeded >State Standard (0.030 ppm)	No	No	No
		Exceeded >National Standard (0.053 ppm)	No	No	No
Sulfur Dioxide		Max 1 Hour (ppm)			
 Victorville-14306	1 Hour	Exceed State Standard (0.25 ppm)			
Park Avenue		Exceed National Standard (0.075 ppm)			
		Max 24-Hour (µg/m³)	182.5	165.2	170.0
Coarse Particles (PM10)	-14306	Days $>$ State Standard (50 μ g/m ³)			
		Days >National Standard (150 μ g/m ³)	1	1	1.9
Victorville-14306 Park Avenue		Annual Average (µg/m³)	30.1	29.8	27.2
Tark Avenue		Exceeded State Standard (20 μ g/m ³)	Yes	Yes	Yes
	2414	Max 24-Hour (µg/m³)	27.2	32.7	17.8
Fine Particulates (PM2.5)	24 Hour	Days >National Standard (35 μ g/m ³)	0	0	0
	14306 Annual	Annual Average (µg/m³)	8.8	8.0	7.1
Victorville-14306 Park Avenue		Exceeded State Standard (12 μ g/m ³)	No	No	No
		Exceeded National Standard (15 μ g/m ³)	No	No	No

Table 7 Local Air Quality

Source: EPA and ARB websites www.epa.gov/air/data.index.html and www.arb.ca.gov/adam/trends/trends1.php μ g/m³ = micrograms per cubic meter

ARB = California Air Resource Board

EPA= Environmental Protection Agency

ppm = part per million

(- -) = Data not provided

3.0 Global Climate Change Setting

Global climate change is the change in the average weather of the earth that is measured by such things as alterations in temperature, wind patterns, storms, and precipitation. Current data shows that the recent period of warming is occurring more rapidly than past geological events. The average global surface temperature has increased by approximately 1.4° Fahrenheit since the early 20th Century. 1.4° Fahrenheit may seem like a small change, but it's an unusual event in Earth's recent history, and as we are seeing, even small changes in temperature can cause enormous changes in the environment.

The planet's climate record, preserved in tree rings, ice cores, and coral reefs, shows that the global average temperature has been stable over long periods of time. For example, at the end of the last ice age, when the Northeast United States was covered by more than 3,000 feet of ice, average global temperatures were only 5° to 9° Fahrenheit cooler than today. The Intergovernmental Panel on Climate Change (IPCC), which includes more than 1,300 scientists from the United States and other countries, forecasts a temperature rise of 2.5° to 10° Fahrenheit over the next century. Therefore, significant changes to the environment are expected in the near future.

The consequences of global climate change include more frequent and severe weather, worsening air pollution by increasing ground level ozone, higher rates of plant and animal extinction, more acidic and oxygen depleted oceans, strain on food and water resources, and threats to densely populated coastal and low lying areas from sea level rise.

The impacts of climate change are already visible in the Southwest United States. In California, the consequences of climate change include;

- A rise in sea levels resulting in the displacement of coastal businesses and residencies
- A reduction in the quality and supply of water from the Sierra snowpack
- Increased risk of large wildfires
- Exacerbation of air quality problems
- Reductions in the quality and quantity of agricultural products
- An increased temperature and extreme weather events
- A decrease in the health and productivity of California's forests



3.1 Greenhouse Gases

Most scientists agree the main cause of the current global warming trend is anthropogenic (human-induced) augmentation of the greenhouse effect. The greenhouse effect refers to the way gases in the earth's atmosphere trap and re-emits long wave infrared radiation, acting like a blanket insulating the earth. Activities such as fossil fuel combustion, industrial processes, agriculture, and waste decomposition have elevated the concentration of greenhouse gases in the atmosphere beyond the level of naturally occurring concentrations.

GHGs comprise less than 0.1 percent of the total atmospheric composition, yet they play an essential role in influencing climate. Greenhouse gases include naturally occurring compounds such as carbon dioxide (CO₂), methane (CH₄), water vapor (H₂O), and nitrous oxide (N₂O), while others are synthetic. Man-made GHGs include the chlorofluorocarbons (CFCs), hydrofluorocarbons (HFCs) and Perfluorocarbons (PFCs), as well as sulfur hexafluoride (SF₆). Different GHGs have different effects on the Earth's warming. GHGs differ from each other in their ability to absorb energy (their "radiative efficiency") and how long they stay in the atmosphere, also known as the "lifetime".

The Global Warming Potential (GWP) was developed to allow comparisons of the global warming impacts of different gases. Specifically, it is a measure of how much energy the emissions of 1 ton of a gas will absorb over a given period of time, relative to the emissions of 1 ton of CO₂. The larger the GWP, the more that a given gas warms the Earth compared to CO₂ over that time period. The time period usually used for GWPs is 100 years. GWPs provide a common unit of measure, which allows analysts to add up emissions estimates of different gases and allows policymakers to compare emissions reduction opportunities across sectors and gases.

Table 8 lists the 100-year GWP of GHGs from the Intergovernmental Panel on Climate Change (IPCC) fifth assessment report (AR5).



Global Warming Potential of Greenhouse Gases''2 Gas Name Formula Lifetime (years) GWP							
Carbon Dioxide	CO ₂		1				
		12	•				
Methane	CH ₄	12	28				
Nitrous Oxide	N ₂ O	114	265				
Sulphur Hexafluoride	SF₀	3200	23,500				
Nitrogen Trifluoride	NF₃	740	16,100				
Hexafluoroethane (PFC-116)	C_2F_6	10,000	11,100				
Octafluoropropane (PFC-218)	C₃Fଃ	2,600	8,900				
Octafluorocyclobutane (PFC-318)	C ₄ F ₈	3,200	9,540				
Tetrafluoromethane (PFC-14)	CF ₄	50,000	6,630				
Hydrofluorocarbon 125	HFC-125	29	3,170				
Hydrofluorocarbon 134a	HFC-134a	14	1,300				
Hydrofluorocarbon 143a	HFC-143a	52	4,800				
Hydrofluorocarbon 152a	HFC-152a	1	138				
Hydrofluorocarbon 227ea	HFC-227ea	34	3,350				
Hydrofluorocarbon 23	HFC-23	270	12,400				
Hydrofluorocarbon 236fa	HFC-236fa	240	8,060				
Hydrofluorocarbon 245fa	HFC-245fa	8	858				
Hydrofluorocarbon 32	HFC-32	5	677				
Hydrofluorocarbon 365mfc	HFC-365mfc	9	804				
Hydrofluorocarbon 43-10mee	HFC-43-10mee	16	1,650				

Table 8Global Warming Potential of Greenhouse Gases^{1, 2}

¹ Source: IPCC Fifth Assessment Report (AR5)

https://www.ipcc.ch/site/assets/uploads/2018/02/WG1AR5_Chapter08_FINAL.pdf

² GWPs are used to convert GHG emission values to "carbon dioxide equivalent" (CO₂e) units

3.2 GHG Regulatory Setting – State of California

The State of California has been a leader in climate change legislation and has passed numerous bills to reduce greenhouse gas emissions across all sectors of the economy. Some of the key climate legislation in the State include the following:



- Assembly Bill (AB) 32, California Global Warming Solutions Act of 2006. AB 32 set the stage for the State's transition to a sustainable, low-carbon future. AB 32 was the first program in the country to take a comprehensive, long-term approach to addressing climate change.⁴
- Senate Bill (SB) 375, Sustainable Communities & Climate Protection Act of 2008. SB 375 requires the Air Resources Board to develop regional greenhouse gas emission reduction targets for passenger vehicles GHG reduction targets for 2020 and 2035 for each region covered by the State's 18 metropolitan planning organizations.⁵
- Senate Bill (SB) 100, California Renewables Portfolio Standard Program. SB 100 established a landmark policy requiring renewable energy and zero-carbon resources supply 100 percent of electric retail sales to end-use customers by 2045.⁶

3.3 **GHG Emissions Inventory**

Table 9 shows the latest GHG emission inventories at the national, state, regional and local levels.

United States	State of California	SCAG	City of Adelanto⁵
(2019) ²	(2018) ³	(2008) ⁴	
6,558.3 MMTCO₂e	425 MMTCO₂e	230.7 MMTCO₂e	

Table 9GHG Emissions Inventory1

¹ MMTCO₂e = Million Metric Tons of Carbon Dioxide Equivalent

² https://www.epa.gov/ghgemissions/inventory-us-greenhouse-gas-emissions-and-sinks

³ https://www.arb.ca.gov/cc/inventory/data/data.htm

⁴ http://www.scag.ca.gov/programs/Pages/GreenhouseGases.aspx

⁵ Data not available.

⁴ California Air Resources Board. AB 32 Global Warming Solutions Act of 2006.

https://ww2.arb.ca.gov/resources/fact-sheets/ab-32-global-warming-solutions-act-2006 ⁵ California Air Resources Board. Sustainable Communities and Climate Protection Program. https://ww2.arb.ca.gov/our-work/programs/sustainable-communities-climate-protection-program/about ⁶ California Energy Commission SB 100 Joint Agency Report. https://www.energy.ca.gov/cb100





4.0 Modeling Parameters and Assumptions

The California Emissions Estimator Model Version 2020.4.0 (CalEEMod) was used to calculate criteria air pollutants and GHG emissions from the construction and operation of the project. CalEEMod is a statewide land use emissions computer model designed to provide a uniform platform for government agencies, land use planners, and environmental professionals to quantify criteria air pollutant and GHG emissions.

The model quantifies direct emissions from construction and operation activities (including vehicle use), as well as indirect emissions, such as GHG emissions from off-site energy generation, solid waste disposal, vegetation planting and/or removal, and water use. The model also identifies mitigation measures to reduce criteria pollutant and GHG emissions. The model was developed for the California Air Pollution Control Officers Association (CAPCOA) in collaboration with the California air districts.

4.1 <u>Construction Assumptions</u>

Construction of the project is assumed to begin in the year 2022 and last approximately 21 months. Construction phases are assumed to consist of site preparation, grading, building construction, paving and architectural coating. The project is expected to be operational in the year 2025. Construction phases are not expected to overlap.

The project site is currently vacant and requires no demolition. The project site is expected to import approximately 43,337 cubic yards of earthwork material during grading phase.

The CalEEMod default construction equipment list is based on survey data and the size of the site. The parameters used to estimate construction emissions, such as the worker and vendor trips and trip lengths, utilize the CalEEMod defaults.

The project will be required to comply with several standard fugitive dust control measures, per MDAQMD Rule 403. The following key inputs are utilized in CalEEMod and are based upon data provided from MDAQMD⁷:

- Utilize soil stabilizers 30% PM₁₀ and PM_{2.5} reduction.
- Replace ground cover 15% PM₁₀ and PM_{2.5} reduction.
- Water exposed areas 2x per day.

⁷ MDAQMD. Fugitive Dust Mitigation Measures. <u>https://www.mdaqmd.ca.gov/home/showpublisheddocument/8482/637393282546170000</u>



- Unpaved road moisture content 25%.
- Unpaved road vehicle speed 15 mph.

4.2 **Operational Assumptions**

Operational emissions occur over the life of the project and are considered "long-term" sources of emissions. Operational emissions include both direct and indirect sources. This section briefly describes the operational sources of emissions analyzed for the project.

4.2.1 Mobile Source Emissions

Mobile source emissions are the largest source of long-term air pollutants from the operation of the project. Mobile sources are direct sources of project emissions that are primarily attributed to tailpipe exhaust and road dust (tire, brake, clutch, and road surface wear) from motor vehicles traveling to and from the site.

Estimates of mobile source emissions require information on four parameters: trip generation, trip length, vehicle/fleet mix, and emission factors (quantity of emission for each mile traveled or time spent idling by each vehicle).

Operational vehicle trip assumptions include trip generation rates, trip lengths, trip type, and diverted/pass-by trips and are based of CalEEMod defaults.

The Emission Factors (EMFAC) 2017 model is used to estimate the mobile source emissions are includes the default off-model adjustment factors for gasoline light duty vehicles to account for the SAFE vehicle rule. No adjustments have been made to default emission factors.

The project's total vehicle miles traveled is shown in the Table 10 for this project.

Land Use	Annual Vehicle Miles Traveled (VMT)
Single Family Housing	2,357,628

Table 10 Operational Vehicle Miles Traveled

¹ CalEEMod Unmitigated Defaults



The operational vehicle fleet mix has been adjusted to reflect vehicle types used for the typical home-based trips generated by the project. The Southern California Association of Governments (SCAG) regional travel demand model does not include heavy-duty trucks, buses or other large vehicles that would require passenger car equivalent (PCE) adjustments for residential home-based trips. To be conservative, the Air Quality/GHG analysis has assumed that 2% of the total home-based trips will include trucks with a gross vehicle weight rating (GVWR) of 10,000 pound or greater. This includes LHD2, MHD, HHD, OBUS, UBUS, and SBUS vehicles. The 2% mix is also consistent with the default Highway Capacity Manual (HCM) assumptions.

Table 11 summarizes vehicle mix used for this project.

Operational Vehicle Mix'					
Υυγ	Vehicle Mix (%)				
Light Duty Automobile (LDA)	55.60%				
Light Duty Truck (LDTI)	5.76%				
Light Duty Truck (LDT2)	17.72%				
Medium Duty Truck (MDV)	13.75%				
Light Heavy Truck (LHD1)	2.63%				
Light Heavy Truck (LHD2)	0.33%				
Medium Heavy Truck (MHD)	0.56%				
Heavy Heavy Truck (HHD)	0.82%				
Other Bus (OBUS)	0.03%				
Urban Bus (UBUS)	0.01%				
Motorcycle (MCY)	2.54%				
School Bus (SBUS)	0.04%				
Motor Home (MH)	0.22%				
Total	100.0%				

Table 11Operational Vehicle Mix1

¹ Adjusted vehicle mix includes 2% total trucks over 10,000 lbs GVWR. (LHD2, MHD, HHD, OBUS, UBUS, SBUS, MH). The adjusted fleet mix has been proportioned according to the default mix.

4.2.2 Energy Source Emissions

Energy usage includes both direct and indirect sources of emissions. Direct sources of emissions include on-site natural gas usage (non-hearth) for heating, while indirect



emissions include electricity generated by offsite power plants. Natural gas use is measured in units of a thousand British Thermal Units (kBTU) per size metric for each land use subtype and electricity use is measured in kilowatt hours (kWh) per size metric for each land use subtype.

CalEEMod divides building electricity and natural gas use into uses that are subject to Title 24 standards and those that are not. Lighting electricity usage is also calculated as a separate category in CalEEMod. For electricity, Title 24 uses include the major building envelope systems covered by Part 6 (California Energy Code) of Title 24, such as space heating, space cooling, water heating, and ventilation. Non-Title 24 uses include all other end uses, such as appliances, electronics, and other miscellaneous plug-in uses. Because some lighting is not considered as part of the building envelope energy budget, and since a separate mitigation measure is applicable to this end use, CalEEMod makes lighting a separate category.

For natural gas, uses are likewise categorized as Title 24 or Non-Title 24. Title 24 uses include building heating and hot water end uses. Non-Title 24 natural gas uses include cooking and appliances (including pool/spa heaters).

The baseline values are based on the California Energy Commission (CEC) sponsored California Commercial End Use Survey (CEUS) and Residential Appliance Saturation Survey (RASS) studies.

The project will be required to provide rooftop solar panels, or sources of on-site renewable energy, per the latest 2019 CA Energy Code requirements. The Energy Code requires all new residential construction to achieve net-zero emissions associated with electricity usage through the use of on-site renewable sources. This analysis has conservatively assumed 80% of electricity usage will be captured via on-site renewable sources (i.e. solar panels), as part of the project design.

Table 12 shows the total annual expected electricity and natural gas usage for the proposed project.



Land Use	Electricity Usage ¹ (KWhr/yr) ²	Natural Gas Usage ¹ (KBTU/yr) ²
Single Family Residential	708,855	2,517,540
Parking Lot (On-site and Off-site Streets)	108,247	0
Total	817,102	2,517,540

Table 12 Electricity and Natural Gas Usage

¹ CalEEMod default unmitigated estimates.

² KWhr/yr = Kilowatt Hours per Year

KBTU/yr = Thousand British Thermal Units per Year

4.2.3 Area Source Emissions

Area source emissions are direct sources of emissions that fall under four categories; hearths, consumer products, architectural coatings, and landscaping equipment.

Consumer products are various solvents used in non-industrial applications which emit ROGs during their product use. These typically include cleaning supplies, kitchen aerosols, cosmetics and toiletries. It was assumed that any paints used would meet the current MDAQMD Rule 1113 VOC limit of 50 grams per liter (g/L) for flats, 50 g/L for non-flat, and those used for traffic coating would meet the 100 g/L VOC limit.

No wood-burning fireplaces will be provided, per the project's development plan.

4.2.4 Other Sources of Operational Emissions

Water. Greenhouse gas emissions are generated from the upstream energy required to supply and treat the water used on the project site. Indirect emissions from water usage are counted as part of the project's overall impact. The estimated water usage for the project is reported in Table 13 and recommendations to reduce water usage are discussed in Section 6.0.

Waste. CalEEMod calculates the indirect GHG emissions associated with waste that is disposed of at a landfill. The program uses annual waste disposal rates from the California Department of Resources Recycling and Recovery (CalRecycle) data for individual land uses. The program quantifies the GHG emissions associated with the decomposition of the waste which generates methane based on the total amount of degradable organic carbon.

The estimated waste generation by the project is reported in Table 13.

Land Use		Waste Generation		
	Indoor	Outdoor	Total	(tons/year) ¹
Single Family Housing	5,798,708.28	3,655,707.39	9,454,415.67	104.55

Table 13Operational Water Usage and Waste Generation

¹ CalEEMod default estimates.



5.0 Significance Thresholds

The Mojave Desert AQMD California Environmental Quality Act (CEQA) and Federal Conformity Guidelines, August 2016, (MDAQMD Guidelines) establishes air quality and greenhouse gas emissions thresholds for purposes of determining whether a project may have a significant effect on the environment per Section 15002(g) of the Guidelines for implementing CEQA.

According to the MDAQMD Guidelines, any project is significant if it triggers or exceeds the most appropriate evaluation criteria. The District will clarify upon request which threshold is most appropriate for a given project; in general, the emissions comparison (criteria number 1) is sufficient:

- 1. Generates total emissions (direct and indirect) in excess of the thresholds given in Table 16
- 2. Generates a violation of any ambient air quality standard when added to the local background
- 3. Does not conform with the applicable attainment or maintenance plan(s)⁸
- 4. Exposes sensitive receptors to substantial pollutant concentrations, including those resulting in a cancer risk greater than or equal to 10 in a million and/or a Hazard Index (HI) (non-cancerous) greater than or equal to 1.

A significant project must incorporate mitigation sufficient to reduce its impact to a level that is not significant. A project that cannot be mitigated to a level that is not significant must incorporate all feasible mitigation.

Note that the emission thresholds are given as a daily value and an annual value, so that a multi-phased project (such as a project with a construction phase and a separate operational phase) with phases shorter than one year can be compared to the daily value.

Table 14 lists the significant emissions thresholds for MDAQMD.

⁸ A project is deemed to not exceed this threshold, and hence not be significant, if it is consistent with the existing land use plan. Zoning changes, specific plans, general plan amendments and similar land use plan changes which do not increase dwelling unit density, do not increase vehicle trips, and do not increase vehicle miles traveled are also deemed to not exceed this threshold.



Pollutant	Annual Thresholds (tons/year)	Daily Thresholds (lbs/day)
Greenhouse Gases (CO2e)	100,000	548,000
Carbon Monoxide (CO	100	548
Oxides of Nitrogen (NO _x)	25	137
Volatile Organic Compounds (VOC)	25	137
Oxides of Sulfur (SO _x)	25	137
Particulate Matter (PM ₁₀)	15	82
Particulate Matter (PM _{2.5})	12	65
Hydrogen Sulfide (H₂S)	10	54
Lead (Pb)	0.6	3

Table 14 MDAQMD Significant Emissions Thresholds¹

¹ Source: MDAQMD CEQA and Federal Conformity Guidelines, August 2016

Lead is not included as part of this analysis as the project is not expected to emit lead in any significant measurable quantity and neither is Hydrogen Sulifide, as the project does not include oil or natural gas extraction and processing or geothermal fields, which are the common sources of hydrogen sulfide. Other sources of hydrogen sulfide include petrochemical plants, coke oven plants and kraft paper mills.⁹

⁹ California Air Resources Board. Hydrogen Sulfide & Health. Website accessed November 2020. <u>https://ww2.arb.ca.gov/resources/hydrogen-sulfide-and-health</u>



6.0 Air Quality Impact Analysis

6.1 <u>Air Quality Emissions</u>

Criteria air pollutants during the construction and operation of the project are quantified using CalEEMod software and compared to the MDAQMD annual and daily thresholds of significance. The annual and daily emissions outputs are provided in Appendix A.

6.1.1 Construction Air Quality Emissions

Table 15 shows the annual tons per year (tons/year) of construction emissions and Table 16 shows daily pounds per day (lbs./day) of construction emissions generated by the project.

Annual Construction Air Quality Emissions (tons/year)						
Year	voc	NO _x	со	SO2	PM 10	PM _{2.5}
2022	0.34	3.32	3.08	0.01	0.47	0.23
2023	0.73	1.43	1.82	0.00	0.20	0.10
Maximum ¹	0.73	3.32	3.08	0.01	0.47	0.23
MDAQMD Annual Threshold	25	25	100	25	15	12
Exceeds Threshold (?)	No	No	No	No	No	No

Table 15 Annual Construction Air Ouality Emissions (tons/vear)

¹ Maximum annual emission includes both on-site and off-site emissions.

Daily Construction Air Quality Emissions (lbs./day)						
Activity	voc	NO _x	со	SO ₂	PM 10	PM _{2.5}
Site Preparation	3.23	33.12	20.26	0.04	9.28	5.39
Grading	4.36	64.10	35.97	0.17	8.73	4.05
Building Construction	2.40	18.85	22.45	0.05	2.59	1.27
Paving	2.01	10.22	15.02	0.02	0.63	0.50
Architectural Coating	54.72	1.37	2.74	0.01	0.34	0.14
Maximum ¹	54.72	64.10	35.97	0.17	9.28	5.39
MDAQMD Threshold	137	137	548	137	82	65
Exceeds Threshold (?)	No	No	No	No	No	No

Table 16Daily Construction Air Quality Emissions (lbs./day)

¹ Maximum daily emission during summer and winter; includes both on-site and off-site project emissions.



As shown in Table 15 and Table 16, the project's annual and daily construction emissions will be below the applicable MDAQMD thresholds of significance.

6.1.2 Operational Air Quality Emissions

Table 17 shows the annual tons per year (tons/year) of operational emissions and Table 18 shows daily pounds per day (lbs./day) of operational emissions generated by the project.

Annual Operational Air Quality Emissions (tons/year)						
Source	voc	NO _x	со	SO ₂	PM ₁₀	PM _{2.5}
Area Sources	0.38	0.00	3.75	0.00	0.00	0.00
Energy Sources	0.01	0.12	0.05	0.00	0.01	0.01
Mobile Source	0.73	0.00	0.69	0.00	0.00	0.00
Total	1.12	0.12	4.49	0.00	0.01	0.01
MDAQMD Threshold	25	25	100	25	15	12
Exceeds Threshold (?)	No	No	No	No	No	No

Table 17

¹ Total annual emission includes both on-site and off-site sources.

Daily Operational Air Quality Emissions (lbs./day)						
Source	voc	NO _x	со	SO ₂	PM 10	PM _{2.5}
Mobile Sources	4.23	1.56	7.96	0.01	0.16	0.16
Energy Sources	0.07	0.64	0.27	0.00	0.05	0.05
Area Sources	2.51	2.43	22.50	0.05	5.09	1.38
Total	6.81	4.62	30.74	0.06	5.31	1.59
MDAQMD Threshold	137	137	548	137	82	65
Exceeds Threshold (?)	No	No	No	No	No	No

Table 18

¹ Maximum daily emission during summer or winter; includes both on-site and off-site project emissions.

As shown in Table 17 and Table 18, the project's annual and daily operational emissions will be below the applicable MDAQMD thresholds of significance.



6.2 Fugitive Dust Control

The Project is required to comply with regional rules that assist in reducing short-term air pollutant emissions associated with suspended particulate matter, also known as fugitive dust. Fugitive dust emissions are commonly associated with land clearing activities, cut-and-fill grading operations, and exposure of soils to the air and wind. MDAQMD Rule 403 requires that fugitive dust is controlled with best-available control measures so that the presence of such dust does not remain visible in the atmosphere beyond the property line of the emission source. In addition, MDAQMD Rules 403 require implementation of dust suppression techniques to prevent fugitive dust from creating a nuisance off site.

To ensure compliance with the fugitive dust control measures and to reduce potential exposure of sensitive receptors to substantial pollution concentrations, the following project design features are recommended to be included as part of the conditions of the project:

- **DF-1** Prepare and submit a Construction Management Plan to the City of Adelanto that demonstrates the ability to implement all construction design features described herein, prior to the start of construction.
- **DF-2** Follow the MDAQMD rules and requirements with regards to fugitive dust control, which includes, but is not limited to the following:
 - 1. All active construction areas shall be watered two (2) times daily.
 - 2. Speed on unpaved roads shall be reduced to less than 15 mph.
 - 3. Any visible dirt deposition on any public roadway shall be swept or washed at the site access points within 30 minutes.
 - 4. Any on-site stockpiles of debris, dirt or other dusty material shall be covered or watered twice daily.
 - 5. All operations on any unpaved surface shall be suspended if winds exceed 15 mph.
 - 6. Access points shall be washed or swept daily.
 - 7. Construction sites shall be sandbagged for erosion control.
 - 8. Apply nontoxic chemical soil stabilizers according to manufacturers' specifications to all inactive construction areas (previously graded areas inactive for 10 days or more).



- 9. Cover all trucks hauling dirt, sand, soil, or other loose materials, and maintain at least 2 feet of freeboard space in accordance with the requirements of California Vehicle Code (CVC) section 23114.
- 10. Pave or gravel construction access roads at least 100 feet onto the site from the main road and use gravel aprons at truck exits.
- 11. Replace the ground cover of disturbed areas as quickly possible.
- 12. A construction management plan with fugitive dust control measures should be prepared and submitted to City of Adelanto prior to the start of construction.

6.3 <u>Toxic Air Contaminants</u>

The primary source of toxic air contaminants (TACs) associated with the project would include diesel particulate matter (DPM) emitted from the use of diesel powered construction equipment and on-road vehicles powered by diesel engines.

MDAQMD Guidelines indicates that a project may result in a significant impact if it exposes sensitive receptors to substantial pollutant concentrations, including those resulting in a cancer risk greater than or equal to 10 in a million and/or a Hazard Index (HI) (non-cancerous) greater than or equal to 1.

The following project types proposed for sites within the specified distance to an existing or planned (zoned) sensitive receptor land use must be evaluated for potential exposure of substantial pollution concentrations.

- Any industrial project within 1,000 feet of a sensitive receptor.
- A distribution center (40 or more trucks per day) within 1,000 feet of a sensitive receptor.
- A major transportation project (50,000 or more vehicles per day) within 1,000 feet of a sensitive receptor.
- A dry cleaner using perchloroethylene within 500 feet of a sensitive receptor.
- A gasoline dispensing facility within 300 feet of a sensitive receptor.

The residential project does not consist of a land use that has been identified by the MDAQMD as potentially significant generator of TACs that could cause the exposure of sensitive receptors to substantial pollutant concentrations. Therefore, since the project is not considered a substation source of stationary pollution, the project's operational impact



may be presumed to cause a less than significant impact without the need for further evaluation.

The project will also generate DPM during construction from off-road diesel equipment and trucks. The California Office of Environmental Health Hazard Assessment (OEHHA) adopted the Guidance Manual for Preparation of Health Risk Assessments (HRA Guidelines) to provide procedures for use in the Air Toxics Hot Spots Program or for the permitting of existing, new, or modified stationary sources¹⁰. The HRA Guidelines provide risk factors for DPM based on exposure over a 30-year span. Short-term risk has not been developed for DPM. In addition, MDAQMD does not typically require the evaluation of long-term cancer risk or chronic health impacts for construction operations of a short-term project. Hence, the impacts from short-term exposure to DMP during project construction may be presumed to be less than significant without the need for a detailed HRA study.

To help reduce the potential health risks associated with DPM exposure during construction, the following project design features are recommended. Project design features include a recommendation for Tier 4 engines on all off-road diesel equipment. Tier 4 engines, along with the latest national fuel standards, have been shown to yield PM reductions of over 95% from the typical Tier 2 and Tier 3 engines¹¹. Thus, ensuring the potential DPM exposure to adjacent sensitive receptors is reduced to the maximum extent feasible.

- **DF-3** All construction equipment should have Tier 4 low emission "clean diesel" engines (OEM or retrofit) that include diesel oxidation catalysts and diesel particulate filters that meet the latest CARB best available control technology.
- **DF-4** Construction equipment should be maintained in proper tune.
- **DF-5** All construction vehicles should be prohibited from excessive idling. Excessive idling is defined as five (5) minutes or longer.
- **DF-6** Minimize the simultaneous operation of multiple construction equipment units.
- **DF-7** The use of heavy construction equipment and earthmoving activity should be suspended during Air Alerts when the Air Quality Index reaches the "Unhealthy" level.

¹¹ EPA. Control of Emissions of Air Pollution from Nonroad Diesel Engines and Fuel; Final Rule. (40 CFR Parts 9, 69, et al.)



¹⁰ OEHHA. Air Toxics Hot Spots Program. Risk Assessment Guidelines. Guidance for Preparation of Health Risk Assessments. February 2015.

- **DF-8** Establish an electricity supply to the construction site and use electric powered equipment instead of diesel-powered equipment or generators, where feasible.
- **DF-9** Establish staging areas for the construction equipment that are as distant as possible from adjacent sensitive receptors (residential land uses).
- **DF-10** Use haul trucks with on-road engines instead of off-road engines for on-site hauling.

6.4 <u>Odors</u>

Odors are typically categorized as a nuisance and are regulated under MDAQMD Rule 402. Rule 402 requires that a person shall not discharge from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance, or annoyance to any considerable number of persons or to the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property.

Land uses that commonly receive odor complaints include agricultural uses (farming and livestock), chemical plants, composting operations, dairies, fiberglass molding facilities, food processing plants, landfills, refineries, rail yards, and wastewater treatment plants.

The proposed project does not contain land uses that would typically be associated with significant odor emissions. Hence, the project related odors are not expected to meet the criteria of being a nuisance and the impact is considered less than significant.



7.0 Greenhouse Gas Impact Analysis

7.1 **Greenhouse Gas Emissions - Construction**

Greenhouse gas emissions are estimated for on-site and off-site construction activity using CalEEMod. Table 19 shows the annual construction greenhouse gas emissions in metric tons of carbon dioxide equivalent (MTCO2e/year) and compares the results to the MDAQMD annual threshold of significance.

Year	Annual GHG Emissions (MTCO ₂ e/year) ¹					
2022	797.69					
2023	375.89					
Maximum Annual Emissions	797.69					
MDAQMD Annual Threshold	100,000					
Exceeds Threshold?	No					

Table 19

¹ MTCO₂e/year = metric tons of carbon dioxide equivalents per year

Table 20 shows the daily construction greenhouse gas emissions in pounds per day of carbon dioxide equivalent (lbs. CO2e/day) and compares the results to the MDAQMD daily threshold of significance.

Daily Construction Greenhouse Gas Emissions									
Year	Daily GHG Emissions (lbs. CO ₂ e/day) ¹								
2022	18,046.67								
2023	5,070.85								
Maximum Daily Emissions ²	18,046.67								
MDAQMD Daily Threshold	548,000								
Exceeds Threshold?	No								

Table 20

¹ lbs. $CO_2e/day =$ pounds of carbon dioxide equivalents per day

² Maximum emissions during summer and winter months.



As shown in Table 19 and Table 20, the project's annual and daily operational greenhouse gas emissions will be below the applicable MDAQMD thresholds of significance.

7.2 <u>Greenhouse Gas Emissions - Operation</u>

Greenhouse gas emissions are estimated for on-site and off-site operational activity using CalEEMod. Greenhouse gas emissions from mobile sources, area sources and energy sources are shown in Table 21. CalEEMod report sheets are provided in Appendix A.

Emission Source	GHG Emissions (MTCO ₂ e/year) ¹					
Area	71.62					
Energy	164.28					
Mobile	746.23					
Waste	52.58					
Water	28.59					
Total Annual Emissions	1,063.30					
MDAQMD Annual Threshold	100,000					
Exceeds Threshold?	No					

Table 21Annual Operational Greenhouse Gas Emissions

¹ MTCO₂e/year = metric tons of carbon dioxide equivalents per year

Table 22 shows the daily operational greenhouse gas emissions in pounds per day of carbon dioxide equivalent (lbs. CO2e/day) and compares the results to the MDAQMD daily threshold of significance.



Emission Source	GHG Emissions (lbs. CO₂e/day) ¹					
Area	1,909.45					
Energy	816.28					
Mobile	4,930.73					
Waste	317.58					
Water	172.70					
Total Daily Emissions	8,146.74					
MDAQMD Daily Threshold	548,000					
Exceeds Threshold?	No					

Table 22Daily Operational Greenhouse Gas Emissions

¹ lbs. $CO_2e/day =$ pounds of carbon dioxide equivalents per day

As shown in Table 21 and Table 22, the project's annual and daily operational greenhouse gas emissions will be below the applicable MDAQMD thresholds of significance.

The following recommended project design features are considered standard building code requirements and best practices that will be included in the project design to help further reduce GHG emissions.

- **DF-11** Comply with the mandatory requirements of California Building Standards Code Title 24 Part 6 (Energy Code) and Title 24 Part 11 (CAL Green), including the installation of rooftop solar panels, community solar panels, and/or other sources of on-site renewable energy capable of meeting the required Energy Design Ratings for residential dwellings.
- **DF-12** Implement water conservation strategies, including low flow fixtures and toilets, water efficient irrigation systems, drought tolerant/native landscaping, and reduce the amount of turf.
- **DF-13** Participate in the local waste management recycling and composting programs for residential uses.
- **DF-14** Provide the necessary infrastructure to support electric vehicle charging, such as dedicated circuits for in-garage charging, as required by the Building Code.



- **DF-15** The homeowner's association should encourage residents and landscape maintenance crews to use electric landscaping equipment, such as lawn mowers and leaf blowers, wherever feasible.
- **DF-16** No wood burning fireplaces will be installed in any residential dwelling.

Based on the results of this analysis, the project impact to Greenhouse Gas emissions is considered less than significant.




Exhibits

Exhibit A Location Map





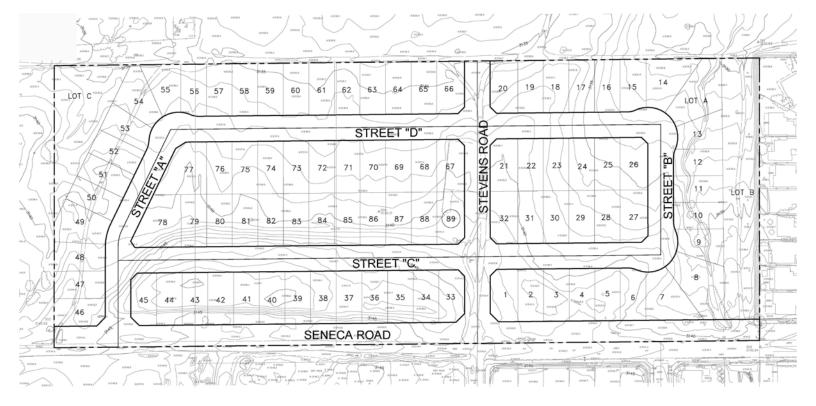

N



Appendices

Appendix A

CalEEMod Emissions Reports (Annual, Summer & Winter)

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

TTM 20398 Single Family Residential Project

San Bernardino-Mojave Desert County, Annual

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Parking Lot	7.10	Acre	7.10	309,276.00	0
Single Family Housing	89.00	Dwelling Unit	16.02	160,200.00	255

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.6	Precipitation Freq (Days)	32
Climate Zone	10			Operational Year	2025
Utility Company	Southern California Edisor	n			
CO2 Intensity (Ib/MWhr)	390.98	CH4 Intensity (Ib/MWhr)	0.033	N2O Intensity (Ib/MWhr)	0.004

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - The project is proposing to develope 89 SFR homes and approximately 7.1 acres of on-site and off-site street improvements.

Construction Phase - The project site is currently vacant and requires no demolition.

Grading - The project is expected to import approximately 49,337 cu yrds of earthwork material.

Architectural Coating - The project is required to comply with MDAQMD Rule 1113 VOC limit of 50 grams per liter (g/L) for flats, 50 g/L for non-flat, and those used for traffic coating would meet the 100 g/L VOC limit

Woodstoves - No wood burning devices are allowed in new developments; therefore, no wood hearths are included in this project.

Construction Off-road Equipment Mitigation - Project will be required to comply with MDAQMD Rule 403 regarding fugitive dust control.

Energy Mitigation - All units will be equipped with rooftop solar installations. ~80% electricity usage generated from on-site renewables.

Fleet Mix - Operational fleet mix adjusted to equal 2% trucks with GVWR > 10,000 lbs.

Area Mitigation - The project is required to comply with MDAQMD Rule 1113 VOC limit of 50 grams per liter (g/L) for flats, 50 g/L for non-flat, and those used for traffic coating would meet the 100 g/L VOC limit

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Area Coating - The project is required to comply with MDAQMD Rule 1113 VOC limit of 50 grams per liter (g/L) for flats, 50 g/L for non-flat, and those used for traffic coating would meet the 100 g/L VOC limit

Table Name	Column Name	Default Value	New Value		
tblArchitecturalCoating	EF_Nonresidential_Exterior	250.00	50.00		
tblArchitecturalCoating	EF_Nonresidential_Interior	250.00	50.00		
tblArchitecturalCoating	EF_Parking	250.00	100.00		
tblArchitecturalCoating	EF_Residential_Exterior	250.00	50.00		
tblArchitecturalCoating	EF_Residential_Interior	250.00	50.00		
tblAreaCoating	Area_EF_Nonresidential_Exterior	250	50		
tblAreaCoating	Area_EF_Nonresidential_Interior	250	50		
tblAreaCoating	Area_EF_Parking	250	100		
tblAreaCoating	Area_EF_Residential_Exterior	250	50		
tblAreaCoating	Area_EF_Residential_Interior	250	50		
tblAreaMitigation	UseLowVOCPaintNonresidentialExteriorV alue	250	50		
tblAreaMitigation	UseLowVOCPaintNonresidentialInteriorV alue	250	50		
tblAreaMitigation	UseLowVOCPaintParkingCheck	False	True		
tblAreaMitigation	UseLowVOCPaintParkingValue	250	100		
tblAreaMitigation	UseLowVOCPaintResidentialExteriorValu e	250	50		
tblAreaMitigation	UseLowVOCPaintResidentialInteriorValu e	250	50		
tblConstDustMitigation	WaterUnpavedRoadMoistureContent	0	12		
tblConstDustMitigation	WaterUnpavedRoadVehicleSpeed	0	15		
tblFireplaces	FireplaceWoodMass	3,078.40	0.00		
tblFireplaces	NumberGas	48.95	89.00		
tblFireplaces	NumberNoFireplace	8.90	0.00		
tblFireplaces	NumberWood	31.15	0.00		
tblFleetMix	HHD	0.02	8.1730e-003		
tblFleetMix	HHD	0.02	8.1730e-003		
tblFleetMix	LDA	0.54	0.56		

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblFleetMix	LDA	0.54	0.56		
tblFleetMix	LDT1	0.06	0.06		
tblFleetMix	LDT1	0.06	0.06		
tblFleetMix	LDT2	0.17	0.18		
tblFleetMix	LDT2	0.17	0.18		
tblFleetMix	LHD1	0.03	0.03		
tblFleetMix	LHD1	0.03	0.03		
tblFleetMix	LHD2	7.0090e-003	3.2770e-003		
tblFleetMix	LHD2	7.0090e-003	3.2770e-003		
tblFleetMix	МСҮ	0.02	0.03		
tblFleetMix	МСҮ	0.02	0.03		
tblFleetMix	MDV	0.13	0.14		
tblFleetMix	MDV	0.13	0.14		
tblFleetMix	MH	4.6060e-003	2.1530e-003		
tblFleetMix	MH	4.6060e-003	2.1530e-003		
tblFleetMix	MHD	0.01	5.5760e-003		
tblFleetMix	MHD	0.01	5.5760e-003		
tblFleetMix	OBUS	5.5200e-004	2.5800e-004		
tblFleetMix	OBUS	5.5200e-004	2.5800e-004		
tblFleetMix	SBUS	9.5600e-004	4.4700e-004		
tblFleetMix	SBUS	9.5600e-004	4.4700e-004		
tblFleetMix	UBUS	2.4800e-004	1.1600e-004		
tblFleetMix	UBUS	2.4800e-004	1.1600e-004		
tblGrading	MaterialImported	0.00	49,337.00		
tblLandUse	LotAcreage	28.90	16.02		
tblWoodstoves	WoodstoveWoodMass	3,019.20	0.00		

2.0 Emissions Summary

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	r tons/yr									MT/yr						
2022	0.3418	3.3188	3.0753	8.5100e- 003	0.5028	0.1324	0.6352	0.1802	0.1239	0.3041	0.0000	779.9489	779.9489	0.1108	0.0502	797.6918
2023	0.7309	1.4344	1.8230	4.1100e- 003	0.1360	0.0619	0.1979	0.0368	0.0582	0.0950	0.0000	370.0610	370.0610	0.0542	0.0150	375.8895
Maximum	0.7309	3.3188	3.0753	8.5100e- 003	0.5028	0.1324	0.6352	0.1802	0.1239	0.3041	0.0000	779.9489	779.9489	0.1108	0.0502	797.6918

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	ar tons/yr											МТ	/yr			
2022	0.3418	3.3188	3.0753	8.5100e- 003	0.3405	0.1324	0.4730	0.1092	0.1239	0.2331	0.0000	779.9485	779.9485	0.1108	0.0502	797.6914
2023	0.7309	1.4344	1.8230	4.1100e- 003	0.1360	0.0619	0.1979	0.0368	0.0582	0.0950	0.0000	370.0608	370.0608	0.0542	0.0150	375.8893
Maximum	0.7309	3.3188	3.0753	8.5100e- 003	0.3405	0.1324	0.4730	0.1092	0.1239	0.2331	0.0000	779.9485	779.9485	0.1108	0.0502	797.6914

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	25.41	0.00	19.48	32.71	0.00	17.79	0.00	0.00	0.00	0.00	0.00	0.00

Quarter	Start Date	End Date	Maximum Unmitigated ROG + NOX (tons/quarter)	Maximum Mitigated ROG + NOX (tons/quarter)
1	1-3-2022	4-2-2022	1.5729	1.5729
2	4-3-2022	7-2-2022	0.6854	0.6854
3	7-3-2022	10-2-2022	0.6930	0.6930
4	10-3-2022	1-2-2023	0.6952	0.6952
5	1-3-2023	4-2-2023	0.6155	0.6155
6	4-3-2023	7-2-2023	0.6192	0.6192
7	7-3-2023	9-30-2023	0.9077	0.9077
		Highest	1.5729	1.5729

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	is/yr							MT	'/yr		
Area	0.7270	0.0681	0.6860	4.2000e- 004		8.5600e- 003	8.5600e- 003		8.5600e- 003	8.5600e- 003	0.0000	71.1804	71.1804	2.3800e- 003	1.2900e- 003	71.6229
Energy	0.0136	0.1160	0.0494	7.4000e- 004		9.3800e- 003	9.3800e- 003		9.3800e- 003	9.3800e- 003	0.0000	279.2547	279.2547	0.0148	3.9500e- 003	280.8006
Mobile	0.3813	0.4420	3.7540	7.7800e- 003	0.8839	5.6100e- 003	0.8895	0.2354	5.2200e- 003	0.2406	0.0000	735.5796	735.5796	0.0437	0.0321	746.2275
Waste	F1					0.0000	0.0000	 	0.0000	0.0000	21.2227	0.0000	21.2227	1.2542	0.0000	52.5784
Water	61					0.0000	0.0000		0.0000	0.0000	1.8397	20.5934	22.4330	0.1907	4.6700e- 003	28.5926
Total	1.1219	0.6261	4.4894	8.9400e- 003	0.8839	0.0236	0.9074	0.2354	0.0232	0.2586	23.0624	1,106.608 1	1,129.670 4	1.5058	0.0420	1,179.821 9

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Area	0.7270	0.0681	0.6860	4.2000e- 004		8.5600e- 003	8.5600e- 003		8.5600e- 003	8.5600e- 003	0.0000	71.1804	71.1804	2.3800e- 003	1.2900e- 003	71.6229
Energy	0.0136	0.1160	0.0494	7.4000e- 004		9.3800e- 003	9.3800e- 003		9.3800e- 003	9.3800e- 003	0.0000	163.3273	163.3273	5.0200e- 003	2.7600e- 003	164.2751
Mobile	0.3813	0.4420	3.7540	7.7800e- 003	0.8839	5.6100e- 003	0.8895	0.2354	5.2200e- 003	0.2406	0.0000	735.5796	735.5796	0.0437	0.0321	746.2275
Waste	r:					0.0000	0.0000		0.0000	0.0000	21.2227	0.0000	21.2227	1.2542	0.0000	52.5784
Water	r:					0.0000	0.0000		0.0000	0.0000	1.8397	20.5934	22.4330	0.1907	4.6700e- 003	28.5926
Total	1.1219	0.6261	4.4894	8.9400e- 003	0.8839	0.0236	0.9074	0.2354	0.0232	0.2586	23.0624	990.6806	1,013.743 0	1.4960	0.0408	1,063.296 4

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.48	10.26	0.65	2.83	9.88

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Site Preparation	Site Preparation	1/3/2022	1/14/2022	5	10	
2	Grading	Grading	1/15/2022	3/4/2022	5	35	
3	Building Construction	Building Construction	3/5/2022	8/4/2023	5	370	

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4	Paving	Paving	8/5/2023	9/1/2023	5	20	
	•	-		9/29/2023	5	20	

Acres of Grading (Site Preparation Phase): 15

Acres of Grading (Grading Phase): 105

Acres of Paving: 7.1

Residential Indoor: 324,405; Residential Outdoor: 108,135; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 18,557 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00	97	0.37
Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48
Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	7.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	7.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	6.00	78	0.48

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Site Preparation	7	18.00	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	0.00	6,167.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	162.00	60.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	32.00	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Use Soil Stabilizer

Replace Ground Cover

Water Exposed Area

Water Unpaved Roads

Reduce Vehicle Speed on Unpaved Roads

3.2 Site Preparation - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Fugitive Dust					0.0983	0.0000	0.0983	0.0505	0.0000	0.0505	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0159	0.1654	0.0985	1.9000e- 004		8.0600e- 003	8.0600e- 003		7.4200e- 003	7.4200e- 003	0.0000	16.7197	16.7197	5.4100e- 003	0.0000	16.8549
Total	0.0159	0.1654	0.0985	1.9000e- 004	0.0983	8.0600e- 003	0.1064	0.0505	7.4200e- 003	0.0579	0.0000	16.7197	16.7197	5.4100e- 003	0.0000	16.8549

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2022

Unmitigated Construction Off-Site

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	2.8000e- 004	2.1000e- 004	2.4800e- 003	1.0000e- 005	7.3000e- 004	0.0000	7.3000e- 004	1.9000e- 004	0.0000	2.0000e- 004	0.0000	0.5859	0.5859	2.0000e- 005	2.0000e- 005	0.5918
Total	2.8000e- 004	2.1000e- 004	2.4800e- 003	1.0000e- 005	7.3000e- 004	0.0000	7.3000e- 004	1.9000e- 004	0.0000	2.0000e- 004	0.0000	0.5859	0.5859	2.0000e- 005	2.0000e- 005	0.5918

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Fugitive Dust					0.0376	0.0000	0.0376	0.0193	0.0000	0.0193	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0159	0.1654	0.0985	1.9000e- 004		8.0600e- 003	8.0600e- 003		7.4200e- 003	7.4200e- 003	0.0000	16.7197	16.7197	5.4100e- 003	0.0000	16.8549
Total	0.0159	0.1654	0.0985	1.9000e- 004	0.0376	8.0600e- 003	0.0457	0.0193	7.4200e- 003	0.0267	0.0000	16.7197	16.7197	5.4100e- 003	0.0000	16.8549

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	∵/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	2.8000e- 004	2.1000e- 004	2.4800e- 003	1.0000e- 005	7.3000e- 004	0.0000	7.3000e- 004	1.9000e- 004	0.0000	2.0000e- 004	0.0000	0.5859	0.5859	2.0000e- 005	2.0000e- 005	0.5918
Total	2.8000e- 004	2.1000e- 004	2.4800e- 003	1.0000e- 005	7.3000e- 004	0.0000	7.3000e- 004	1.9000e- 004	0.0000	2.0000e- 004	0.0000	0.5859	0.5859	2.0000e- 005	2.0000e- 005	0.5918

3.3 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	'/yr		
Fugitive Dust					0.1645	0.0000	0.1645	0.0645	0.0000	0.0645	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0634	0.6798	0.5082	1.0900e- 003		0.0286	0.0286		0.0263	0.0263	0.0000	95.4356	95.4356	0.0309	0.0000	96.2072
Total	0.0634	0.6798	0.5082	1.0900e- 003	0.1645	0.0286	0.1931	0.0645	0.0263	0.0908	0.0000	95.4356	95.4356	0.0309	0.0000	96.2072

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Unmitigated Construction Off-Site

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Hauling	0.0115	0.4441	0.1107	1.8100e- 003	0.0531	4.4200e- 003	0.0575	0.0146	4.2300e- 003	0.0188	0.0000	179.2137	179.2137	7.6600e- 003	0.0284	187.8684
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.1000e- 003	8.1000e- 004	9.6300e- 003	2.0000e- 005	2.8200e- 003	2.0000e- 005	2.8400e- 003	7.5000e- 004	1.0000e- 005	7.6000e- 004	0.0000	2.2785	2.2785	8.0000e- 005	7.0000e- 005	2.3014
Total	0.0126	0.4450	0.1203	1.8300e- 003	0.0559	4.4400e- 003	0.0604	0.0153	4.2400e- 003	0.0196	0.0000	181.4922	181.4922	7.7400e- 003	0.0285	190.1698

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Fugitive Dust					0.0629	0.0000	0.0629	0.0247	0.0000	0.0247	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0634	0.6798	0.5082	1.0900e- 003		0.0286	0.0286		0.0263	0.0263	0.0000	95.4354	95.4354	0.0309	0.0000	96.2071
Total	0.0634	0.6798	0.5082	1.0900e- 003	0.0629	0.0286	0.0915	0.0247	0.0263	0.0510	0.0000	95.4354	95.4354	0.0309	0.0000	96.2071

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Hauling	0.0115	0.4441	0.1107	1.8100e- 003	0.0531	4.4200e- 003	0.0575	0.0146	4.2300e- 003	0.0188	0.0000	179.2137	179.2137	7.6600e- 003	0.0284	187.8684
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.1000e- 003	8.1000e- 004	9.6300e- 003	2.0000e- 005	2.8200e- 003	2.0000e- 005	2.8400e- 003	7.5000e- 004	1.0000e- 005	7.6000e- 004	0.0000	2.2785	2.2785	8.0000e- 005	7.0000e- 005	2.3014
Total	0.0126	0.4450	0.1203	1.8300e- 003	0.0559	4.4400e- 003	0.0604	0.0153	4.2400e- 003	0.0196	0.0000	181.4922	181.4922	7.7400e- 003	0.0285	190.1698

3.4 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Off-Road	0.1834	1.6787	1.7591	2.9000e- 003		0.0870	0.0870		0.0818	0.0818	0.0000	249.1046	249.1046	0.0597	0.0000	250.5966
Total	0.1834	1.6787	1.7591	2.9000e- 003		0.0870	0.0870		0.0818	0.0818	0.0000	249.1046	249.1046	0.0597	0.0000	250.5966

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0114	0.3093	0.1075	1.2700e- 003	0.0430	3.5500e- 003	0.0466	0.0124	3.4000e- 003	0.0158	0.0000	123.2409	123.2409	3.3200e- 003	0.0182	128.7608
Worker	0.0549	0.0404	0.4793	1.2300e- 003	0.1403	7.7000e- 004	0.1411	0.0373	7.1000e- 004	0.0380	0.0000	113.3701	113.3701	3.8100e- 003	3.5100e- 003	114.5108
Total	0.0663	0.3498	0.5868	2.5000e- 003	0.1834	4.3200e- 003	0.1877	0.0497	4.1100e- 003	0.0538	0.0000	236.6110	236.6110	7.1300e- 003	0.0218	243.2716

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Off-Road	0.1834	1.6787	1.7591	2.9000e- 003		0.0870	0.0870		0.0818	0.0818	0.0000	249.1043	249.1043	0.0597	0.0000	250.5963
Total	0.1834	1.6787	1.7591	2.9000e- 003		0.0870	0.0870		0.0818	0.0818	0.0000	249.1043	249.1043	0.0597	0.0000	250.5963

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	'/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0114	0.3093	0.1075	1.2700e- 003	0.0430	3.5500e- 003	0.0466	0.0124	3.4000e- 003	0.0158	0.0000	123.2409	123.2409	3.3200e- 003	0.0182	128.7608
Worker	0.0549	0.0404	0.4793	1.2300e- 003	0.1403	7.7000e- 004	0.1411	0.0373	7.1000e- 004	0.0380	0.0000	113.3701	113.3701	3.8100e- 003	3.5100e- 003	114.5108
Total	0.0663	0.3498	0.5868	2.5000e- 003	0.1834	4.3200e- 003	0.1877	0.0497	4.1100e- 003	0.0538	0.0000	236.6110	236.6110	7.1300e- 003	0.0218	243.2716

3.4 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Off-Road	0.1219	1.1148	1.2589	2.0900e- 003		0.0542	0.0542	- 	0.0510	0.0510	0.0000	179.6487	179.6487	0.0427	0.0000	180.7171
Total	0.1219	1.1148	1.2589	2.0900e- 003		0.0542	0.0542		0.0510	0.0510	0.0000	179.6487	179.6487	0.0427	0.0000	180.7171

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	5.3500e- 003	0.1780	0.0705	8.8000e- 004	0.0310	1.3000e- 003	0.0323	8.9500e- 003	1.2400e- 003	0.0102	0.0000	85.2743	85.2743	2.2200e- 003	0.0126	89.0837
Worker	0.0366	0.0257	0.3177	8.6000e- 004	0.1012	5.3000e- 004	0.1017	0.0269	4.8000e- 004	0.0274	0.0000	79.5788	79.5788	2.4800e- 003	2.3300e- 003	80.3355
Total	0.0419	0.2037	0.3882	1.7400e- 003	0.1322	1.8300e- 003	0.1340	0.0358	1.7200e- 003	0.0376	0.0000	164.8531	164.8531	4.7000e- 003	0.0149	169.4192

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Off-Road	0.1219	1.1148	1.2589	2.0900e- 003		0.0542	0.0542		0.0510	0.0510	0.0000	179.6485	179.6485	0.0427	0.0000	180.7169
Total	0.1219	1.1148	1.2589	2.0900e- 003		0.0542	0.0542		0.0510	0.0510	0.0000	179.6485	179.6485	0.0427	0.0000	180.7169

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	5.3500e- 003	0.1780	0.0705	8.8000e- 004	0.0310	1.3000e- 003	0.0323	8.9500e- 003	1.2400e- 003	0.0102	0.0000	85.2743	85.2743	2.2200e- 003	0.0126	89.0837
Worker	0.0366	0.0257	0.3177	8.6000e- 004	0.1012	5.3000e- 004	0.1017	0.0269	4.8000e- 004	0.0274	0.0000	79.5788	79.5788	2.4800e- 003	2.3300e- 003	80.3355
Total	0.0419	0.2037	0.3882	1.7400e- 003	0.1322	1.8300e- 003	0.1340	0.0358	1.7200e- 003	0.0376	0.0000	164.8531	164.8531	4.7000e- 003	0.0149	169.4192

3.5 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Off-Road	0.0103	0.1019	0.1458	2.3000e- 004		5.1000e- 003	5.1000e- 003		4.6900e- 003	4.6900e- 003	0.0000	20.0269	20.0269	6.4800e- 003	0.0000	20.1888
Paving	9.3000e- 003					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0196	0.1019	0.1458	2.3000e- 004		5.1000e- 003	5.1000e- 003		4.6900e- 003	4.6900e- 003	0.0000	20.0269	20.0269	6.4800e- 003	0.0000	20.1888

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

Unmitigated Construction Off-Site

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	∵/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	4.4000e- 004	3.1000e- 004	3.8000e- 003	1.0000e- 005	1.2100e- 003	1.0000e- 005	1.2200e- 003	3.2000e- 004	1.0000e- 005	3.3000e- 004	0.0000	0.9508	0.9508	3.0000e- 005	3.0000e- 005	0.9598
Total	4.4000e- 004	3.1000e- 004	3.8000e- 003	1.0000e- 005	1.2100e- 003	1.0000e- 005	1.2200e- 003	3.2000e- 004	1.0000e- 005	3.3000e- 004	0.0000	0.9508	0.9508	3.0000e- 005	3.0000e- 005	0.9598

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Off-Road	0.0103	0.1019	0.1458	2.3000e- 004		5.1000e- 003	5.1000e- 003		4.6900e- 003	4.6900e- 003	0.0000	20.0268	20.0268	6.4800e- 003	0.0000	20.1888
Paving	9.3000e- 003		1			0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0196	0.1019	0.1458	2.3000e- 004		5.1000e- 003	5.1000e- 003		4.6900e- 003	4.6900e- 003	0.0000	20.0268	20.0268	6.4800e- 003	0.0000	20.1888

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	4.4000e- 004	3.1000e- 004	3.8000e- 003	1.0000e- 005	1.2100e- 003	1.0000e- 005	1.2200e- 003	3.2000e- 004	1.0000e- 005	3.3000e- 004	0.0000	0.9508	0.9508	3.0000e- 005	3.0000e- 005	0.9598
Total	4.4000e- 004	3.1000e- 004	3.8000e- 003	1.0000e- 005	1.2100e- 003	1.0000e- 005	1.2200e- 003	3.2000e- 004	1.0000e- 005	3.3000e- 004	0.0000	0.9508	0.9508	3.0000e- 005	3.0000e- 005	0.9598

3.6 Architectural Coating - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Archit. Coating	0.5442					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	1.9200e- 003	0.0130	0.0181	3.0000e- 005		7.1000e- 004	7.1000e- 004		7.1000e- 004	7.1000e- 004	0.0000	2.5533	2.5533	1.5000e- 004	0.0000	2.5571
Total	0.5461	0.0130	0.0181	3.0000e- 005		7.1000e- 004	7.1000e- 004		7.1000e- 004	7.1000e- 004	0.0000	2.5533	2.5533	1.5000e- 004	0.0000	2.5571

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	9.3000e- 004	6.6000e- 004	8.1000e- 003	2.0000e- 005	2.5800e- 003	1.0000e- 005	2.5900e- 003	6.8000e- 004	1.0000e- 005	7.0000e- 004	0.0000	2.0283	2.0283	6.0000e- 005	6.0000e- 005	2.0476
Total	9.3000e- 004	6.6000e- 004	8.1000e- 003	2.0000e- 005	2.5800e- 003	1.0000e- 005	2.5900e- 003	6.8000e- 004	1.0000e- 005	7.0000e- 004	0.0000	2.0283	2.0283	6.0000e- 005	6.0000e- 005	2.0476

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	∵/yr		
Archit. Coating	0.5442					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	1.9200e- 003	0.0130	0.0181	3.0000e- 005		7.1000e- 004	7.1000e- 004		7.1000e- 004	7.1000e- 004	0.0000	2.5533	2.5533	1.5000e- 004	0.0000	2.5571
Total	0.5461	0.0130	0.0181	3.0000e- 005		7.1000e- 004	7.1000e- 004		7.1000e- 004	7.1000e- 004	0.0000	2.5533	2.5533	1.5000e- 004	0.0000	2.5571

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023

Mitigated Construction Off-Site

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	9.3000e- 004	6.6000e- 004	8.1000e- 003	2.0000e- 005	2.5800e- 003	1.0000e- 005	2.5900e- 003	6.8000e- 004	1.0000e- 005	7.0000e- 004	0.0000	2.0283	2.0283	6.0000e- 005	6.0000e- 005	2.0476
Total	9.3000e- 004	6.6000e- 004	8.1000e- 003	2.0000e- 005	2.5800e- 003	1.0000e- 005	2.5900e- 003	6.8000e- 004	1.0000e- 005	7.0000e- 004	0.0000	2.0283	2.0283	6.0000e- 005	6.0000e- 005	2.0476

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Mitigated	0.3813	0.4420	3.7540	7.7800e- 003	0.8839	5.6100e- 003	0.8895	0.2354	5.2200e- 003	0.2406	0.0000	735.5796	735.5796	0.0437	0.0321	746.2275
Unmitigated	0.3813	0.4420	3.7540	7.7800e- 003	0.8839	5.6100e- 003	0.8895	0.2354	5.2200e- 003	0.2406	0.0000	735.5796	735.5796	0.0437	0.0321	746.2275

4.2 Trip Summary Information

	Ave	rage Daily Trip Ra	ate	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Parking Lot	0.00	0.00	0.00		
Single Family Housing	840.16	849.06	760.95	2,357,628	2,357,628
Total	840.16	849.06	760.95	2,357,628	2,357,628

4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Parking Lot	9.50	7.30	7.30	0.00	0.00	0.00	0	0	0
Single Family Housing	10.80	7.30	7.50	40.20	19.20	40.60	86	11	3

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Parking Lot	0.556009	0.057640	0.177204	0.137453	0.026255	0.003277	0.005576	0.008173	0.000258	0.000116	0.025439	0.000447	0.002153
Single Family Housing	0.556009	0.057640	0.177204	0.137453	0.026255	0.003277	0.005576	0.008173	0.000258	0.000116	0.025439	0.000447	0.002153

5.0 Energy Detail

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Historical Energy Use: N

5.1 Mitigation Measures Energy

Percent of Electricity Use Generated with Renewable Energy

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Electricity Mitigated						0.0000	0.0000		0.0000	0.0000	0.0000	28.9819	28.9819	2.4500e- 003	3.0000e- 004	29.1314
Electricity Unmitigated	,, , , , , , , , , , , , , , , , ,			· · · · · · · · · · · · · · · · · · ·		0.0000	0.0000		0.0000	0.0000	0.0000	144.9093	144.9093	0.0122	1.4800e- 003	145.6568
	0.0136	0.1160	0.0494	7.4000e- 004		9.3800e- 003	9.3800e- 003		9.3800e- 003	9.3800e- 003	0.0000	134.3454	134.3454	2.5700e- 003	2.4600e- 003	135.1437
	0.0136	0.1160	0.0494	7.4000e- 004		9.3800e- 003	9.3800e- 003		9.3800e- 003	9.3800e- 003	0.0000	134.3454	134.3454	2.5700e- 003	2.4600e- 003	135.1437

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGa s Use	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					ton	s/yr							МТ	/yr		
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Single Family Housing	2.51754e +006	0.0136	0.1160	0.0494	7.4000e- 004		9.3800e- 003	9.3800e- 003		9.3800e- 003	9.3800e- 003	0.0000	134.3454	134.3454	2.5700e- 003	2.4600e- 003	135.1437
Total		0.0136	0.1160	0.0494	7.4000e- 004		9.3800e- 003	9.3800e- 003		9.3800e- 003	9.3800e- 003	0.0000	134.3454	134.3454	2.5700e- 003	2.4600e- 003	135.1437

Mitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					ton	s/yr							MT	/yr		
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Single Family Housing	2.51754e +006	0.0136	0.1160	0.0494	7.4000e- 004		9.3800e- 003	9.3800e- 003		9.3800e- 003	9.3800e- 003	0.0000	134.3454	134.3454	2.5700e- 003	2.4600e- 003	135.1437
Total		0.0136	0.1160	0.0494	7.4000e- 004		9.3800e- 003	9.3800e- 003		9.3800e- 003	9.3800e- 003	0.0000	134.3454	134.3454	2.5700e- 003	2.4600e- 003	135.1437

Page 25 of 32

TTM 20398 Single Family Residential Project - San Bernardino-Mojave Desert County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.3 Energy by Land Use - Electricity

Unmitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr		MT	ī/yr	
Parking Lot	108247	19.1971	1.6200e- 003	2.0000e- 004	19.2961
Single Family Housing	708855	125.7122	0.0106	1.2900e- 003	126.3608
Total		144.9093	0.0122	1.4900e- 003	145.6569

Mitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr		MT	/yr	
Parking Lot	21649.3	3.8394	3.2000e- 004	4.0000e- 005	3.8592
Single Family Housing	141771	25.1425	2.1200e- 003	2.6000e- 004	25.2722
Total		28.9819	2.4400e- 003	3.0000e- 004	29.1314

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.1 Mitigation Measures Area

Use Low VOC Paint - Residential Interior

- Use Low VOC Paint Residential Exterior
- Use Low VOC Paint Non-Residential Interior

Use Low VOC Paint - Non-Residential Exterior

Use only Natural Gas Hearths

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Mitigated	0.7270	0.0681	0.6860	4.2000e- 004		8.5600e- 003	8.5600e- 003		8.5600e- 003	8.5600e- 003	0.0000	71.1804	71.1804	2.3800e- 003	1.2900e- 003	71.6229
Unmitigated	0.7270	0.0681	0.6860	4.2000e- 004		8.5600e- 003	8.5600e- 003		8.5600e- 003	8.5600e- 003	0.0000	71.1804	71.1804	2.3800e- 003	1.2900e- 003	71.6229

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

<u>Unmitigated</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					ton	s/yr							МТ	/yr		
Architectural Coating	0.0544					0.0000	0.0000	1 1 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Products	0.6457					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	7.0800e- 003	0.0605	0.0258	3.9000e- 004		4.8900e- 003	4.8900e- 003		4.8900e- 003	4.8900e- 003	0.0000	70.1008	70.1008	1.3400e- 003	1.2900e- 003	70.5174
Landscaping	0.0198	7.6100e- 003	0.6603	3.0000e- 005		3.6600e- 003	3.6600e- 003		3.6600e- 003	3.6600e- 003	0.0000	1.0796	1.0796	1.0300e- 003	0.0000	1.1054
Total	0.7270	0.0681	0.6860	4.2000e- 004		8.5500e- 003	8.5500e- 003		8.5500e- 003	8.5500e- 003	0.0000	71.1804	71.1804	2.3700e- 003	1.2900e- 003	71.6229

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					ton	s/yr							МТ	/yr		
Architectural Coating	0.0544					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	0.6457					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	7.0800e- 003	0.0605	0.0258	3.9000e- 004		4.8900e- 003	4.8900e- 003		4.8900e- 003	4.8900e- 003	0.0000	70.1008	70.1008	1.3400e- 003	1.2900e- 003	70.5174
Landscaping	0.0198	7.6100e- 003	0.6603	3.0000e- 005		3.6600e- 003	3.6600e- 003		3.6600e- 003	3.6600e- 003	0.0000	1.0796	1.0796	1.0300e- 003	0.0000	1.1054
Total	0.7270	0.0681	0.6860	4.2000e- 004		8.5500e- 003	8.5500e- 003		8.5500e- 003	8.5500e- 003	0.0000	71.1804	71.1804	2.3700e- 003	1.2900e- 003	71.6229

7.0 Water Detail

7.1 Mitigation Measures Water

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	Total CO2	CH4	N2O	CO2e
Category		MT	/yr	
	22.4330	0.1907	4.6700e- 003	28.5926
	22.4330	0.1907	4.6700e- 003	28.5926

7.2 Water by Land Use <u>Unmitigated</u>

	Indoor/Out door Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal		MT	/yr	
Parking Lot	0/0	0.0000	0.0000	0.0000	0.0000
Single Family Housing	5.79871 / 3.65571	22.4330	0.1907	4.6700e- 003	28.5926
Total		22.4330	0.1907	4.6700e- 003	28.5926

Page 30 of 32

TTM 20398 Single Family Residential Project - San Bernardino-Mojave Desert County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

7.2 Water by Land Use

Mitigated

	Indoor/Out door Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal		MT	/yr	
Parking Lot	0/0	0.0000	0.0000	0.0000	0.0000
Single Family Housing	5.79871 / 3.65571	22.4330	0.1907	4.6700e- 003	28.5926
Total		22.4330	0.1907	4.6700e- 003	28.5926

8.0 Waste Detail

8.1 Mitigation Measures Waste

Category/Year

	Total CO2	CH4	N2O	CO2e
		Π	/yr	
initigation	21.2227	1.2542	0.0000	52.5784
Onnitigated	21.2227	1.2542	0.0000	52.5784

Page 31 of 32

TTM 20398 Single Family Residential Project - San Bernardino-Mojave Desert County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.2 Waste by Land Use

Unmitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e
Land Use	tons		МТ	/yr	
Parking Lot	0	0.0000	0.0000	0.0000	0.0000
Single Family Housing	104.55	21.2227	1.2542	0.0000	52.5784
Total		21.2227	1.2542	0.0000	52.5784

Mitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e
Land Use	tons		МТ	/yr	
Parking Lot	0	0.0000	0.0000	0.0000	0.0000
Single Family Housing	104.55	21.2227	1.2542	0.0000	52.5784
Total		21.2227	1.2542	0.0000	52.5784

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type
User Defined Equipment					
Equipment Type	Number				

11.0 Vegetation

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

TTM 20398 Single Family Residential Project

San Bernardino-Mojave Desert County, Summer

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Parking Lot	7.10	Acre	7.10	309,276.00	0
Single Family Housing	89.00	Dwelling Unit	16.02	160,200.00	255

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.6	Precipitation Freq (Days)	32
Climate Zone	10			Operational Year	2025
Utility Company	Southern California Edisor	n			
CO2 Intensity (Ib/MWhr)	390.98	CH4 Intensity (Ib/MWhr)	0.033	N2O Intensity (Ib/MWhr)	0.004

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - The project is proposing to develope 89 SFR homes and approximately 7.1 acres of on-site and off-site street improvements.

Construction Phase - The project site is currently vacant and requires no demolition.

Grading - The project is expected to import approximately 49,337 cu yrds of earthwork material.

Architectural Coating - The project is required to comply with MDAQMD Rule 1113 VOC limit of 50 grams per liter (g/L) for flats, 50 g/L for non-flat, and those used for traffic coating would meet the 100 g/L VOC limit

Woodstoves - No wood burning devices are allowed in new developments; therefore, no wood hearths are included in this project.

Construction Off-road Equipment Mitigation - Project will be required to comply with MDAQMD Rule 403 regarding fugitive dust control.

Energy Mitigation - All units will be equipped with rooftop solar installations. ~80% electricity usage generated from on-site renewables.

Fleet Mix - Operational fleet mix adjusted to equal 2% trucks with GVWR > 10,000 lbs.

Area Mitigation - The project is required to comply with MDAQMD Rule 1113 VOC limit of 50 grams per liter (g/L) for flats, 50 g/L for non-flat, and those used for traffic coating would meet the 100 g/L VOC limit

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Area Coating - The project is required to comply with MDAQMD Rule 1113 VOC limit of 50 grams per liter (g/L) for flats, 50 g/L for non-flat, and those used for traffic coating would meet the 100 g/L VOC limit

Table Name	Column Name	Default Value	New Value
tblArchitecturalCoating	EF_Nonresidential_Exterior	250.00	50.00
tblArchitecturalCoating	EF_Nonresidential_Interior	250.00	50.00
tblArchitecturalCoating	EF_Parking	250.00	100.00
tblArchitecturalCoating	EF_Residential_Exterior	250.00	50.00
tblArchitecturalCoating	EF_Residential_Interior	250.00	50.00
tblAreaCoating	Area_EF_Nonresidential_Exterior	250	50
tblAreaCoating	Area_EF_Nonresidential_Interior	250	50
tblAreaCoating	Area_EF_Parking	250	100
tblAreaCoating	Area_EF_Residential_Exterior	250	50
tblAreaCoating	Area_EF_Residential_Interior	250	50
tblAreaMitigation	UseLowVOCPaintNonresidentialExteriorV alue	250	50
tblAreaMitigation	UseLowVOCPaintNonresidentialInteriorV alue	250	50
tblAreaMitigation	UseLowVOCPaintParkingCheck	False	True
tblAreaMitigation	UseLowVOCPaintParkingValue	250	100
tblAreaMitigation	UseLowVOCPaintResidentialExteriorValu e	250	50
tblAreaMitigation	UseLowVOCPaintResidentialInteriorValu e	250	50
tblConstDustMitigation	WaterUnpavedRoadMoistureContent	0	12
tblConstDustMitigation	WaterUnpavedRoadVehicleSpeed	0	15
tblFireplaces	FireplaceWoodMass	3,078.40	0.00
tblFireplaces	NumberGas	48.95	89.00
tblFireplaces	NumberNoFireplace	8.90	0.00
tblFireplaces	NumberWood	31.15	0.00
tblFleetMix	HHD	0.02	8.1730e-003
tblFleetMix	HHD	0.02	8.1730e-003
tblFleetMix	LDA	0.54	0.56

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblFleetMix	LDA	0.54	0.56
tblFleetMix	LDT1	0.06	0.06
tblFleetMix	LDT1	0.06	0.06
tblFleetMix	LDT2	0.17	0.18
tblFleetMix	LDT2	0.17	0.18
tblFleetMix	LHD1	0.03	0.03
tblFleetMix	LHD1	0.03	0.03
tblFleetMix	LHD2	7.0090e-003	3.2770e-003
tblFleetMix	LHD2	7.0090e-003	3.2770e-003
tblFleetMix	МСҮ	0.02	0.03
tblFleetMix	МСҮ	0.02	0.03
tblFleetMix	MDV	0.13	0.14
tblFleetMix	MDV	0.13	0.14
tblFleetMix	MH	4.6060e-003	2.1530e-003
tblFleetMix	MH	4.6060e-003	2.1530e-003
tblFleetMix	MHD	0.01	5.5760e-003
tblFleetMix	MHD	0.01	5.5760e-003
tblFleetMix	OBUS	5.5200e-004	2.5800e-004
tblFleetMix	OBUS	5.5200e-004	2.5800e-004
tblFleetMix	SBUS	9.5600e-004	4.4700e-004
tblFleetMix	SBUS	9.5600e-004	4.4700e-004
tblFleetMix	UBUS	2.4800e-004	1.1600e-004
tblFleetMix	UBUS	2.4800e-004	1.1600e-004
tblGrading	MaterialImported	0.00	49,337.00
tblLandUse	LotAcreage	28.90	16.02
tblWoodstoves	WoodstoveWoodMass	3,019.20	0.00

2.0 Emissions Summary

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day									lb/day						
2022	4.3631	62.9003	35.9371	0.1673	19.8049	1.8880	21.4183	10.1417	1.7463	11.6260	0.0000	17,451.70 63	17,451.70 63	2.4321	1.7925	18,046.66 71
2023	54.7192	16.8687	21.8202	0.0502	1.7374	0.7232	2.4606	0.4701	0.6807	1.1507	0.0000	4,991.426 6	4,991.426 6	0.7171	0.2100	5,070.847 4
Maximum	54.7192	62.9003	35.9371	0.1673	19.8049	1.8880	21.4183	10.1417	1.7463	11.6260	0.0000	17,451.70 63	17,451.70 63	2.4321	1.7925	18,046.66 71

Mitigated Construction

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day									lb/day						
2022	4.3631	62.9003	35.9371	0.1673	7.6667	1.8880	9.2801	3.9034	1.7463	5.3877	0.0000	17,451.70 63	17,451.70 63	2.4321	1.7925	18,046.66 71
2023	54.7192	16.8687	21.8202	0.0502	1.7374	0.7232	2.4606	0.4701	0.6807	1.1507	0.0000	4,991.426 6	4,991.426 6	0.7171	0.2100	5,070.847 4
Maximum	54.7192	62.9003	35.9371	0.1673	7.6667	1.8880	9.2801	3.9034	1.7463	5.3877	0.0000	17,451.70 63	17,451.70 63	2.4321	1.7925	18,046.66 71

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	56.35	0.00	50.83	58.79	0.00	48.83	0.00	0.00	0.00	0.00	0.00	0.00

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	/ Ib/day								lb/day							
Area	4.2291	1.5609	7.9646	9.8100e- 003		0.1601	0.1601		0.1601	0.1601	0.0000	1,897.928 6	1,897.928 6	0.0488	0.0346	1,909.445 1
Energy	0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766
Mobile	2.5073	2.2774	22.5009	0.0467	5.0632	0.0315	5.0947	1.3466	0.0294	1.3759		4,867.761 0	4,867.761 0	0.2592	0.1896	4,930.731 7
Total	6.8107	4.4739	30.7360	0.0606	5.0632	0.2430	5.3062	1.3466	0.2408	1.5874	0.0000	7,577.144 1	7,577.144 1	0.3235	0.2390	7,656.453 4

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
Area	4.2291	1.5609	7.9646	9.8100e- 003		0.1601	0.1601		0.1601	0.1601	0.0000	1,897.928 6	1,897.928 6	0.0488	0.0346	1,909.445 1
Energy	0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766
Mobile	2.5073	2.2774	22.5009	0.0467	5.0632	0.0315	5.0947	1.3466	0.0294	1.3759		4,867.761 0	4,867.761 0	0.2592	0.1896	4,930.731 7
Total	6.8107	4.4739	30.7360	0.0606	5.0632	0.2430	5.3062	1.3466	0.2408	1.5874	0.0000	7,577.144 1	7,577.144 1	0.3235	0.2390	7,656.453 4

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Site Preparation	Site Preparation	1/3/2022	1/14/2022	5	10	
2	Grading	Grading	1/15/2022	3/4/2022	5	35	
3	Building Construction	Building Construction	3/5/2022	8/4/2023	5	370	
4	Paving	Paving	8/5/2023	9/1/2023	5	20	
5	Architectural Coating	Architectural Coating	9/2/2023	9/29/2023	5	20	

Acres of Grading (Site Preparation Phase): 15

Acres of Grading (Grading Phase): 105

Acres of Paving: 7.1

Residential Indoor: 324,405; Residential Outdoor: 108,135; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 18,557 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00	97	0.37
Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	7.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	7.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	6.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Site Preparation	7	18.00	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	0.00	6,167.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	162.00	60.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	32.00	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Use Soil Stabilizer

Replace Ground Cover

Water Exposed Area

Water Unpaved Roads

Reduce Vehicle Speed on Unpaved Roads

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Fugitive Dust					19.6570	0.0000	19.6570	10.1025	0.0000	10.1025			0.0000			0.0000
Off-Road	3.1701	33.0835	19.6978	0.0380		1.6126	1.6126		1.4836	1.4836		3,686.061 9	3,686.061 9	1.1922		3,715.865 5
Total	3.1701	33.0835	19.6978	0.0380	19.6570	1.6126	21.2696	10.1025	1.4836	11.5860		3,686.061 9	3,686.061 9	1.1922		3,715.865 5

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0648	0.0380	0.5668	1.3700e- 003	0.1479	8.0000e- 004	0.1487	0.0392	7.4000e- 004	0.0400		139.7709	139.7709	4.2000e- 003	3.7500e- 003	140.9941
Total	0.0648	0.0380	0.5668	1.3700e- 003	0.1479	8.0000e- 004	0.1487	0.0392	7.4000e- 004	0.0400		139.7709	139.7709	4.2000e- 003	3.7500e- 003	140.9941

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Fugitive Dust					7.5188	0.0000	7.5188	3.8642	0.0000	3.8642			0.0000			0.0000
Off-Road	3.1701	33.0835	19.6978	0.0380		1.6126	1.6126		1.4836	1.4836	0.0000	3,686.061 9	3,686.061 9	1.1922		3,715.865 5
Total	3.1701	33.0835	19.6978	0.0380	7.5188	1.6126	9.1314	3.8642	1.4836	5.3478	0.0000	3,686.061 9	3,686.061 9	1.1922		3,715.865 5

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0648	0.0380	0.5668	1.3700e- 003	0.1479	8.0000e- 004	0.1487	0.0392	7.4000e- 004	0.0400		139.7709	139.7709	4.2000e- 003	3.7500e- 003	140.9941
Total	0.0648	0.0380	0.5668	1.3700e- 003	0.1479	8.0000e- 004	0.1487	0.0392	7.4000e- 004	0.0400		139.7709	139.7709	4.2000e- 003	3.7500e- 003	140.9941

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	day		
Fugitive Dust					9.4017	0.0000	9.4017	3.6838	0.0000	3.6838			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041		6,011.410 5	6,011.410 5	1.9442		6,060.015 8
Total	3.6248	38.8435	29.0415	0.0621	9.4017	1.6349	11.0366	3.6838	1.5041	5.1879		6,011.410 5	6,011.410 5	1.9442		6,060.015 8

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	lay		
Hauling	0.6663	24.0146	6.2658	0.1036	3.0857	0.2523	3.3379	0.8461	0.2413	1.0875		11,284.99 48	11,284.99 48	0.4832	1.7883	11,829.99 12
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0720	0.0422	0.6298	1.5300e- 003	0.1643	8.9000e- 004	0.1652	0.0436	8.2000e- 004	0.0444		155.3010	155.3010	4.6600e- 003	4.1700e- 003	156.6601
Total	0.7383	24.0568	6.8956	0.1052	3.2500	0.2532	3.5031	0.8897	0.2422	1.1319		11,440.29 57	11,440.29 57	0.4879	1.7925	11,986.65 13

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Fugitive Dust					3.5961	0.0000	3.5961	1.4090	0.0000	1.4090			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041	0.0000	6,011.410 5	6,011.410 5	1.9442		6,060.015 8
Total	3.6248	38.8435	29.0415	0.0621	3.5961	1.6349	5.2310	1.4090	1.5041	2.9131	0.0000	6,011.410 5	6,011.410 5	1.9442		6,060.015 8

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.6663	24.0146	6.2658	0.1036	3.0857	0.2523	3.3379	0.8461	0.2413	1.0875		11,284.99 48	11,284.99 48	0.4832	1.7883	11,829.99 12
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0720	0.0422	0.6298	1.5300e- 003	0.1643	8.9000e- 004	0.1652	0.0436	8.2000e- 004	0.0444		155.3010	155.3010	4.6600e- 003	4.1700e- 003	156.6601
Total	0.7383	24.0568	6.8956	0.1052	3.2500	0.2532	3.5031	0.8897	0.2422	1.1319		11,440.29 57	11,440.29 57	0.4879	1.7925	11,986.65 13

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090	- 	0.7612	0.7612		2,554.333 6	2,554.333 6	0.6120		2,569.632 2
Total	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612		2,554.333 6	2,554.333 6	0.6120		2,569.632 2

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.1079	2.7345	0.9843	0.0118	0.4066	0.0330	0.4396	0.1171	0.0316	0.1487		1,263.161 0	1,263.161 0	0.0341	0.1869	1,319.697 1
Worker	0.5834	0.3416	5.1014	0.0124	1.3308	7.2000e- 003	1.3380	0.3530	6.6300e- 003	0.3596		1,257.937 9	1,257.937 9	0.0378	0.0338	1,268.946 9
Total	0.6913	3.0761	6.0857	0.0242	1.7374	0.0402	1.7776	0.4701	0.0382	0.5083		2,521.098 8	2,521.098 8	0.0719	0.2206	2,588.643 9

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090	- 	0.7612	0.7612	0.0000	2,554.333 6	2,554.333 6	0.6120		2,569.632 2
Total	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612	0.0000	2,554.333 6	2,554.333 6	0.6120		2,569.632 2

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.1079	2.7345	0.9843	0.0118	0.4066	0.0330	0.4396	0.1171	0.0316	0.1487		1,263.161 0	1,263.161 0	0.0341	0.1869	1,319.697 1
Worker	0.5834	0.3416	5.1014	0.0124	1.3308	7.2000e- 003	1.3380	0.3530	6.6300e- 003	0.3596		1,257.937 9	1,257.937 9	0.0378	0.0338	1,268.946 9
Total	0.6913	3.0761	6.0857	0.0242	1.7374	0.0402	1.7776	0.4701	0.0382	0.5083		2,521.098 8	2,521.098 8	0.0719	0.2206	2,588.643 9

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584		2,555.209 9	2,555.209 9	0.6079		2,570.406 1
Total	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584		2,555.209 9	2,555.209 9	0.6079		2,570.406 1

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0716	2.1824	0.8968	0.0113	0.4066	0.0167	0.4233	0.1171	0.0160	0.1331		1,211.713 1	1,211.713 1	0.0317	0.1789	1,265.806 2
Worker	0.5385	0.3014	4.6794	0.0120	1.3308	6.7800e- 003	1.3376	0.3530	6.2400e- 003	0.3592		1,224.503 5	1,224.503 5	0.0339	0.0312	1,234.635 1
Total	0.6101	2.4838	5.5762	0.0233	1.7374	0.0235	1.7609	0.4701	0.0222	0.4923		2,436.216 7	2,436.216 7	0.0656	0.2100	2,500.441 3

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584	0.0000	2,555.209 9	2,555.209 9	0.6079		2,570.406 1
Total	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584	0.0000	2,555.209 9	2,555.209 9	0.6079		2,570.406 1

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0716	2.1824	0.8968	0.0113	0.4066	0.0167	0.4233	0.1171	0.0160	0.1331		1,211.713 1	1,211.713 1	0.0317	0.1789	1,265.806 2
Worker	0.5385	0.3014	4.6794	0.0120	1.3308	6.7800e- 003	1.3376	0.3530	6.2400e- 003	0.3592		1,224.503 5	1,224.503 5	0.0339	0.0312	1,234.635 1
Total	0.6101	2.4838	5.5762	0.0233	1.7374	0.0235	1.7609	0.4701	0.0222	0.4923		2,436.216 7	2,436.216 7	0.0656	0.2100	2,500.441 3

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	day		
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.584 1	2,207.584 1	0.7140		2,225.433 6
Paving	0.9301					0.0000	0.0000	1 1 1 1 1	0.0000	0.0000			0.0000			0.0000
Total	1.9628	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.584 1	2,207.584 1	0.7140		2,225.433 6

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0499	0.0279	0.4333	1.1100e- 003	0.1232	6.3000e- 004	0.1239	0.0327	5.8000e- 004	0.0333		113.3800	113.3800	3.1400e- 003	2.8800e- 003	114.3181
Total	0.0499	0.0279	0.4333	1.1100e- 003	0.1232	6.3000e- 004	0.1239	0.0327	5.8000e- 004	0.0333		113.3800	113.3800	3.1400e- 003	2.8800e- 003	114.3181

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

Mitigated Construction On-Site

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.584 1	2,207.584 1	0.7140		2,225.433 6
Paving	0.9301					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	1.9628	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.584 1	2,207.584 1	0.7140		2,225.433 6

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0499	0.0279	0.4333	1.1100e- 003	0.1232	6.3000e- 004	0.1239	0.0327	5.8000e- 004	0.0333		113.3800	113.3800	3.1400e- 003	2.8800e- 003	114.3181
Total	0.0499	0.0279	0.4333	1.1100e- 003	0.1232	6.3000e- 004	0.1239	0.0327	5.8000e- 004	0.0333		113.3800	113.3800	3.1400e- 003	2.8800e- 003	114.3181

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Archit. Coating	54.4212					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1917	1.3030	1.8111	2.9700e- 003		0.0708	0.0708		0.0708	0.0708		281.4481	281.4481	0.0168		281.8690
Total	54.6128	1.3030	1.8111	2.9700e- 003		0.0708	0.0708		0.0708	0.0708		281.4481	281.4481	0.0168		281.8690

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.1064	0.0595	0.9243	2.3600e- 003	0.2629	1.3400e- 003	0.2642	0.0697	1.2300e- 003	0.0710		241.8772	241.8772	6.7000e- 003	6.1500e- 003	243.8785
Total	0.1064	0.0595	0.9243	2.3600e- 003	0.2629	1.3400e- 003	0.2642	0.0697	1.2300e- 003	0.0710		241.8772	241.8772	6.7000e- 003	6.1500e- 003	243.8785

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/d	lay		
Archit. Coating	54.4212					0.0000	0.0000	- - - - -	0.0000	0.0000		- - - - -	0.0000			0.0000
Off-Road	0.1917	1.3030	1.8111	2.9700e- 003		0.0708	0.0708		0.0708	0.0708	0.0000	281.4481	281.4481	0.0168		281.8690
Total	54.6128	1.3030	1.8111	2.9700e- 003		0.0708	0.0708		0.0708	0.0708	0.0000	281.4481	281.4481	0.0168		281.8690

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.1064	0.0595	0.9243	2.3600e- 003	0.2629	1.3400e- 003	0.2642	0.0697	1.2300e- 003	0.0710		241.8772	241.8772	6.7000e- 003	6.1500e- 003	243.8785
Total	0.1064	0.0595	0.9243	2.3600e- 003	0.2629	1.3400e- 003	0.2642	0.0697	1.2300e- 003	0.0710		241.8772	241.8772	6.7000e- 003	6.1500e- 003	243.8785

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Mitigated	2.5073	2.2774	22.5009	0.0467	5.0632	0.0315	5.0947	1.3466	0.0294	1.3759		4,867.761 0	4,867.761 0	0.2592	0.1896	4,930.731 7
Unmitigated	2.5073	2.2774	22.5009	0.0467	5.0632	0.0315	5.0947	1.3466	0.0294	1.3759		4,867.761 0	4,867.761 0	0.2592	0.1896	4,930.731 7

4.2 Trip Summary Information

	Ave	rage Daily Trip Ra	ate	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Parking Lot	0.00	0.00	0.00		
Single Family Housing	840.16	849.06	760.95	2,357,628	2,357,628
Total	840.16	849.06	760.95	2,357,628	2,357,628

4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Parking Lot	9.50	7.30	7.30	0.00	0.00	0.00	0	0	0
Single Family Housing	10.80	7.30	7.50	40.20	19.20	40.60	86	11	3

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Parking Lot	0.556009	0.057640	0.177204	0.137453	0.026255	0.003277	0.005576	0.008173	0.000258	0.000116	0.025439	0.000447	0.002153
Single Family Housing	0.556009	0.057640	0.177204	0.137453	0.026255	0.003277	0.005576	0.008173	0.000258	0.000116	0.025439	0.000447	0.002153

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

Percent of Electricity Use Generated with Renewable Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
NaturalGas Mitigated	0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766
NaturalGas Unmitigated	0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514	 ! ! !	0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/o	day							lb/c	lay		
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Single Family Housing	6897.36	0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766
Total		0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766

Mitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/o	day							lb/c	lay		
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Single Family Housing	6.89736	0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766
Total		0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.1 Mitigation Measures Area

Use Low VOC Paint - Residential Interior

- Use Low VOC Paint Residential Exterior
- Use Low VOC Paint Non-Residential Interior

Use Low VOC Paint - Non-Residential Exterior

Use only Natural Gas Hearths

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Mitigated	4.2291	1.5609	7.9646	9.8100e- 003		0.1601	0.1601		0.1601	0.1601	0.0000	1,897.928 6	1,897.928 6	0.0488	0.0346	1,909.445 1
Unmitigated	4.2291	1.5609	7.9646	9.8100e- 003		0.1601	0.1601		0.1601	0.1601	0.0000	1,897.928 6	1,897.928 6	0.0488	0.0346	1,909.445 1

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

<u>Unmitigated</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/e	day							lb/d	day		
Architectural Coating	0.2982					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	3.5378					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.1728	1.4764	0.6282	9.4200e- 003		0.1194	0.1194		0.1194	0.1194	0.0000	1,884.705 9	1,884.705 9	0.0361	0.0346	1,895.905 8
Landscaping	0.2203	0.0845	7.3364	3.9000e- 004		0.0407	0.0407		0.0407	0.0407		13.2227	13.2227	0.0127		13.5393
Total	4.2291	1.5609	7.9646	9.8100e- 003		0.1601	0.1601		0.1601	0.1601	0.0000	1,897.928 6	1,897.928 6	0.0488	0.0346	1,909.445 1

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/e	day							lb/c	day		
Architectural Coating	0.2982					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	3.5378					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.1728	1.4764	0.6282	9.4200e- 003		0.1194	0.1194		0.1194	0.1194	0.0000	1,884.705 9	1,884.705 9	0.0361	0.0346	1,895.905 8
Landscaping	0.2203	0.0845	7.3364	3.9000e- 004		0.0407	0.0407		0.0407	0.0407		13.2227	13.2227	0.0127		13.5393
Total	4.2291	1.5609	7.9646	9.8100e- 003		0.1601	0.1601		0.1601	0.1601	0.0000	1,897.928 6	1,897.928 6	0.0488	0.0346	1,909.445 1

7.0 Water Detail

7.1 Mitigation Measures Water

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

	Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
--	----------------	--------	-----------	------------	-------------	-------------	-----------

Boilers

Equipment type framework index input four point framing fracting fracting	Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type
---------------------------------------------------------------------------	----------------	--------	----------------	-----------------	---------------	-----------

User Defined Equipment

Equipment Type

Number

11.0 Vegetation

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

TTM 20398 Single Family Residential Project

San Bernardino-Mojave Desert County, Winter

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Parking Lot	7.10	Acre	7.10	309,276.00	0
Single Family Housing	89.00	Dwelling Unit	16.02	160,200.00	255

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.6	Precipitation Freq (Days)	32
Climate Zone	10			Operational Year	2025
Utility Company	Southern California Edisor	n			
CO2 Intensity (Ib/MWhr)	390.98	CH4 Intensity (Ib/MWhr)	0.033	N2O Intensity (Ib/MWhr)	0.004

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - The project is proposing to develope 89 SFR homes and approximately 7.1 acres of on-site and off-site street improvements.

Construction Phase - The project site is currently vacant and requires no demolition.

Grading - The project is expected to import approximately 49,337 cu yrds of earthwork material.

Architectural Coating - The project is required to comply with MDAQMD Rule 1113 VOC limit of 50 grams per liter (g/L) for flats, 50 g/L for non-flat, and those used for traffic coating would meet the 100 g/L VOC limit

Woodstoves - No wood burning devices are allowed in new developments; therefore, no wood hearths are included in this project.

Construction Off-road Equipment Mitigation - Project will be required to comply with MDAQMD Rule 403 regarding fugitive dust control.

Energy Mitigation - All units will be equipped with rooftop solar installations. ~80% electricity usage generated from on-site renewables.

Fleet Mix - Operational fleet mix adjusted to equal 2% trucks with GVWR > 10,000 lbs.

Area Mitigation - The project is required to comply with MDAQMD Rule 1113 VOC limit of 50 grams per liter (g/L) for flats, 50 g/L for non-flat, and those used for traffic coating would meet the 100 g/L VOC limit

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Area Coating - The project is required to comply with MDAQMD Rule 1113 VOC limit of 50 grams per liter (g/L) for flats, 50 g/L for non-flat, and those used for traffic coating would meet the 100 g/L VOC limit

Table Name	Column Name	Default Value	New Value
tblArchitecturalCoating	EF_Nonresidential_Exterior	250.00	50.00
tblArchitecturalCoating	EF_Nonresidential_Interior	250.00	50.00
tblArchitecturalCoating	EF_Parking	250.00	100.00
tblArchitecturalCoating	EF_Residential_Exterior	250.00	50.00
tblArchitecturalCoating	EF_Residential_Interior	250.00	50.00
tblAreaCoating	Area_EF_Nonresidential_Exterior	250	50
tblAreaCoating	Area_EF_Nonresidential_Interior	250	50
tblAreaCoating	Area_EF_Parking	250	100
tblAreaCoating	Area_EF_Residential_Exterior	250	50
tblAreaCoating	Area_EF_Residential_Interior	250	50
tblAreaMitigation	UseLowVOCPaintNonresidentialExteriorV alue	250	50
tblAreaMitigation	UseLowVOCPaintNonresidentialInteriorV alue	250	50
tblAreaMitigation	UseLowVOCPaintParkingCheck	False	True
tblAreaMitigation	UseLowVOCPaintParkingValue	250	100
tblAreaMitigation	UseLowVOCPaintResidentialExteriorValu e	250	50
tblAreaMitigation	UseLowVOCPaintResidentialInteriorValu e	250	50
tblConstDustMitigation	WaterUnpavedRoadMoistureContent	0	12
tblConstDustMitigation	WaterUnpavedRoadVehicleSpeed	0	15
tblFireplaces	FireplaceWoodMass	3,078.40	0.00
tblFireplaces	NumberGas	48.95	89.00
tblFireplaces	NumberNoFireplace	8.90	0.00
tblFireplaces	NumberWood	31.15	0.00
tblFleetMix	HHD	0.02	8.1730e-003
tblFleetMix	HHD	0.02	8.1730e-003
tblFleetMix	LDA	0.54	0.56

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblFleetMix	LDA	0.54	0.56
tblFleetMix	LDT1	0.06	0.06
tblFleetMix	LDT1	0.06	0.06
tblFleetMix	LDT2	0.17	0.18
tblFleetMix	LDT2	0.17	0.18
tblFleetMix	LHD1	0.03	0.03
tblFleetMix	LHD1	0.03	0.03
tblFleetMix	LHD2	7.0090e-003	3.2770e-003
tblFleetMix	LHD2	7.0090e-003	3.2770e-003
tblFleetMix	МСҮ	0.02	0.03
tblFleetMix	МСҮ	0.02	0.03
tblFleetMix	MDV	0.13	0.14
tblFleetMix	MDV	0.13	0.14
tblFleetMix	МН	4.6060e-003	2.1530e-003
tblFleetMix	МН	4.6060e-003	2.1530e-003
tblFleetMix	MHD	0.01	5.5760e-003
tblFleetMix	MHD	0.01	5.5760e-003
tblFleetMix	OBUS	5.5200e-004	2.5800e-004
tblFleetMix	OBUS	5.5200e-004	2.5800e-004
tblFleetMix	SBUS	9.5600e-004	4.4700e-004
tblFleetMix	SBUS	9.5600e-004	4.4700e-004
tblFleetMix	UBUS	2.4800e-004	1.1600e-004
tblFleetMix	UBUS	2.4800e-004	1.1600e-004
tblGrading	MaterialImported	0.00	49,337.00
tblLandUse	LotAcreage	28.90	16.02
tblWoodstoves	WoodstoveWoodMass	3,019.20	0.00

2.0 Emissions Summary

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/o	day							lb/c	lay		
2022	4.3313	64.1021	35.9745	0.1672	19.8049	1.8884	21.4183	10.1417	1.7466	11.6260	0.0000	17,445.56 13	17,445.56 13	2.4308	1.7940	18,040.93 09
2023	54.7129	17.0064	21.0846	0.0491	1.7374	0.7233	2.4607	0.4701	0.6807	1.1508	0.0000	4,879.672 9	4,879.672 9	0.7172	0.2116	4,959.574 8
Maximum	54.7129	64.1021	35.9745	0.1672	19.8049	1.8884	21.4183	10.1417	1.7466	11.6260	0.0000	17,445.56 13	17,445.56 13	2.4308	1.7940	18,040.93 09

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/d	day		
2022	4.3313	64.1021	35.9745	0.1672	7.6667	1.8884	9.2801	3.9034	1.7466	5.3877	0.0000	17,445.56 13	17,445.56 13	2.4308	1.7940	18,040.93 09
2023	54.7129	17.0064	21.0846	0.0491	1.7374	0.7233	2.4607	0.4701	0.6807	1.1508	0.0000	4,879.672 9	4,879.672 9	0.7172	0.2116	4,959.574 7
Maximum	54.7129	64.1021	35.9745	0.1672	7.6667	1.8884	9.2801	3.9034	1.7466	5.3877	0.0000	17,445.56 13	17,445.56 13	2.4308	1.7940	18,040.93 09

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	56.35	0.00	50.83	58.79	0.00	48.83	0.00	0.00	0.00	0.00	0.00	0.00

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
Area	4.2291	1.5609	7.9646	9.8100e- 003		0.1601	0.1601		0.1601	0.1601	0.0000	1,897.928 6	1,897.928 6	0.0488	0.0346	1,909.445 1
Energy	0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766
Mobile	2.1639	2.4257	20.2592	0.0431	5.0632	0.0316	5.0948	1.3466	0.0294	1.3760		4,489.626 8	4,489.626 8	0.2676	0.1954	4,554.551 0
Total	6.4674	4.6222	28.4943	0.0569	5.0632	0.2430	5.3062	1.3466	0.2409	1.5874	0.0000	7,199.009 9	7,199.009 9	0.3320	0.2449	7,280.272 7

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Area	4.2291	1.5609	7.9646	9.8100e- 003		0.1601	0.1601		0.1601	0.1601	0.0000	1,897.928 6	1,897.928 6	0.0488	0.0346	1,909.445 1
Energy	0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766
Mobile	2.1639	2.4257	20.2592	0.0431	5.0632	0.0316	5.0948	1.3466	0.0294	1.3760		4,489.626 8	4,489.626 8	0.2676	0.1954	4,554.551 0
Total	6.4674	4.6222	28.4943	0.0569	5.0632	0.2430	5.3062	1.3466	0.2409	1.5874	0.0000	7,199.009 9	7,199.009 9	0.3320	0.2449	7,280.272 7

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Site Preparation	Site Preparation	1/3/2022	1/14/2022	5	10	
2	Grading	Grading	1/15/2022	3/4/2022	5	35	
3	Building Construction	Building Construction	3/5/2022	8/4/2023	5	370	
4	Paving	Paving	8/5/2023	9/1/2023	5	20	
5	Architectural Coating	Architectural Coating	9/2/2023	9/29/2023	5	20	

Acres of Grading (Site Preparation Phase): 15

Acres of Grading (Grading Phase): 105

Acres of Paving: 7.1

Residential Indoor: 324,405; Residential Outdoor: 108,135; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 18,557 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00	97	0.37
Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	7.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	7.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	6.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Site Preparation	7	18.00	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	0.00	6,167.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	162.00	60.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	32.00	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Use Soil Stabilizer

Replace Ground Cover

Water Exposed Area

Water Unpaved Roads

Reduce Vehicle Speed on Unpaved Roads

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2022

Unmitigated Construction On-Site

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Fugitive Dust					19.6570	0.0000	19.6570	10.1025	0.0000	10.1025			0.0000			0.0000
Off-Road	3.1701	33.0835	19.6978	0.0380		1.6126	1.6126		1.4836	1.4836		3,686.061 9	3,686.061 9	1.1922		3,715.865 5
Total	3.1701	33.0835	19.6978	0.0380	19.6570	1.6126	21.2696	10.1025	1.4836	11.5860		3,686.061 9	3,686.061 9	1.1922		3,715.865 5

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0609	0.0399	0.4732	1.2500e- 003	0.1479	8.0000e- 004	0.1487	0.0392	7.4000e- 004	0.0400		126.6573	126.6573	4.2900e- 003	3.8800e- 003	127.9201
Total	0.0609	0.0399	0.4732	1.2500e- 003	0.1479	8.0000e- 004	0.1487	0.0392	7.4000e- 004	0.0400		126.6573	126.6573	4.2900e- 003	3.8800e- 003	127.9201

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Fugitive Dust					7.5188	0.0000	7.5188	3.8642	0.0000	3.8642			0.0000			0.0000
Off-Road	3.1701	33.0835	19.6978	0.0380		1.6126	1.6126		1.4836	1.4836	0.0000	3,686.061 9	3,686.061 9	1.1922		3,715.865 5
Total	3.1701	33.0835	19.6978	0.0380	7.5188	1.6126	9.1314	3.8642	1.4836	5.3478	0.0000	3,686.061 9	3,686.061 9	1.1922		3,715.865 5

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0609	0.0399	0.4732	1.2500e- 003	0.1479	8.0000e- 004	0.1487	0.0392	7.4000e- 004	0.0400		126.6573	126.6573	4.2900e- 003	3.8800e- 003	127.9201
Total	0.0609	0.0399	0.4732	1.2500e- 003	0.1479	8.0000e- 004	0.1487	0.0392	7.4000e- 004	0.0400		126.6573	126.6573	4.2900e- 003	3.8800e- 003	127.9201

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/d	day		
Fugitive Dust					9.4017	0.0000	9.4017	3.6838	0.0000	3.6838			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041		6,011.410 5	6,011.410 5	1.9442		6,060.015 8
Total	3.6248	38.8435	29.0415	0.0621	9.4017	1.6349	11.0366	3.6838	1.5041	5.1879		6,011.410 5	6,011.410 5	1.9442		6,060.015 8

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	lay		
Hauling	0.6389	25.2142	6.4073	0.1037	3.0857	0.2526	3.3383	0.8461	0.2417	1.0878		11,293.42 04	11,293.42 04	0.4819	1.7897	11,838.78 16
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0676	0.0444	0.5257	1.3800e- 003	0.1643	8.9000e- 004	0.1652	0.0436	8.2000e- 004	0.0444		140.7303	140.7303	4.7600e- 003	4.3100e- 003	142.1334
Total	0.7065	25.2586	6.9330	0.1051	3.2500	0.2535	3.5035	0.8897	0.2425	1.1322		11,434.15 08	11,434.15 08	0.4866	1.7940	11,980.91 50

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Mitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Fugitive Dust					3.5961	0.0000	3.5961	1.4090	0.0000	1.4090			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041	0.0000	6,011.410 5	6,011.410 5	1.9442		6,060.015 8
Total	3.6248	38.8435	29.0415	0.0621	3.5961	1.6349	5.2310	1.4090	1.5041	2.9131	0.0000	6,011.410 5	6,011.410 5	1.9442		6,060.015 8

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Hauling	0.6389	25.2142	6.4073	0.1037	3.0857	0.2526	3.3383	0.8461	0.2417	1.0878		11,293.42 04	11,293.42 04	0.4819	1.7897	11,838.78 16
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0676	0.0444	0.5257	1.3800e- 003	0.1643	8.9000e- 004	0.1652	0.0436	8.2000e- 004	0.0444		140.7303	140.7303	4.7600e- 003	4.3100e- 003	142.1334
Total	0.7065	25.2586	6.9330	0.1051	3.2500	0.2535	3.5035	0.8897	0.2425	1.1322		11,434.15 08	11,434.15 08	0.4866	1.7940	11,980.91 50

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090	- 	0.7612	0.7612		2,554.333 6	2,554.333 6	0.6120		2,569.632 2
Total	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612		2,554.333 6	2,554.333 6	0.6120		2,569.632 2

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.1038	2.8703	1.0182	0.0118	0.4066	0.0331	0.4397	0.1171	0.0317	0.1488		1,264.484 9	1,264.484 9	0.0339	0.1872	1,321.109 3
Worker	0.5477	0.3594	4.2584	0.0112	1.3308	7.2000e- 003	1.3380	0.3530	6.6300e- 003	0.3596		1,139.915 7	1,139.915 7	0.0386	0.0349	1,151.280 6
Total	0.6515	3.2297	5.2766	0.0230	1.7374	0.0403	1.7777	0.4701	0.0383	0.5084		2,404.400 6	2,404.400 6	0.0725	0.2221	2,472.389 8

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612	0.0000	2,554.333 6	2,554.333 6	0.6120		2,569.632 2
Total	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612	0.0000	2,554.333 6	2,554.333 6	0.6120		2,569.632 2

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.1038	2.8703	1.0182	0.0118	0.4066	0.0331	0.4397	0.1171	0.0317	0.1488		1,264.484 9	1,264.484 9	0.0339	0.1872	1,321.109 3
Worker	0.5477	0.3594	4.2584	0.0112	1.3308	7.2000e- 003	1.3380	0.3530	6.6300e- 003	0.3596		1,139.915 7	1,139.915 7	0.0386	0.0349	1,151.280 6
Total	0.6515	3.2297	5.2766	0.0230	1.7374	0.0403	1.7777	0.4701	0.0383	0.5084		2,404.400 6	2,404.400 6	0.0725	0.2221	2,472.389 8

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584		2,555.209 9	2,555.209 9	0.6079		2,570.406 1
Total	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584		2,555.209 9	2,555.209 9	0.6079		2,570.406 1

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0667	2.3045	0.9240	0.0113	0.4066	0.0168	0.4234	0.1171	0.0160	0.1331		1,214.505 5	1,214.505 5	0.0314	0.1794	1,268.751 3
Worker	0.5066	0.3170	3.9167	0.0109	1.3308	6.7800e- 003	1.3376	0.3530	6.2400e- 003	0.3592		1,109.957 4	1,109.957 4	0.0348	0.0322	1,120.417 4
Total	0.5733	2.6215	4.8406	0.0222	1.7374	0.0236	1.7609	0.4701	0.0223	0.4924		2,324.462 9	2,324.462 9	0.0662	0.2116	2,389.168 7

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997	- 	0.6584	0.6584	0.0000	2,555.209 9	2,555.209 9	0.6079		2,570.406 1
Total	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584	0.0000	2,555.209 9	2,555.209 9	0.6079		2,570.406 1

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0667	2.3045	0.9240	0.0113	0.4066	0.0168	0.4234	0.1171	0.0160	0.1331		1,214.505 5	1,214.505 5	0.0314	0.1794	1,268.751 3
Worker	0.5066	0.3170	3.9167	0.0109	1.3308	6.7800e- 003	1.3376	0.3530	6.2400e- 003	0.3592		1,109.957 4	1,109.957 4	0.0348	0.0322	1,120.417 4
Total	0.5733	2.6215	4.8406	0.0222	1.7374	0.0236	1.7609	0.4701	0.0223	0.4924		2,324.462 9	2,324.462 9	0.0662	0.2116	2,389.168 7

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.584 1	2,207.584 1	0.7140		2,225.433 6
Paving	0.9301					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	1.9628	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.584 1	2,207.584 1	0.7140		2,225.433 6

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0469	0.0294	0.3627	1.0000e- 003	0.1232	6.3000e- 004	0.1239	0.0327	5.8000e- 004	0.0333		102.7738	102.7738	3.2200e- 003	2.9800e- 003	103.7424
Total	0.0469	0.0294	0.3627	1.0000e- 003	0.1232	6.3000e- 004	0.1239	0.0327	5.8000e- 004	0.0333		102.7738	102.7738	3.2200e- 003	2.9800e- 003	103.7424

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.584 1	2,207.584 1	0.7140		2,225.433 6
Paving	0.9301					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	1.9628	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.584 1	2,207.584 1	0.7140		2,225.433 6

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0469	0.0294	0.3627	1.0000e- 003	0.1232	6.3000e- 004	0.1239	0.0327	5.8000e- 004	0.0333		102.7738	102.7738	3.2200e- 003	2.9800e- 003	103.7424
Total	0.0469	0.0294	0.3627	1.0000e- 003	0.1232	6.3000e- 004	0.1239	0.0327	5.8000e- 004	0.0333		102.7738	102.7738	3.2200e- 003	2.9800e- 003	103.7424

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Archit. Coating	54.4212					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1917	1.3030	1.8111	2.9700e- 003		0.0708	0.0708		0.0708	0.0708		281.4481	281.4481	0.0168		281.8690
Total	54.6128	1.3030	1.8111	2.9700e- 003		0.0708	0.0708		0.0708	0.0708		281.4481	281.4481	0.0168		281.8690

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.1001	0.0626	0.7737	2.1400e- 003	0.2629	1.3400e- 003	0.2642	0.0697	1.2300e- 003	0.0710		219.2509	219.2509	6.8700e- 003	6.3600e- 003	221.3170
Total	0.1001	0.0626	0.7737	2.1400e- 003	0.2629	1.3400e- 003	0.2642	0.0697	1.2300e- 003	0.0710		219.2509	219.2509	6.8700e- 003	6.3600e- 003	221.3170

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	day		
Archit. Coating	54.4212					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1917	1.3030	1.8111	2.9700e- 003		0.0708	0.0708		0.0708	0.0708	0.0000	281.4481	281.4481	0.0168		281.8690
Total	54.6128	1.3030	1.8111	2.9700e- 003		0.0708	0.0708		0.0708	0.0708	0.0000	281.4481	281.4481	0.0168		281.8690

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.1001	0.0626	0.7737	2.1400e- 003	0.2629	1.3400e- 003	0.2642	0.0697	1.2300e- 003	0.0710		219.2509	219.2509	6.8700e- 003	6.3600e- 003	221.3170
Total	0.1001	0.0626	0.7737	2.1400e- 003	0.2629	1.3400e- 003	0.2642	0.0697	1.2300e- 003	0.0710		219.2509	219.2509	6.8700e- 003	6.3600e- 003	221.3170

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Mitigated	2.1639	2.4257	20.2592	0.0431	5.0632	0.0316	5.0948	1.3466	0.0294	1.3760		4,489.626 8	4,489.626 8	0.2676	0.1954	4,554.551 0
Unmitigated	2.1639	2.4257	20.2592	0.0431	5.0632	0.0316	5.0948	1.3466	0.0294	1.3760		4,489.626 8	4,489.626 8	0.2676	0.1954	4,554.551 0

4.2 Trip Summary Information

	Ave	rage Daily Trip Ra	ate	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Parking Lot	0.00	0.00	0.00		
Single Family Housing	840.16	849.06	760.95	2,357,628	2,357,628
Total	840.16	849.06	760.95	2,357,628	2,357,628

4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Parking Lot	9.50	7.30	7.30	0.00	0.00	0.00	0	0	0
Single Family Housing	10.80	7.30	7.50	40.20	19.20	40.60	86	11	3

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Parking Lot	0.556009	0.057640	0.177204	0.137453	0.026255	0.003277	0.005576	0.008173	0.000258	0.000116	0.025439	0.000447	0.002153
Single Family Housing	0.556009	0.057640	0.177204	0.137453	0.026255	0.003277	0.005576	0.008173	0.000258	0.000116	0.025439	0.000447	0.002153

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

Percent of Electricity Use Generated with Renewable Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
NaturalGas Mitigated	0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766
NaturalGas Unmitigated	0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/o	day							lb/c	lay		
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Single Family Housing	6897.36	0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766
Total		0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766

Mitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/o	day							lb/c	lay		
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Single Family Housing	6.89736	0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766
Total		0.0744	0.6356	0.2705	4.0600e- 003		0.0514	0.0514		0.0514	0.0514		811.4545	811.4545	0.0156	0.0149	816.2766

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.1 Mitigation Measures Area

Use Low VOC Paint - Residential Interior

- Use Low VOC Paint Residential Exterior
- Use Low VOC Paint Non-Residential Interior

Use Low VOC Paint - Non-Residential Exterior

Use only Natural Gas Hearths

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Mitigated	4.2291	1.5609	7.9646	9.8100e- 003		0.1601	0.1601		0.1601	0.1601	0.0000	1,897.928 6	1,897.928 6	0.0488	0.0346	1,909.445 1
Unmitigated	4.2291	1.5609	7.9646	9.8100e- 003		0.1601	0.1601		0.1601	0.1601	0.0000	1,897.928 6	1,897.928 6	0.0488	0.0346	1,909.445 1

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

<u>Unmitigated</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/c	lay		
Coating	0.2982					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
	3.5378					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.1728	1.4764	0.6282	9.4200e- 003		0.1194	0.1194		0.1194	0.1194	0.0000	1,884.705 9	1,884.705 9	0.0361	0.0346	1,895.905 8
Landscaping	0.2203	0.0845	7.3364	3.9000e- 004		0.0407	0.0407		0.0407	0.0407		13.2227	13.2227	0.0127		13.5393
Total	4.2291	1.5609	7.9646	9.8100e- 003		0.1601	0.1601		0.1601	0.1601	0.0000	1,897.928 6	1,897.928 6	0.0488	0.0346	1,909.445 1

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/e	day							lb/c	day		
Architectural Coating	0.2982					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	3.5378					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.1728	1.4764	0.6282	9.4200e- 003		0.1194	0.1194		0.1194	0.1194	0.0000	1,884.705 9	1,884.705 9	0.0361	0.0346	1,895.905 8
Landscaping	0.2203	0.0845	7.3364	3.9000e- 004		0.0407	0.0407		0.0407	0.0407		13.2227	13.2227	0.0127		13.5393
Total	4.2291	1.5609	7.9646	9.8100e- 003		0.1601	0.1601		0.1601	0.1601	0.0000	1,897.928 6	1,897.928 6	0.0488	0.0346	1,909.445 1

7.0 Water Detail

7.1 Mitigation Measures Water

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type

Boilers

Equipment Type Number Heat Input/Day Heat Input/Year Boiler Rating	Fuel Type
--------------------------------------------------------------------	-----------

User Defined Equipment

Equipment Type

Number

11.0 Vegetation