# **APPENDIX 4**

# Air Quality and Greenhouse Gas Study

# Harikrishna Gas Station and Carwash Project City of Highland, CA



# Prepared for:

Empire Design Group 5 511 N. Main Street Murrieta, CA 92530

# Prepared by:



November 2022

# TABLE OF CONTENTS

| 1.0  | INTRODUCTION  |    |
|------|---|----|
|      | 1.1 Purpose of Analysis and Study Objectives            |    |
|      | 1.2 Site Location and Study Area                        |    |
|      | 1.3 Sensitive Receptors in Project Vicinity             |    |
|      | 1.4 Project Description                                 | 2  |
|      | 1.5 Standard Air Quality and GHG Regulatory Conditions  | 2  |
|      | 1.6 Summary of Analysis Results                         |    |
|      | 1.7 Mitigation Measures Required for the Project        | 5  |
| 2.0  | POLLUTANTS  |    |
|      | 2.1 Criteria Pollutants                                 |    |
|      | 2.2 Other Pollutants of Concern                         | 9  |
|      | 2.3 Greenhouse Gases                                    |    |
|      | 2.4 Global Warming Potential                            | 13 |
| 3.0  | AIR QUALITY MANAGEMENT                                  | 14 |
|      | 3.1 Regulatory Setting                                  | 14 |
| 4.0  | ATMOSPHERIC SETTING                                     | 26 |
|      | 4.1 Regional – San Bernardino County                    | 26 |
|      | 4.2 Local – Highland                                    |    |
|      | 4.3 Monitored Local Air Quality                         |    |
|      | 4.4 Toxic Air Contaminant Levels in the Air Basin       | 27 |
| 5.0  | THRESHOLDS OF SIGNIFICANCE                              |    |
|      | 5.1 Regional Air Quality                                |    |
|      | 5.2 Local Air Quality                                   |    |
|      | 5.3 Toxic Air Contaminants                              |    |
|      | 5.4 Odor Impacts  |    |
|      | 5.5 Greenhouse Gases                                    | 29 |
| 6.0  | IMPACT ANALYSIS   |    |
|      | 6.1 CEQA Thresholds of Significance                     |    |
|      | 6.2 Air Quality Compliance                              |    |
|      | 6.3 Air Quality Standard Violation                      |    |
|      | 6.4 Cumulative Net Increase in Non-Attainment Pollution |    |
|      | 6.5 Sensitive Receptors                                 |    |
|      | 6.6 Objectionable Odors                                 |    |
|      | 6.8 Greenhouse Gas Plan Consistency                     |    |
| 7.0  | REFERENCES  |    |
|      |   | 40 |
| APPI | ENDIX A   | 1  |

# **LIST OF FIGURES**

| Figure 1 Project Local Study Area   | 6  |
|---|----|
| Figure 2 Proposed Site Plan   | 7  |
|   |    |
| LIST OF TABLES  |    |
| Table 2-1 – Global Warming Potentials, Atmospheric Lifetimes and Abundances of GHGs       | 13 |
| Table 3-1 – State and Federal Criteria Pollutant Standards                                | 15 |
| Table 3-2 – Federal and State Ambient Air Quality Standards                               | 16 |
| Table 4-1 – Local Area Air Quality Monitoring Summary                                     | 27 |
| Table 5-1 – SCAQMD Regional Criteria Pollutant Emission Thresholds of Significance        | 28 |
| Table 5-2 – SCAQMD Local Air Quality Thresholds of Significance (pounds/day) <sup>1</sup> | 29 |
| Table 6-1 – Construction-Related Regional Criteria Pollutant Emissions (pounds/day)       | 33 |
| Table 6-2 – Construction-Related Local Criteria Pollutant Emissions                       | 34 |
| Table 6-3 – Operational Criteria Pollutant Emissions (pounds/day)                         | 35 |
| Table 6-4 – Project Greenhouse Gas Annual Emissions                                       |    |

#### ACRONYMS AND ABBREVIATIONS

Air Basin South Coast Air Basin

AQMP Air Quality Management Plan

CAAQS California Ambient Air Quality Standards

CAPCOA California Air Pollution Control Officers Association

CARB California Air Resources Board

CCAA California Clean Air Act

CEC California Energy Commission

CEQA California Environmental Quality Act

CO Carbon monoxide

CO<sub>2</sub> Carbon dioxide

CO<sub>2</sub>e Carbon dioxide equivalent

DPM Diesel particulate matter

EPA Environmental Protection Agency

°F Fahrenheit

GHG Greenhouse gas

GWP Global warming potential

HFCs Hydrofluorocarbons

IPCC International Panel on Climate Change

LST Localized Significant Thresholds

MSAT Mobile Source Air Toxics

MTCO<sub>2</sub>e Metric tons of carbon dioxide equivalent

MMTCO<sub>2</sub>e Million metric tons of carbon dioxide equivalent

MPO Metropolitan Planning Organization

NAAQS National Ambient Air Quality Standards

NO<sub>x</sub> Nitrogen oxides NO<sub>2</sub> Nitrogen dioxide

O<sub>3</sub> Ozone

PM Particle matter

PM10 Particles that are less than 10 micrometers in diameter
PM2.5 Particles that are less than 2.5 micrometers in diameter

PPM Parts per million
PPB Parts per billion

PPT Parts per trillion

RTIP Regional Transportation Improvement Plan
SCAQMD South Coast Air Quality Management District

SIP State Implementation Plan

SO<sub>x</sub> Sulfur oxides

TAC Toxic air contaminants

UNFCCC United Nations' Framework Convention on Climate Change

VOC Volatile organic compounds

## 1.0 INTRODUCTION

This air quality and greenhouse gas (GHG) analysis has been prepared to support the City of Highland (City) environmental review process and provides information regarding potential impacts to air quality and GHG associated with the approval of the project. This air quality/GHG study describes the existing air quality, identifies applicable rules and regulations, evaluates potential air quality impacts of the project, and where applicable, includes measures to mitigate or minimize pollutant emissions associated with the project.

# 1.1 Purpose of Analysis and Study Objectives

This Air Quality and Greenhouse Gas Emissions Impact Analysis has been completed to determine the air quality and greenhouse gas (GHG) emissions impacts associated with the Harikrishna Gas Station and Carwash on Palm Ave and 5<sup>th</sup> Street (project). The following is provided in this report:

- A description of the project;
- A description of the atmospheric setting;
- A description of the criteria pollutants and GHGs;
- A description of the air quality regulatory framework;
- A description of the air quality and GHG emissions thresholds including the California Environmental Quality Act (CEQA) significance thresholds;
- An analysis of the short-term construction related and long-term operational air quality and GHG emissions impacts;
- An analysis of the conformity of the project with the South Coast Air Quality Management District (SCAQMD) Air Quality Management Plan (AQMP); and
- An analysis of the conformity of the project with all applicable GHG emissions reduction plans and policies.

# 1.2 Site Location and Study Area

The project site is located on a 1.83-acre site at the northeast corner of Palm Avenue and 5<sup>th</sup> Street in the City of Highland, as shown in Figure 1. The project site plan is shown in Figure 2.

# 1.3 Sensitive Receptors in Project Vicinity

The nearest offsite sensitive receptors to the project site is single family residences approximately 0.18 miles north of the project site along Palm Avenue.

# 1.4 Project Description

The Harikrishna Gas Station and Carwash on Palm Ave and 5<sup>th</sup> Street is located on a 1.83-acre parcel at the northeast corner of Palm Avenue and 5<sup>th</sup> Street in the City of Highland (City) in San Bernardino County. The site is currently vacant and undeveloped. The project is seeking city's approval to construct a new convenience store of 4,520 square feet and a fueling canopy with 15 fueling positions including three high-speed diesel fuel pumps, and an automated car wash tunnel of 1,387 square feet. The proposed site plan is shown in Figure 2.

# 1.5 Standard Air Quality and GHG Regulatory Conditions

The project will be required to comply with the following regulatory conditions from the SCAQMD and State of California (State).

#### South Coast Air Quality Management District Rules

The following lists the SCAQMD rules that are applicable to all commercial projects in the South Coast Air Basin (Air Basin).

#### Rule 402 - Nuisance

Rule 402 prohibits a person from discharging from any source whatsoever such quantities of air contaminants or other material which causes injury, detriment, nuisance, or annoyance to any considerable number of persons or to the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property. Compliance with Rule 402 will reduce local air quality and odor impacts to nearby sensitive receptors.

#### Rule 403- Fugitive Dust

Rule 403 governs emissions of fugitive dust during construction activities and requires that no person shall cause or allow the emissions of fugitive dust such that dust remains visible in the atmosphere beyond the property line or the dust emission exceeds 20 percent opacity, if the dust is from the operation of a motorized vehicle. Compliance with this rule is achieved through application of standard Best Available Control Measures, which include but are not limited to the measures below. Compliance with these rules would reduce local air quality impacts to nearby sensitive receptors.

- 1.5.1 Utilize either a pad of washed gravel 50 feet long, 100 feet of paved surface, a wheel shaker, or a wheel washing device to remove material from vehicle tires and undercarriages before leaving project site.
- 1.5.2 Do not allow any track out of material to extend more than 25 feet onto a public roadway and remove all track out at the end of each workday.
- 1.5.3 Water all exposed areas on active sites at least three times per day and pre-water all areas prior to clearing and soil moving activities.
- 1.5.4 Apply nontoxic chemical stabilizers according to manufacturer specifications to all construction areas that will remain inactive for 10 days or longer.
- 1.5.5 Pre-water all material to be exported prior to loading, and either cover all loads or maintain at least 2 feet of freeboard in accordance with the requirements of California Vehicle Code Section 23114.
  - 1.5.6 Replant all disturbed area as soon as practical.
  - 1.5.7 Suspend all grading activities when wind speeds (including wind gusts) exceed 25 miles per hour.

1.5.8 Restrict traffic speeds on all unpaved roads to 15 miles per hour or less.

#### Rules 1108 and 1108.1 – Cutback and Emulsified Asphalt

Rules 1108 and 1108.1 govern the sale, use, and manufacturing of asphalt and limits the VOC content in asphalt. This rule regulates the VOC contents of asphalt used during construction as well as any on-going maintenance during operations. Therefore, all asphalt used during construction and operation of the project must comply with SCAQMD Rules 1108 and 1108.1.

#### Rule 1113 – Architectural Coatings

Rule 1113 governs the sale, use, and manufacturing of architectural coatings and limits the VOC content in sealers, coatings, paints and solvents. This rule regulates the VOC contents of paints available during construction. Therefore, all paints and solvents used during construction and operation of the project must comply with SCAQMD Rule 1113.

#### Rule 1143 – Paint Thinners

Rule 1143 governs the sale, use, and manufacturing of paint thinners and multi-purpose solvents that are used in thinning of coating materials, cleaning of coating application equipment, and other solvent cleaning operations. This rule regulates the VOC content of solvents used during construction. Solvents used during construction and operation of the project must comply with SCAQMD Rule 1143.

#### **State of California Rules**

The following lists the State of California rules that are applicable to projects in the State.

#### CARB Regulation for In-Use Off-Road Diesel Vehicles

On July 26, 2007, the California Air Resources Board (CARB) adopted California Code of Regulations Title 13, Article 4.8, Chapter 9, Section 2449 to reduce diesel particulate matter (DPM) and NOx emissions from in-use off-road heavy-duty diesel vehicles in California. Such vehicles are used in construction, mining, and industrial operations. The regulation limits idling to no more than five consecutive minutes, requires reporting and labeling, and requires disclosure of the regulation upon vehicle sale. Performance requirements of the rule are based on a fleet's average NOx emissions, which can be met by replacing older vehicles with newer, cleaner vehicles or by applying exhaust retrofits. The regulation was amended in 2010 to delay the original timeline of the performance requirement making the first compliance deadline January 1, 2014 for large fleets (over 5,000 horsepower), 2017 for medium fleets (2,501-5,000 horsepower), and 2019 for small fleets (2,500 horsepower or less). Currently, no commercial operation in California may add any equipment to their fleet that has a Tier 0 or Tier 1 engine. By January 1, 2018 medium and large fleets will be restricted from adding Tier 2 engines to their fleets and by January 2023, no commercial operation will be allowed to add Tier 2 engines to their fleets. It should be noted that commercial fleets may continue to use their existing Tier 0 and 1 equipment, if they can demonstrate that the average emissions from their entire fleet emissions meet the NOx emissions targets.

# CARB Resolution 08-43 for On-Road Diesel Truck Fleets

On December 12, 2008 the CARB adopted Resolution 08-43, which limits NOx, PM10 and PM2.5 emissions from on-road diesel truck fleets that operate in California. On October 12, 2009 Executive Order R-09-010 was adopted that codified Resolution 08-43 into Section 2025, title 13 of the California Code of Regulations. This regulation requires that by the year 2023 all commercial diesel trucks that operate in California shall meet model year 2010 (Tier 4 Final) or latter emission standards. In the interim period, this regulation provides annual interim targets for fleet owners to meet. By January 1, 2014, 50 percent of a truck fleet is required to have installed Best Available Control Technology (BACT) for NOx emissions and 100 percent of a truck fleet installed BACT for PM10 emissions. This regulation also provides a few

exemptions including a one-time per year 3-day pass for trucks registered outside of California. All on-road diesel trucks utilized during construction of the project will be required to comply with Resolution 08-43.

#### California Code of Regulations (CCR) Title 24, Part 6

CCR Title 24, Part 6: California's Energy Efficiency Standards for Residential and Nonresidential Buildings (Title 24) standards require the installation of insulated hot water pipes, improved window performance, improved wall insulation, and mandatory duct sealing. Other Title 24 requirements include the use of cool roofing shingles, a minimum 1-inch air space between roof material and roof deck, and a minimum of R-22 roof/ceiling insulation. All lighting is required to be high efficiency and daylight sensors and motion sensors are required for outdoor lighting, bathrooms, utility rooms, and other spaces. The forced air systems are required to limit leakage to 5 percent or less and requires all heat pump systems to be equipped with liquid line filter driers. The 2016 Title 24 Part 6 standards are anticipated to reduce electricity consumption by 281 gigawatt-hours per year and natural gas consumption by 16 million therms per year (http://www.energy.ca.gov/2015publications/CEC-400-2015-037/CEC-400-2015-037- CMF.pdf).

#### California Code of Regulations (CCR) Title 24, Part 11

CCR Title 24, Part 11: California Green Building Standards (Title 24) requires that new buildings reduce water consumption, employ building commissioning to increase building system efficiencies, divert construction waste from landfills, and install low pollutant-emitting finish materials. One focus of CCR Title 24, Part 11 is water conservation measures, which reduce GHG emissions by reducing electrical consumption associated with pumping and treating water. CCR Title 24, Part 11 has approximately 52 nonresidential mandatory measures and an additional 130 provisions for optional use.

## 1.6 Summary of Analysis Results

The following is a summary of the project's impacts with regard to the State CEQA Guidelines air quality and GHG emissions checklist questions.

#### Conflict with or obstruct implementation of the applicable air quality plan?

Less than significant impact.

# Violate any air quality standard or contribute substantially to an existing or projected air quality violation?

Less than significant impact.

# Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is non-attainment under an applicable Federal or State ambient air quality standard?

Less than significant impact.

#### Expose sensitive receptors to substantial pollutant concentrations?

Less than significant impact.

#### Create objectionable odors affecting a substantial number of people?

Less than significant impact.

# Generate GHG emissions, either directly or indirectly, that may have a significant impact on the environment?

Less than significant impact.

Conflict with any applicable plan, policy or regulation of an agency adopted for the purpose of reducing the emissions of GHGs?

Less than significant impact.

# 1.7 Mitigation Measures Required for the Project

This analysis found that implementation of the State and SCAQMD air quality and GHG emissions reductions regulations were adequate to limit criteria pollutants, toxic air contaminants, odors, and GHG emissions from the project to less than significant levels. No mitigation measures are required for the project with respect to air quality and GHG emissions.

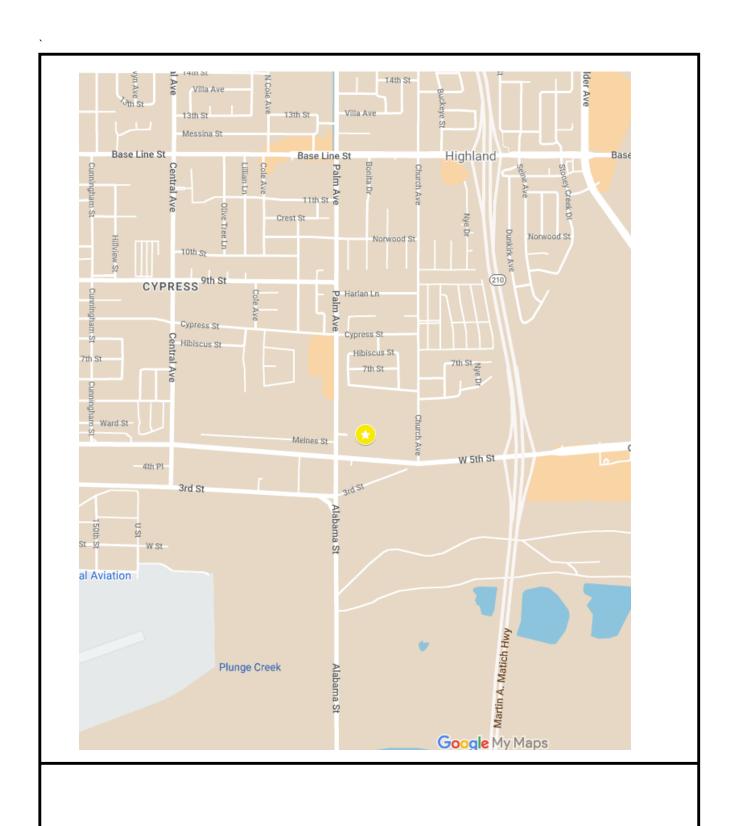


Figure 1 Project Local Study Area

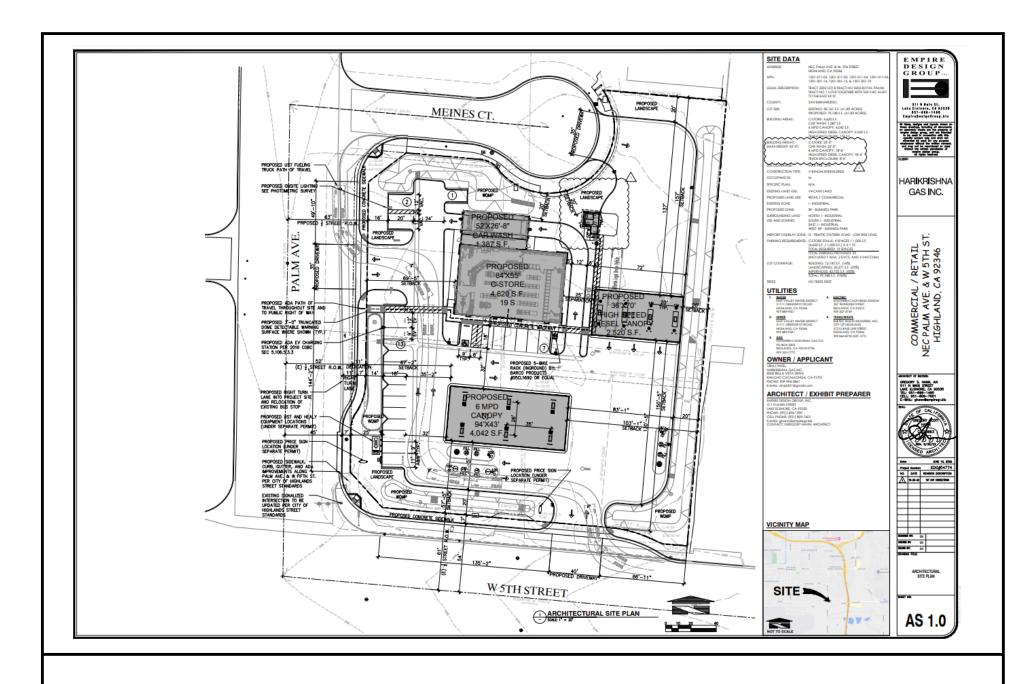


Figure 2 Proposed Site Plan

#### 2.0 POLLUTANTS

Pollutants are generally classified as either criteria pollutants or non-criteria pollutants. Federal ambient air quality standards have been established for criteria pollutants, whereas no ambient standards have been established for non-criteria pollutants. For some criteria pollutants, separate standards have been set for different periods. Most standards have been set to protect public health. For some pollutants, standards have been based on other values (such as protection of crops, protection of materials, or avoidance of nuisance conditions). A summary of federal and state ambient air quality standards is provided in the Regulatory Framework section.

#### 2.1 Criteria Pollutants

The criteria pollutants consist of ozone, nitrogen oxides, carbon monoxide, sulfur oxides, lead, and particulate matter. These pollutants can harm your health and the environment, and cause property damage. The Environmental Protection Agency (EPA) calls these pollutants "criteria" air pollutants because it regulates them by developing human health-based and/or environmentally-based criteria for setting permissible levels. The following provides descriptions of each of the criteria pollutants.

#### Nitrogen Oxides

Nitrogen Oxides (NOx) is the generic term for a group of highly reactive gases which contain nitrogen and oxygen. While most NOx are colorless and odorless, concentrations of nitrogen dioxide (NO<sub>2</sub>) can often be seen as a reddish-brown layer over many urban areas. NOx form when fuel is burned at high temperatures, as in a combustion process. The primary manmade sources of  $NO_x$  are motor vehicles, electric utilities, and other industrial, commercial, and residential sources that burn fuel. NOx reacts with other pollutants to form, ground-level ozone, nitrate particles, acid aerosols, as well as  $NO_2$ , which cause respiratory problems.  $NO_x$  and the pollutants formed from  $NO_x$  can be transported over long distances, following the patterns of prevailing winds. Therefore controlling NOx is often most effective if done from a regional perspective, rather than focusing on the nearest sources.

#### Ozone

Ozone is not usually emitted directly into the air but in the vicinity of ground-level is created by a chemical reaction between NOx and volatile organic compounds (VOC) in the presence of sunlight. Motor vehicle exhaust, industrial emissions, gasoline vapors, chemical solvents as well as natural sources emit NOx and VOC that help form ozone. Ground-level ozone is the primary constituent of smog. Sunlight and hot weather cause ground-level ozone to form with the greatest concentrations usually occurring downwind from urban areas. Ozone is subsequently considered a regional pollutant. Ground-level ozone is a respiratory irritant and an oxidant that increases susceptibility to respiratory infections and can cause substantial damage to vegetation and other materials. Because NOx and VOC are ozone precursors, the health effects associated with ozone are also indirect health effects associated with significant levels of NOx and VOC emissions.

#### Carbon Monoxide

Carbon monoxide (CO) is a colorless, odorless gas that is formed when carbon in fuel is not burned completely. It is a component of motor vehicle exhaust, which contributes approximately 56 percent of all CO emissions nationwide. In cities, 85 to 95 percent of all CO emissions may come from motor vehicle exhaust. Other sources of CO emissions include industrial processes (such as metals processing and chemical manufacturing), residential wood burning, and natural sources such as forest fires. Woodstoves, gas stoves, cigarette smoke, and unvented gas and kerosene space heaters are indoor sources of CO. The highest levels of CO in the outside air typically occur during the colder months of the year when inversion conditions are more frequent. The air pollution becomes trapped near the ground beneath

a layer of warm air. CO is described as having only a local influence because it dissipates quickly. Since CO concentrations are strongly associated with motor vehicle emissions, high CO concentrations generally occur in the immediate vicinity of roadways with high traffic volumes and traffic congestion, active parking lots, and in automobile tunnels. Areas adjacent to heavily traveled and congested intersections are particularly susceptible to high CO concentrations.

CO is a public health concern because it combines readily with hemoglobin and thus reduces the amount of oxygen transported in the bloodstream. The health threat from lower levels of CO is most serious for those who suffer from heart disease such as angina, clogged arteries, or congestive heart failure. For a person with heart disease, a single exposure to CO at low levels may cause chest pain and reduce that person's ability to exercise; repeated exposures may contribute to other cardiovascular effects. High levels of CO can affect even healthy people. People who breathe high levels of CO can develop vision problems, reduced ability to work or learn, reduced manual dexterity, and difficulty performing complex tasks. At extremely high levels, CO is poisonous and can cause death.

#### **Sulfur Oxides**

Sulfur Oxide (SOx) gases are formed when fuel containing sulfur, such as coal and oil is burned, as well as from the refining of gasoline. SOx dissolves easily in water vapor to form acid and interacts with other gases and particles in the air to form sulfates and other products that can be harmful to people and the environment.

#### Lead

Lead is a metal found naturally in the environment as well as manufactured products. The major sources of lead emissions have historically been motor vehicles and industrial sources. Due to the phase out of leaded gasoline, metal processing is now the primary source of lead emissions to the air. High levels of lead in the air are typically only found near lead smelters, waste incinerators, utilities, and lead-acid battery manufacturers. Exposure of fetuses, infants and children to low levels of Pb can adversely affect the development and function of the central nervous system, leading to learning disorders, distractibility, inability to follow simple commands, and lower intelligence quotient. In adults, increased lead levels are associated with increased blood pressure.

#### **Particulate Matter**

Particle matter (PM) is the term for a mixture of solid particles and liquid droplets found in the air. PM is made up of a number of components including acids (such as nitrates and sulfates), organic chemicals, metals, and soil or dust particles. The size of particles is directly linked to their potential for causing health problems. Particles that are less than 10 micrometers in diameter (PM10) are the particles that generally pass through the throat and nose and enter the lungs. Once inhaled, these particles can affect the heart and lungs and cause serious health effects. Particles that are less than 2.5 micrometers in diameter (PM2.5) have been designated as a subset of PM10 due to their increased negative health impacts and its ability to remain suspended in the air longer and travel further.

# 2.2 Other Pollutants of Concern

#### **Toxic Air Contaminants**

In addition to the above-listed criteria pollutants, toxic air contaminants (TACs) are another group of pollutants of concern. Sources of TACs include industrial processes such as petroleum refining and chrome plating operations, commercial operations such as gasoline stations and dry cleaners, and motor vehicle exhaust. Cars and trucks release at least 40 different toxic air contaminants. The most important of these TACs, in terms of health risk, are diesel particulates, benzene, formaldehyde, 1,3-butadiene, and

acetaldehyde. Public exposure to TACs can result from emissions from normal operations as well as from accidental releases. Health effects of TACs include cancer, birth defects, neurological damage, and death.

TACs are less pervasive in the urban atmosphere than criteria air pollutants, however they are linked to short-term (acute) or long-term (chronic or carcinogenic) adverse human health effects. There are hundreds of different types of TACs with varying degrees of toxicity. Sources of TACs include industrial processes, commercial operations (e.g., gasoline stations and dry cleaners), and motor vehicle exhaust.

According to *The California Almanac of Emissions and Air Quality 2013 Edition*, the majority of the estimated health risk from TACs can be attributed to relatively few compounds, the most important of which is diesel particulate matter (DPM). DPM is a subset of PM2.5 because the size of diesel particles are typically 2.5 microns and smaller. The identification of DPM as a TAC in 1998 led the California Air Resources Board (CARB) to adopt the Risk Reduction Plan to Reduce Particulate Matter Emissions from Diesel-fueled Engines and Vehicles in September 2000. The plan's goals are a 75-percent reduction in DPM by 2010 and an 85-percent reduction by 2020 from the 2000 baseline. Diesel engines emit a complex mixture of air pollutants, composed of gaseous and solid material. The visible emissions in diesel exhaust are known as particulate matter or PM, which includes carbon particles or "soot." Diesel exhaust also contains a variety of harmful gases and over 40 other cancer-causing substances. California's identification of DPM as a toxic air contaminant was based on its potential to cause cancer, premature deaths, and other health problems. Exposure to DPM is a health hazard, particularly to children whose lungs are still developing and the elderly who may have other serious health problems. Overall, diesel engine emissions are responsible for the majority of California's potential airborne cancer risk from combustion sources.

#### **Asbestos**

Asbestos is listed as a TAC by CARB and as a Hazardous Air Pollutant by the EPA. Asbestos occurs naturally in mineral formations and crushing or breaking these rocks, through construction or other means, can release asbestiform fibers into the air. Asbestos emissions can result from the sale or use of asbestos-containing materials, road surfacing with such materials, grading activities, and surface mining. The risk of disease is dependent upon the intensity and duration of exposure. When inhaled, asbestos fibers may remain in the lungs and with time may be linked to such diseases as asbestosis, lung cancer, and mesothelioma. The nearest likely locations of naturally occurring asbestos, as identified in the *General Location Guide for Ultramafic Rocks in California*, prepared by the California Division of Mines and Geology, is located in Santa Barbara County. The nearest historic asbestos mine to the project site, as identified in the *Reported Historic Asbestos Mines, Historic Asbestos Prospects, and Other Natural Occurrences of Asbestos in California*, prepared by U.S. Geological Survey, is located at Asbestos Mountain, which is approximately 53 miles southeast of the project site in the San Jacinto Mountains. Due to the distance to the nearest natural occurrences of asbestos, the project site is not likely to contain asbestos.

## 2.3 Greenhouse Gases

Constituent gases of the Earth's atmosphere, called atmospheric greenhouse gases (GHGs), play a critical role in the Earth's radiation amount by trapping infrared radiation from the Earth's surface, which otherwise would have escaped to space. Prominent greenhouse gases contributing to this process include carbon dioxide (CO<sub>2</sub>), methane (CH<sub>4</sub>), ozone (O<sub>3</sub>), water vapor, nitrous oxide (N<sub>2</sub>O), and chlorofluorocarbons (CFCs). This phenomenon, known as the Greenhouse Effect, is responsible for maintaining a habitable climate. Anthropogenic (caused or produced by humans) emissions of these greenhouse gases in excess of natural ambient concentrations are responsible for the enhancement of the Greenhouse Effect and have led to a trend of unnatural warming of the Earth's natural climate, known as

global warming or climate change. Emissions of gases that induce global warming are attributable to human activities associated with industrial/manufacturing, agriculture, utilities, transportation, and residential land uses. Transportation is responsible for 41 percent of the State's greenhouse gas emissions, followed by electricity generation. Emissions of  $CO_2$  and  $N_2O$  are byproducts of fossil fuel combustion. Methane, a potent greenhouse gas, results from off-gassing associated with agricultural practices and landfills. Sinks of  $CO_2$ , where  $CO_2$  is stored outside of the atmosphere, include uptake by vegetation and dissolution into the ocean. The following provides a description of each of the greenhouse gases and their global warming potential.

#### Water Vapor

Water vapor is the most abundant, important, and variable GHG in the atmosphere. Water vapor is not considered a pollutant; in the atmosphere it maintains a climate necessary for life. Changes in its concentration are primarily considered a result of climate feedbacks related to the warming of the atmosphere rather than a direct result of industrialization. The feedback loop in which water is involved is critically important to projecting future climate change. As the temperature of the atmosphere rises, more water is evaporated from ground storage (rivers, oceans, reservoirs, soil). Because the air is warmer, the relative humidity can be higher (in essence, the air is able to "hold" more water when it is warmer), leading to more water vapor in the atmosphere. As a GHG, the higher concentration of water vapor is then able to absorb more thermal indirect energy radiated from the Earth, thus further warming the atmosphere. The warmer atmosphere can then hold more water vapor and so on and so on. This is referred to as a "positive feedback loop." The extent to which this positive feedback loop will continue is unknown as there is also dynamics that put the positive feedback loop in check. As an example, when water vapor increases in the atmosphere, more of it will eventually also condense into clouds, which are more able to reflect incoming solar radiation (thus allowing less energy to reach the Earth's surface and heat it up).

#### Carbon Dioxide

The natural production and absorption of CO<sub>2</sub> is achieved through the terrestrial biosphere and the ocean. However, humankind has altered the natural carbon cycle by burning coal, oil, natural gas, and wood. Since the industrial revolution began in the mid-1700s, each of these activities has increased in scale and distribution. CO<sub>2</sub> was the first GHG demonstrated to be increasing in atmospheric concentration with the first conclusive measurements being made in the last half of the 20<sup>th</sup> century. Prior to the industrial revolution, concentrations were fairly stable at 280 parts per million (ppm). The International Panel on Climate Change (IPCC) indicates that concentrations were 379 ppm in 2005, an increase of more than 30 percent. Left unchecked, the IPCC projects that concentration of carbon dioxide in the atmosphere is projected to increase to a minimum of 540 ppm by 2100 as a direct result of anthropogenic sources. This could result in an average global temperature rise of at least two degrees Celsius or 3.6 degrees Fahrenheit.

#### Methane

CH<sub>4</sub> is an extremely effective absorber of radiation, although its atmospheric concentration is less than that of CO<sub>2</sub>. Its lifetime in the atmosphere is brief (10 to 12 years), compared to some other GHGs (such as CO<sub>2</sub>, N<sub>2</sub>O, and Chlorofluorocarbons (CFCs)). CH<sub>4</sub> has both natural and anthropogenic sources. It is released as part of the biological processes in low oxygen environments, such as in swamplands or in rice production (at the roots of the plants). Over the last 50 years, human activities such as growing rice, raising cattle, using natural gas, and mining coal have added to the atmospheric concentration of methane. Other anthropocentric sources include fossil-fuel combustion and biomass burning.

#### **Nitrous Oxide**

Concentrations of  $N_2O$  also began to rise at the beginning of the industrial revolution. In 1998, the global concentration of this GHG was documented at 314 parts per billion (ppb).  $N_2O$  is produced by microbial processes in soil and water, including those reactions which occur in fertilizer containing nitrogen. In addition to agricultural sources, some industrial processes (fossil fuel-fired power plants, nylon production, nitric acid production, and vehicle emissions) also contribute to its atmospheric load.  $N_2O$  is also commonly used as an aerosol spray propellant (i.e., in whipped cream bottles, in potato chip bags to keep chips fresh, and in rocket engines and race cars).

#### Chlorofluorocarbons

CFCs are gases formed synthetically by replacing all hydrogen atoms in methane or ethane ( $C_2H_6$ ) with chlorine and/or fluorine atoms. CFCs are nontoxic, nonflammable, insoluble, and chemically unreactive in the troposphere (the level of air at the Earth's surface). CFCs have no natural source but were first synthesized in 1928. They were used for refrigerants, aerosol propellants, and cleaning solvents. Due to the discovery that they are able to destroy stratospheric ozone, a global effort to halt their production was undertaken and in 1989 the European Community agreed to ban CFCs by 2000 and subsequent treaties banned CFCs worldwide by 2010. This effort was extremely successful, and the levels of the major CFCs are now remaining level or declining. However, their long atmospheric lifetimes mean that some of the CFCs will remain in the atmosphere for over 100 years.

# Hydrofluorocarbons

HFCs are synthetic man-made chemicals that are used as a substitute for CFCs. Out of all the GHGs, they are one of three groups with the highest global warming potential. The HFCs with the largest measured atmospheric abundances are (in order), HFC-23 (CHF<sub>3</sub>), HFC-134a (CF<sub>3</sub>CH<sub>2</sub>F), and HFC-152a (CH<sub>3</sub>CHF<sub>2</sub>). Prior to 1990, the only significant emissions were HFC-23. HFC-134a use is increasing due to its use as a refrigerant. Concentrations of HFC-23 and HFC-134a in the atmosphere are now about 10 parts per trillion (ppt) each. Concentrations of HFC-152a are about 1 ppt. HFCs are manmade for applications such as automobile air conditioners and refrigerants.

#### **Perfluorocarbons**

Perfluorocarbons (PFCs) have stable molecular structures and do not break down through the chemical processes in the lower atmosphere. High-energy ultraviolet rays about 60 kilometers above Earth's surface are able to destroy the compounds. Because of this, PFCs have very long lifetimes, between 10,000 and 50,000 years. Two common PFCs are tetrafluoromethane ( $C_4$ ) and hexafluoroethane ( $C_4$ ). Concentrations of  $C_4$  in the atmosphere are over 70 ppt. The two main sources of PFCs are primary aluminum production and semiconductor manufacturing.

#### Sulfur Hexafluoride

Sulfur Hexafluoride (SF<sub>6</sub>) is an inorganic, odorless, colorless, nontoxic, nonflammable gas. SF<sub>6</sub> has the highest global warming potential of any gas evaluated; 23,900 times that of CO<sub>2</sub>. Concentrations in the 1990s were about 4 ppt. Sulfur hexafluoride is used for insulation in electric power transmission and distribution equipment, in the magnesium industry, in semiconductor manufacturing, and as a tracer gas for leak detection.

#### Aerosols

Aerosols are particles emitted into the air through burning biomass (plant material) and fossil fuels. Aerosols can warm the atmosphere by absorbing and emitting heat and can cool the atmosphere by reflecting light. Cloud formation can also be affected by aerosols. Sulfate aerosols are emitted when fuel containing sulfur is burned. Black carbon (or soot) is emitted during biomass burning due to the

incomplete combustion of fossil fuels. Particulate matter regulation has been lowering aerosol concentrations in the United States; however, global concentrations are likely increasing.

# 2.4 Global Warming Potential

GHGs have varying global warming potential (GWP). The GWP is the potential of a gas or aerosol to trap heat in the atmosphere; it is the cumulative radiative forcing effects of a gas over a specified time horizon resulting from the emission of a unit mass of gas relative to the reference gas, CO<sub>2</sub>. The GHGs listed by the IPCC and the CEQA Guidelines are discussed in this section in order of abundance in the atmosphere. Water vapor, the most abundant GHG, is not included in this list because its natural concentrations and fluctuations far outweigh its anthropogenic (human-made) sources. To simplify reporting and analysis, GHGs are commonly defined in terms of their GWP. The IPCCC defines the GWP of various GHG emissions on a normalized scale that recasts all GHG emissions in terms of CO<sub>2</sub>e. The GWP of CO<sub>2</sub> is by definition, 1. The GWP values used in this analysis are based on the IPCC Second Assessment Report (SAR) and United Nations Framework Convention on Climate Change (UNFCCC) reporting guidelines and are detailed in Table 2-1. The SAR GWPs are used in CARB's California inventory and AB32 Scoping Plan estimates.

Table 2-1 – Global Warming Potentials, Atmospheric Lifetimes and Abundances of GHGs

| Gas  | Atmospheric Lifetime<br>(years) <sup>1</sup> | Global Warming Potential Atmospheri<br>(100 Year Horizon) <sup>2</sup> Abundance |           |  |
|--|--|--|-----------|--|
| Carbon Dioxide (CO <sub>2</sub> )                      | 50-200                                       | 1  | 379 ppm   |  |
| Methane (CH <sub>4</sub> )                             | 9-15   | 25   | 1,774 ppb |  |
| Nitrous Oxide (N <sub>2</sub> O)                       | 114  | 298  | 319 ppb   |  |
| HFC-23   | 270  | 14,800   | 18 ppt    |  |
| HFC-134a   | 14   | 1,430  | 35 ppt    |  |
| HFC-152a   | 1.4  | 124  | 3.9 ppt   |  |
| PFC: Tetrafluoromethane (CF <sub>4</sub> )             | 50,000                                       | 7,390  | 74 ppt    |  |
| PFC: Hexafluoroethane (C <sub>2</sub> F <sub>6</sub> ) | 10,000                                       | 12,200   | 2.9 ppt   |  |
| Sulfur Hexafluoride (SF <sub>6</sub> )                 | 3,200  | 22,800   | 5.6 ppt   |  |

Notes:

Source: IPCC 2007, EPA 2015

<sup>&</sup>lt;sup>1</sup> Defined as the half-life of the gas.

<sup>&</sup>lt;sup>2</sup> Compared to the same quantity of CO<sub>2</sub> emissions and is based on the Intergovernmental Panel On Climate Change (IPCC) 2007 standard, which is utilized in CalEEmod (Version 2016.3.1), which is used in this report (CalEEmod user guide: Appendix A). Definitions: ppm = parts per million; ppb = parts per billion; ppt = parts per trillion

# 3.0 AIR QUALITY MANAGEMENT

# 3.1 Regulatory Setting

The air quality at the project site is addressed through the efforts of various international, federal, state, regional, and local government agencies. These agencies work jointly, as well as individually, to improve air quality through legislation, regulations, planning, policy-making, education, and a variety of programs. The agencies responsible for improving the air quality are discussed below.

#### International

In 1988, the United Nations established the Intergovernmental Panel on Climate Change (IPCC) to evaluate the impacts of global climate change and to develop strategies that nations could implement to curtail global climate change. In 1992, the United States joined other countries around the world in signing the United Nations' Framework Convention on Climate Change (UNFCCC) agreement with the goal of controlling GHG emissions. The parties of the UNFCCC adopted the Kyoto Protocol, which set binding GHG reduction targets for 37 industrialized countries, the objective of reducing their collective GHG emissions by five percent below 1990 levels by 2012. The Kyoto Protocol has been ratified by 182 countries but has not been ratified by the United States. It should be noted that Japan and Canada opted out of the Kyoto Protocol and the remaining developed countries that ratified the Kyoto Protocol have not met their Kyoto targets. The Kyoto Protocol expired in 2012 and the amendment for the second commitment period from 2013 to 2020 has not yet entered into legal force. The Parties to the Kyoto Protocol negotiated the Paris Agreement in December 2015, agreeing to set a goal of limiting global warming to less than 2 degrees Celsius compared with pre-industrial levels. The Paris Agreement has been adopted by 195 nations with 147 ratifying it, including the United States by President Obama, who ratified it by Executive Order on September 3, 2016. On June 1, 2017, President Trump announced that the United States is withdrawing from the Paris Agreement, however the Paris Agreement is still legally binding by the other remaining nations.

Additionally, the Montreal Protocol was originally signed in 1987 and substantially amended in 1990 and 1992. The Montreal Protocol stipulates that the production and consumption of compounds that deplete ozone in the stratosphere—CFCs, halons, carbon tetrachloride, and methyl chloroform—were to be phased out, with the first three by the year 2000 and methyl chloroform by 2005.

#### Federal – United States Environmental Protection Agency

The Clean Air Act, first passed in 1963 with major amendments in 1970, 1977 and 1990, is the overarching legislation covering regulation of air pollution in the United States. The Clean Air Act has established the mandate for requiring regulation of both mobile and stationary sources of air pollution at the state and federal level. The Environmental Protection Agency (EPA) was created in 1970 in order to consolidate research, monitoring, standard-setting and enforcement authority into a single agency.

The EPA is responsible for setting and enforcing the National Ambient Air Quality Standards (NAAQS) for atmospheric pollutants. It regulates emission sources that are under the exclusive authority of the federal government, such as aircraft, ships, and certain locomotives. NAAQS pollutants were identified using medical evidence and are shown below in Table 3-1.

Table 3-1 – State and Federal Criteria Pollutant Standards

|  | Concentration /   | Averaging Time  |  |  |  |
|--|---|---|--|--|--|
| Air<br>Pollutant   | California Federal Primary<br>Standards Standards   |   | -<br>Most Relevant Effects   |  |  |
| Ozone (O <sub>3</sub> )                                    | 0.09 ppm / 1-hour<br>0.07 ppm / 8-hour  | 0.070 ppm, / 8-hour                                     | (a) Pulmonary function decrements and localized lung edema in humans and animals; (b) Risk to public health implied by alterations in pulmonary morphology and host defense in animals; (c) Increased mortality risk; (d) Risk to public health implied by altered connective tissue metabolism and altered pulmonary morphology in animals after long-term exposures and pulmonary function decrements in chronically exposed humans; (e) Vegetation damage; and (f) Property damage. |  |  |
| Carbon<br>Monoxide<br>(CO)                                 | 20.0 ppm / 1-hour<br>9.0 ppm / 8-hour   | 35.0 ppm / 1-hour<br>9.0 ppm / 8-hour                   | (a) Aggravation of angina pectoris and other aspects of coronary heart disease; (b) Decreased exercise tolerance in persons with peripheral vascular disease and lung disease; (c) Impairment of central nervous system functions; and (d)   |  |  |
| Nitrogen<br>Dioxide<br>(NO <sub>2</sub> )                  | 0.18 ppm / 1-hour<br>0.030 ppm / annual   | 100 ppb / 1-hour<br>0.053 ppm / annual                  | Possible increased risk to fetuses.  (a) Potential to aggravate chronic respiratory disease and respiratory symptoms in sensitive groups; (b) Risk to public health implied by pulmonary and extra-pulmonary biochemical and cellular changes and pulmonary structural changes; and (c) Contribution to atmospheric discoloration.   |  |  |
| Sulfur<br>Dioxide<br>(SO <sub>2</sub> )                    | 0.25 ppm / 1-hour<br>0.04 ppm / 24-hour   | 75 ppb / 1-hour<br>0.14 ppm/annual                      | (a) Bronchoconstriction accompanied by symptoms which may include wheezing, shortness of breath and chest tightness, during exercise or physical activity in persons with asthma.  |  |  |
| Suspended<br>Particulate<br>Matter                         | 50 μg/m³ / 24-hour<br>20 μg/m³ / annual   | 150 μg/m <sup>3</sup> / 24-hour                         | (a) Exacerbation of symptoms in sensitive patients with  |  |  |
| (PM <sub>10</sub> )  |   |   | respiratory or cardiovascular disease; (b) Declines in   |  |  |
| Suspended<br>Particulate<br>Matter<br>(PM <sub>2.5</sub> ) | 12 μg/m³ / annual   | $35~\mu g/m^3~/~24\text{-hour}$ $12~\mu g/m^3~/~annual$ | pulmonary function growth in children; and (c) Increased risk of premature death from heart or lung diseases in elderly.   |  |  |
| Sulfates   | 25 μg/m <sup>3</sup> / 24-hour  | No Federal<br>Standards                                 | (a) Decrease in ventilatory function; (b) Aggravation of asthmatic symptoms; (c) Aggravation of cardio-pulmonary disease; (d) Vegetation damage; (e) Degradation of visibility; and (f) Property damage.   |  |  |
| Lead   | $1.5 \ \mu g/m^3 / 30$ -day   | 0.15 μg/m <sup>3</sup> /3-<br>month rolling             | (a) Learning disabilities; and (b) Impairment of blood formation and nerve conduction.   |  |  |
| Visibility<br>Reducing<br>Particles                        | Extinction coefficient of 0.23 per kilometer - visibility of ten miles or more due to particles when relative humidity is less than 70 percent. | No Federal<br>Standards                                 | Visibility impairment on days when relative humidity is less than 70 percent.  |  |  |

 $Source: \underline{http://www.arb.ca.gov/research/aaqs/aaqs2.pdf}$ 

.

As part of its enforcement responsibilities, the EPA requires each state with federal nonattainment areas to prepare and submit a State Implementation Plan (SIP) that demonstrates the means to attain the national standards. The SIP must integrate federal, state, and local components and regulations to identify specific measures to reduce pollution, using a combination of performance standards and market-based programs within the timeframe identified in the SIP. The CARB defines attainment as the category given to an area with no violations in the past three years. As indicated below in Table 3-2, the Air Basin has been designated by EPA for the national standards as a non-attainment area for ozone (O<sub>3</sub>) and suspended particulates (PM10 and PM2.5) and partial non-attainment for lead. Currently, the Air Basin is in attainment with the national ambient air quality standards for carbon monoxide (CO), sulfur dioxide (SO<sub>2</sub>), and nitrogen dioxide (NO<sub>2</sub>).

Table 3-2. Attainment Status of the South Coast Air Basin

| Criteria Pollutant            | Federal Designation | State Designation |
|-------------------------------|---------------------|-------------------|
| Ozone                         | Nonattainment       | Nonattainment     |
| $PM_{10}$                     | Attainment          | Nonattainment     |
| PM <sub>2.5</sub>             | Nonattainment       | Nonattainment     |
| Carbon Monoxide               | Maintenance         | Attainment        |
| Nitrogen Dioxide              | Maintenance         | Attainment        |
| Sulfur Dioxide                | Attainment          | Attainment        |
| Lead                          | Attainment          | Attainment        |
| Sulfates                      | No Standard         | Attainment        |
| Hydrogen Sulfide              | No Standard         | Unclassified*     |
| Visibility Reducing Particles | No Standard         | Unclassified*     |

Sources: EPA website, http://www.epa.gov/oaqps001/greenbk/index.html, December 2014. and CARB website, http://www.arb.ca.gov/desig/adm/adm.htm, August 2014.

In 2011, the Air Basin exceeded federal standards for either ozone or PM2.5 at one or more locations on a total of 124 days, based on the current federal standards for 8-hour ozone and 24-hour PM2.5. Despite substantial improvements in air quality over the past few decades, some air monitoring stations in the Air Basin still exceed the NAAQS for ozone more frequently than any other stations in the U.S. In 2011, three of the top five stations that exceeded the 8-hour ozone NAAQS were located in the Air Basin (Central San Bernardino Mountains, East San Bernardino Valley, and Metropolitan Riverside County). (SCAQMD 2012)

PM2.5 in the Air Basin has improved significantly in recent years, with 2010 and 2011 being the cleanest years on record. In 2011, only one station in the Air Basin (Metropolitan Riverside County at Mira Loma) exceeded the annual PM2.5 NAAQS and the 98<sup>th</sup> percentile for the 24-hour PM2.5 NAAQS, as well as the 3-year design values for these standards. Basin-wide, the federal PM2.5 24-hour standard level was exceeded in 2011 on 17 sampling days. (SCAQMD 2012)

The Air Basin is currently in attainment for the federal standards for NO<sub>2</sub>. While the concentration level of the new 1-hour NO<sub>2</sub> federal standard (100 ppb) was exceeded in the Air Basin at two stations (Central Los Angeles and Long Beach) on the same day in 2011, the NAAQS NO<sub>2</sub> design value has not been exceeded. (SCAQMD 2012) Therefore, the Basin remains in attainment of the NO<sub>2</sub> NAAQS.

Although much of the South Coast Air Basin, including the project site location in San Bernardino County, is in attainment for lead, the EPA designated the Los Angeles County portion of the Air Basin as nonattainment for the revised (2008) federal lead standard (0.15  $\mu$ g/m³, rolling 3-month average). This was due to the addition of source-specific monitoring under the new federal regulation. This designation was based on two source-specific monitors in Vernon and the City of Industry exceeding the revised standard in the 2007-2009 period of data used. As of the 2009-2011 data period, only one of these stations (Vernon)

<sup>\*</sup>If there is inadequate or inconclusive data to make a definitive attainment designation, districts are considered "unclassified."

still exceeded the lead standard. The 2012 Lead State Implementation Plan Los Angeles County, prepared by SCAQMD and adopted on May 4, 2012, provided measures to meet attainment of lead by December 31, 2015. Current monitoring data shows that lead is now below the standards at all monitoring stations, however it will take three years of meeting the standards before Los Angeles County can request to be redesignated by the EPA.

In Massachusetts v. Environmental Protection Agency (Docket No. 05–1120), argued November 29, 2006 and decided April 2, 2007, the U.S. Supreme Court held that not only did the EPA have authority to regulate greenhouse gases, but the EPA's reasons for not regulating this area did not fit the statutory requirements. As such, the U.S. Supreme Court ruled that the EPA should be required to regulate CO2 and other greenhouse gases as pollutants under the federal Clean Air Act (CAA).

In response to the FY2008 Consolidations Appropriations Act (H.R. 2764; Public Law 110-161), EPA proposed a rule on March 10, 2009 that requires mandatory reporting of GHG emissions from large sources in the United States. On September 22, 2009, the Final Mandatory Reporting of GHG Rule was signed and published in the Federal Register on October 30, 2009. The rule became effective on December 29, 2009. This rule requires suppliers of fossil fuels or industrial GHGs, manufacturers of vehicles and engines, and facilities that emit 25,000 metric tons or more per year of GHG emissions to submit annual reports to EPA.

On December 7, 2009, the EPA Administrator signed two distinct findings under section 202(a) of the Clean Air Act. One is an endangerment finding that finds concentrations of the six GHGs in the atmosphere threaten the public health and welfare of current and future generations. The other is a cause or contribute finding, that finds emissions from new motor vehicles and new motor vehicle engines contribute to the GHG pollution which threatens public health and welfare. These actions did not impose any requirements on industry or other entities, however, since 2009 the EPA has been providing GHG emission standards for vehicles and other stationary sources of GHG emissions that are regulated by the EPA. On September 13, 2013 the EPA Administrator signed 40 CFR Part 60, that limits emissions from new sources to 1,100 pounds of CO<sub>2</sub> per MWh for fossil fuel-fired utility boilers and 1,000 pounds of CO<sub>2</sub> per MWh for large natural gas-fired combustion units.

On August 3, 2015, the EPA announced the Clean Power Plan, emissions guidelines for U.S. states to follow in developing plans to reduce GHG emissions from existing fossil fuel-fired power plants (Federal Register Vol. 80, No. 205, October 23 2015). On February 9, 2016 the Supreme Court stayed implementation of the Clean Power Plan due to a legal challenge from 29 states and in April 2017, the Supreme Court put the case on a 60 day hold and directed both sides to make arguments for whether it should keep the case on hold indefinitely or close it and remand the issue to the EPA.

#### State - California Air Resources Board

The California Air Resources Board (CARB), which is a part of the California Environmental Protection Agency, is responsible for the coordination and administration of both federal and state air pollution control programs within California. In this capacity, the CARB conducts research, sets the California Ambient Air Quality Standards (CAAQS), compiles emission inventories, develops suggested control measures, provides oversight of local programs, and prepares the SIP. The CAAQS for criteria pollutants are shown above in Table 3-1. In addition, the CARB establishes emission standards for motor vehicles sold in California, consumer products (e.g. hairspray, aerosol paints, and barbeque lighter fluid), and various types of commercial equipment. It also sets fuel specifications to further reduce vehicular emissions.

The Air Basin has been designated by the CARB as a non-attainment area for ozone, PM10, PM2.5 and lead. Currently, the South Coast Air Basin is in attainment with the ambient air quality standards for CO,  $NO_2$ ,  $SO_2$ , and sulfates and is unclassified for visibility reducing particles and Hydrogen Sulfide.

In 2008 the CARB adopted Resolution 08-43, which limits NOx, PM10 and PM2.5 emissions from on-

road diesel truck fleets that operate in California. In 2009 Executive Order R-09-010 was adopted that codified Resolution 08-43 into Section 2025, title 13 of the California Code of Regulations. This regulation requires that by the year 2023 all commercial diesel trucks that operate in California shall meet model year 2010 (Tier 4 Final) or latter emission standards. In the interim period, this regulation provides annual interim targets for fleet owners to meet. This regulation also provides a few exemptions including a onetime per year 3-day pass for trucks registered outside of California.

CARB is also responsible for regulations pertaining to Toxic Air Contaminants (TACs). The Air Toxics "Hot Spots" Information and Assessment Act (Assembly Bill [AB] 2588, 1987, Connelly) was enacted in 1987 as a means to establish a formal air toxics emission inventory risk quantification program. AB 2588, as amended, establishes a process that requires stationary sources to report the type and quantities of certain substances their facilities routinely release in California. The data is ranked by high, intermediate, and low categories, which are determined by: the potency, toxicity, quantity, volume, and proximity of the facility to nearby receptors.

CARB also proposed interim statewide CEQA thresholds for GHG emissions and released *Recommended Approaches for Setting Interim Significance Thresholds for Greenhouse Gases under the California Environmental Quality Act*, on October 24, 2008 that has been utilized by the SCAQMD's GHG Significance Threshold Stakeholder Working Group in their framework for developing SCAQMD's draft GHG emissions thresholds. The State currently has no regulations that establish ambient air quality standards for GHGs. However, the State has passed laws directing CARB to develop actions to reduce GHG emissions, which are listed below.

#### Executive Order B-30-15, Senate Bill 32 and Assembly Bill 197

The California Governor issued Executive Order B-30-15 on April 29, 2015 that aims to reduce California's GHG emissions 40 percent below 1990 levels by 2030. This executive order aligns California's GHG reduction targets with those of other international governments, such as the European Union that set the same target for 2030 in October, 2014. This target will make it possible to reach the ultimate goal of reducing GHG emissions 80 percent under 1990 levels by 2050 that is based on scientifically established levels needed in the U.S.A to limit global warming below 2 degrees Celsius – the warming threshold at which scientists say there will likely be major climate disruptions such as super droughts and rising sea levels. Assembly Bill 197 (AB 197) (September 8, 2016) and Senate Bill 32 (SB 32) (September 8, 2016) codified into statute the GHG emissions reduction targets of at least 40 percent below 1990 levels by 2030 as detailed in EO B-30-15. AB 197 also requires additional GHG emissions reporting that is broken down to sub-county levels and requires CARB to consider the social costs of emissions impacting disadvantaged communities.

#### Executive Order B-29-15

The California Governor issued Executive Order B-29-15 on April 1, 2015 and directed the State Water Resources Control Board to impose restrictions to achieve a statewide 25% reduction in urban water usage and directed the Department of Water Resources to replace 50 million square feet of lawn with drought tolerant landscaping through an update to the State's Model Water Efficient Landscape Ordinance. The Ordinance also requires installation of more efficient irrigation systems, promotion of greywater usage and onsite stormwater capture, and limits the turf planted in new residential landscapes to 25 percent of the total area and restricts turf from being planted in median strips or in parkways unless the parkway is next to a parking strip and a flat surface is required to enter and exit vehicles. Executive Order B-29-15 would reduce GHG emissions associated with the energy used to transport and filter water.

#### Assembly Bill 1109

California Assembly Bill 1109 (AB 1109), which also known as the Lighting Efficiency and Toxics Reduction Act, prohibits the manufacturing of lights after January 1, 2010 that contain levels of hazardous

substances prohibited by the European Union pursuant to the RoHS Directive. AB 1109 also requires reductions in energy usage for lighting and is structured to reduce lighting electrical consumption by: (1) At least 50 percent reduction from 2007 levels for indoor residential lighting; and (2) At least 25 percent reduction from 2007 levels for indoor commercial and all outdoor lighting by 2018. AB 1109 would reduce GHG emissions through reducing the amount of electricity required to be generated by fossil fuels in California.

#### Assembly Bill 1493

California Assembly Bill 1493 (also known as the Pavley Bill, in reference to its author Fran Pavley) was enacted on July 22, 2002 and required CARB to develop and adopt regulations that reduce GHGs emitted by passenger vehicles and light duty trucks. In 2004, CARB approved the "Pavley I" regulations limiting the amount of GHGs that may be released from new passenger automobiles that are being phased in between model years 2009 through 2016. These regulations will reduce GHG emissions by 30 percent from 2002 levels by 2016. The second set of regulations "Pavley II" is currently in development and will be phased in between model years 2017 through 2025 and will reduce emissions by 45 percent by the year 2020 as compared to the 2002 fleet. The Pavley II standards are being developed by linking the GHG emissions and formerly separate toxic tailpipe emissions standards previously known as the "LEV III" (third stage of the Low Emission Vehicle standards) into a single regulatory framework. The new rules reduce emissions from gasoline-powered cars as well as promote zero-emissions auto technologies such as electricity and hydrogen, and through increasing the infrastructure for fueling hydrogen vehicles. In 2009, the U.S. EPA granted California the authority to implement the GHG standards for passenger cars, pickup trucks and sport utility vehicles. In September 2009, the Pavley I regulations were adopted by CARB.

#### Executive Order S-3-05

In 2005 the California Governor issued Executive Order S 3-05, GHG Emission, which established the following reduction targets:

- 2010: Reduce greenhouse gas emissions to 2000 levels;
- 2020: Reduce greenhouse gas emissions to 1990 levels;
- 2050: Reduce greenhouse gas emissions to 80 percent below 1990 levels.

The executive order directed the secretary of the California Environmental Protection Agency (CalEPA) to coordinate a multi-agency effort to reduce GHG emissions to the target levels. To comply with the Executive Order, the secretary of CalEPA created the California Climate Action Team (CAT), made up of members from various state agencies and commissions. The team released its first report in March 2006. The report proposed to achieve the targets by building on the voluntary actions of businesses, local governments, and communities and through State incentive and regulatory programs. The State achieved its first goal of reducing greenhouse gas emissions to 2000 levels by 2010.

#### Assembly Bill 32

In 2006, the California State Legislature adopted Assembly Bill 32 (AB 32), the California Global Warming Solutions Act of 2006. AB 32 requires CARB, to adopt rules and regulations that would achieve GHG emissions equivalent to statewide levels in 1990 by 2020 through an enforceable statewide emission cap which will be phased in starting in 2012. Emission reductions shall include carbon sequestration projects that would remove carbon from the atmosphere and utilize best management practices that are technologically feasible and cost effective.

In 2007 CARB released the calculated Year 1990 GHG emissions of 431 million metric tons of CO2e (MMTCO<sub>2</sub>e). The 2020 target of 431 MMTCO<sub>2</sub>e requires the reduction of 78 MMTCO<sub>2</sub>e, or approximately 16 percent from the State's projected 2020 business as usual emissions of 509 MMTCO<sub>2</sub>e (CARB, 2014). Under AB 32, CARB was required to adopt regulations by January 1, 2011 to achieve reductions in GHGs

to meet the 1990 cap by 2020. Early measures CARB took to lower GHG emissions included requiring operators of the largest industrial facilities that emit 25,000 metric tons of CO<sub>2</sub> in a calendar year to submit verification of GHG emissions by December 1, 2010. The CARB Board also approved nine discrete early action measures that include regulations affecting landfills, motor vehicle fuels, refrigerants in cars, port operations and other sources, all of which became enforceable on or before January 1, 2010.

CARB's Scoping Plan that was adopted in 2009, proposes a variety of measures including: strengthening energy efficiency and building standards; targeted fees on water and energy use; a market-based cap-and-trade system; achieving a 33 percent renewable energy mix; and a fee regulation to fund the program. The 2014 update to the Scoping Plan identifies strategies moving beyond the 2020 targets to the year 2050.

The Cap and Trade Program established under the Scoping Plan sets a statewide limit on sources responsible for 85 percent of California's GHG emissions and has established a market for long-term investment in energy efficiency and cleaner fuels since 2012.

#### Senate Bill 1368

Senate Bill 1368 (SB 1368) is the companion Bill of AB 32 and was adopted September 2006. SB 1368 requires that the California Public Utilities Commission (CPUC) establish a performance standard for baseload generation of GHG emissions by investor-owned utilities by February 1, 2007 and for local publicly owned utilities by June 30, 2007. These standards could not exceed the GHG emissions rate from a baseload combined-cycle, natural gas-fired plant. Furthermore, the legislation states that all electricity provided to the State, including imported electricity, must be generated by plants that meet the standards set by CPUC and California Energy Commission (CEC).

#### Executive Order S-1-07

Executive Order S-1-07 was issued in 2007 and proclaims that the transportation sector is the main source of GHG emissions in the State, since it generates more than 40 percent of the State's GHG emissions. It establishes a goal to reduce the carbon intensity of transportation fuels sold in the State by at least ten percent by 2020. This Order also directs CARB to determine whether this Low Carbon Fuel Standard (LCFS) could be adopted as a discrete early-action measure as part of the effort to meet the mandates in AB 32.

In 2009 CARB approved the proposed regulation to implement the low carbon fuel standard. The standard was challenged in the courts but has been in effect since 2011 and was re-approved by the CARB in 2015. The low carbon fuel standard is anticipated to reduce GHG emissions by about 16 MMT per year by 2020. The low carbon fuel standard is designed to provide a framework that uses market mechanisms to spur the steady introduction of lower carbon fuels. The framework establishes performance standards that fuel producers and importers must meet annually. Reformulated gasoline mixed with corn-derived ethanol and low-sulfur diesel fuel represent the baseline fuels. Lower carbon fuels may be ethanol, biodiesel, renewable diesel, or blends of these fuels with gasoline or diesel. Compressed natural gas and liquefied natural gas also may be low-carbon fuels. Hydrogen and electricity, when used in fuel cells or electric vehicles, are also considered as low-carbon fuels.

#### Senate Bill 97

Senate Bill 97 (SB 97) was adopted August 2007 and acknowledges that climate change is a prominent environmental issue that requires analysis under CEQA. SB 97 directed the Governor's Office of Planning and Research (OPR), which is part of the State Natural Resources Agency, to prepare, develop, and transmit to CARB guidelines for the feasible mitigation of GHG emissions or the effects of GHG emissions, as required by CEQA, by July 1, 2009. The Natural Resources Agency was required to certify and adopt those guidelines by January 1, 2010.

Pursuant to the requirements of SB 97 as stated above, on December 30, 2009 the Natural Resources Agency adopted amendments to the State CEQA guidelines that address GHG emissions. The CEQA Guidelines Amendments changed 14 sections of the CEQA Guidelines and incorporated GHG language throughout the Guidelines. However, no GHG emissions thresholds of significance were provided and no specific mitigation measures were identified. The GHG emission reduction amendments went into effect on March 18, 2010 and are summarized below:

- Climate action plans and other greenhouse gas reduction plans can be used to determine whether a project has significant impacts, based upon its compliance with the plan.
- Local governments are encouraged to quantify the greenhouse gas emissions of projects, noting that they have the freedom to select the models and methodologies that best meet their needs and circumstances. The section also recommends consideration of several qualitative factors that may be used in the determination of significance, such as the extent to which the given project complies with state, regional, or local GHG reduction plans and policies. OPR does not set or dictate specific thresholds of significance. Consistent with existing CEQA Guidelines, OPR encourages local governments to develop and publish their own thresholds of significance for GHG impacts assessment.
- When creating their own thresholds of significance, local governments may consider the thresholds of significance adopted or recommended by other public agencies or recommended by experts.
- New amendments include guidelines for determining methods to mitigate the effects of greenhouse gas emissions in Appendix F of the CEQA Guidelines.
- OPR is clear to state that "to qualify as mitigation, specific measures from an existing plan must be identified and incorporated into the project; general compliance with a plan, by itself, is not mitigation."
- OPR's emphasizes the advantages of analyzing GHG impacts on an institutional, programmatic level. OPR therefore approves tiering of environmental analyses and highlights some benefits of such an approach.
- Environmental impact reports (EIRs) must specifically consider a project's energy use and energy efficiency potential.

#### Senate Bills 1078, 107, and X1-2 and Executive Orders S-14-08 and S-21-09

Senate Bill 1078 (SB 1078) requires retail sellers of electricity to provide at least 20 percent of their supply from renewable sources by 2017. Senate Bill 107 (SB 107) changed the target date to 2010. Executive Order S-14-08 was signed on November 2008 and expands the State's Renewable Energy Standard to 33 percent renewable energy by 2020. Executive Order S-21-09 directed CARB to adopt regulations by July 31, 2010 to enforce S-14-08. Senate Bill X1-2 codifies the 33 percent renewable energy requirement by 2020.

#### Senate Bill 375

Senate Bill 375 (SB 375) was adopted September 2008 in order to support the State's climate action goals to reduce GHG emissions through coordinated regional transportation planning efforts, regional GHG emission reduction targets, and land use and housing allocation. SB 375 requires CARB to set regional targets for GHG emissions reductions from passenger vehicle use. In 2010, CARB established targets for 2020 and 2035 for each Metropolitan Planning Organizations (MPO) within the State. It was up to each MPO to adopt a sustainable communities strategy (SCS) that will prescribe land use allocation in that MPOs Regional Transportation Plan (RTP) to meet CARB's 2020 and 2035 GHG emission reduction targets. These reduction targets are required to be updated every eight years and in June 2017 CARB released *Staff Report Proposed Update to the SB 375 Greenhouse Gas Emission Reduction Target*, which provides recommended GHG emissions reduction targets for SCAG of 8 percent by 2020 and 21 percent by 2035.

The 2016-2040 Regional Transportation Plan/Sustainable Communities Strategy (RTP/SCS), adopted by SCAG April, 2016 provides a 2020 GHG emission reduction target of 8 percent and a 2035 GHG emission reduction target of 18 percent. SCAG will need to develop additional strategies in its next revision of the RTP/SCS in order to meet CARB's new 21 percent GHG emission reduction target for 2035. CARB is also charged with reviewing SCAG's RTP/SCS for consistency with its assigned targets.

City and County land use policies, including General Plans, are not required to be consistent with the RTP and associated SCS or APS. However, new provisions of CEQA would incentivize, through streamlining and other provisions, qualified projects that are consistent with an approved SCS or APS and categorized as "transit priority projects."

## Assembly Bill 341 and Senate Bills 939 and 1374

Senate Bill 939 (SB 939) requires that each jurisdiction in California to divert at least 50 percent of its waste away from landfills, whether through waste reduction, recycling or other means. Senate Bill 1374 (SB 1374) requires the California Integrated Waste Management Board to adopt a model ordinance by March 1, 2004 suitable for adoption by any local agency to require 50 to 75 percent diversion of construction and demolition of waste materials from landfills. Assembly Bill 341 (AB 341) was adopted in 2011 and builds upon the waste reduction measures of SB 939 and 1374 and sets a new target of a 75 percent reduction in solid waste generated by the year 2020.

#### California Code of Regulations (CCR) Title 24, Part 6

CCR Title 24, Part 6: California's Energy Efficiency Standards for Residential and Nonresidential Buildings (Title 24) were first established in 1978 in response to a legislative mandate to reduce California's energy consumption. The standards are updated periodically to allow consideration and possible incorporation of new energy efficiency technologies and methods. Although it was not originally intended to reduce GHG emissions, electricity production by fossil fuels results in GHG emissions and energy efficient buildings require less electricity. Therefore, increased energy efficiency results in decreased GHG emissions.

Title 24 standards are updated on a three-year schedule and the most current 2016 standards went into effect on January 1, 2017. The Title 24 standards require the installation of insulated hot water pipes, improved window performance, improved wall insulation, and mandatory duct sealing. Title 24 also requires roofs to be constructed to be solar ready, with cool roofing shingles, a minimum 1-inch air space between roof material and roof deck, and a minimum of R-22 roof/ceiling insulation. All lighting is required to be high efficiency and daylight sensors and motion sensors are required for outdoor lighting, bathrooms, utility rooms and other spaces. The forced air systems are required to limit leakage to 5 percent or less and requires all heat pump systems to be equipped with liquid line filter driers. The 2016 Title 24 Part 6 standards are anticipated to reduce electricity consumption by 281 gigawatt-hours per year and natural gas consumption by 16 million therms per year (<a href="http://www.energy.ca.gov/2015publications/CEC-400-2015-037/CEC-400-2015-037/CEC-400-2015-037-CMF.pdf">http://www.energy.ca.gov/2015publications/CEC-400-2015-037/CEC-400-2015-037/CEC-400-2015-037-CMF.pdf</a>).

#### California Code of Regulations (CCR) Title 24, Part 11

CCR Title 24, Part 11: California Green Building Standards (Title 24) was developed in response to continued efforts to reduce GHG emissions associated with energy consumption. The most current version is the 2013 California Green Building Standards Code (CalGreen), which became effective on January 1, 2014 and replaced the 2010 CalGreen. One focus of CCR Title 24, Part 11 is water conservation measures, which reduce GHG emissions by reducing electrical consumption associated with pumping and treating water. CCR Title 24, Part 11 has approximately 52 nonresidential mandatory measures and an additional 130 provisions for optional use. Some key mandatory measures for commercial occupancies include specified parking for clean air vehicles, a 20 percent reduction of potable water use within buildings

through use of low-flow fixtures, a 50 percent construction waste diversion from landfills, and use of building finish materials that emit low levels of volatile organic compounds.

#### Regional

The SCAQMD is the agency principally responsible for comprehensive air pollution control in the South Coast Air Basin. To that end, as a regional agency, the SCAQMD works directly with the Southern California Association of Governments (SCAG), county transportation commissions, and local governments and cooperates actively with all federal and state agencies.

#### South Coast Air Quality Management District

SCAQMD develops rules and regulations, establishes permitting requirements for stationary sources, inspects emission sources, and enforces such measures through educational programs or fines, when necessary. SCAQMD is directly responsible for reducing emissions from stationary, mobile, and indirect sources. It has responded to this requirement by preparing a sequence of AQMPs. The *Final 2016 Air Quality Management Plan* (2016 AQMP) was adopted by the SCAQMD Board on March 3, 2016 and its adoption is pending at CARB. The 2016 AQMP was prepared in order to meet the following standards:

- 8-hour Ozone (75 ppb) by 2032
- Annual PM2.5 (12 μg/m3) by 2021-2025
- 8-hour Ozone (80 ppb) by 2024 (updated from the 2007 and 2012 AQMPs)
- 1-hour Ozone (120 ppb) by 2023 (updated from the 2012 AQMP)
- 24-hour PM2.5 (35 μg/m3) by 2019 (updated from the 2012 AQMP)

In addition to meeting the above standards, the 2016 AQMP will also include revisions to the attainment demonstrations for the 1997 8-hour ozone NAAQS and the 1979 1-hour ozone NAAQS. The prior 2012 AQMP was prepared in order to demonstrate attainment with the 24-hour PM2.5 standard by 2014 through adoption of all feasible measures. The prior 2007 AQMP demonstrated attainment with the 1997 8-hour ozone (80 ppb) standard by 2023, through implementation of future improvements in control techniques and technologies. These "black box" emissions reductions represent 65 percent of the remaining NOx emission reductions by 2023 in order to show attainment with the 1997 8-hour ozone NAAQS. Given the magnitude of these needed emissions reductions, additional NOx control measures have been provided in the 2012 AQMP even though the primary purpose was to show compliance with 24-hour PM2.5 emissions standards.

The 2016 AQMP provides a new approach that focuses on available, proven and cost-effective alternatives to traditional strategies, while seeking to achieve multiple goals in partnership with other entities to promote reductions in GHG emissions and TAC emissions as well as efficiencies in energy use, transportation, and goods movement. The 2016 AQMP recognizes the critical importance of working with other agencies to develop funding and other incentives that encourage the accelerated transition of vehicles, buildings and industrial facilities to cleaner technologies in a manner that benefits not only air quality, but also local businesses and the regional economy.

Although SCAQMD is responsible for regional air quality planning efforts, it does not have the authority to directly regulate air quality issues associated with plans and new development projects throughout the Air Basin. Instead, this is controlled through local jurisdictions in accordance to the California Environmental Quality Act (CEQA). In order to assist local jurisdictions with air quality compliance issues the CEQA Air Quality Handbook (SCAQMD CEQA Handbook), prepared by SCAQMD, 1993, with the most current updates found at <a href="http://www.aqmd.gov/ceqa/hdbk.html">http://www.aqmd.gov/ceqa/hdbk.html</a>, was developed in accordance with the projections and programs detailed in the AQMPs. The purpose of the SCAQMD CEQA Handbook is to assist Lead Agencies, as well as consultants, project proponents, and other interested parties in evaluating a project's potential air quality impacts. Specifically, the SCAQMD CEQA Handbook explains the procedures that SCAQMD recommends be followed for the environmental review process required by CEQA. The SCAQMD CEQA Handbook provides direction on how to evaluate potential air quality impacts, how to determine whether these impacts are significant, and how to mitigate these impacts. The SCAQMD intends that by providing this guidance, the air quality impacts of plans and development proposals will be analyzed accurately and consistently throughout the Air Basin, and adverse impacts will be minimized.

#### SCAQMD Working Group

Since neither CARB nor the OPR has developed GHG emissions threshold, the SCAQMD formed a Working Group to develop significance thresholds related to GHG emissions. At the September 28, 2010 Working Group meeting, the SCAQMD released its most current version of the draft GHG emissions thresholds, which recommends a tiered approach that either provides a quantitative annual thresholds of 3,500 MTCO<sub>2</sub>e for residential uses, 1,400 MTCO<sub>2</sub>e for commercial uses, and 3,000 MTCO<sub>2</sub>e for mixed uses. An alternative annual threshold of 3,000 MTCO<sub>2</sub>e for all land use types is also proposed.

#### Southern California Association of Governments

The SCAG is the regional planning agency for Los Angeles, Orange, Ventura, Riverside, San Bernardino, and Imperial Counties and addresses regional issues relating to transportation, the economy, community development and the environment. SCAG is the federally designated Metropolitan Planning Organization (MPO) for the majority of the southern California region and is the largest MPO in the nation. With respect to air quality planning, SCAG has prepared the 2016-2040 Regional Transportation Plan/Sustainable Communities Strategy (RTP/SCS), adopted April, 2016 and the 2015 Federal Transportation Improvement Program (FTIP), adopted October 2013, which addresses regional development and growth forecasts. Although the RTP/SCS and FTIP are primarily planning documents for future transportation projects a key component of these plans are to integrate land use planning with transportation planning that promotes higher density infill development in close proximity to existing transit service. These plans form the basis for the land use and transportation components of the AQMP, which are utilized in the preparation of air quality forecasts and in the consistency, analysis included in the AQMP. The RTP/SCS, FTIP, and AQMP are based on projections originating within the City and County General Plans.

#### Local - City of Highland General Plan Safety Element

Local jurisdictions, such as the County of San Bernardino, have the authority and responsibility to reduce air pollution through its police power and decision-making authority. Specifically, the City is responsible for the assessment and mitigation of air emissions resulting from its land use decisions. The City is also responsible for the implementation of transportation control measures as outlined in the 2016 AQMP. Examples of such measures include bus turnouts, energy-efficient streetlights, and synchronized traffic signals. In accordance with CEQA requirements and the CEQA review process, the City assesses the air quality impacts of new development projects, requires mitigation of potentially significant air quality impacts by conditioning discretionary permits, and monitors and enforces implementation of such mitigation.

In accordance with the CEQA requirements, the City does not, however, have the expertise to develop plans, programs, procedures, and methodologies to ensure that air quality within the City and region will meet federal and state standards. Instead, the City relies on the expertise of the SCAQMD and utilizes the SCAQMD CEQA Handbook as the guidance document for the environmental review of plans and development proposals within its jurisdiction.

The City of Highland has participated in the preparation of a Regional Air Quality Plan for San Bernardino County and its cities within the South Coast Air Basin. The plan includes an Air Quality Element with goals and policies that would become part of each jurisdiction general plan as agreed upon by the participants through consensus. The portions of the Regional Air Quality Plan applicable to the City of Highland General Plan have been integrated into the goals and policies of the Public Health and Safety Element.

The City of Highland General Plan contains the following air quality-related goals and policies that are applicable to the project:

- Reduce mobile and stationary source air pollutant emissions through cooperation and endorsement of the San Bernardino Regional Air Quality Plan and support of feasible techniques, incentives, and regulatory measures to achieve significant air quality improvements and any necessary air quality related lifestyle and economic changes while sustaining continued economic growth.
- **Policy 1** Ensure consistency of Federal, State, and County legislation with Highland's Air Quality goal and policies.
- Policy 2 Participate in formulating regional policies and solutions to air quality problems established by the San Bernardino County Air Quality Plan.
- Policy 7 Support current incentive programs that recognize and reqard developments using new and innovative emission reduction techniques.
- Policy 12 Continue to encourage the integration of air quality planning with land use and transportation planning in the design, review, and development processes.
- Policy 13 Regulate the location and design of sensitive receptors from excessive and hazardous emissions to air pollution, and continue to support site plans that separate and/or buffer residential and sensitive receptors from freeways, arterials, point sources, and hazardous material locations.
- **Policy 14** Reduce particulate emissions from construction sites, grading activities, temporary roads and parking lots, and agricultural operations by enforcing requirements that minimize fugitive dust.

#### 4.0 ATMOSPHERIC SETTING

# 4.1 Regional – San Bernardino County

The project site is located within the south western portion of San Berardino County, which is part of the South Coast Air Basin (Air Basin) that includes the non-desert portions of Riverside, San Bernardino, and Los Angeles Counties and all of all of Orange County. Temperature inversions are the prime factor in the accumulation of contaminants in the Air Basin. The mild climatological pattern is interrupted infrequently by periods of extremely hot weather, winter storms, and Santa Ana winds. The topography and climate of Southern California combine to create an area of high air pollution potential in the Air Basin. During the summer months, a warm air mass frequently descends over the cool, moist marine layer produced by the interaction between the ocean's surface and the lowest layer of the atmosphere. The warm upper layer forms a cup over the cool marine layer, which prevents pollution from dispersing upward. This inversion allows pollutants to accumulate within the lower layer. Light winds during the summer further limit ventilation from occurring.

Due to the low average wind speeds in the summer and a persistent daytime temperature inversion, emissions of hydrocarbons and oxides of nitrogen have an opportunity to combine with sunlight in a complex series of reactions. These reactions produce a photochemical oxidant commonly known as smog. Since the Air Basin experiences more days of sunlight than any other major urban area in the United States, except Phoenix, the smog potential in the region is higher than in most other areas of the nation.

# 4.2 Local – Highland

The major factors affecting local air pollution conditions in the Highland planning area are the extent and types of both region-wide and local emissions, climate, and meteorology. The general climate of Highland is characterized by sparse winter rainfall and hot summers tempered by cool ocean breezes. The climate in and around Highland, as well as most of Southern California, is controlled largely by the strength and position of the subtropical high-pressure cell over the Pacific Ocean. This high-pressure cell produces a typical Mediterranean climate with warm summers, mild winters, and moderate rainfall. This pattern is infrequently interrupted by periods of extremely hot weather brought in by Santa Ana winds. Most of the area's precipitation occurs intermittently between November and April; the area is still dominated by sunny or partly sunny conditions during these months. Cyclic land and sea breezes are the primary factors affecting the region's mild climate. The daytime winds are normally sea breezes, predominantly from the west, that flow at relatively low velocities.

# 4.3 Monitored Local Air Quality

The air quality at any site is dependent on the regional air quality and local pollutant sources. Regional air quality is determined by the release of pollutants throughout the Air Basin. Estimates of the existing emissions in the Air Basin provided in the 2012 AQMP, indicate that collectively, mobile sources account for 59 percent of the VOC, 88 percent of the NOx emissions and 40 percent of directly emitted PM2.5, with another 10 percent of PM2.5 from road dust.

SCAQMD has divided the Air Basin into 38 air-monitoring areas. The project site is located in Air Monitoring Area 34, Central San Bernardino Valley. The nearest air monitoring station to the project site is the San Bernardino Monitoring Station located approximately 3.5 miles west of the project site at 24302 E. 4<sup>th</sup> Street, San Bernardino. However, it should be noted that due to the air monitoring station's distance from the project site, recorded air pollution levels at the San Bernardino Station reflect with varying degrees of accuracy, local air quality conditions at the project site. It should also be noted that CO measurements have not been provided, since CO is currently in attainment in the Air Basin and monitoring of CO within the Air Basin ended on March 31, 2013.

The monitoring data from the San Bernardino Station is presented in Table 4-1 and shows the most recent three years of monitoring data from CARB. Table 4-1 shows that ozone and particulate matter (PM10 and PM2.5) are the air pollutants of primary concern in the project area, which are detailed below:

Table 4-1 – Local Area Air Quality Monitoring Summary

|  |       | Year <sup>1</sup> |       |  |  |
|--|-------|-------------------|-------|--|--|
| Pollutant (Standard)                         | 2019  | 2020              | 2021  |  |  |
| Ozone:                                       |       |                   |       |  |  |
| Maximum 1-Hour Concentration (ppm)           | 0.127 | 0.162             | 0.142 |  |  |
| Days > CAAQS (0.09 ppm)                      | 63    | 89                | 66    |  |  |
| Maximum 8-Hour Concentration (ppm)           | 0.114 | 0.128             | 0.112 |  |  |
| Days > NAAQS (0.070 ppm)                     | 96    | 130               | 98    |  |  |
| Days > CAAQs (0.070 ppm)                     | 96    | 132               | 101   |  |  |
| Inhalable Particulates (PM10):               |       |                   |       |  |  |
| Maximum 24-Hour Concentration (ug/m³)        | 112.7 | 174.8             | 182.4 |  |  |
| Days > NAAQS (150 ug/m <sup>3</sup> )        | ND    | 1                 | 1     |  |  |
| Days > CAAQS (50 ug/m <sup>3</sup> )         | 24.9  | ND                | 25.8  |  |  |
| Annual Arithmetic Mean (AAM) (15 ug/m³)      | 30.4  | 41.1              | 40.5  |  |  |
| Days > NAAQS (50 ug/m <sup>3</sup> )         | ND    | ND                | ND    |  |  |
| Days > CAAQS (20 ug/m <sup>3</sup> )         | ND    | ND                | ND    |  |  |
| Ultra-Fine Particulates (PM2.5):             |       |                   |       |  |  |
| Maximum 24-Hour National Measurement (ug/m³) | 60.5  | 56.6              | 57.9  |  |  |
| Days > NAAQS (35 ug/m <sup>3</sup> )         | ND    | 6.1               | 3     |  |  |
| Annual Arithmetic Mean (AAM) (ug/m³)         | ND    | 12.2              | 11.8  |  |  |
| Annual > NAAQS and CAAQS (12 ug/m³)          | ND    | ND                | ND    |  |  |

Notes: Exceedances are listed in **bold**. CAAQS = California Ambient Air Quality Standard; NAAQS = National Ambient Air Quality Standard; ppm = parts per million; ppb = parts per billion; ND = no data available.

Source: http://www.arb.ca.gov/adam/

#### 4.4 Toxic Air Contaminant Levels in the Air Basin

In order to determine the Air Basin-wide risks associated with major airborne carcinogens, the SCAQMD conducted the Multiple Air Toxics Exposure Study (MATES) studies. According to the SCAQMD's MATES-IV study, the project site has an estimated cancer risk of 329 per million persons chance of cancer. In comparison, the average cancer risk for the Air Basin is 991 per million persons, which is based on the use of age-sensitivity factors detailed in the OEHHA Guidelines (OEHHA, 2015).

In order to provide a perspective of risk, it is often estimated that the incidence in cancer over a lifetime for the U.S. population ranges between 1 in 3 to 4 and 1 in 3, or a risk of about 300,000 per million persons. The MATES-III study referenced a Harvard Report on Cancer Prevention, which estimated that of cancers associated with known risk factors, about 30 percent were related to tobacco, about 30 percent were related to diet and obesity, and about 2 percent were associated with environmental pollution related exposures that includes hazardous air pollutants.

Data obtained from the San Bernardino Station.

#### 5.0 THRESHOLDS OF SIGNIFICANCE

# 5.1 Regional Air Quality

Many air quality impacts that derive from dispersed mobile sources, which are the dominate pollution generators in the Air Basin, often occurs hours later and miles away after photochemical processes have converted primary exhaust pollutants into secondary contaminants such as ozone. The incremental regional air quality impact of an individual project is generally very small and difficult to measure. Therefore, SCAQMD has developed significance thresholds based on the volume of pollution emitted rather than on actual ambient air quality because the direct air quality impact of a project is not quantifiable on a regional scale. The SCAQMD CEQA Handbook states that any project in the Air Basin with daily emissions that exceed any of the identified significance thresholds should be considered as having an individually and cumulatively significant air quality impact. For the purposes to this air quality impact analysis, a regional air quality impact would be considered significant if emissions exceed the SCAQMD significance thresholds identified in Table 5-1.

Table 5-1 – SCAQMD Regional Criteria Pollutant Emission Thresholds of Significance

|              | Pollutant Emissions (pounds/day) |     |     |                 |      |       |      |
|--------------|----------------------------------|-----|-----|-----------------|------|-------|------|
|              | VOC                              | NOx | CO  | SO <sub>x</sub> | PM10 | PM2.5 | Lead |
| Construction | 75                               | 100 | 550 | 150             | 150  | 55    | 3    |
| Operation    | 55                               | 55  | 550 | 150             | 150  | 55    | 3    |

Source: http://www.aqmd.gov/ceqa/handbook/signthres.pdf

# 5.2 Local Air Quality

Project-related construction air emissions may have the potential to exceed the State and Federal air quality standards in the project vicinity, even though these pollutant emissions may not be significant enough to create a regional impact to the Air Basin. In order to assess local air quality impacts the SCAQMD has developed Localized Significant Thresholds (LSTs) to assess the project-related air emissions in the project vicinity. SCAQMD has also provided *Final Localized Significance Threshold Methodology* (LST Methodology), July 2008, which details the methodology to analyze local air emission impacts. The LST Methodology found that the primary emissions of concern are NO<sub>2</sub>, CO, PM10, and PM2.5.

The LST Methodology provides Look-Up Tables with different thresholds based on the location and size of the project site and distance to the nearest sensitive receptors. The project size of 1 acres disturbed per day was used based on the number and type of equipment utilized during each phase of construction.

The project site is located in Air Monitoring Area 34, Central San Bernardino Valley. The nearest sensitive receptors to the project site consist of the single-family residences approximately 0.175 miles (282 meters) north of the project site. According to LST Methodology, a distance of 200 meters was used for the threshold as a conservative measure. Table 5-2 below shows the LSTs for NO<sub>2</sub>, PM10 and PM2.5 for both construction and operational activities.

Table 5-2 – SCAQMD Local Air Quality Thresholds of Significance (pounds/day)<sup>1</sup>

| Activity     | NOx | CO    | PM10 | PM2.5 |
|--------------|-----|-------|------|-------|
| Construction | 334 | 5,356 | 74   | 23    |
| Operation    | 334 | 5,356 | 18   | 6     |

Notes:

#### 5.3 Toxic Air Contaminants

According to the SCAQMD CEQA Handbook, any project that has the potential to expose the public to toxic air contaminants in excess of the following thresholds would be considered to have a significant air quality impact:

- If the Maximum Incremental Cancer Risk is 10 in one million or greater; or
- Toxic air contaminants from the project would result in a Hazard Index increase of 1 or greater.

In order to determine if the project may have a significant impact related to hazardous air pollutants (HAP), the *Health Risk Assessment Guidance for analyzing Cancer Risks from Mobile Source Diesel Idling Emissions for CEQA Air Quality Analysis*, (Diesel Analysis) prepared by SCAQMD, August 2003, recommends that if the project is anticipated to create HAPs through stationary sources or regular operations of diesel trucks on the project site, then the proximity of the nearest receptors to the source of the HAP and the toxicity of the HAP should be analyzed through a comprehensive facility-wide health risk assessment (HRA).

# 5.4 Odor Impacts

The SCAQMD CEQA Handbook states that an odor impact would occur if the project creates an odor nuisance pursuant to SCAQMD Rule 402, which states:

"A person shall not discharge from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance, or annoyance to any considerable number of persons to the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property.

The provisions of this rule shall not apply to odors emanating from agricultural operations necessary for the growing of crops or the raising of fowl or animals."

If the project results in a violation of Rule 402 with regards to odor impacts, then the project would create a significant odor impact.

#### 5.5 Greenhouse Gases

In 2008, SCAQMD formed a Working Group to identify GHG emissions thresholds for land use projects that could be used by local lead agencies in the SCAB. The Working Group developed several different options that are contained in the SCAQMD Draft Guidance Document – Interim CEQA GHG Significance Threshold, that could be applied by lead agencies. The working group has not provided additional guidance since release of the interim guidance in 2008. The SCAQMD Board has not approved the thresholds; however, the Guidance Document provides substantial evidence supporting the approaches to significance of GHG emissions that can be considered by the lead agency in adopting its own threshold. The current interim thresholds consist of the following tiered approach:

<sup>&</sup>lt;sup>1</sup> The nearest sensitive receptors are single-family homes located 0.175 miles (280 meters) north of the project site. Source: Calculated from SCAQMD's Mass Rate Look-up Tables for one acre in Air Monitoring Area 34, Central San Bernardino Valley.

- Tier 1 consists of evaluating whether or not the project qualifies for any applicable exemption under CEQA.
- Tier 2 consists of determining whether the project is consistent with a GHG reduction plan. If a project is consistent with a qualifying local GHG reduction plan, it does not have significant GHG emissions.
- Tier 3 consists of screening values, which the lead agency can choose, but must be consistent with all projects within its jurisdiction. A project's construction emissions are averaged over 30 years and are added to the project's operational emissions.

If the project's emissions are below the following screening threshold, then the project is less than significant: 3,000 MTCO2e per year.

#### 6.0 IMPACT ANALYSIS

# 6.1 CEQA Thresholds of Significance

Consistent with CEQA and the State CEQA Guidelines, a significant impact related to air quality and global climate change would occur if the project is determined to result in:

- Conflict with or obstruct implementation of the applicable air quality plan;
- Violate any air quality standard or contribute substantially to an existing or projected air quality violation;
- Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is non-attainment under an applicable Federal or State ambient air quality standard (including releasing emissions which exceed quantitative thresholds for ozone precursors);
- Expose sensitive receptors to substantial pollutant concentrations;
- Create objectionable odors affecting a substantial number of people.
- Generate GHG emissions, either directly or indirectly, that may have a significant impact on the environment; or
- Conflict with any applicable plan, policy or regulation of an agency adopted for the purpose of reducing the emissions of GHGs.

# 6.2 Air Quality Compliance

The project would not conflict with or obstruct implementation of the SCAQMD Air Quality Management Plan (AQMP). The following section discusses the project's consistency with the SCAQMD AQMP.

#### **SCAQMD Air Quality Management Plan**

The California Environmental Quality Act (CEQA) requires a discussion of any inconsistencies between a project and applicable General Plans and regional plans (CEQA Guidelines Section 15125). The regional plan that applies to the project includes the SCAQMD AQMP. Therefore, this section discusses any potential inconsistencies of the project with the AQMP.

The purpose of this discussion is to set forth the issues regarding consistency with the assumptions and objectives of the AQMP and discuss whether the project would interfere with the region's ability to comply with Federal and State air quality standards. If the decision-makers determine that the project is inconsistent, the lead agency may consider project modifications or inclusion of mitigation to eliminate the inconsistency.

The SCAQMD CEQA Handbook states that "New or amended General Plan Elements (including land use zoning and density amendments), Specific Plans, and significant projects must be analyzed for consistency with the AQMP." Strict consistency with all aspects of the plan is usually not required. A project should be considered to be consistent with the AQMP if it furthers one or more policies and does not obstruct other policies. The SCAQMD CEQA Handbook identifies two key indicators of consistency:

(1) Whether the project will result in an increase in the frequency or severity of existing air quality violations or cause or contribute to new violations or delay timely attainment of air quality standards or the interim emission reductions specified in the AQMP.

(2) Whether the project will exceed the assumptions in the AQMP or increments based on the year of project buildout and phase.

Both of these criteria are evaluated below.

#### Criterion 1 - Increase in the Frequency or Severity of Violations?

Based on the air quality modeling analysis contained in this report, short-term regional construction air emissions would not result in significant impacts based on SCAQMD regional or local thresholds of significance. The ongoing operation of the project would generate air pollutant emissions that are inconsequential on a regional basis and would not result in significant impacts based on SCAQMD thresholds of significance. The analysis for long-term local air quality impacts showed that local pollutant concentrations would not be projected to exceed the air quality standards. Therefore, a less than significant long-term impact would occur and no mitigation would be required.

### Criterion 2 - Exceed Assumptions in the AQMP?

The proposed uses are consistent with the zoning designation for the project site, which is consistent with the City General Plan. The City General Plan is consistent with the SCAG Regional Comprehensive Plan Guidelines and the SCAQMD AQMP. Pursuant to the methodology in Chapter 12 of the 1993 SCAQMD CEQA Air Quality Handbook, consistency with the Basin 2016 AQMP is affirmed when a project (1) does not increase the frequency or severity of an air quality standards violation or cause a new violation; and (2) is consistent with the growth assumptions in the AQMP. Consistency review is presented below.

The CEQA Air Quality Handbook indicates that consistency with AQMP growth assumptions must be analyzed for new or amended General Plan elements, Specific Plans, and significant projects. Significant projects include airports, electrical generating facilities, petroleum and gas refineries, designation of oil drilling districts, water ports, solid waste disposal sites, and offshore drilling facilities; therefore, the project is not defined as significant.

Based on the consistency analysis presented above, the project is consistent with the General Plans and the regional AQMP.

#### Level of Significance

Less than significant impact.

### 6.3 Air Quality Standard Violation

The project would not violate an air quality standard or contribute substantially to an existing or projected air quality violation. The following section calculates the potential air emissions associated with the construction and operations of the project and compares the emissions to the SCAQMD standards.

#### **Construction Emissions**

### **Construction-Related Regional Impacts**

The CalEEMod model has been utilized to calculate the construction-related regional emissions from the project. The worst-case summer or winter daily construction-related criteria pollutant emissions from the project for each phase of construction activities are shown below in Table 6-1 and the CalEEMod daily printouts are shown in Appendix A.

Table 6-1 - Construction-Related Regional Criteria Pollutant Emissions (pounds/day)<sup>1</sup>

| Activity           | VOC  | NOx | CO   | SO2  | PM10 | PM2.5 |
|--------------------|------|-----|------|------|------|-------|
| Summer             | 11.5 | 7.9 | 66.1 | 0.09 | 8.9  | 2.4   |
| Winter             | 11.5 | 7.9 | 66.1 | 0.09 | 8.9  | 2.4   |
| SCQAMD Thresholds  | 75   | 100 | 550  | 150  | 150  | 55    |
| Exceeds Threshold? | No   | No  | No   | No   | No   | No    |

Notes:

Source: CalEEMod Version 2016.3.1.

Table 6-1 shows that none of the analyzed criteria pollutants would exceed the regional construction emissions thresholds. Therefore, a less than significant regional air quality impact would occur from construction of the project.

### Construction-Related Local Impacts

Construction-related air emissions may have the potential to exceed the State and Federal air quality standards in the project vicinity, even though these pollutant emissions may not be significant enough to create a regional impact to the Air Basin.

The local air quality emissions from construction were analyzed through utilizing the methodology described in *Localized Significance Threshold Methodology* (LST Methodology), prepared by SCAQMD, revised October 2009. The LST Methodology found the primary criteria pollutant emissions of concern are NOx, CO, PM10, and PM2.5. In order to determine if any of these pollutants require a detailed analysis of the local air quality impacts, each phase of construction was screened using the SCAQMD's Mass Rate LST Look-up Tables. The Look-up Tables were developed by the SCAQMD in order to readily determine if the daily onsite emissions of CO, NOx, PM10, and PM2.5 from the project could result in a significant impact to the local air quality. Table 6-2 shows the onsite emissions from the CalEEMod model for the different construction phases and the calculated emissions thresholds. Since it is possible that building construction, paving, and architectural coating activities may occur concurrently, Table 6-2 also shows the combined local criteria pollutant emissions from building construction, paving and architectural coating phases of construction.

<sup>&</sup>lt;sup>1</sup> Grading based on adherence to fugitive dust suppression requirements from SCAQMD Rule 403.

Table 6-2 – Construction-Related Local Criteria Pollutant Emissions

| 1 abic 0-2 Constituction-                                | TOTAL ESCAL     | Criteria i onu   |                 | ·     |
|--|-----------------|------------------|-----------------|-------|
| Phase  |                 | Pollutant Emissi | ons (pounds/day | )     |
|  | NO <sub>x</sub> | СО               | PM10            | PM2.5 |
| Demolition   | 14.3            | 13.5             | 0.7             | 0.6   |
| Site Preparation   | 12.4            | 6.6              | 3.3             | 1.8   |
| Grading  | 14.5            | 8.7              | 3.8             | 2.1   |
| Daily on-site Total                                      | 41.2            | 28.8             | 7.8             | 4.5   |
| Combined Building Construction, Paving,                  |                 |                  |                 |       |
| and Architectural Coatings                               | 29.9            | 35.8             | 1.3             | 1.2   |
| Building Construction (2023)                             | 11.7            | 12.6             | 0.5             | 0.5   |
| Building Construction (2024)                             | 11.1            | 12.5             | 0.5             | 0.4   |
| Paving   | 5.9             | 8.8              | 0.3             | 0.3   |
| Architectural Coatings                                   | 1.2             | 1.8              | 0.1             | 0.1   |
| Total  | 71.1            | 64.6             | 9.1             | 5.8   |
| SCAQMD Thresholds for 200 meters (656 feet) <sup>2</sup> | 334             | 5,356            | 74              | 23    |
| Exceeds Threshold?                                       | No              | No               | No              | No    |

Notes:

The data provided in Table 6-2 shows that none of the analyzed criteria pollutants would exceed the local emissions thresholds during the demolition, grading, site preparation phases or the combined building construction, paving, and architectural coatings phases. Therefore, a less than significant local air quality impact would occur from construction of the project.

#### **Operational Emissions**

The on-going operation of the project would result in a long-term increase in air quality emissions. This increase would be due to emissions from the project-generated vehicle trips and through operational emissions from the on-going use of the project. The following section provides an analysis of potential long-term air quality impacts due to regional air quality impacts with the on-going operations of the project. The potential operations-related air emissions have been analyzed below for the regional criteria pollutant emissions and cumulative impacts.

#### Operations-Related Criteria Pollutant Analysis

The operations-related criteria air quality impacts created by the project have been analyzed through use of the CalEEMod model. The worst-case summer or winter VOC, NOx, CO, SO<sub>2</sub>, PM10, and PM2.5 daily emissions created from the project's long-term operations have been calculated and are summarized below in Table 6-3 and the CalEEMod daily emissions printouts are shown in Appendix A.

<sup>&</sup>lt;sup>1</sup> Grading based on adherence to fugitive dust suppression requirements from SCAQMD Rule 403.

<sup>&</sup>lt;sup>2</sup> The nearest sensitive receptors are single-family homes located 0.175 miles (282 meters) north of the project site

Source: Calculated from CalEEMod and SCAQMD's Mass Rate Look-up Tables for one acre in Air Monitoring Area 34, Central San Bernardino Valley.

Table 6-3 – Operational Criteria Pollutant Emissions (pounds/day)

| Activity                      | VOC    | NOx     | CO     | SO <sub>2</sub> | PM10    | PM2.5   |
|-------------------------------|--------|---------|--------|-----------------|---------|---------|
| Area Sources <sup>1</sup>     | 0.31   | 0.00009 | 0.0095 | 0               | 0.00003 | 0.00003 |
| Energy Usage <sup>2</sup>     | 0.0021 | 0.019   | 0.016  | 0.00011         | 0.0014  | 0.0014  |
| Mobile Sources <sup>3</sup>   | 11.2   | 7.92    | 66.1   | 0.089           | 8.95    | 2.4     |
| <b>Total Emissions</b>        | 11.5   | 7.9     | 66.1   | 0.09            | 8.95    | 2.4     |
| SCQAMD Operational Thresholds | 55     | 55      | 550    | 150             | 150     | 55      |
| Exceeds Threshold?            | No     | No      | No     | No              | No      | No      |

#### Notes:

Source: Calculated from CalEEMod Version 2020.4.0.

The data provided in Table 6-3 above shows that none of the analyzed criteria pollutants would exceed the regional operation emissions thresholds. Therefore, a less than significant regional air quality impact would occur from operation of the project.

### Operations-Related Local Air Quality Impacts

Project-related air emissions may have the potential to exceed the State and Federal air quality standards in the project vicinity, even though these pollutant emissions may not be significant enough to create a regional impact to the Air Basin. The project has been analyzed for the potential local CO emission impacts from the project-generated vehicular trips and from the potential local air quality impacts from on-site operations. The following analysis analyzes the vehicular CO emissions and local impacts from on-site operations.

### Local CO Hotspot Impacts from Project-Generated Vehicular Trips

CO is the pollutant of major concern along roadways because the most notable source of CO is motor vehicles. For this reason, CO concentrations are usually indicative of the local air quality generated by a roadway network and are used as an indicator of potential local air quality impacts. Local air quality impacts can be assessed by comparing future without and with project CO levels to the State and Federal CO standards of 20 ppm over one hour or 9 ppm over eight hours. At the time of the 1993 Handbook, the Air Basin was designated nonattainment under the CAAQS and NAAQS for CO. With the turnover of older vehicles, introduction of cleaner fuels, and implementation of control technology on industrial facilities, CO concentrations in the Air Basin and in the state have steadily declined. In 2007, the Air Basin was designated in attainment for CO under both the CAAQS and NAAQS. SCAQMD conducted a CO hot spot analysis for attainment at the busiest intersections in Los Angeles during the peak morning and afternoon periods and did not predict a violation of CO standards. The four intersections analyzed by the SCAQMD were: Long Beach Boulevard and Imperial Highway; Wilshire Boulevard and Veteran Avenue; Sunset Boulevard and Highland Avenue; and La Cienega Boulevard and Century Boulevard. The busiest intersection evaluated (Wilshire and Veteran) had a daily traffic volume of approximately 100,000 vehicles per day with LOS E in the morning and LOS F in the evening peak hour.

For the purpose of Senate Bill (SB) 743 and California Environmental Quality ACT (CEQA) compliance, a Vehicle Miles Traveled (VMT) analysis should be conducted for land use projects. The San Bernardino County Transportation Authority (SBCTA) has identified a number of screening criteria that may be applied to screen projects from requiring a project-level assessment. The Project consists of a local serving gas station and car wash facilities that provide local services and is expected to reduce overall VMT. In accordance with the SBCTA guidelines, local serving retail projects less than 50,000 square feet may be presumed to have a less than significant air quality impact and the Project does not require a full VMT analysis or a hot-spot modeling analysis.

<sup>&</sup>lt;sup>1</sup> Area sources consist of emissions from consumer products, architectural coatings, and landscaping equipment.

<sup>&</sup>lt;sup>2</sup> Energy usage consist of emissions from natural gas usage (excluding hearths).

<sup>&</sup>lt;sup>3</sup> Mobile sources consist of emissions from vehicles and road dust.

### 6.4 Cumulative Net Increase in Non-Attainment Pollution

The project would not result in a cumulatively considerable net increase of any criteria pollutant for which the project region is non-attainment under an applicable Federal or State ambient air quality standard (including releasing emissions which exceed quantitative thresholds for ozone precursors).

Cumulative projects include local development as well as general growth within the project area. However, as with most development, the greatest source of emissions is from mobile sources, which travel throughout the local area. Therefore, from an air quality standpoint, the cumulative analysis would extend beyond any local projects and when wind patterns are considered would cover an even larger area. Accordingly, the cumulative analysis for the project's air quality must be generic by nature. The project area is out of attainment for ozone and PM10 and PM2.5 particulate matter. In accordance with CEQA Guidelines Section 15130(b), this analysis of cumulative impacts incorporates a three-tiered approach to assess cumulative air quality impacts.

- Consistency with the SCAQMD project specific thresholds for construction and operations;
- Project consistency with existing air quality plans; and
- Assessment of the cumulative health effects of the pollutants.

### **Consistency with Project Specific Thresholds**

### **Construction-Related Impacts**

The project site is located in the South Coast Air Basin, which is currently designated by the EPA for federal standards as a non-attainment area for ozone and PM2.5 and by CARB for the state standards as a non-attainment area for ozone, PM10, and PM2.5. The regional ozone, PM10, and PM2.5 emissions associated with construction of the project. The analysis found that development of the project would result in less than significant regional emissions of VOC and NOx (ozone precursors), PM10, and PM2.5 during construction of the project. Therefore, a less than significant cumulative impact would occur from construction of the project.

#### Operational-Related Impacts

The greatest cumulative operational impact on the air quality to the Air Basin will be the incremental addition of pollutants mainly from increased traffic from residential, commercial, and industrial development. In accordance with SCAQMD methodology, projects that do not exceed SCAQMD criteria or can be mitigated to less than criteria levels are not significant and do not add to the overall cumulative impact. The regional ozone, PM10, and PM2.5 emissions created from the on-going operations of the project have been calculated. The analysis found that development of the project would result in less than significant regional emissions of VOC and NOx (ozone precursors), PM10, and PM2.5 during operation of the project. With respect to long-term emissions, this project would create a less than significant cumulative impact.

#### **Cumulative Health Impacts**

The Air Basin is designated as nonattainment for ozone, PM10, and PM2.5, which means that the background levels of those pollutants are at times higher than the ambient air quality standards. The air quality standards were set to protect public health, including the health of sensitive individuals (elderly, children, and the sick). Therefore, when the concentrations of those pollutants exceeds the standard, it is likely that some sensitive individuals in the population would experience health effects. The regional analysis found that the project would not exceed the SCAQMD regional significance thresholds for VOC and NOx (ozone precursors), PM10 and PM2.5. As such, the project would result in a less than significant cumulative health impact.

### Level of Significance

Less than significant impact.

### 6.5 Sensitive Receptors

The project would not expose sensitive receptors to substantial pollutant concentrations. The local concentrations of criteria pollutant emissions produced in the nearby vicinity of the project, which may expose sensitive receptors to substantial concentrations for both construction and operations, which are discussed separately below. The discussion below also includes an analysis of the potential impacts from toxic air contaminant emissions.

### **Construction-Related Sensitive Receptor Impacts**

Construction of the project may expose sensitive receptors to substantial pollutant concentrations of localized criteria pollutant concentrations and from toxic air contaminant emissions created from onsite construction equipment, which are described below.

#### Local Criteria Pollutant Impacts from Construction

The local air quality impacts from construction of the project has been analyzed and found that the construction of the project would not exceed the local NOx, CO, PM10 and PM2.5 thresholds of significance. Therefore, construction of the project would create a less than significant construction-related impact to local air quality and no mitigation would be required.

#### Toxic Air Contaminants Impacts from Construction

The greatest potential for toxic air contaminant emissions would be related to diesel particulate matter (DPM) emissions associated with heavy equipment operations during construction of the project. According to SCAQMD methodology, health effects from carcinogenic air toxics are usually described in terms of "individual cancer risk". "Individual Cancer Risk" is the likelihood that a person exposed to concentrations of toxic air contaminants over a 70-year lifetime will contract cancer, based on the use of standard riskassessment methodology. Given the relatively limited number of heavy-duty construction equipment and the short-term construction schedule, the project would not result in a long-term (i.e., 70 years) substantial source of toxic air contaminant emissions and corresponding individual cancer risk. In addition, California Code of Regulations Title 13, Article 4.8, Chapter 9, Section 2449 regulates emissions from off-road diesel equipment in California. This regulation limits idling of equipment to no more than five minutes, requires equipment operators to label each piece of equipment and provide annual reports to CARB of their fleet's usage and emissions. This regulation also requires systematic upgrading of the emission Tier level of each fleet, and currently no commercial operator is allowed to purchase Tier 0 or Tier 1 equipment and by January 2023 no commercial operator is allowed to purchase Tier 2 equipment. In addition to the purchase restrictions, equipment operators need to meet fleet average emissions targets that become more stringent each year between years 2014 and 2023. Therefore, no significant short-term toxic air contaminant impacts would occur during construction of the project. As such, construction of the project would result in a less than significant exposure of sensitive receptors to substantial pollutant concentrations.

#### **Operations-Related Sensitive Receptor Impacts**

The on-going operations of the project may expose sensitive receptors to substantial pollutant concentrations of local CO emission impacts from the project-generated vehicular trips and from the potential local air quality impacts from onsite operations. The following analyzes the vehicular CO emissions. Local criteria pollutant impacts from onsite operations, and toxic air contaminant impacts.

### Local CO Hotspot Impacts from Project-Generated Vehicle Trips

CO is the pollutant of major concern along roadways because the most notable source of CO is motor vehicles. For this reason, CO concentrations are usually indicative of the local air quality generated by a roadway network and are used as an indicator of potential impacts to sensitive receptors. The VMT and CO hot spot analysis was not required for this project because the project consists of a local serving gas station and carwash that provide local services and is expected to reduce overall VMT. In accordance with SBCTA guidelines, local serving retail projects less than 50,000 square feet may be presumed have a less than significant impact. Therefore, operation of the project would result in a less than significant exposure of offsite sensitive receptors to substantial pollutant concentrations.

#### Operations-Related Toxic Air Contaminant Impacts

Particulate matter (PM) from diesel exhaust is the predominant TAC in most areas and according to *The California Almanac of Emissions and Air Quality 2013 Edition*, prepared by CARB, about 80 percent of the outdoor TAC cancer risk is from diesel exhaust. Some chemicals in diesel exhaust, such as benzene and formaldehyde have been listed as carcinogens by State Proposition 65 and the Federal Hazardous Air Pollutants program. Due to the nominal number of diesel truck trips generated by the project, a less than significant TAC impact would occur during the on-going operations of the project and no mitigation would be required.

### Level of Significance

Less than significant impact.

# 6.6 Objectionable Odors

The project would not create objectionable odors affecting a substantial number of people. Potential odor impacts have been analyzed separately for construction and operations below.

Individual responses to odors are highly variable and can result in a variety of effects. Generally, the impact of an odor results from a variety of factors such as frequency, duration, offensiveness, location, and sensory perception. The frequency is a measure of how often an individual is exposed to an odor in the ambient environment. The intensity refers to an individual's or group's perception of the odor strength or concentration. The duration of an odor refers to the elapsed time over which an odor is experienced. The offensiveness of the odor is the subjective rating of the pleasantness or unpleasantness of an odor. The location accounts for the type of area in which a potentially affected person lives, works, or visits; the type of activity in which he or she is engaged; and the sensitivity of the impacted receptor.

Sensory perception has four major components: detectability, intensity, character, and hedonic tone. The detection (or threshold) of an odor is based on a panel of responses to the odor. There are two types of thresholds: the odor detection threshold and the recognition threshold. The detection threshold is the lowest concentration of an odor that will elicit a response in a percentage of the people that live and work in the immediate vicinity of the project site and is typically presented as the mean (or 50 percent of the population). The recognition threshold is the minimum concentration that is recognized as having a characteristic odor quality, this is typically represented by recognition by 50 percent of the population. The intensity refers to the perceived strength of the odor. The odor character is what the substance smells like. The hedonic tone is a judgment of the pleasantness or unpleasantness of the odor. The hedonic tone varies in subjective experience, frequency, odor character, odor intensity, and duration.

### **Construction-Related Odor Impacts**

Potential sources that may emit odors during construction activities include the application of coatings such as asphalt pavement, paints and solvents and from emissions from diesel equipment. The objectionable odors that may be produced during the construction process would be temporary and would not likely be noticeable for extended periods of time beyond the project site's boundaries. Due to the transitory nature

of construction odors, a less than significant odor impact would occur and no mitigation would be required.

### **Potential Operations-Related Odor Impacts**

Potential sources that may emit odors during the on-going operations of the project would primarily occur from odor emissions from the trash storage areas. Pursuant to City regulations, permanent trash enclosures that protect trash bins from rain as well as limit air circulation would be required for the trash storage areas. Due to the distance of the nearest receptors from the project site and through compliance with SCAQMD's Rule 402, no significant impact related to odors would occur during the on-going operations of the project. Therefore, a less than significant odor impact would occur and no mitigation would be required.

### Level of Significance

Less than significant impact.

# 6.7 Generation of Greenhouse Gas Emissions

The project would not generate GHG emissions, either directly or indirectly, that may have a significant impact on the environment. The most appropriate threshold for the proposed Project would be 3,000 MTCO<sub>2</sub>e per year as recommended by SCAQMD for all non-industrial projects to evaluate potential for the project to contribute to GHG emissions cumulatively. Table 6-4 provides a summary of the greenhouse gas emissions and the CalEEMod model runs are provided in Appendix A.

Table 6-4 – Project Greenhouse Gas Annual Emissions

|   | Greenhou        | ise Gas Emission | s (Metric Tons po | er Year)          |
|---|-----------------|------------------|-------------------|-------------------|
| Category                                    | CO <sub>2</sub> | CH <sub>4</sub>  | N <sub>2</sub> O  | CO <sub>2</sub> e |
|   | Year 2024 Em    | issions          |                   |                   |
| Operational Emissions                       | 1,547           | 0.7              | 0.1               | 1,599             |
| Maximum Construction Emissions <sup>1</sup> | 250             | 0.03             | 0                 | 252               |
| <b>Total 2024 Emissions</b>                 | 1,797           | 0.7              | 0.1               | 1,851             |
| SCA   | AQMD Threshold  | of Significance  | •                 | 3,000             |

Notes:

The data provided in Table 6-4 shows that the project would create 1,851 MTCO<sub>2</sub>e per year the project's GHG emissions would be within the SCAQMD's thresholds of significance of 3,000 MTCO<sub>2</sub>e per year. Therefore, impacts would be less than significant.

#### Level of Significance

Less than significant impact.

### 6.8 Greenhouse Gas Plan Consistency

The project would be below the commercial land use threshold of 3,000 MTCO<sub>2</sub>e per year and reduction targets and would not conflict with the applicable plan for reducing GHG emissions. Impacts would be less than significant.

#### Level of Significance

Less than significant impact.

<sup>&</sup>lt;sup>1</sup> Construction emissions amortized over 30 years as recommended in the SCAQMD GHG Working Group on November 19, 2009.

#### 7.0 REFERENCES

California Air Resources Board, Appendix VII Risk Characterization Scenarios, October 2000.

California Air Resources Board, The California Almanac of Emissions and Air Quality 2013 Edition.

California Air Resources Board, Resolution 08-43, December 12, 2008.

California Air Resources Board, Recommended Approaches for Setting Interim Significance Thresholds for Greenhouse Gases under the California Environmental Quality Act, on October 24, 2008.

California Air Resources Board, First Update to the Climate Change Scoping Plan, May 2014.

California Air Resources Board, Staff Report Proposed Update to the SB 375 Greenhouse Gas Emission Reduction Targets, June 2017.

California Department of Conservation, A General Guide for Ultramafic Rocks in California – Areas More Likely to Contain Naturally Occurring Asbestos, August, 2000.

City of Highland, City of Highland General Plan, 2012.

Environmental Protection Agency, Nonattainment Major New Source Review Implementation Under 8-Hour Ozone National Ambient Air Quality Standard: Reconsideration, June 30, 2005.

South Coast Air Quality Management District, 2007 Air Quality Management Plan, June 1, 2007.

South Coast Air Quality Management District, CEQA Air Quality Handbook, April 1993.

South Coast Air Quality Management District, Final 2016 Air Quality Management Plan, April, 2017.

South Coast Air Quality Management District, *Final Localized Significance Threshold Methodology*, Revised July 2008.

South Coast Air Quality Management District, Revised Draft – 2012 Lead State Implementation Plan Los Angeles County, May 4, 2012.

South Coast Air Quality Management District, Rule 402 Nuisance, Adopted May 7, 1976.

South Coast Air Quality Management District, Rule 403 Fugitive Dust, Amended June 3, 2005.

South Coast Air Quality Management District, *Rule 461 Gasoline Transfer and Dispensing*, Amended April 6, 2012.

South Coast Air Quality Management District, *Rule 1113 Architectural Coatings*, Amended September 6, 2013.

South Coast Air Quality Management District, Rule 1143 Consumer Paint Thinners & Multi-Purpose Solvents, Amended December 3, 2010.

South Coast Air Quality Management District, *Rule 1403 Asbestos Emissions from Demolition/ Renovation Activities*, Amended October 5, 2007.

South Coast Air Quality Management District, SCAQMD Air Quality Significance Thresholds, March 2015.

South Coast Air Quality Management District, *Draft Report Multiple Air Toxics Exposure Study in the South Coast Air Basin, MATES III*, January 2008.

South Coast Air Quality Management District, *Draft Report Multiple Air Toxics Exposure Study in the South Coast Air Basin, MATES-IV*, October 2014.

Southern California Association of Governments, 2016-2040 Regional Transportation Plan/Sustainable Communities Strategy, April 2016.

University of California, Davis, *Transportation Project-Level Carbon Monoxide Protocol*, December 1997.



CalEEMod Version: CalEEMod.2020.4.0 Page 1 of 28 Date: 11/30/2022 10:42 AM

Harikrishna Gas and Carwash - South Coast Air Basin, Summer

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

### Harikrishna Gas and Carwash

**South Coast Air Basin, Summer** 

# 1.0 Project Characteristics

#### 1.1 Land Usage

| Land Uses                         | Size  | Metric   | Lot Acreage | Floor Surface Area | Population |
|-----------------------------------|-------|----------|-------------|--------------------|------------|
| Parking Lot                       | 23.00 | Space    | 0.21        | 9,200.00           | 0          |
| Convenience Market with Gas Pumps | 11.18 | 1000sqft | 0.26        | 11,180.00          | 0          |
| Automobile Care Center            | 1.39  | 1000sqft | 0.03        | 1,390.00           | 0          |
| Other Asphalt Surfaces            | 34.53 | 1000sqft | 0.79        | 34,532.00          | 0          |
| Other Non-Asphalt Surfaces        | 23.27 | 1000sqft | 0.53        | 23,271.00          | 0          |

### 1.2 Other Project Characteristics

UrbanizationUrbanWind Speed (m/s)2.2Precipitation Freq (Days)31Climate Zone10Operational Year2024

Utility Company Southern California Edison

 CO2 Intensity
 390.98
 CH4 Intensity
 0.033
 N2O Intensity
 0.004

 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)

#### 1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Convenience store - 4620 SF 6 MPD Canopy - 4042 SF High Speed Diesel Canopy - 2,520 SF Car Wash - 1387 SF Parking - 23 spaces including 1 ADA, 2EVC, and 2 Vacuum Other impervious - 34,532 SF Landscaping - 23,271 SF

Construction Off-road Equipment Mitigation - Rule 403 applied for dust control

Construction Off-road Equipment Mitigation - Construction Off-road Equipment Mitigation - Rule 403 applied for dust control

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

| Table Name | Column Name       | Default Value | New Value |
|------------|-------------------|---------------|-----------|
| tblLandUse | LandUseSquareFeet | 34,530.00     | 34,532.00 |
| tblLandUse | LandUseSquareFeet | 23,270.00     | 23,271.00 |

# 2.0 Emissions Summary

CalEEMod Version: CalEEMod.2020.4.0 Page 3 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 2.1 Overall Construction (Maximum Daily Emission)

# **Unmitigated Construction**

|         | ROG     | NOx     | СО      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---------|---------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Year    |         |         |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | lay |     |      |
| 2023    | 1.6384  | 14.4889 | 13.9110 | 0.0276 | 7.1944           | 0.6775          | 7.7994        | 3.4544            | 0.6335           | 4.0110         |          |           |           |     |     |      |
| 2024    | 13.7141 | 11.6025 | 13.7355 | 0.0274 | 0.4409           | 0.4552          | 0.8961        | 0.1188            | 0.4391           | 0.5579         |          |           |           |     |     |      |
| Maximum | 13.7141 | 14.4889 | 13.9110 | 0.0276 | 7.1944           | 0.6775          | 7.7994        | 3.4544            | 0.6335           | 4.0110         |          |           |           |     |     |      |

# **Mitigated Construction**

|         | ROG     | NOx     | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---------|---------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Year    |         |         |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |     |      |
| 2023    | 1.6384  | 14.4889 | 13.9110 | 0.0276 | 3.2989           | 0.6775          | 3.9039        | 1.5708            | 0.6335           | 2.1274         |          |           |           |     |     | <br> |
| 2024    | 13.7141 | 11.6025 | 13.7355 | 0.0274 | 0.4409           | 0.4552          | 0.8961        | 0.1188            | 0.4391           | 0.5579         |          | <br> <br> |           |     |     | <br> |
| Maximum | 13.7141 | 14.4889 | 13.9110 | 0.0276 | 3.2989           | 0.6775          | 3.9039        | 1.5708            | 0.6335           | 2.1274         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 4 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|                      | ROG  | NOx  | СО   | SO2  | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4  | N20  | CO2e |
|----------------------|------|------|------|------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|----------|-----------|------|------|------|
| Percent<br>Reduction | 0.00 | 0.00 | 0.00 | 0.00 | 51.02            | 0.00            | 44.80         | 52.71             | 0.00             | 41.23          | 0.00     | 0.00     | 0.00      | 0.00 | 0.00 | 0.00 |

CalEEMod Version: CalEEMod.2020.4.0 Page 5 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 2.2 Overall Operational

# **Unmitigated Operational**

|          | ROG             | NOx             | CO              | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|-----------------|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|-----------|-----------|-----|-----|------|
| Category |                 |                 |                 |                 | lb/d             | day             |                 |                   |                  |                 |          |           | lb/d      | lay |     |      |
| Area     | 0.3105          | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000          |                  | 3.0000e-<br>005 | 3.0000e-<br>005 |                   | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |
| "        | 2.0500e-<br>003 | 0.0187          | 0.0157          | 1.1000e-<br>004 |                  | 1.4200e-<br>003 | 1.4200e-<br>003 |                   | 1.4200e-<br>003  | 1.4200e-<br>003 |          |           |           |     |     |      |
| Mobile   | 11.8387         | 7.3722          | 62.4613         | 0.0924          | 8.8686           | 0.0812          | 8.9498          | 2.3632            | 0.0754           | 2.4386          |          |           |           |     |     |      |
| Total    | 12.1513         | 7.3910          | 62.4865         | 0.0925          | 8.8686           | 0.0827          | 8.9513          | 2.3632            | 0.0768           | 2.4400          |          |           |           |     |     |      |

# **Mitigated Operational**

|          | ROG             | NOx             | CO              | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|-----------------|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|-----------|-----------|-----|-----|------|
| Category |                 |                 |                 |                 | lb/d             | day             |                 |                   |                  |                 |          |           | lb/d      | day |     |      |
| Area     | 0.3105          | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000          |                  | 3.0000e-<br>005 | 3.0000e-<br>005 |                   | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |
| Energy   | 2.0500e-<br>003 | 0.0187          | 0.0157          | 1.1000e-<br>004 |                  | 1.4200e-<br>003 | 1.4200e-<br>003 |                   | 1.4200e-<br>003  | 1.4200e-<br>003 |          |           |           |     |     |      |
| Mobile   | 11.8387         | 7.3722          | 62.4613         | 0.0924          | 8.8686           | 0.0812          | 8.9498          | 2.3632            | 0.0754           | 2.4386          |          |           |           |     |     |      |
| Total    | 12.1513         | 7.3910          | 62.4865         | 0.0925          | 8.8686           | 0.0827          | 8.9513          | 2.3632            | 0.0768           | 2.4400          |          |           |           |     |     |      |

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

Date: 11/30/2022 10:42 AM

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|                      | ROG  | NOx  | СО   | SO2  | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4  | N20  | CO2e |
|----------------------|------|------|------|------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|----------|-----------|------|------|------|
| Percent<br>Reduction | 0.00 | 0.00 | 0.00 | 0.00 | 0.00             | 0.00            | 0.00          | 0.00              | 0.00             | 0.00           | 0.00     | 0.00     | 0.00      | 0.00 | 0.00 | 0.00 |

# 3.0 Construction Detail

#### **Construction Phase**

| Phase<br>Number | Phase Name            | Phase Type            | Start Date | End Date  | Num Days<br>Week | Num Days | Phase Description |
|-----------------|-----------------------|-----------------------|------------|-----------|------------------|----------|-------------------|
| 1               | Demolition            | Demolition            | 3/1/2023   | 3/28/2023 | 5                | 20       |                   |
| 2               | Site Preparation      | Site Preparation      | 3/29/2023  | 3/30/2023 | 5                | 2        |                   |
| 3               | Grading               | Grading               | 3/31/2023  | 4/5/2023  | 5                | 4        |                   |
| 4               | Building Construction | Building Construction | 4/6/2023   | 1/10/2024 | 5                | 200      |                   |
| 5               | Paving                | Paving                | 1/11/2024  | 1/24/2024 | 5                | 10       |                   |
| 6               | Architectural Coating | Architectural Coating | 1/25/2024  | 2/7/2024  | 5                | 10       |                   |

Acres of Grading (Site Preparation Phase): 1.88

Acres of Grading (Grading Phase): 4

Acres of Paving: 1.53

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 18,855; Non-Residential Outdoor: 6,285; Striped Parking Area: 4,020 (Architectural Coating – sqft)

### **OffRoad Equipment**

| Phase Name            | Offroad Equipment Type   | Amount | Usage Hours | Horse Power | Load Factor |
|-----------------------|--------------------------|--------|-------------|-------------|-------------|
| Architectural Coating | Air Compressors          | 1      | 6.00        | 78          | 0.48        |
| Paving                | Cement and Mortar Mixers | 1      | 6.00        | 9           | 0.56        |
| Demolition            | Concrete/Industrial Saws | 1      | 8.00        | 81          | 0.73        |
| Building Construction | Cranes                   | 1      | 6.00        | 231         | 0.29        |
| Building Construction | Forklifts                | 1      | 6.00        | 89          | 0.20        |

CalEEMod Version: CalEEMod.2020.4.0 Page 7 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

| Building Construction | Generator Sets            | 1 | 8.00 | 84  | 0.74 |
|-----------------------|---------------------------|---|------|-----|------|
| Grading               | Graders                   | 1 | 8.00 | 187 | 0.41 |
| Site Preparation      | Graders                   | 1 | 8.00 | 187 | 0.41 |
| Paving                | Pavers                    | 1 | 6.00 | 130 | 0.42 |
| Paving                | Paving Equipment          | 1 | 8.00 | 132 | 0.36 |
| Paving                | Rollers                   | 1 | 7.00 | 80  | 0.38 |
| Demolition            | Rubber Tired Dozers       | 1 | 8.00 | 247 | 0.40 |
| Grading               | Rubber Tired Dozers       | 1 | 8.00 | 247 | 0.40 |
| Site Preparation      | Rubber Tired Dozers       | 1 | 7.00 | 247 | 0.40 |
| Building Construction | Tractors/Loaders/Backhoes | 1 | 6.00 | 97  | 0.37 |
| Demolition            | Tractors/Loaders/Backhoes | 3 | 8.00 | 97  | 0.37 |
| Grading               | Tractors/Loaders/Backhoes | 2 | 7.00 | 97  | 0.37 |
| Paving                | Tractors/Loaders/Backhoes | 1 | 8.00 | 97  | 0.37 |
| Site Preparation      | Tractors/Loaders/Backhoes | 1 | 8.00 | 97  | 0.37 |
| Building Construction | Welders                   | 3 | 8.00 | 46  | 0.45 |

# **Trips and VMT**

| Phase Name            | Offroad Equipment<br>Count | Worker Trip<br>Number | Vendor Trip<br>Number | Hauling Trip<br>Number | Worker Trip<br>Length | Vendor Trip<br>Length | Hauling Trip<br>Length | Worker Vehicle<br>Class | Vendor<br>Vehicle Class | Hauling<br>Vehicle Class |
|-----------------------|----------------------------|-----------------------|-----------------------|------------------------|-----------------------|-----------------------|------------------------|-------------------------|-------------------------|--------------------------|
| Demolition            | 5                          | 13.00                 | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Site Preparation      | 3                          | 8.00                  | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Grading               | 4                          | 10.00                 | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Building Construction | 7                          | 32.00                 | 13.00                 | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Paving                | 5                          | 13.00                 | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Architectural Coating | 1                          | 6.00                  | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |

# **3.1 Mitigation Measures Construction**

Water Exposed Area

CalEEMod Version: CalEEMod.2020.4.0 Page 8 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.2 **Demolition - 2023**

# **Unmitigated Construction On-Site**

|          | ROG    | NOx     | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |         |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | day |     |      |
|          | 1.4725 | 14.3184 | 13.4577 | 0.0241 |                  | 0.6766          | 0.6766        |                   | 0.6328           | 0.6328         |          |           |           |     |     |      |
| Total    | 1.4725 | 14.3184 | 13.4577 | 0.0241 |                  | 0.6766          | 0.6766        |                   | 0.6328           | 0.6328         |          |           |           |     |     |      |

|          | ROG    | NOx    | СО     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Worker   | 0.0411 | 0.0277 | 0.4533 | 1.2700e-<br>003 | 0.1453           | 8.2000e-<br>004 | 0.1461        | 0.0385            | 7.5000e-<br>004  | 0.0393         |          |           |           |     |     |      |
| Total    | 0.0411 | 0.0277 | 0.4533 | 1.2700e-<br>003 | 0.1453           | 8.2000e-<br>004 | 0.1461        | 0.0385            | 7.5000e-<br>004  | 0.0393         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 9 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.2 **Demolition - 2023**

# **Mitigated Construction On-Site**

|          | ROG    | NOx     | СО      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |         |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |     |      |
| 3        | 1.4725 | 14.3184 | 13.4577 | 0.0241 |                  | 0.6766          | 0.6766        |                   | 0.6328           | 0.6328         |          |           |           |     |     |      |
| Total    | 1.4725 | 14.3184 | 13.4577 | 0.0241 |                  | 0.6766          | 0.6766        |                   | 0.6328           | 0.6328         |          |           |           |     |     |      |

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2   | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-------------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |             | lb/d      | day |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |             |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          | <del></del> |           |     |     |      |
| Worker   | 0.0411 | 0.0277 | 0.4533 | 1.2700e-<br>003 | 0.1453           | 8.2000e-<br>004 | 0.1461        | 0.0385            | 7.5000e-<br>004  | 0.0393         |          | 1           |           |     |     |      |
| Total    | 0.0411 | 0.0277 | 0.4533 | 1.2700e-<br>003 | 0.1453           | 8.2000e-<br>004 | 0.1461        | 0.0385            | 7.5000e-<br>004  | 0.0393         |          |             |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 10 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.3 Site Preparation - 2023

# **Unmitigated Construction On-Site**

|               | ROG    | NOx     | CO     | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e   |
|---------------|--------|---------|--------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|--------|
| Category      |        |         |        |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |                     |        |
| Fugitive Dust |        |         |        |        | 6.2662           | 0.0000          | 6.2662        | 3.0041            | 0.0000           | 3.0041         |          |           |           |     |                     |        |
| Off-Road      | 1.1339 | 12.4250 | 6.6420 | 0.0172 |                  | 0.5074          | 0.5074        |                   | 0.4668           | 0.4668         |          |           |           |     | <br> <br> <br> <br> | i<br>i |
| Total         | 1.1339 | 12.4250 | 6.6420 | 0.0172 | 6.2662           | 0.5074          | 6.7736        | 3.0041            | 0.4668           | 3.4709         |          |           |           |     |                     |        |

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     | ,    |
| Worker   | 0.0253 | 0.0170 | 0.2789 | 7.8000e-<br>004 | 0.0894           | 5.0000e-<br>004 | 0.0899        | 0.0237            | 4.6000e-<br>004  | 0.0242         |          |           |           |     |     | ,    |
| Total    | 0.0253 | 0.0170 | 0.2789 | 7.8000e-<br>004 | 0.0894           | 5.0000e-<br>004 | 0.0899        | 0.0237            | 4.6000e-<br>004  | 0.0242         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 11 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.3 Site Preparation - 2023

# **Mitigated Construction On-Site**

|               | ROG    | NOx     | CO     | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e |
|---------------|--------|---------|--------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|------|
| Category      |        |         |        |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |                     |      |
| Fugitive Dust |        |         |        |        | 2.8198           | 0.0000          | 2.8198        | 1.3518            | 0.0000           | 1.3518         |          |           |           |     |                     |      |
| Off-Road      | 1.1339 | 12.4250 | 6.6420 | 0.0172 |                  | 0.5074          | 0.5074        |                   | 0.4668           | 0.4668         |          | !<br>!    |           |     | <br> <br> <br> <br> |      |
| Total         | 1.1339 | 12.4250 | 6.6420 | 0.0172 | 2.8198           | 0.5074          | 3.3272        | 1.3518            | 0.4668           | 1.8186         |          |           |           |     |                     |      |

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2   | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-------------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |             | lb/d      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |             |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          | 1           |           |     |     |      |
| Worker   | 0.0253 | 0.0170 | 0.2789 | 7.8000e-<br>004 | 0.0894           | 5.0000e-<br>004 | 0.0899        | 0.0237            | 4.6000e-<br>004  | 0.0242         |          | 1<br>1<br>1 |           |     |     |      |
| Total    | 0.0253 | 0.0170 | 0.2789 | 7.8000e-<br>004 | 0.0894           | 5.0000e-<br>004 | 0.0899        | 0.0237            | 4.6000e-<br>004  | 0.0242         |          |             |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 12 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

3.4 Grading - 2023

# **Unmitigated Construction On-Site**

|               | ROG    | NOx     | CO     | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e   |
|---------------|--------|---------|--------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|--------|
| Category      |        |         |        |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |                     |        |
| Fugitive Dust |        |         |        |        | 7.0826           | 0.0000          | 7.0826        | 3.4247            | 0.0000           | 3.4247         |          |           |           |     |                     |        |
| Off-Road      | 1.3330 | 14.4676 | 8.7038 | 0.0206 |                  | 0.6044          | 0.6044        |                   | 0.5560           | 0.5560         |          |           |           |     | <br> <br> <br> <br> | i<br>i |
| Total         | 1.3330 | 14.4676 | 8.7038 | 0.0206 | 7.0826           | 0.6044          | 7.6869        | 3.4247            | 0.5560           | 3.9807         |          |           |           |     |                     |        |

|          | ROG    | NOx    | СО     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2   | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-------------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |             | lb/d      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |             |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          | 1           |           |     |     |      |
| Worker   | 0.0316 | 0.0213 | 0.3487 | 9.8000e-<br>004 | 0.1118           | 6.3000e-<br>004 | 0.1124        | 0.0296            | 5.8000e-<br>004  | 0.0302         |          | 1<br>1<br>1 |           |     |     |      |
| Total    | 0.0316 | 0.0213 | 0.3487 | 9.8000e-<br>004 | 0.1118           | 6.3000e-<br>004 | 0.1124        | 0.0296            | 5.8000e-<br>004  | 0.0302         |          |             |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 13 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

3.4 Grading - 2023

# **Mitigated Construction On-Site**

|               | ROG            | NOx     | СО     | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---------------|----------------|---------|--------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category      |                |         |        |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |     |      |
| Fugitive Dust | 11<br>11<br>11 |         |        |        | 3.1872           | 0.0000          | 3.1872        | 1.5411            | 0.0000           | 1.5411         |          |           |           |     |     |      |
| Off-Road      | 1.3330         | 14.4676 | 8.7038 | 0.0206 |                  | 0.6044          | 0.6044        |                   | 0.5560           | 0.5560         |          |           |           |     |     |      |
| Total         | 1.3330         | 14.4676 | 8.7038 | 0.0206 | 3.1872           | 0.6044          | 3.7915        | 1.5411            | 0.5560           | 2.0971         |          |           |           |     |     |      |

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2   | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-------------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |             | lb/c      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |             |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          | 1<br>1<br>1 |           |     |     |      |
| Worker   | 0.0316 | 0.0213 | 0.3487 | 9.8000e-<br>004 | 0.1118           | 6.3000e-<br>004 | 0.1124        | 0.0296            | 5.8000e-<br>004  | 0.0302         |          | 1<br>1<br>1 |           |     |     |      |
| Total    | 0.0316 | 0.0213 | 0.3487 | 9.8000e-<br>004 | 0.1118           | 6.3000e-<br>004 | 0.1124        | 0.0296            | 5.8000e-<br>004  | 0.0302         |          |             |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 14 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.5 Building Construction - 2023 <u>Unmitigated Construction On-Site</u>

|          | ROG    | NOx     | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |         |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |     |      |
|          | 1.5233 | 11.7104 | 12.6111 | 0.0221 |                  | 0.5145          | 0.5145        |                   | 0.4968           | 0.4968         |          |           |           |     |     |      |
| Total    | 1.5233 | 11.7104 | 12.6111 | 0.0221 |                  | 0.5145          | 0.5145        |                   | 0.4968           | 0.4968         |          |           |           |     |     |      |

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0140 | 0.4757 | 0.1826 | 2.3700e-<br>003 | 0.0832           | 2.6300e-<br>003 | 0.0859        | 0.0240            | 2.5100e-<br>003  | 0.0265         |          |           |           |     |     |      |
| Worker   | 0.1012 | 0.0682 | 1.1158 | 3.1300e-<br>003 | 0.3577           | 2.0200e-<br>003 | 0.3597        | 0.0949            | 1.8600e-<br>003  | 0.0967         |          |           |           |     |     |      |
| Total    | 0.1152 | 0.5439 | 1.2984 | 5.5000e-<br>003 | 0.4409           | 4.6500e-<br>003 | 0.4456        | 0.1188            | 4.3700e-<br>003  | 0.1232         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 15 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.5 Building Construction - 2023

# **Mitigated Construction On-Site**

|          | ROG    | NOx     | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |         |         |        | lb/d             | day             |               |                   |                  | lb/c           | day      |           |           |     |     |      |
|          | 1.5233 | 11.7104 | 12.6111 | 0.0221 |                  | 0.5145          | 0.5145        |                   | 0.4968           | 0.4968         |          |           |           |     |     |      |
| Total    | 1.5233 | 11.7104 | 12.6111 | 0.0221 |                  | 0.5145          | 0.5145        |                   | 0.4968           | 0.4968         |          |           |           |     |     |      |

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2   | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-------------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |             | lb/d      | day |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |             |           |     |     |      |
| Vendor   | 0.0140 | 0.4757 | 0.1826 | 2.3700e-<br>003 | 0.0832           | 2.6300e-<br>003 | 0.0859        | 0.0240            | 2.5100e-<br>003  | 0.0265         |          | !<br>!<br>! |           |     |     |      |
| Worker   | 0.1012 | 0.0682 | 1.1158 | 3.1300e-<br>003 | 0.3577           | 2.0200e-<br>003 | 0.3597        | 0.0949            | 1.8600e-<br>003  | 0.0967         |          | 1           |           |     |     |      |
| Total    | 0.1152 | 0.5439 | 1.2984 | 5.5000e-<br>003 | 0.4409           | 4.6500e-<br>003 | 0.4456        | 0.1188            | 4.3700e-<br>003  | 0.1232         |          |             |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 16 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.5 Building Construction - 2024 <u>Unmitigated Construction On-Site</u>

|          | ROG    | NOx     | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |         |         |        | lb/d             | day             |               |                   |                  | lb/c           | day      |           |           |     |     |      |
| Off-Road | 1.4200 | 11.0639 | 12.5172 | 0.0221 |                  | 0.4506          | 0.4506        |                   | 0.4348           | 0.4348         |          |           |           |     |     |      |
| Total    | 1.4200 | 11.0639 | 12.5172 | 0.0221 |                  | 0.4506          | 0.4506        |                   | 0.4348           | 0.4348         |          |           |           |     |     |      |

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0136 | 0.4778 | 0.1796 | 2.3300e-<br>003 | 0.0832           | 2.6400e-<br>003 | 0.0859        | 0.0240            | 2.5300e-<br>003  | 0.0265         |          |           |           |     |     |      |
| Worker   | 0.0945 | 0.0609 | 1.0387 | 3.0400e-<br>003 | 0.3577           | 1.9300e-<br>003 | 0.3596        | 0.0949            | 1.7700e-<br>003  | 0.0966         |          | !<br>!    |           |     |     |      |
| Total    | 0.1081 | 0.5387 | 1.2183 | 5.3700e-<br>003 | 0.4409           | 4.5700e-<br>003 | 0.4455        | 0.1188            | 4.3000e-<br>003  | 0.1231         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 17 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.5 Building Construction - 2024

# **Mitigated Construction On-Site**

|          | ROG    | NOx     | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |         |         |        | lb/d             | day             |               |                   |                  | lb/c           | day      |           |           |     |     |      |
|          | 1.4200 | 11.0639 | 12.5172 | 0.0221 |                  | 0.4506          | 0.4506        |                   | 0.4348           | 0.4348         |          |           |           |     |     |      |
| Total    | 1.4200 | 11.0639 | 12.5172 | 0.0221 |                  | 0.4506          | 0.4506        |                   | 0.4348           | 0.4348         |          |           |           |     |     |      |

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2   | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-------------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |             | lb/d      | day |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |             |           |     |     |      |
| Vendor   | 0.0136 | 0.4778 | 0.1796 | 2.3300e-<br>003 | 0.0832           | 2.6400e-<br>003 | 0.0859        | 0.0240            | 2.5300e-<br>003  | 0.0265         |          | !<br>!<br>! |           |     |     |      |
| Worker   | 0.0945 | 0.0609 | 1.0387 | 3.0400e-<br>003 | 0.3577           | 1.9300e-<br>003 | 0.3596        | 0.0949            | 1.7700e-<br>003  | 0.0966         |          | 1           |           |     |     |      |
| Total    | 0.1081 | 0.5387 | 1.2183 | 5.3700e-<br>003 | 0.4409           | 4.5700e-<br>003 | 0.4455        | 0.1188            | 4.3000e-<br>003  | 0.1231         |          |             |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 18 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

3.6 Paving - 2024
<u>Unmitigated Construction On-Site</u>

|          | ROG    | NOx    | CO     | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e        |
|----------|--------|--------|--------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|-------------|
| Category |        |        |        |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |                     |             |
| Off-Road | 0.6180 | 5.8607 | 8.8253 | 0.0136 |                  | 0.2810          | 0.2810        |                   | 0.2594           | 0.2594         |          |           |           |     |                     |             |
| Paving   | 0.2620 |        |        |        |                  | 0.0000          | 0.0000        |                   | 0.0000           | 0.0000         |          |           | <br>      |     | <br> <br> <br> <br> | ,<br>,<br>, |
| Total    | 0.8800 | 5.8607 | 8.8253 | 0.0136 |                  | 0.2810          | 0.2810        |                   | 0.2594           | 0.2594         |          |           |           |     |                     |             |

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Worker   | 0.0384 | 0.0247 | 0.4220 | 1.2300e-<br>003 | 0.1453           | 7.8000e-<br>004 | 0.1461        | 0.0385            | 7.2000e-<br>004  | 0.0393         |          |           |           |     |     |      |
| Total    | 0.0384 | 0.0247 | 0.4220 | 1.2300e-<br>003 | 0.1453           | 7.8000e-<br>004 | 0.1461        | 0.0385            | 7.2000e-<br>004  | 0.0393         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 19 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

3.6 Paving - 2024

<u>Mitigated Construction On-Site</u>

|          | ROG    | NOx    | CO     | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e        |
|----------|--------|--------|--------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|-------------|
| Category |        |        |        |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | lay |                     |             |
| Off-Road | 0.6180 | 5.8607 | 8.8253 | 0.0136 |                  | 0.2810          | 0.2810        |                   | 0.2594           | 0.2594         |          |           |           |     |                     |             |
| Paving   | 0.2620 |        |        |        |                  | 0.0000          | 0.0000        |                   | 0.0000           | 0.0000         |          |           |           |     | <br> <br> <br> <br> | ,<br>,<br>, |
| Total    | 0.8800 | 5.8607 | 8.8253 | 0.0136 |                  | 0.2810          | 0.2810        |                   | 0.2594           | 0.2594         |          |           |           |     |                     |             |

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          | 1         |           |     |     |      |
| Worker   | 0.0384 | 0.0247 | 0.4220 | 1.2300e-<br>003 | 0.1453           | 7.8000e-<br>004 | 0.1461        | 0.0385            | 7.2000e-<br>004  | 0.0393         |          |           |           |     |     |      |
| Total    | 0.0384 | 0.0247 | 0.4220 | 1.2300e-<br>003 | 0.1453           | 7.8000e-<br>004 | 0.1461        | 0.0385            | 7.2000e-<br>004  | 0.0393         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 20 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.7 Architectural Coating - 2024 <u>Unmitigated Construction On-Site</u>

|                 | ROG     | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5   | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e |
|-----------------|---------|--------|--------|-----------------|------------------|-----------------|---------------|---------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|------|
| Category        |         |        |        |                 | lb/d             | day             |               |                     |                  |                |          |           | lb/c      | day |                     |      |
| Archit. Coating | 13.5157 |        |        |                 |                  | 0.0000          | 0.0000        |                     | 0.0000           | 0.0000         |          |           |           |     |                     |      |
|                 | 0.1808  | 1.2188 | 1.8101 | 2.9700e-<br>003 |                  | 0.0609          | 0.0609        | <br> <br> <br> <br> | 0.0609           | 0.0609         |          |           |           |     | <br> <br> <br> <br> |      |
| Total           | 13.6964 | 1.2188 | 1.8101 | 2.9700e-<br>003 |                  | 0.0609          | 0.0609        |                     | 0.0609           | 0.0609         |          |           |           |     |                     |      |

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2   | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-------------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |             | lb/c      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |             |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          | 1           |           |     |     |      |
| Worker   | 0.0177 | 0.0114 | 0.1948 | 5.7000e-<br>004 | 0.0671           | 3.6000e-<br>004 | 0.0674        | 0.0178            | 3.3000e-<br>004  | 0.0181         |          | 1<br>1<br>1 |           |     |     |      |
| Total    | 0.0177 | 0.0114 | 0.1948 | 5.7000e-<br>004 | 0.0671           | 3.6000e-<br>004 | 0.0674        | 0.0178            | 3.3000e-<br>004  | 0.0181         |          |             |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 21 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.7 Architectural Coating - 2024 Mitigated Construction On-Site

|                 | ROG     | NOx    | CO          | SO2             | Fugitive<br>PM10    | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2  | CH4 | N2O | CO2e |
|-----------------|---------|--------|-------------|-----------------|---------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|------------|-----|-----|------|
| Category        |         |        |             |                 | lb/d                | day             |               |                   |                  |                |          |           | lb/d       | day |     |      |
| Archit. Coating | 13.5157 |        | 1<br>1<br>1 |                 |                     | 0.0000          | 0.0000        |                   | 0.0000           | 0.0000         |          | i<br>i    | i<br>i     | 1   |     |      |
| Off-Road        | 0.1808  | 1.2188 | 1.8101      | 2.9700e-<br>003 | <br> <br> <br> <br> | 0.0609          | 0.0609        |                   | 0.0609           | 0.0609         |          | i<br>i    | ]<br> <br> |     |     |      |
| Total           | 13.6964 | 1.2188 | 1.8101      | 2.9700e-<br>003 |                     | 0.0609          | 0.0609        |                   | 0.0609           | 0.0609         |          |           |            |     |     |      |

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Worker   | 0.0177 | 0.0114 | 0.1948 | 5.7000e-<br>004 | 0.0671           | 3.6000e-<br>004 | 0.0674        | 0.0178            | 3.3000e-<br>004  | 0.0181         |          |           |           |     |     |      |
| Total    | 0.0177 | 0.0114 | 0.1948 | 5.7000e-<br>004 | 0.0671           | 3.6000e-<br>004 | 0.0674        | 0.0178            | 3.3000e-<br>004  | 0.0181         |          |           |           |     |     |      |

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 4.0 Operational Detail - Mobile

# **4.1 Mitigation Measures Mobile**

|             | ROG     | NOx    | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|-------------|---------|--------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category    |         |        |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | day |     |      |
| Mitigated   | 11.8387 | 7.3722 | 62.4613 | 0.0924 | 8.8686           | 0.0812          | 8.9498        | 2.3632            | 0.0754           | 2.4386         |          |           |           |     |     |      |
| Unmitigated | 11.8387 | 7.3722 | 62.4613 | 0.0924 | 8.8686           | 0.0812          | 8.9498        | 2.3632            | 0.0754           | 2.4386         |          |           |           |     |     |      |

# **4.2 Trip Summary Information**

|                                   | Aver     | age Daily Trip Ra | ate      | Unmitigated | Mitigated  |
|-----------------------------------|----------|-------------------|----------|-------------|------------|
| Land Use                          | Weekday  | Saturday          | Sunday   | Annual VMT  | Annual VMT |
| Automobile Care Center            | 32.97    | 32.97             | 16.51    | 41,017      | 41,017     |
| Convenience Market with Gas Pumps | 6,978.56 | 6,978.56          | 6978.56  | 4,165,323   | 4,165,323  |
| Other Asphalt Surfaces            | 0.00     | 0.00              | 0.00     |             |            |
| Parking Lot                       | 0.00     | 0.00              | 0.00     |             |            |
| Other Non-Asphalt Surfaces        | 0.00     | 0.00              | 0.00     |             |            |
| Total                             | 7,011.53 | 7,011.53          | 6,995.07 | 4,206,340   | 4,206,340  |

# 4.3 Trip Type Information

|                             |            | Miles      |             |            | Trip %     |             |         | Trip Purpos | e %     |
|-----------------------------|------------|------------|-------------|------------|------------|-------------|---------|-------------|---------|
| Land Use                    | H-W or C-W | H-S or C-C | H-O or C-NW | H-W or C-W | H-S or C-C | H-O or C-NW | Primary | Diverted    | Pass-by |
| Automobile Care Center      | 16.60      | 8.40       | 6.90        | 33.00      | 48.00      | 19.00       | 21      | 51          | 28      |
| Convenience Market with Gas |            | 8.40       | 6.90        | 0.80       | 80.20      | 19.00       | 14      | 21          | 65      |

CalEEMod Version: CalEEMod.2020.4.0 Page 23 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|                            |            | Miles      |             |            | Trip %     |             |         | Trip Purpos | e %     |
|----------------------------|------------|------------|-------------|------------|------------|-------------|---------|-------------|---------|
| Land Use                   | H-W or C-W | H-S or C-C | H-O or C-NW | H-W or C-W | H-S or C-C | H-O or C-NW | Primary | Diverted    | Pass-by |
| Other Asphalt Surfaces     | 16.60      | 8.40       | 6.90        | 0.00       | 0.00       | 0.00        | 0       | 0           | 0       |
| Parking Lot                | 16.60      | 8.40       | 6.90        | 0.00       | 0.00       | 0.00        | 0       | 0           | 0       |
| Other Non-Asphalt Surfaces | 16.60      | 8.40       | 6.90        | 0.00       | 0.00       | 0.00        | 0       | 0           | 0       |

#### 4.4 Fleet Mix

| Land Use                             | LDA      | LDT1     | LDT2     | MDV      | LHD1     | LHD2     | MHD      | HHD      | OBUS     | UBUS     | MCY      | SBUS     | MH       |
|--------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Automobile Care Center               | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |
| Convenience Market with Gas<br>Pumps | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |
| Other Asphalt Surfaces               | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |
| Parking Lot                          | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |
| Other Non-Asphalt Surfaces           | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |

# 5.0 Energy Detail

Historical Energy Use: N

# **5.1 Mitigation Measures Energy**

CalEEMod Version: CalEEMod.2020.4.0 Page 24 of 28 Date: 11/30/2022 10:42 AM

# Harikrishna Gas and Carwash - South Coast Air Basin, Summer

# EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|                                     | ROG             | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |  |
|-------------------------------------|-----------------|--------|--------|-----------------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|-----------|-----------|-----|-----|------|--|
| Category                            | lb/day          |        |        |                 |                  |                 |                 |                   |                  |                 | lb/day   |           |           |     |     |      |  |
| NAMES AND ADDRESS OF TAXABLE PARTY. | 2.0500e-<br>003 | 0.0187 | 0.0157 | 1.1000e-<br>004 |                  | 1.4200e-<br>003 | 1.4200e-<br>003 |                   | 1.4200e-<br>003  | 1.4200e-<br>003 |          |           |           |     |     |      |  |
| Unmitianted 1                       | 2.0500e-<br>003 | 0.0187 | 0.0157 | 1.1000e-<br>004 |                  | 1.4200e-<br>003 | 1.4200e-<br>003 |                   | 1.4200e-<br>003  | 1.4200e-<br>003 |          |           |           |     |     |      |  |

# 5.2 Energy by Land Use - NaturalGas <u>Unmitigated</u>

|   | NaturalGa<br>s Use | ROG             | NOx             | CO              | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2   | Total CO2 | CH4 | N2O | CO2e |  |  |
|---|--------------------|-----------------|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|-------------|-----------|-----|-----|------|--|--|
| Land Use                                | kBTU/yr            | lb/day          |                 |                 |                 |                  |                 |                 |                   |                  |                 |          | lb/day      |           |     |     |      |  |  |
| Automobile Care<br>Center               | 123.12             | 1.3300e-<br>003 | 0.0121          | 0.0101          | 7.0000e-<br>005 |                  | 9.2000e-<br>004 | 9.2000e-<br>004 |                   | 9.2000e-<br>004  | 9.2000e-<br>004 |          |             |           |     |     |      |  |  |
| Convenience<br>Market with Gas<br>Pumps |                    | 7.3000e-<br>004 | 6.6100e-<br>003 | 5.5500e-<br>003 | 4.0000e-<br>005 |                  | 5.0000e-<br>004 | 5.0000e-<br>004 |                   | 5.0000e-<br>004  | 5.0000e-<br>004 |          |             |           |     |     |      |  |  |
| Other Asphalt<br>Surfaces               | 0                  | 0.0000          | 0.0000          | 0.0000          | 0.0000          |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          |             |           |     |     |      |  |  |
| Other Non-<br>Asphalt Surfaces          | 0                  | 0.0000          | 0.0000          | 0.0000          | 0.0000          |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          | i<br>i<br>i |           |     |     |      |  |  |
| Parking Lot                             | 0                  | 0.0000          | 0.0000          | 0.0000          | 0.0000          | <br>             | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          | ]           |           |     |     |      |  |  |
| Total                                   |                    | 2.0600e-<br>003 | 0.0187          | 0.0157          | 1.1000e-<br>004 |                  | 1.4200e-<br>003 | 1.4200e-<br>003 |                   | 1.4200e-<br>003  | 1.4200e-<br>003 |          |             |           |     |     |      |  |  |

CalEEMod Version: CalEEMod.2020.4.0 Page 25 of 28 Date: 11/30/2022 10:42 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Summer

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

### **5.2 Energy by Land Use - NaturalGas**

#### **Mitigated**

|   | NaturalGa<br>s Use | ROG             | NOx             | CO              | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O    | CO2e |
|---|--------------------|-----------------|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|-----------|-----------|-----|--------|------|
| Land Use                                | kBTU/yr            |                 |                 |                 |                 | lb/d             | day             |                 |                   |                  |                 |          |           | lb/c      | lay |        |      |
| Automobile Care<br>Center               | 0.12312            | 1.3300e-<br>003 | 0.0121          | 0.0101          | 7.0000e-<br>005 |                  | 9.2000e-<br>004 | 9.2000e-<br>004 |                   | 9.2000e-<br>004  | 9.2000e-<br>004 |          |           |           |     |        |      |
| Convenience<br>Market with Gas<br>Pumps |                    | 7.3000e-<br>004 | 6.6100e-<br>003 | 5.5500e-<br>003 | 4.0000e-<br>005 |                  | 5.0000e-<br>004 | 5.0000e-<br>004 |                   | 5.0000e-<br>004  | 5.0000e-<br>004 |          |           |           |     |        |      |
| Other Asphalt<br>Surfaces               | 0                  | 0.0000          | 0.0000          | 0.0000          | 0.0000          |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          |           |           |     |        |      |
| Other Non-<br>Asphalt Surfaces          |                    | 0.0000          | 0.0000          | 0.0000          | 0.0000          |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          |           |           |     | i<br>i |      |
| Parking Lot                             | 0                  | 0.0000          | 0.0000          | 0.0000          | 0.0000          |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          |           |           |     |        |      |
| Total                                   |                    | 2.0600e-<br>003 | 0.0187          | 0.0157          | 1.1000e-<br>004 |                  | 1.4200e-<br>003 | 1.4200e-<br>003 |                   | 1.4200e-<br>003  | 1.4200e-<br>003 |          |           |           |     |        |      |

### 6.0 Area Detail

### **6.1 Mitigation Measures Area**

CalEEMod Version: CalEEMod.2020.4.0 Page 26 of 28 Date: 11/30/2022 10:42 AM

### Harikrishna Gas and Carwash - South Coast Air Basin, Summer

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|             | ROG    | NOx             | CO              | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|-------------|--------|-----------------|-----------------|--------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|-----------|-----------|-----|-----|------|
| Category    |        |                 |                 |        | lb/d             | day             |                 |                   |                  |                 |          |           | lb/d      | lay |     |      |
| Mitigated   | 0.3105 | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000 |                  | 3.0000e-<br>005 | 3.0000e-<br>005 |                   | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |
| Unmitigated | 0.3105 | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000 | i<br>i           | 3.0000e-<br>005 | 3.0000e-<br>005 |                   | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           | <br>      |     |     |      |

# 6.2 Area by SubCategory

#### **Unmitigated**

|             | ROG             | NOx             | CO              | SO2    | Fugitive<br>PM10    | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5   | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|-------------|-----------------|-----------------|-----------------|--------|---------------------|-----------------|-----------------|---------------------|------------------|-----------------|----------|-----------|-----------|-----|-----|------|
| SubCategory |                 |                 |                 |        | lb/d                | day             |                 |                     |                  |                 |          |           | lb/d      | day |     |      |
| Coating     | 0.0370          |                 |                 |        |                     | 0.0000          | 0.0000          |                     | 0.0000           | 0.0000          |          |           |           |     |     |      |
| Products    | 0.2726          |                 |                 |        | <br> <br> <br> <br> | 0.0000          | 0.0000          | <br> <br> <br> <br> | 0.0000           | 0.0000          |          |           |           |     |     |      |
| ' "         | 8.8000e-<br>004 | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000 |                     | 3.0000e-<br>005 | 3.0000e-<br>005 |                     | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |
| Total       | 0.3105          | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000 |                     | 3.0000e-<br>005 | 3.0000e-<br>005 |                     | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 27 of 28 Date: 11/30/2022 10:42 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Summer

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

### 6.2 Area by SubCategory

#### **Mitigated**

|             | ROG             | NOx             | CO              | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|-------------|-----------------|-----------------|-----------------|--------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|-----------|-----------|-----|-----|------|
| SubCategory |                 |                 |                 |        | lb/d             | day             |                 |                   |                  |                 |          |           | lb/d      | lay |     |      |
| Coating     | 0.0370          |                 |                 |        |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          |           |           |     |     |      |
|             | 0.2726          |                 | <br>            |        |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          |           |           |     |     |      |
| · · ·       | 8.8000e-<br>004 | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000 |                  | 3.0000e-<br>005 | 3.0000e-<br>005 |                   | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |
| Total       | 0.3105          | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000 |                  | 3.0000e-<br>005 | 3.0000e-<br>005 |                   | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |

### 7.0 Water Detail

### 7.1 Mitigation Measures Water

CalEEMod Version: CalEEMod.2020.4.0 Page 28 of 28 Date: 11/30/2022 10:42 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Summer

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

#### 8.0 Waste Detail

### 8.1 Mitigation Measures Waste

### 9.0 Operational Offroad

| Equipment Type | Number | Hours/Day | Days/Year | Horse Power | Load Factor | Fuel Type |
|----------------|--------|-----------|-----------|-------------|-------------|-----------|

### **10.0 Stationary Equipment**

#### **Fire Pumps and Emergency Generators**

| Equipment Type | Number | Hours/Day | Hours/Year | Horse Power | Load Factor | Fuel Type |
|----------------|--------|-----------|------------|-------------|-------------|-----------|
|----------------|--------|-----------|------------|-------------|-------------|-----------|

#### **Boilers**

| Equipment Type | Number | Heat Input/Day | Heat Input/Year | Boiler Rating | Fuel Type |
|----------------|--------|----------------|-----------------|---------------|-----------|

#### **User Defined Equipment**

| Equipment Type | Number |
|----------------|--------|
|                |        |

### 11.0 Vegetation

CalEEMod Version: CalEEMod.2020.4.0 Page 1 of 28 Date: 11/30/2022 10:49 AM

Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

#### Harikrishna Gas and Carwash

**South Coast Air Basin, Winter** 

#### 1.0 Project Characteristics

#### 1.1 Land Usage

| Land Uses                         | Size  | Metric   | Lot Acreage | Floor Surface Area | Population |
|-----------------------------------|-------|----------|-------------|--------------------|------------|
| Parking Lot                       | 23.00 | Space    | 0.21        | 9,200.00           | 0          |
| Convenience Market with Gas Pumps | 11.18 | 1000sqft | 0.26        | 11,180.00          | 0          |
| Automobile Care Center            | 1.39  | 1000sqft | 0.03        | 1,390.00           | 0          |
| Other Asphalt Surfaces            | 34.53 | 1000sqft | 0.79        | 34,532.00          | 0          |
| Other Non-Asphalt Surfaces        | 23.27 | 1000sqft | 0.53        | 23,271.00          | 0          |

#### 1.2 Other Project Characteristics

UrbanizationUrbanWind Speed (m/s)2.2Precipitation Freq (Days)31Climate Zone10Operational Year2024

Utility Company Southern California Edison

 CO2 Intensity
 390.98
 CH4 Intensity
 0.033
 N2O Intensity
 0.004

 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)

#### 1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Convenience store - 4620 SF 6 MPD Canopy - 4042 SF High Speed Diesel Canopy - 2,520 SF Car Wash - 1387 SF Parking - 23 spaces including 1 ADA, 2EVC, and 2 Vacuum Other impervious - 34,532 SF Landscaping - 23,271 SF

Construction Off-road Equipment Mitigation - Rule 403 applied for dust control

Construction Off-road Equipment Mitigation - Construction Off-road Equipment Mitigation - Rule 403 applied for dust control

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

| Table Name | Column Name       | Default Value | New Value |
|------------|-------------------|---------------|-----------|
| tblLandUse | LandUseSquareFeet | 34,530.00     | 34,532.00 |
| tblLandUse | LandUseSquareFeet | 23,270.00     | 23,271.00 |

### 2.0 Emissions Summary

CalEEMod Version: CalEEMod.2020.4.0 Page 3 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

### 2.1 Overall Construction (Maximum Daily Emission)

#### **Unmitigated Construction**

|         | ROG     | NOx     | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e |
|---------|---------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|------|
| Year    |         |         |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |                     |      |
| 2023    | 1.6444  | 14.4910 | 13.8709 | 0.0274 | 7.1944           | 0.6775          | 7.7994        | 3.4544            | 0.6335           | 4.0110         |          |           |           |     |                     |      |
| 2024    | 13.7153 | 11.6309 | 13.6499 | 0.0273 | 0.4409           | 0.4552          | 0.8961        | 0.1188            | 0.4391           | 0.5579         |          |           |           |     | <br> <br> <br> <br> |      |
| Maximum | 13.7153 | 14.4910 | 13.8709 | 0.0274 | 7.1944           | 0.6775          | 7.7994        | 3.4544            | 0.6335           | 4.0110         |          |           |           |     |                     |      |

#### **Mitigated Construction**

|         | ROG     | NOx     | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---------|---------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Year    |         |         |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |     |      |
| 2023    | 1.6444  | 14.4910 | 13.8709 | 0.0274 | 3.2989           | 0.6775          | 3.9039        | 1.5708            | 0.6335           | 2.1274         |          |           |           |     |     |      |
| 2024    | 13.7153 | 11.6309 | 13.6499 | 0.0273 | 0.4409           | 0.4552          | 0.8961        | 0.1188            | 0.4391           | 0.5579         |          |           |           |     |     | <br> |
| Maximum | 13.7153 | 14.4910 | 13.8709 | 0.0274 | 3.2989           | 0.6775          | 3.9039        | 1.5708            | 0.6335           | 2.1274         |          |           |           | -   |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 4 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|                      | ROG  | NOx  | СО   | SO2  | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4  | N20  | CO2e |
|----------------------|------|------|------|------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|----------|-----------|------|------|------|
| Percent<br>Reduction | 0.00 | 0.00 | 0.00 | 0.00 | 51.02            | 0.00            | 44.80         | 52.71             | 0.00             | 41.23          | 0.00     | 0.00     | 0.00      | 0.00 | 0.00 | 0.00 |

CalEEMod Version: CalEEMod.2020.4.0 Page 5 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

### 2.2 Overall Operational

#### **Unmitigated Operational**

|          | ROG             | NOx             | CO              | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|-----------------|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|-----------|-----------|-----|-----|------|
| Category |                 |                 |                 |                 | lb/d             | day             |                 |                   |                  |                 |          |           | lb/c      | lay |     |      |
| Area     | 0.3105          | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000          |                  | 3.0000e-<br>005 | 3.0000e-<br>005 |                   | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |
|          | 2.0500e-<br>003 | 0.0187          | 0.0157          | 1.1000e-<br>004 |                  | 1.4200e-<br>003 | 1.4200e-<br>003 |                   | 1.4200e-<br>003  | 1.4200e-<br>003 |          |           |           |     |     |      |
| Mobile   | 11.2226         | 7.9289          | 66.1335         | 0.0887          | 8.8686           | 0.0814          | 8.9500          | 2.3632            | 0.0755           | 2.4387          |          |           |           |     |     |      |
| Total    | 11.5352         | 7.9477          | 66.1587         | 0.0888          | 8.8686           | 0.0828          | 8.9514          | 2.3632            | 0.0769           | 2.4402          |          |           |           |     |     |      |

#### **Mitigated Operational**

|          | ROG             | NOx             | CO              | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|-----------------|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|-----------|-----------|-----|-----|------|
| Category |                 |                 |                 |                 | lb/              | day             |                 |                   |                  |                 |          |           | lb/d      | day |     |      |
| Area     | 0.3105          | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000          |                  | 3.0000e-<br>005 | 3.0000e-<br>005 |                   | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |
| Energy   | 2.0500e-<br>003 | 0.0187          | 0.0157          | 1.1000e-<br>004 |                  | 1.4200e-<br>003 | 1.4200e-<br>003 |                   | 1.4200e-<br>003  | 1.4200e-<br>003 |          |           |           |     |     |      |
| Mobile   | 11.2226         | 7.9289          | 66.1335         | 0.0887          | 8.8686           | 0.0814          | 8.9500          | 2.3632            | 0.0755           | 2.4387          |          |           |           |     |     |      |
| Total    | 11.5352         | 7.9477          | 66.1587         | 0.0888          | 8.8686           | 0.0828          | 8.9514          | 2.3632            | 0.0769           | 2.4402          |          |           |           |     |     |      |

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

Date: 11/30/2022 10:49 AM

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|                      | ROG  | NOx  | СО   | SO2  | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4  | N20  | CO2e |
|----------------------|------|------|------|------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|----------|-----------|------|------|------|
| Percent<br>Reduction | 0.00 | 0.00 | 0.00 | 0.00 | 0.00             | 0.00            | 0.00          | 0.00              | 0.00             | 0.00           | 0.00     | 0.00     | 0.00      | 0.00 | 0.00 | 0.00 |

### 3.0 Construction Detail

#### **Construction Phase**

| Phase<br>Number | Phase Name            | Phase Type            | Start Date | End Date  | Num Days<br>Week | Num Days | Phase Description |
|-----------------|-----------------------|-----------------------|------------|-----------|------------------|----------|-------------------|
| 1               | Demolition            | Demolition            | 3/1/2023   | 3/28/2023 | 5                | 20       |                   |
| 2               | Site Preparation      | Site Preparation      | 3/29/2023  | 3/30/2023 | 5                | 2        |                   |
| 3               | Grading               | Grading               | 3/31/2023  | 4/5/2023  | 5                | 4        |                   |
| 4               | Building Construction | Building Construction | 4/6/2023   | 1/10/2024 | 5                | 200      |                   |
| 5               | Paving                | Paving                | 1/11/2024  | 1/24/2024 | 5                | 10       |                   |
| 6               | Architectural Coating | Architectural Coating | 1/25/2024  | 2/7/2024  | 5                | 10       |                   |

Acres of Grading (Site Preparation Phase): 1.88

Acres of Grading (Grading Phase): 4

Acres of Paving: 1.53

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 18,855; Non-Residential Outdoor: 6,285; Striped Parking Area: 4,020 (Architectural Coating – sqft)

#### **OffRoad Equipment**

| Phase Name            | Offroad Equipment Type   | Amount | Usage Hours | Horse Power | Load Factor |
|-----------------------|--------------------------|--------|-------------|-------------|-------------|
| Architectural Coating | Air Compressors          | 1      | 6.00        | 78          | 0.48        |
| Paving                | Cement and Mortar Mixers | 1      | 6.00        | 9           | 0.56        |
| Demolition            | Concrete/Industrial Saws | 1      | 8.00        | 81          | 0.73        |
| Building Construction | Cranes                   | 1      | 6.00        | 231         | 0.29        |
| Building Construction | Forklifts                | 1      | 6.00        | 89          | 0.20        |

CalEEMod Version: CalEEMod.2020.4.0 Page 7 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

| Building Construction | Generator Sets            | 1 | 8.00 | 84  | 0.74 |
|-----------------------|---------------------------|---|------|-----|------|
| Grading               | Graders                   | 1 | 8.00 | 187 | 0.41 |
| Site Preparation      | Graders                   | 1 | 8.00 | 187 | 0.41 |
| Paving                | Pavers                    | 1 | 6.00 | 130 | 0.42 |
| Paving                | Paving Equipment          | 1 | 8.00 | 132 | 0.36 |
| Paving                | Rollers                   | 1 | 7.00 | 80  | 0.38 |
| Demolition            | Rubber Tired Dozers       | 1 | 8.00 | 247 | 0.40 |
| Grading               | Rubber Tired Dozers       | 1 | 8.00 | 247 | 0.40 |
| Site Preparation      | Rubber Tired Dozers       | 1 | 7.00 | 247 | 0.40 |
| Building Construction | Tractors/Loaders/Backhoes | 1 | 6.00 | 97  | 0.37 |
| Demolition            | Tractors/Loaders/Backhoes | 3 | 8.00 | 97  | 0.37 |
| Grading               | Tractors/Loaders/Backhoes | 2 | 7.00 | 97  | 0.37 |
| Paving                | Tractors/Loaders/Backhoes | 1 | 8.00 | 97  | 0.37 |
| Site Preparation      | Tractors/Loaders/Backhoes | 1 | 8.00 | 97  | 0.37 |
| Building Construction | Welders                   | 3 | 8.00 | 46  | 0.45 |

#### **Trips and VMT**

| Phase Name            | Offroad Equipment<br>Count | Worker Trip<br>Number | Vendor Trip<br>Number | Hauling Trip<br>Number | Worker Trip<br>Length | Vendor Trip<br>Length | Hauling Trip<br>Length | Worker Vehicle<br>Class | Vendor<br>Vehicle Class | Hauling<br>Vehicle Class |
|-----------------------|----------------------------|-----------------------|-----------------------|------------------------|-----------------------|-----------------------|------------------------|-------------------------|-------------------------|--------------------------|
| Demolition            | 5                          | 13.00                 | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Site Preparation      | 3                          | 8.00                  | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Grading               | 4                          | 10.00                 | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Building Construction | 7                          | 32.00                 | 13.00                 | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Paving                | 5                          | 13.00                 | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Architectural Coating | 1                          | 6.00                  | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |

### **3.1 Mitigation Measures Construction**

Water Exposed Area

CalEEMod Version: CalEEMod.2020.4.0 Page 8 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

#### 3.2 **Demolition - 2023**

#### **Unmitigated Construction On-Site**

|          | ROG    | NOx     | СО      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |         |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |     |      |
| 3        | 1.4725 | 14.3184 | 13.4577 | 0.0241 |                  | 0.6766          | 0.6766        |                   | 0.6328           | 0.6328         |          |           |           |     |     |      |
| Total    | 1.4725 | 14.3184 | 13.4577 | 0.0241 |                  | 0.6766          | 0.6766        |                   | 0.6328           | 0.6328         |          |           |           |     |     |      |

#### **Unmitigated Construction Off-Site**

|          | ROG    | NOx    | СО     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Worker   | 0.0438 | 0.0304 | 0.4132 | 1.2000e-<br>003 | 0.1453           | 8.2000e-<br>004 | 0.1461        | 0.0385            | 7.5000e-<br>004  | 0.0393         |          |           |           |     |     |      |
| Total    | 0.0438 | 0.0304 | 0.4132 | 1.2000e-<br>003 | 0.1453           | 8.2000e-<br>004 | 0.1461        | 0.0385            | 7.5000e-<br>004  | 0.0393         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 9 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

#### 3.2 **Demolition - 2023**

#### **Mitigated Construction On-Site**

|          | ROG    | NOx     | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |         |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | day |     |      |
|          | 1.4725 | 14.3184 | 13.4577 | 0.0241 |                  | 0.6766          | 0.6766        |                   | 0.6328           | 0.6328         |          |           |           |     |     |      |
| Total    | 1.4725 | 14.3184 | 13.4577 | 0.0241 |                  | 0.6766          | 0.6766        |                   | 0.6328           | 0.6328         |          |           |           |     |     |      |

#### **Mitigated Construction Off-Site**

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Worker   | 0.0438 | 0.0304 | 0.4132 | 1.2000e-<br>003 | 0.1453           | 8.2000e-<br>004 | 0.1461        | 0.0385            | 7.5000e-<br>004  | 0.0393         |          |           |           |     |     |      |
| Total    | 0.0438 | 0.0304 | 0.4132 | 1.2000e-<br>003 | 0.1453           | 8.2000e-<br>004 | 0.1461        | 0.0385            | 7.5000e-<br>004  | 0.0393         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 10 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.3 Site Preparation - 2023

#### **Unmitigated Construction On-Site**

|               | ROG    | NOx     | CO     | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e   |
|---------------|--------|---------|--------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|--------|
| Category      |        |         |        |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |                     |        |
| Fugitive Dust |        |         |        |        | 6.2662           | 0.0000          | 6.2662        | 3.0041            | 0.0000           | 3.0041         |          |           |           |     |                     |        |
| Off-Road      | 1.1339 | 12.4250 | 6.6420 | 0.0172 |                  | 0.5074          | 0.5074        |                   | 0.4668           | 0.4668         |          |           |           |     | <br> <br> <br> <br> | i<br>i |
| Total         | 1.1339 | 12.4250 | 6.6420 | 0.0172 | 6.2662           | 0.5074          | 6.7736        | 3.0041            | 0.4668           | 3.4709         |          |           |           |     |                     |        |

#### **Unmitigated Construction Off-Site**

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e        |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|-------------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |     |             |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |             |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     | ,   | ,<br>,<br>, |
| Worker   | 0.0270 | 0.0187 | 0.2543 | 7.4000e-<br>004 | 0.0894           | 5.0000e-<br>004 | 0.0899        | 0.0237            | 4.6000e-<br>004  | 0.0242         |          |           |           |     |     |             |
| Total    | 0.0270 | 0.0187 | 0.2543 | 7.4000e-<br>004 | 0.0894           | 5.0000e-<br>004 | 0.0899        | 0.0237            | 4.6000e-<br>004  | 0.0242         |          |           |           |     |     |             |

CalEEMod Version: CalEEMod.2020.4.0 Page 11 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.3 Site Preparation - 2023

#### **Mitigated Construction On-Site**

|               | ROG    | NOx     | CO     | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e        |
|---------------|--------|---------|--------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|-------------|
| Category      |        |         |        |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |     |             |
| Fugitive Dust |        |         |        |        | 2.8198           | 0.0000          | 2.8198        | 1.3518            | 0.0000           | 1.3518         |          |           |           |     |     |             |
| Off-Road      | 1.1339 | 12.4250 | 6.6420 | 0.0172 |                  | 0.5074          | 0.5074        |                   | 0.4668           | 0.4668         |          |           |           |     |     | ,<br>,<br>, |
| Total         | 1.1339 | 12.4250 | 6.6420 | 0.0172 | 2.8198           | 0.5074          | 3.3272        | 1.3518            | 0.4668           | 1.8186         |          |           |           |     |     |             |

#### **Mitigated Construction Off-Site**

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Worker   | 0.0270 | 0.0187 | 0.2543 | 7.4000e-<br>004 | 0.0894           | 5.0000e-<br>004 | 0.0899        | 0.0237            | 4.6000e-<br>004  | 0.0242         |          | !<br>!    |           |     |     |      |
| Total    | 0.0270 | 0.0187 | 0.2543 | 7.4000e-<br>004 | 0.0894           | 5.0000e-<br>004 | 0.0899        | 0.0237            | 4.6000e-<br>004  | 0.0242         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 12 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

3.4 Grading - 2023

#### **Unmitigated Construction On-Site**

|               | ROG    | NOx     | CO     | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---------------|--------|---------|--------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category      |        |         |        |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |     |      |
| Fugitive Dust |        |         |        |        | 7.0826           | 0.0000          | 7.0826        | 3.4247            | 0.0000           | 3.4247         |          |           |           |     |     |      |
| Off-Road      | 1.3330 | 14.4676 | 8.7038 | 0.0206 | <br>             | 0.6044          | 0.6044        |                   | 0.5560           | 0.5560         |          | !<br>!    | <br>      |     |     |      |
| Total         | 1.3330 | 14.4676 | 8.7038 | 0.0206 | 7.0826           | 0.6044          | 7.6869        | 3.4247            | 0.5560           | 3.9807         |          |           |           |     |     |      |

#### **Unmitigated Construction Off-Site**

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e        |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|-------------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |                     |             |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |                     |             |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     | <br> <br> <br> <br> | ,<br>,<br>, |
| Worker   | 0.0337 | 0.0234 | 0.3178 | 9.2000e-<br>004 | 0.1118           | 6.3000e-<br>004 | 0.1124        | 0.0296            | 5.8000e-<br>004  | 0.0302         |          |           |           |     | <br> <br> <br> <br> | ,<br>,<br>, |
| Total    | 0.0337 | 0.0234 | 0.3178 | 9.2000e-<br>004 | 0.1118           | 6.3000e-<br>004 | 0.1124        | 0.0296            | 5.8000e-<br>004  | 0.0302         |          |           |           |     |                     |             |

CalEEMod Version: CalEEMod.2020.4.0 Page 13 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

3.4 Grading - 2023

#### **Mitigated Construction On-Site**

|               | ROG    | NOx     | CO     | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e |
|---------------|--------|---------|--------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|------|
| Category      |        |         |        |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |                     |      |
| Fugitive Dust |        |         |        |        | 3.1872           | 0.0000          | 3.1872        | 1.5411            | 0.0000           | 1.5411         |          |           |           |     |                     |      |
| Off-Road      | 1.3330 | 14.4676 | 8.7038 | 0.0206 |                  | 0.6044          | 0.6044        |                   | 0.5560           | 0.5560         |          |           |           |     | <br> <br> <br> <br> |      |
| Total         | 1.3330 | 14.4676 | 8.7038 | 0.0206 | 3.1872           | 0.6044          | 3.7915        | 1.5411            | 0.5560           | 2.0971         |          |           |           |     |                     |      |

#### **Mitigated Construction Off-Site**

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | day |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     | ,    |
| Worker   | 0.0337 | 0.0234 | 0.3178 | 9.2000e-<br>004 | 0.1118           | 6.3000e-<br>004 | 0.1124        | 0.0296            | 5.8000e-<br>004  | 0.0302         |          |           |           |     |     | ,    |
| Total    | 0.0337 | 0.0234 | 0.3178 | 9.2000e-<br>004 | 0.1118           | 6.3000e-<br>004 | 0.1124        | 0.0296            | 5.8000e-<br>004  | 0.0302         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 14 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.5 Building Construction - 2023 <u>Unmitigated Construction On-Site</u>

|          | ROG    | NOx     | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |         |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | day |     |      |
| 0        | 1.5233 | 11.7104 | 12.6111 | 0.0221 |                  | 0.5145          | 0.5145        |                   | 0.4968           | 0.4968         |          |           |           |     |     |      |
| Total    | 1.5233 | 11.7104 | 12.6111 | 0.0221 |                  | 0.5145          | 0.5145        |                   | 0.4968           | 0.4968         |          |           |           |     |     |      |

#### **Unmitigated Construction Off-Site**

|          | ROG    | NOx    | СО     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     | 1    |
| Vendor   | 0.0134 | 0.4982 | 0.1884 | 2.3700e-<br>003 | 0.0832           | 2.6400e-<br>003 | 0.0859        | 0.0240            | 2.5300e-<br>003  | 0.0265         |          |           |           |     |     |      |
| Worker   | 0.1078 | 0.0748 | 1.0171 | 2.9500e-<br>003 | 0.3577           | 2.0200e-<br>003 | 0.3597        | 0.0949            | 1.8600e-<br>003  | 0.0967         |          |           |           |     |     | <br> |
| Total    | 0.1212 | 0.5729 | 1.2055 | 5.3200e-<br>003 | 0.4409           | 4.6600e-<br>003 | 0.4456        | 0.1188            | 4.3900e-<br>003  | 0.1232         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 15 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

### 3.5 Building Construction - 2023

#### **Mitigated Construction On-Site**

|          | ROG    | NOx     | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |         |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |     |      |
|          | 1.5233 | 11.7104 | 12.6111 | 0.0221 |                  | 0.5145          | 0.5145        |                   | 0.4968           | 0.4968         |          |           |           |     |     |      |
| Total    | 1.5233 | 11.7104 | 12.6111 | 0.0221 |                  | 0.5145          | 0.5145        |                   | 0.4968           | 0.4968         |          |           |           |     |     |      |

### **Mitigated Construction Off-Site**

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2                      | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|--------------------------------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |                                | lb/d      | day |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |                                |           |     |     |      |
| Vendor   | 0.0134 | 0.4982 | 0.1884 | 2.3700e-<br>003 | 0.0832           | 2.6400e-<br>003 | 0.0859        | 0.0240            | 2.5300e-<br>003  | 0.0265         |          | <br> <br> <br> <br>            |           |     |     |      |
| Worker   | 0.1078 | 0.0748 | 1.0171 | 2.9500e-<br>003 | 0.3577           | 2.0200e-<br>003 | 0.3597        | 0.0949            | 1.8600e-<br>003  | 0.0967         |          | <del></del><br> <br> <br> <br> |           |     |     |      |
| Total    | 0.1212 | 0.5729 | 1.2055 | 5.3200e-<br>003 | 0.4409           | 4.6600e-<br>003 | 0.4456        | 0.1188            | 4.3900e-<br>003  | 0.1232         |          |                                |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 16 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.5 Building Construction - 2024 <u>Unmitigated Construction On-Site</u>

|          | ROG    | NOx     | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |         |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | day |     |      |
| 3        | 1.4200 | 11.0639 | 12.5172 | 0.0221 |                  | 0.4506          | 0.4506        |                   | 0.4348           | 0.4348         |          |           |           |     |     | <br> |
| Total    | 1.4200 | 11.0639 | 12.5172 | 0.0221 |                  | 0.4506          | 0.4506        |                   | 0.4348           | 0.4348         |          |           |           |     |     |      |

#### **Unmitigated Construction Off-Site**

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2   | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-------------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |             | lb/d      | day |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |             |           |     |     |      |
| Vendor   | 0.0130 | 0.5003 | 0.1853 | 2.3400e-<br>003 | 0.0832           | 2.6600e-<br>003 | 0.0859        | 0.0240            | 2.5400e-<br>003  | 0.0265         |          | 1           |           |     |     |      |
| Worker   | 0.1009 | 0.0668 | 0.9474 | 2.8700e-<br>003 | 0.3577           | 1.9300e-<br>003 | 0.3596        | 0.0949            | 1.7700e-<br>003  | 0.0966         |          | 1<br>1<br>1 |           |     |     |      |
| Total    | 0.1139 | 0.5671 | 1.1327 | 5.2100e-<br>003 | 0.4409           | 4.5900e-<br>003 | 0.4455        | 0.1188            | 4.3100e-<br>003  | 0.1231         |          |             |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 17 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.5 Building Construction - 2024

# **Mitigated Construction On-Site**

|          | ROG    | NOx     | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|---------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |         |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | day |     |      |
|          | 1.4200 | 11.0639 | 12.5172 | 0.0221 |                  | 0.4506          | 0.4506        |                   | 0.4348           | 0.4348         |          |           |           |     |     |      |
| Total    | 1.4200 | 11.0639 | 12.5172 | 0.0221 |                  | 0.4506          | 0.4506        |                   | 0.4348           | 0.4348         |          |           |           |     |     |      |

### **Mitigated Construction Off-Site**

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2   | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-------------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |             | lb/d      | day |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |             |           |     |     |      |
| Vendor   | 0.0130 | 0.5003 | 0.1853 | 2.3400e-<br>003 | 0.0832           | 2.6600e-<br>003 | 0.0859        | 0.0240            | 2.5400e-<br>003  | 0.0265         |          | 1           |           |     |     |      |
| Worker   | 0.1009 | 0.0668 | 0.9474 | 2.8700e-<br>003 | 0.3577           | 1.9300e-<br>003 | 0.3596        | 0.0949            | 1.7700e-<br>003  | 0.0966         |          | 1<br>1<br>1 |           |     |     |      |
| Total    | 0.1139 | 0.5671 | 1.1327 | 5.2100e-<br>003 | 0.4409           | 4.5900e-<br>003 | 0.4455        | 0.1188            | 4.3100e-<br>003  | 0.1231         |          |             |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 18 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

3.6 Paving - 2024
<u>Unmitigated Construction On-Site</u>

|          | ROG    | NOx    | CO     | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e        |
|----------|--------|--------|--------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|-------------|
| Category |        |        |        |        | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | lay |                     |             |
| Off-Road | 0.6180 | 5.8607 | 8.8253 | 0.0136 |                  | 0.2810          | 0.2810        |                   | 0.2594           | 0.2594         |          |           |           |     |                     |             |
| Paving   | 0.2620 |        |        |        |                  | 0.0000          | 0.0000        |                   | 0.0000           | 0.0000         |          |           |           |     | <br> <br> <br> <br> | ,<br>,<br>, |
| Total    | 0.8800 | 5.8607 | 8.8253 | 0.0136 |                  | 0.2810          | 0.2810        |                   | 0.2594           | 0.2594         |          |           |           |     |                     |             |

#### **Unmitigated Construction Off-Site**

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          | 1         |           |     |     |      |
| Worker   | 0.0410 | 0.0271 | 0.3849 | 1.1700e-<br>003 | 0.1453           | 7.8000e-<br>004 | 0.1461        | 0.0385            | 7.2000e-<br>004  | 0.0393         |          |           |           |     |     |      |
| Total    | 0.0410 | 0.0271 | 0.3849 | 1.1700e-<br>003 | 0.1453           | 7.8000e-<br>004 | 0.1461        | 0.0385            | 7.2000e-<br>004  | 0.0393         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 19 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

3.6 Paving - 2024

<u>Mitigated Construction On-Site</u>

|          | ROG    | NOx    | CO         | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O  | CO2e   |
|----------|--------|--------|------------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|------|--------|
| Category |        |        |            |        | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | day |      |        |
| Off-Road | 0.6180 | 5.8607 | 8.8253     | 0.0136 |                  | 0.2810          | 0.2810        |                   | 0.2594           | 0.2594         |          |           |           |     |      |        |
|          | 0.2620 |        | ]<br> <br> |        |                  | 0.0000          | 0.0000        |                   | 0.0000           | 0.0000         |          |           |           |     | <br> | !<br>! |
| Total    | 0.8800 | 5.8607 | 8.8253     | 0.0136 |                  | 0.2810          | 0.2810        |                   | 0.2594           | 0.2594         |          |           |           |     |      |        |

#### **Mitigated Construction Off-Site**

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          | 1         |           |     |     |      |
| Worker   | 0.0410 | 0.0271 | 0.3849 | 1.1700e-<br>003 | 0.1453           | 7.8000e-<br>004 | 0.1461        | 0.0385            | 7.2000e-<br>004  | 0.0393         |          | 1         |           |     |     |      |
| Total    | 0.0410 | 0.0271 | 0.3849 | 1.1700e-<br>003 | 0.1453           | 7.8000e-<br>004 | 0.1461        | 0.0385            | 7.2000e-<br>004  | 0.0393         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 20 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.7 Architectural Coating - 2024 <u>Unmitigated Construction On-Site</u>

|                 | ROG     | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e |
|-----------------|---------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|------|
| Category        |         |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |                     |      |
| Archit. Coating | 13.5157 |        |        |                 |                  | 0.0000          | 0.0000        |                   | 0.0000           | 0.0000         |          |           |           |     |                     |      |
| Off-Road        | 0.1808  | 1.2188 | 1.8101 | 2.9700e-<br>003 |                  | 0.0609          | 0.0609        |                   | 0.0609           | 0.0609         |          |           |           |     | <br> <br> <br> <br> |      |
| Total           | 13.6964 | 1.2188 | 1.8101 | 2.9700e-<br>003 |                  | 0.0609          | 0.0609        |                   | 0.0609           | 0.0609         |          |           |           |     |                     |      |

#### **Unmitigated Construction Off-Site**

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e        |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|-------------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |                     |             |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |                     |             |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     | <br> <br> <br> <br> | ,<br>,<br>, |
| Worker   | 0.0189 | 0.0125 | 0.1776 | 5.4000e-<br>004 | 0.0671           | 3.6000e-<br>004 | 0.0674        | 0.0178            | 3.3000e-<br>004  | 0.0181         |          | 1         |           |     | <br> <br> <br> <br> | ,<br>,<br>, |
| Total    | 0.0189 | 0.0125 | 0.1776 | 5.4000e-<br>004 | 0.0671           | 3.6000e-<br>004 | 0.0674        | 0.0178            | 3.3000e-<br>004  | 0.0181         |          |           |           |     |                     |             |

CalEEMod Version: CalEEMod.2020.4.0 Page 21 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.7 Architectural Coating - 2024 Mitigated Construction On-Site

|                 | ROG     | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O                 | CO2e |
|-----------------|---------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|---------------------|------|
| Category        |         |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | day |                     |      |
| Archit. Coating | 13.5157 |        |        |                 |                  | 0.0000          | 0.0000        |                   | 0.0000           | 0.0000         |          |           |           |     |                     |      |
|                 | 0.1808  | 1.2188 | 1.8101 | 2.9700e-<br>003 |                  | 0.0609          | 0.0609        |                   | 0.0609           | 0.0609         |          | i         |           |     | <br> <br> <br> <br> |      |
| Total           | 13.6964 | 1.2188 | 1.8101 | 2.9700e-<br>003 |                  | 0.0609          | 0.0609        |                   | 0.0609           | 0.0609         |          |           |           |     |                     |      |

#### **Mitigated Construction Off-Site**

|          | ROG    | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|----------|--------|--------|--------|-----------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category |        |        |        |                 | lb/d             | day             |               |                   |                  |                |          |           | lb/d      | day |     |      |
| Hauling  | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Vendor   | 0.0000 | 0.0000 | 0.0000 | 0.0000          | 0.0000           | 0.0000          | 0.0000        | 0.0000            | 0.0000           | 0.0000         |          |           |           |     |     |      |
| Worker   | 0.0189 | 0.0125 | 0.1776 | 5.4000e-<br>004 | 0.0671           | 3.6000e-<br>004 | 0.0674        | 0.0178            | 3.3000e-<br>004  | 0.0181         |          |           |           |     |     |      |
| Total    | 0.0189 | 0.0125 | 0.1776 | 5.4000e-<br>004 | 0.0671           | 3.6000e-<br>004 | 0.0674        | 0.0178            | 3.3000e-<br>004  | 0.0181         |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 22 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

### 4.0 Operational Detail - Mobile

### **4.1 Mitigation Measures Mobile**

|             | ROG     | NOx    | CO      | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|-------------|---------|--------|---------|--------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----|-----|------|
| Category    |         |        |         |        | lb/d             | day             |               |                   |                  |                |          |           | lb/c      | lay |     |      |
| Mitigated   | 11.2226 | 7.9289 | 66.1335 | 0.0887 | 8.8686           | 0.0814          | 8.9500        | 2.3632            | 0.0755           | 2.4387         |          |           |           |     |     |      |
| Unmitigated | 11.2226 | 7.9289 | 66.1335 | 0.0887 | 8.8686           | 0.0814          | 8.9500        | 2.3632            | 0.0755           | 2.4387         |          |           |           |     |     |      |

### **4.2 Trip Summary Information**

|                                   | Ave      | rage Daily Trip Ra | ate      | Unmitigated | Mitigated  |
|-----------------------------------|----------|--------------------|----------|-------------|------------|
| Land Use                          | Weekday  | Saturday           | Sunday   | Annual VMT  | Annual VMT |
| Automobile Care Center            | 32.97    | 32.97              | 16.51    | 41,017      | 41,017     |
| Convenience Market with Gas Pumps | 6,978.56 | 6,978.56           | 6978.56  | 4,165,323   | 4,165,323  |
| Other Asphalt Surfaces            | 0.00     | 0.00               | 0.00     |             |            |
| Parking Lot                       | 0.00     | 0.00               | 0.00     |             |            |
| Other Non-Asphalt Surfaces        | 0.00     | 0.00               | 0.00     |             |            |
| Total                             | 7,011.53 | 7,011.53           | 6,995.07 | 4,206,340   | 4,206,340  |

### 4.3 Trip Type Information

|                             |            | Miles      |             |            | Trip %     |             |         | Trip Purpos | e %     |
|-----------------------------|------------|------------|-------------|------------|------------|-------------|---------|-------------|---------|
| Land Use                    | H-W or C-W | H-S or C-C | H-O or C-NW | H-W or C-W | H-S or C-C | H-O or C-NW | Primary | Diverted    | Pass-by |
| Automobile Care Center      | 16.60      | 8.40       | 6.90        | 33.00      | 48.00      | 19.00       | 21      | 51          | 28      |
| Convenience Market with Gas | 16.60      | 8.40       | 6.90        | 0.80       | 80.20      | 19.00       | 14      | 21          | 65      |

CalEEMod Version: CalEEMod.2020.4.0 Page 23 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|                            |            | Miles      |             |            | Trip %     |             |         | Trip Purpos | e %     |
|----------------------------|------------|------------|-------------|------------|------------|-------------|---------|-------------|---------|
| Land Use                   | H-W or C-W | H-S or C-C | H-O or C-NW | H-W or C-W | H-S or C-C | H-O or C-NW | Primary | Diverted    | Pass-by |
| Other Asphalt Surfaces     | 16.60      | 8.40       | 6.90        | 0.00       | 0.00       | 0.00        | 0       | 0           | 0       |
| Parking Lot                | 16.60      | 8.40       | 6.90        | 0.00       | 0.00       | 0.00        | 0       | 0           | 0       |
| Other Non-Asphalt Surfaces | 16.60      | 8.40       | 6.90        | 0.00       | 0.00       | 0.00        | 0       | 0           | 0       |

#### 4.4 Fleet Mix

| Land Use                             | LDA      | LDT1     | LDT2     | MDV      | LHD1     | LHD2     | MHD      | HHD      | OBUS     | UBUS     | MCY      | SBUS     | MH       |
|--------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Automobile Care Center               | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |
| Convenience Market with Gas<br>Pumps | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |
| Other Asphalt Surfaces               | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |
| Parking Lot                          | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |
| Other Non-Asphalt Surfaces           | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |

### 5.0 Energy Detail

Historical Energy Use: N

### **5.1 Mitigation Measures Energy**

CalEEMod Version: CalEEMod.2020.4.0 Page 24 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|                   | ROG             | NOx    | CO     | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e   |
|-------------------|-----------------|--------|--------|-----------------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|-----------|-----------|-----|-----|--------|
| Category          |                 |        |        |                 | lb/d             | day             |                 |                   |                  |                 |          |           | lb/c      | day |     |        |
| A Arrest Action 1 | 2.0500e-<br>003 | 0.0187 | 0.0157 | 1.1000e-<br>004 |                  | 1.4200e-<br>003 | 1.4200e-<br>003 |                   | 1.4200e-<br>003  | 1.4200e-<br>003 |          |           |           |     |     |        |
|                   | 2.0500e-<br>003 | 0.0187 | 0.0157 | 1.1000e-<br>004 |                  | 1.4200e-<br>003 | 1.4200e-<br>003 |                   | 1.4200e-<br>003  | 1.4200e-<br>003 |          |           |           |     |     | i<br>i |

# 5.2 Energy by Land Use - NaturalGas <u>Unmitigated</u>

|   | NaturalGa<br>s Use | ROG             | NOx             | CO              | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2           | Total CO2 | CH4 | N2O               | CO2e |
|---|--------------------|-----------------|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|---------------------|-----------|-----|-------------------|------|
| Land Use                                | kBTU/yr            |                 |                 |                 |                 | lb/d             | day             |                 |                   |                  |                 |          |                     | lb/c      | day |                   |      |
| Automobile Care<br>Center               | 123.12             | 1.3300e-<br>003 | 0.0121          | 0.0101          | 7.0000e-<br>005 |                  | 9.2000e-<br>004 | 9.2000e-<br>004 |                   | 9.2000e-<br>004  | 9.2000e-<br>004 |          | <br>                |           |     | i<br>i            |      |
| Convenience<br>Market with Gas<br>Pumps | 67.3863            | 7.3000e-<br>004 | 6.6100e-<br>003 | 5.5500e-<br>003 | 4.0000e-<br>005 |                  | 5.0000e-<br>004 | 5.0000e-<br>004 |                   | 5.0000e-<br>004  | 5.0000e-<br>004 |          |                     |           |     | <br> <br> -<br> - |      |
| Other Asphalt<br>Surfaces               | 0                  | 0.0000          | 0.0000          | 0.0000          | 0.0000          |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          |                     |           |     | 1<br>1<br>1       |      |
| Other Non-<br>Asphalt Surfaces          | 0                  | 0.0000          | 0.0000          | 0.0000          | 0.0000          |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          | !<br>!<br>!         |           |     | !<br>!            |      |
| Parking Lot                             | 0                  | 0.0000          | 0.0000          | 0.0000          | 0.0000          |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          | <br> <br> <br> <br> |           |     | 1<br>1<br>1       |      |
| Total                                   |                    | 2.0600e-<br>003 | 0.0187          | 0.0157          | 1.1000e-<br>004 |                  | 1.4200e-<br>003 | 1.4200e-<br>003 |                   | 1.4200e-<br>003  | 1.4200e-<br>003 |          |                     |           |     |                   |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 25 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

### **5.2 Energy by Land Use - NaturalGas**

### **Mitigated**

|   | NaturalGa<br>s Use | ROG             | NOx             | CO              | SO2             | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O         | CO2e |
|---|--------------------|-----------------|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|-----------|-----------|-----|-------------|------|
| Land Use                                | kBTU/yr            |                 |                 |                 |                 | lb/d             | day             |                 |                   |                  |                 |          |           | lb/c      | lay |             |      |
| Automobile Care<br>Center               | 0.12312            | 1.3300e-<br>003 | 0.0121          | 0.0101          | 7.0000e-<br>005 |                  | 9.2000e-<br>004 | 9.2000e-<br>004 |                   | 9.2000e-<br>004  | 9.2000e-<br>004 |          |           |           |     |             |      |
| Convenience<br>Market with Gas<br>Pumps | 0.0673863          | 7.3000e-<br>004 | 6.6100e-<br>003 | 5.5500e-<br>003 | 4.0000e-<br>005 |                  | 5.0000e-<br>004 | 5.0000e-<br>004 |                   | 5.0000e-<br>004  | 5.0000e-<br>004 |          |           |           |     |             |      |
| Other Asphalt<br>Surfaces               | 0                  | 0.0000          | 0.0000          | 0.0000          | 0.0000          |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          |           |           |     |             |      |
| Other Non-<br>Asphalt Surfaces          |                    | 0.0000          | 0.0000          | 0.0000          | 0.0000          |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          |           |           |     | 1<br>1      |      |
| Parking Lot                             | 0                  | 0.0000          | 0.0000          | 0.0000          | 0.0000          |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          |           |           |     | 1<br>1<br>1 |      |
| Total                                   |                    | 2.0600e-<br>003 | 0.0187          | 0.0157          | 1.1000e-<br>004 |                  | 1.4200e-<br>003 | 1.4200e-<br>003 |                   | 1.4200e-<br>003  | 1.4200e-<br>003 |          |           |           |     |             |      |

### 6.0 Area Detail

### **6.1 Mitigation Measures Area**

CalEEMod Version: CalEEMod.2020.4.0 Page 26 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|             | ROG    | NOx             | CO              | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|-------------|--------|-----------------|-----------------|--------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|-----------|-----------|-----|-----|------|
| Category    |        |                 |                 |        | lb/c             | lay             |                 |                   |                  |                 |          |           | lb/d      | lay |     |      |
| Mitigated   | 0.3105 | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000 |                  | 3.0000e-<br>005 | 3.0000e-<br>005 |                   | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |
| Unmitigated | 0.3105 | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000 |                  | 3.0000e-<br>005 | 3.0000e-<br>005 |                   | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |

# 6.2 Area by SubCategory

#### **Unmitigated**

|             | ROG             | NOx             | CO              | SO2    | Fugitive<br>PM10    | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5   | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|-------------|-----------------|-----------------|-----------------|--------|---------------------|-----------------|-----------------|---------------------|------------------|-----------------|----------|-----------|-----------|-----|-----|------|
| SubCategory |                 |                 |                 |        | lb/d                | day             |                 |                     |                  |                 |          |           | lb/d      | day |     |      |
| Coating     | 0.0370          |                 |                 |        |                     | 0.0000          | 0.0000          |                     | 0.0000           | 0.0000          |          |           |           |     |     |      |
| Products    | 0.2726          |                 |                 |        | <br> <br> <br> <br> | 0.0000          | 0.0000          | <br> <br> <br> <br> | 0.0000           | 0.0000          |          |           |           |     |     |      |
| ' "         | 8.8000e-<br>004 | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000 |                     | 3.0000e-<br>005 | 3.0000e-<br>005 |                     | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |
| Total       | 0.3105          | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000 |                     | 3.0000e-<br>005 | 3.0000e-<br>005 |                     | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |

CalEEMod Version: CalEEMod.2020.4.0 Page 27 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

### 6.2 Area by SubCategory

### **Mitigated**

|                          | ROG             | NOx             | CO              | SO2    | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total   | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total  | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|--------------------------|-----------------|-----------------|-----------------|--------|------------------|-----------------|-----------------|-------------------|------------------|-----------------|----------|-----------|-----------|-----|-----|------|
| SubCategory              |                 |                 |                 |        | lb/d             | day             |                 |                   |                  |                 |          |           | lb/c      | lay |     |      |
| Architectural<br>Coating | . 0.0070        |                 |                 |        |                  | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          |           |           |     |     |      |
| Consumer<br>Products     | 0.2726          |                 |                 |        | <br>             | 0.0000          | 0.0000          |                   | 0.0000           | 0.0000          |          |           |           |     |     | <br> |
| Landscaping              | 8.8000e-<br>004 | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000 |                  | 3.0000e-<br>005 | 3.0000e-<br>005 |                   | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     | <br> |
| Total                    | 0.3105          | 9.0000e-<br>005 | 9.5200e-<br>003 | 0.0000 |                  | 3.0000e-<br>005 | 3.0000e-<br>005 |                   | 3.0000e-<br>005  | 3.0000e-<br>005 |          |           |           |     |     |      |

### 7.0 Water Detail

### 7.1 Mitigation Measures Water

CalEEMod Version: CalEEMod.2020.4.0 Page 28 of 28 Date: 11/30/2022 10:49 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Winter

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

#### 8.0 Waste Detail

### 8.1 Mitigation Measures Waste

### 9.0 Operational Offroad

| Equipment Type | Number | Hours/Day | Days/Year | Horse Power | Load Factor | Fuel Type |
|----------------|--------|-----------|-----------|-------------|-------------|-----------|

### **10.0 Stationary Equipment**

#### **Fire Pumps and Emergency Generators**

| Equipment Type | Number | Hours/Day | Hours/Year | Horse Power | Load Factor | Fuel Type |
|----------------|--------|-----------|------------|-------------|-------------|-----------|
|----------------|--------|-----------|------------|-------------|-------------|-----------|

### **Boilers**

| Equipment Type | Number | Heat Input/Day | Heat Input/Year   | Boiler Rating | Fuel Type  |
|----------------|--------|----------------|-------------------|---------------|------------|
| =40.6          |        | put 2 uy       | . roat input roai | 266           | . 45. 1966 |

#### **User Defined Equipment**

| Equipment Type | Number |
|----------------|--------|
|----------------|--------|

### 11.0 Vegetation

CalEEMod Version: CalEEMod.2020.4.0 Page 1 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

#### Harikrishna Gas and Carwash

**South Coast Air Basin, Annual** 

#### 1.0 Project Characteristics

#### 1.1 Land Usage

| Land Uses                         | Size  | Metric   | Lot Acreage | Floor Surface Area | Population |
|-----------------------------------|-------|----------|-------------|--------------------|------------|
| Parking Lot                       | 23.00 | Space    | 0.21        | 9,200.00           | 0          |
| Convenience Market with Gas Pumps | 11.18 | 1000sqft | 0.26        | 11,180.00          | 0          |
| Automobile Care Center            | 1.39  | 1000sqft | 0.03        | 1,390.00           | 0          |
| Other Asphalt Surfaces            | 34.53 | 1000sqft | 0.79        | 34,532.00          | 0          |
| Other Non-Asphalt Surfaces        | 23.27 | 1000sqft | 0.53        | 23,271.00          | 0          |

#### 1.2 Other Project Characteristics

UrbanizationUrbanWind Speed (m/s)2.2Precipitation Freq (Days)31Climate Zone10Operational Year2024

Utility Company Southern California Edison

 CO2 Intensity
 390.98
 CH4 Intensity
 0.033
 N2O Intensity
 0.004

 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)

#### 1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Convenience store - 4620 SF 6 MPD Canopy - 4042 SF High Speed Diesel Canopy - 2,520 SF Car Wash - 1387 SF Parking - 23 spaces including 1 ADA, 2EVC, and 2 Vacuum Other impervious - 34,532 SF Landscaping - 23,271 SF

Construction Off-road Equipment Mitigation - Rule 403 applied for dust control

Construction Off-road Equipment Mitigation - Construction Off-road Equipment Mitigation - Rule 403 applied for dust control

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

| Table Name | Column Name       | Default Value | New Value |
|------------|-------------------|---------------|-----------|
| tblLandUse | LandUseSquareFeet | 34,530.00     | 34,532.00 |
| tblLandUse | LandUseSquareFeet | 23,270.00     | 23,271.00 |

### 2.0 Emissions Summary

CalEEMod Version: CalEEMod.2020.4.0 Page 3 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

#### 2.1 Overall Construction

#### **Unmitigated Construction**

|         | ROG            | NOx | CO     | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5   | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e     |
|---------|----------------|-----|--------|-----|------------------|-----------------|---------------|---------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|----------|
| Year    | tons/yr        |     |        |     |                  |                 |               |                     |                  | MT/yr          |          |           |           |                 |                 |          |
| 2023    |                |     |        |     |                  |                 |               |                     |                  |                | 0.0000   | 250.5562  | 250.5562  | 0.0382          | 3.9500e-<br>003 | 252.6857 |
| 2024    | 11<br>11<br>11 |     | I<br>I |     | i<br>i<br>i      |                 |               | <br> <br> <br> <br> |                  |                | 0.0000   | 17.2015   | 17.2015   | 3.2300e-<br>003 | 1.8000e-<br>004 | 17.3354  |
| Maximum |                |     |        |     |                  |                 |               |                     |                  |                | 0.0000   | 250.5562  | 250.5562  | 0.0382          | 3.9500e-<br>003 | 252.6857 |

#### **Mitigated Construction**

|         | ROG            | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e     |
|---------|----------------|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|----------|
| Year    | tons/yr        |     |    |     |                  |                 |               |                   |                  |                | MT/yr    |           |           |                 |                 |          |
| 2023    |                |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 250.5560  | 250.5560  | 0.0382          | 3.9500e-<br>003 | 252.6855 |
| 2024    | 11<br>11<br>11 |     |    |     |                  | <br>            |               |                   |                  |                | 0.0000   | 17.2015   | 17.2015   | 3.2300e-<br>003 | 1.8000e-<br>004 | 17.3354  |
| Maximum |                |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 250.5560  | 250.5560  | 0.0382          | 3.9500e-<br>003 | 252.6855 |

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|                      | ROG  | NOx  | СО   | SO2  | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4  | N20  | CO2e |
|----------------------|------|------|------|------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|----------|-----------|------|------|------|
| Percent<br>Reduction | 0.00 | 0.00 | 0.00 | 0.00 | 0.00             | 0.00            | 0.00          | 0.00              | 0.00             | 0.00           | 0.00     | 0.00     | 0.00      | 0.00 | 0.00 | 0.00 |

| Quarter | Start Date | End Date | Maximum Unmitigated ROG + NOX (tons/quarter) | Maximum Mitigated ROG + NOX (tons/quarter) |
|---------|------------|----------|--|--|
|         |            | Highest  |  |  |

### 2.2 Overall Operational

### **Unmitigated Operational**

|          | ROG     | NOx | CO   | SO2 | Fugitive<br>PM10    | Exhaust<br>PM10      | PM10<br>Total                          | Fugitive<br>PM2.5         | Exhaust<br>PM2.5    | PM2.5<br>Total | Bio- CO2 | NBio- CO2       | Total CO2       | CH4             | N2O             | CO2e            |  |
|----------|---------|-----|------|-----|---------------------|----------------------|--|---------------------------|---------------------|----------------|----------|-----------------|-----------------|-----------------|-----------------|-----------------|--|
| Category | tons/yr |     |      |     |                     |                      |  |                           |                     |                | MT/yr    |                 |                 |                 |                 |                 |  |
| Area     |         |     | <br> |     |                     | 1<br>1<br>1<br>1     |  | <br>                      |                     |                | 0.0000   | 2.3200e-<br>003 | 2.3200e-<br>003 | 1.0000e-<br>005 | 0.0000          | 2.4700e-<br>003 |  |
| Energy   | ri      |     | 1    |     |                     | 1                    | <b>-                              </b> |                           |                     |                | 0.0000   | 30.7973         | 30.7973         | 2.3600e-<br>003 | 3.5000e-<br>004 | 30.9591         |  |
| Mobile   |         |     | ,    |     | <br> <br> <br> <br> | 1<br> <br> <br> <br> |  | <br> <br> <br> <br>       | <br> <br> <br> <br> |                | 0.0000   | 1,504.866<br>1  | 1,504.866<br>1  | 0.1993          | 0.1150          | 1,544.110<br>4  |  |
| Waste    |         |     | ,    |     |                     | 1<br> <br> <br> <br> |  |                           |                     |                | 7.8984   | 0.0000          | 7.8984          | 0.4668          | 0.0000          | 19.5679         |  |
| Water    |         |     | ,    |     |                     | ,                    | <del></del><br> <br>                   | ,<br> <br> <br> <br> <br> | <br> <br> <br> <br> |                | 0.3042   | 3.3723          | 3.6765          | 0.0315          | 7.7000e-<br>004 | 4.6949          |  |
| Total    |         |     |      |     |                     |                      |  |                           |                     |                | 8.2026   | 1,539.038<br>1  | 1,547.240<br>6  | 0.7000          | 0.1161          | 1,599.334<br>8  |  |

CalEEMod Version: CalEEMod.2020.4.0 Page 5 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

## 2.2 Overall Operational

#### **Mitigated Operational**

|          | ROG | NOx | CO | SO2 | Fugitive<br>PM10     | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total      | Bio- CO2 | NBio- CO2       | Total CO2       | CH4             | N2O             | CO2e            |
|----------|-----|-----|----|-----|----------------------|-----------------|---------------|-------------------|------------------|---------------------|----------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Category |     |     |    |     | ton                  | s/yr            |               |                   |                  |                     |          |                 | МТ              | /yr             |                 |                 |
| Area     |     |     |    |     |                      |                 |               |                   |                  |                     | 0.0000   | 2.3200e-<br>003 | 2.3200e-<br>003 | 1.0000e-<br>005 | 0.0000          | 2.4700e-<br>003 |
| Energy   |     |     |    |     |                      |                 |               |                   |                  |                     | 0.0000   | 30.7973         | 30.7973         | 2.3600e-<br>003 | 3.5000e-<br>004 | 30.9591         |
| Mobile   |     |     |    |     |                      |                 |               |                   |                  |                     | 0.0000   | 1,504.866<br>1  | 1,504.866<br>1  | 0.1993          | 0.1150          | 1,544.110<br>4  |
| Waste    |     |     |    |     | 1<br> <br> <br> <br> |                 |               |                   |                  | <br>!<br>!<br>!     | 7.8984   | 0.0000          | 7.8984          | 0.4668          | 0.0000          | 19.5679         |
| Water    |     |     |    |     | 1<br> <br> <br> <br> |                 |               |                   |                  | <br> <br> <br> <br> | 0.3042   | 3.3723          | 3.6765          | 0.0315          | 7.7000e-<br>004 | 4.6949          |
| Total    |     |     |    |     |                      |                 |               |                   |                  |                     | 8.2026   | 1,539.038<br>1  | 1,547.240<br>6  | 0.7000          | 0.1161          | 1,599.334<br>8  |

|                      | ROG  | NOx  | СО   | SO2  | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4  | N20  | CO2e |
|----------------------|------|------|------|------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|----------|-----------|------|------|------|
| Percent<br>Reduction | 0.00 | 0.00 | 0.00 | 0.00 | 0.00             | 0.00            | 0.00          | 0.00              | 0.00             | 0.00           | 0.00     | 0.00     | 0.00      | 0.00 | 0.00 | 0.00 |

## 3.0 Construction Detail

## **Construction Phase**

| Phase<br>Number | Phase Name       | Phase Type       | Start Date | End Date  | Num Days<br>Week | Num Days | Phase Description |
|-----------------|------------------|------------------|------------|-----------|------------------|----------|-------------------|
| 1               | Demolition       | Demolition       | 3/1/2023   | 3/28/2023 | 5                | 20       |                   |
| 2               | Site Preparation | Site Preparation | 3/29/2023  | 3/30/2023 | 5                | 2        |                   |
| 3               | Grading          | Grading          | 3/31/2023  | 4/5/2023  | 5                | 4        |                   |

Date: 11/30/2022 10:54 AM

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|   | Building Construction | Building Construction | 4/6/2023  | 1/10/2024 | 5 | 200 |  |
|---|-----------------------|-----------------------|-----------|-----------|---|-----|--|
| 5 |                       | Paving                | 1/11/2024 | 1/24/2024 | 5 | 10  |  |
|   | Architectural Coating | Architectural Coating | 1/25/2024 | 2/7/2024  | 5 | 10  |  |

Acres of Grading (Site Preparation Phase): 1.88

Acres of Grading (Grading Phase): 4

Acres of Paving: 1.53

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 18,855; Non-Residential Outdoor: 6,285; Striped Parking Area: 4,020

(Architectural Coating - sqft)

#### **OffRoad Equipment**

| Phase Name            | Offroad Equipment Type    | Amount | Usage Hours | Horse Power | Load Factor |
|-----------------------|---------------------------|--------|-------------|-------------|-------------|
| Architectural Coating | Air Compressors           | 1      | 6.00        | 78          | 0.48        |
| Paving                | Cement and Mortar Mixers  | 1      | 6.00        | 9           | 0.56        |
| Demolition            | Concrete/Industrial Saws  | 1      | 8.00        | 81          | 0.73        |
| Building Construction | Cranes                    | 1      | 6.00        | 231         | 0.29        |
| Building Construction | Forklifts                 | 1      | 6.00        | 89          | 0.20        |
| Building Construction | Generator Sets            | 1      | 8.00        | 84          | 0.74        |
| Grading               | Graders                   | 1      | 8.00        | 187         | 0.41        |
| Site Preparation      | Graders                   | 1      | 8.00        | 187         | 0.41        |
| Paving                | Pavers                    | 1      | 6.00        | 130         | 0.42        |
| Paving                | Paving Equipment          | 1      | 8.00        | 132         | 0.36        |
| Paving                | Rollers                   | 1      | 7.00        | 80          | 0.38        |
| Demolition            | Rubber Tired Dozers       | 1      | 8.00        | 247         | 0.40        |
| Grading               | Rubber Tired Dozers       | 1      | 8.00        | 247         | 0.40        |
| Site Preparation      | Rubber Tired Dozers       | 1      | 7.00        | 247         | 0.40        |
| Building Construction | Tractors/Loaders/Backhoes | 1      | 6.00        | 97          | 0.37        |
| Demolition            | Tractors/Loaders/Backhoes | 3      | 8.00        | 97          | 0.37        |
| Grading               | Tractors/Loaders/Backhoes | 2      | 7.00        | 97          | 0.37        |

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

| Paving                | Tractors/Loaders/Backhoes | 1  | 8.00 | 97 | 0.37 |
|-----------------------|---------------------------|----|------|----|------|
| Site Preparation      | Tractors/Loaders/Backhoes | 1  | 8.00 | 97 | 0.37 |
| Building Construction | Welders                   | 3: | 8.00 | 46 | 0.45 |

#### **Trips and VMT**

| Phase Name            | Offroad Equipment<br>Count | Worker Trip<br>Number | Vendor Trip<br>Number | Hauling Trip<br>Number | Worker Trip<br>Length | Vendor Trip<br>Length | Hauling Trip<br>Length | Worker Vehicle<br>Class | Vendor<br>Vehicle Class | Hauling<br>Vehicle Class |
|-----------------------|----------------------------|-----------------------|-----------------------|------------------------|-----------------------|-----------------------|------------------------|-------------------------|-------------------------|--------------------------|
| Demolition            | 5                          | 13.00                 | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Site Preparation      | 3                          | 8.00                  | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Grading               | 4                          | 10.00                 | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Building Construction | 7                          | 32.00                 | 13.00                 | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Paving                | 5                          | 13.00                 | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |
| Architectural Coating | 1                          | 6.00                  | 0.00                  | 0.00                   | 14.70                 | 6.90                  | 20.00                  | LD_Mix                  | HDT_Mix                 | HHDT                     |

# **3.1 Mitigation Measures Construction**

Water Exposed Area

## 3.2 Demolition - 2023

|          | ROG            | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O    | CO2e    |
|----------|----------------|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|--------|---------|
| Category |                |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |        |         |
|          | 11<br>11<br>11 |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 21.0866   | 21.0866   | 5.3500e-<br>003 | 0.0000 | 21.2202 |
| Total    |                |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 21.0866   | 21.0866   | 5.3500e-<br>003 | 0.0000 | 21.2202 |

CalEEMod Version: CalEEMod.2020.4.0 Page 8 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

## 3.2 **Demolition - 2023**

#### **Unmitigated Construction Off-Site**

|          | ROG | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e   |
|----------|-----|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|--------|
| Category |     |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |                 |        |
| Hauling  |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Vendor   |     |     |    |     |                  | <br>            |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Worker   |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 1.1161    | 1.1161    | 3.0000e-<br>005 | 3.0000e-<br>005 | 1.1254 |
| Total    |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 1.1161    | 1.1161    | 3.0000e-<br>005 | 3.0000e-<br>005 | 1.1254 |

|          | ROG | NOx | CO          | SO2  | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O    | CO2e    |
|----------|-----|-----|-------------|------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|--------|---------|
| Category |     |     |             |      | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |        |         |
| Off-Road |     |     | 1<br>1<br>1 | <br> | <br> -<br> -     | <br>            |               | <br>              |                  |                | 0.0000   | 21.0865   | 21.0865   | 5.3500e-<br>003 | 0.0000 | 21.2202 |
| Total    |     |     |             |      |                  |                 |               |                   |                  |                | 0.0000   | 21.0865   | 21.0865   | 5.3500e-<br>003 | 0.0000 | 21.2202 |

CalEEMod Version: CalEEMod.2020.4.0 Page 9 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

## 3.2 **Demolition - 2023**

#### **Mitigated Construction Off-Site**

|          | ROG | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e   |
|----------|-----|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|--------|
| Category |     |     |    |     | ton              | s/yr            |               |                   |                  | MT             | /yr      |           |           |                 |                 |        |
| Hauling  |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Vendor   |     |     |    |     |                  | <br>            |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Worker   |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 1.1161    | 1.1161    | 3.0000e-<br>005 | 3.0000e-<br>005 | 1.1254 |
| Total    |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 1.1161    | 1.1161    | 3.0000e-<br>005 | 3.0000e-<br>005 | 1.1254 |

## 3.3 Site Preparation - 2023

|                | ROG            | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O    | CO2e   |
|----------------|----------------|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|--------|--------|
| Category       |                |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | МТ        | /yr             |        |        |
| T agilivo Buot |                |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000 | 0.0000 |
| Off-Road       | 11<br>11<br>11 |     |    |     |                  |                 |               | <br>              | <br>             |                | 0.0000   | 1.5114    | 1.5114    | 4.9000e-<br>004 | 0.0000 | 1.5236 |
| Total          |                |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 1.5114    | 1.5114    | 4.9000e-<br>004 | 0.0000 | 1.5236 |

CalEEMod Version: CalEEMod.2020.4.0 Page 10 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.3 Site Preparation - 2023

#### **Unmitigated Construction Off-Site**

|          | ROG            | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4    | N2O    | CO2e   |
|----------|----------------|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|--------|--------|--------|
| Category |                |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr    |        |        |
| Hauling  |                |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000 | 0.0000 | 0.0000 |
| Vendor   | ii<br>ii<br>ii |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000 | 0.0000 | 0.0000 |
| Worker   | ii<br>ii       |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0687    | 0.0687    | 0.0000 | 0.0000 | 0.0693 |
| Total    |                |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0687    | 0.0687    | 0.0000 | 0.0000 | 0.0693 |

|               | ROG | NOx  | СО | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O    | CO2e   |
|---------------|-----|------|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|--------|--------|
| Category      |     |      |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |        |        |
| Fugitive Dust |     |      |    |     |                  |                 |               | 1<br>1<br>1       |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000 | 0.0000 |
| Off-Road      |     | <br> |    |     |                  |                 |               | 1<br>1<br>1<br>1  |                  |                | 0.0000   | 1.5114    | 1.5114    | 4.9000e-<br>004 | 0.0000 | 1.5236 |
| Total         |     |      |    |     |                  |                 |               |                   |                  |                | 0.0000   | 1.5114    | 1.5114    | 4.9000e-<br>004 | 0.0000 | 1.5236 |

CalEEMod Version: CalEEMod.2020.4.0 Page 11 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.3 Site Preparation - 2023

#### **Mitigated Construction Off-Site**

|          | ROG                  | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4    | N2O    | CO2e   |
|----------|----------------------|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|--------|--------|--------|
| Category |                      |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr    |        |        |
| Hauling  |                      |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000 | 0.0000 | 0.0000 |
| Vendor   | II<br>II<br>II<br>II |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000 | 0.0000 | 0.0000 |
| Worker   | ri<br>               |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0687    | 0.0687    | 0.0000 | 0.0000 | 0.0693 |
| Total    |                      |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0687    | 0.0687    | 0.0000 | 0.0000 | 0.0693 |

## 3.4 Grading - 2023

|               | ROG            | NOx  | CO          | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O    | CO2e   |
|---------------|----------------|------|-------------|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|--------|--------|
| Category      |                |      |             |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |        |        |
| Fugitive Dust |                |      |             |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000 | 0.0000 |
| Off-Road      | 11<br>11<br>11 | <br> | 1<br>1<br>1 |     |                  |                 |               |                   | <br>             |                | 0.0000   | 3.6208    | 3.6208    | 1.1700e-<br>003 | 0.0000 | 3.6501 |
| Total         |                |      |             |     |                  |                 |               |                   |                  |                | 0.0000   | 3.6208    | 3.6208    | 1.1700e-<br>003 | 0.0000 | 3.6501 |

CalEEMod Version: CalEEMod.2020.4.0 Page 12 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.4 Grading - 2023

#### **Unmitigated Construction Off-Site**

|          | ROG | NOx | CO | SO2 | Fugitive<br>PM10    | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4    | N2O    | CO2e   |
|----------|-----|-----|----|-----|---------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|--------|--------|--------|
| Category |     |     |    |     | ton                 | s/yr            |               |                   |                  |                |          |           | MT        | /yr    |        |        |
| Hauling  |     |     |    |     |                     |                 |               | i<br>i<br>i       |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000 | 0.0000 | 0.0000 |
| Vendor   |     |     |    |     | <br> <br> <br> <br> |                 |               | 1                 | ,                |                | 0.0000   | 0.0000    | 0.0000    | 0.0000 | 0.0000 | 0.0000 |
| Worker   |     |     |    |     | <br> <br> <br> <br> |                 |               | 1                 | ;                | <br>           | 0.0000   | 0.1717    | 0.1717    | 0.0000 | 0.0000 | 0.1731 |
| Total    |     |     |    |     |                     |                 |               |                   |                  |                | 0.0000   | 0.1717    | 0.1717    | 0.0000 | 0.0000 | 0.1731 |

|               | ROG    | NOx | CO | SO2 | Fugitive<br>PM10    | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O    | CO2e   |
|---------------|--------|-----|----|-----|---------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|--------|--------|
| Category      |        |     |    |     | ton                 | s/yr            |               |                   |                  |                |          |           | MT        | 7/yr            |        |        |
| Fugitive Dust |        |     |    |     |                     |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000 | 0.0000 |
| Off-Road      | ri<br> |     |    |     | <br> <br> <br> <br> |                 |               |                   |                  |                | 0.0000   | 3.6208    | 3.6208    | 1.1700e-<br>003 | 0.0000 | 3.6501 |
| Total         |        |     |    |     |                     |                 |               |                   |                  |                | 0.0000   | 3.6208    | 3.6208    | 1.1700e-<br>003 | 0.0000 | 3.6501 |

CalEEMod Version: CalEEMod.2020.4.0 Page 13 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

3.4 Grading - 2023

#### **Mitigated Construction Off-Site**

|          | ROG | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4    | N2O    | CO2e   |
|----------|-----|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|--------|--------|--------|
| Category |     |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr    |        |        |
| Hauling  |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000 | 0.0000 | 0.0000 |
| Vendor   |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000 | 0.0000 | 0.0000 |
| Worker   |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.1717    | 0.1717    | 0.0000 | 0.0000 | 0.1731 |
| Total    |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.1717    | 0.1717    | 0.0000 | 0.0000 | 0.1731 |

## 3.5 Building Construction - 2023

|          | ROG | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4    | N2O    | CO2e     |
|----------|-----|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|--------|--------|----------|
| Category |     |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr    |        |          |
| Off-Road |     |     |    |     |                  |                 |               | <br>              |                  |                | 0.0000   | 174.3352  | 174.3352  | 0.0296 | 0.0000 | 175.0753 |
| Total    |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 174.3352  | 174.3352  | 0.0296 | 0.0000 | 175.0753 |

CalEEMod Version: CalEEMod.2020.4.0 Page 14 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.5 Building Construction - 2023 <u>Unmitigated Construction Off-Site</u>

|          | ROG              | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e    |
|----------|------------------|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|---------|
| Category |                  |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |                 |         |
| Hauling  |                  |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000  |
| Vendor   | 1<br>1<br>1<br>1 |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 22.2717   | 22.2717   | 8.2000e-<br>004 | 3.2300e-<br>003 | 23.2557 |
| Worker   |                  |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 26.3741   | 26.3741   | 6.8000e-<br>004 | 6.8000e-<br>004 | 26.5931 |
| Total    |                  |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 48.6458   | 48.6458   | 1.5000e-<br>003 | 3.9100e-<br>003 | 49.8488 |

|          | ROG | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4    | N2O    | CO2e     |
|----------|-----|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|--------|--------|----------|
| Category |     |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr    |        |          |
|          |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 174.3350  | 174.3350  | 0.0296 | 0.0000 | 175.0751 |
| Total    |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 174.3350  | 174.3350  | 0.0296 | 0.0000 | 175.0751 |

CalEEMod Version: CalEEMod.2020.4.0 Page 15 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.5 Building Construction - 2023

#### **Mitigated Construction Off-Site**

|          | ROG | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e    |
|----------|-----|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|---------|
| Category |     |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |                 |         |
| Hauling  |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000  |
| Vendor   |     |     |    |     |                  | <br>            |               |                   |                  |                | 0.0000   | 22.2717   | 22.2717   | 8.2000e-<br>004 | 3.2300e-<br>003 | 23.2557 |
| Worker   |     |     |    |     |                  | <br>            |               |                   |                  |                | 0.0000   | 26.3741   | 26.3741   | 6.8000e-<br>004 | 6.8000e-<br>004 | 26.5931 |
| Total    |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 48.6458   | 48.6458   | 1.5000e-<br>003 | 3.9100e-<br>003 | 49.8488 |

# 3.5 Building Construction - 2024

|          | ROG | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O    | CO2e   |
|----------|-----|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|--------|--------|
| Category |     |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |        |        |
|          |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 7.2645    | 7.2645    | 1.2100e-<br>003 | 0.0000 | 7.2947 |
| Total    |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 7.2645    | 7.2645    | 1.2100e-<br>003 | 0.0000 | 7.2947 |

CalEEMod Version: CalEEMod.2020.4.0 Page 16 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.5 Building Construction - 2024 <u>Unmitigated Construction Off-Site</u>

|          | ROG | NOx | CO | SO2 | Fugitive<br>PM10    | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e   |
|----------|-----|-----|----|-----|---------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|--------|
| Category |     |     |    |     | ton                 | s/yr            |               |                   |                  |                |          |           | МТ        | /yr             |                 |        |
| Hauling  |     |     |    |     |                     |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Vendor   |     |     |    |     | <br> <br> <br> <br> |                 |               |                   |                  |                | 0.0000   | 0.9148    | 0.9148    | 3.0000e-<br>005 | 1.3000e-<br>004 | 0.9553 |
| Worker   | h   |     |    |     | <br> <br> <br> <br> |                 |               |                   |                  | <br>           | 0.0000   | 1.0668    | 1.0668    | 3.0000e-<br>005 | 3.0000e-<br>005 | 1.0753 |
| Total    |     |     |    |     |                     |                 |               |                   |                  |                | 0.0000   | 1.9816    | 1.9816    | 6.0000e-<br>005 | 1.6000e-<br>004 | 2.0306 |

|            | ROG                 | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O    | CO2e   |
|------------|---------------------|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|--------|--------|
| Category   |                     |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |        |        |
| - Cirrioda | 1<br>11<br>11<br>11 |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 7.2644    | 7.2644    | 1.2100e-<br>003 | 0.0000 | 7.2947 |
| Total      |                     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 7.2644    | 7.2644    | 1.2100e-<br>003 | 0.0000 | 7.2947 |

CalEEMod Version: CalEEMod.2020.4.0 Page 17 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.5 Building Construction - 2024

**Mitigated Construction Off-Site** 

|          | ROG | NOx | CO | SO2                 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e   |
|----------|-----|-----|----|---------------------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|--------|
| Category |     |     |    |                     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |                 |        |
| Hauling  |     |     |    |                     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Vendor   |     |     |    | <br> <br> <br>      |                  | <br>            |               |                   |                  |                | 0.0000   | 0.9148    | 0.9148    | 3.0000e-<br>005 | 1.3000e-<br>004 | 0.9553 |
| Worker   |     |     |    | <br> <br> <br> <br> |                  | <br>            |               |                   |                  |                | 0.0000   | 1.0668    | 1.0668    | 3.0000e-<br>005 | 3.0000e-<br>005 | 1.0753 |
| Total    |     |     |    |                     |                  |                 |               |                   |                  |                | 0.0000   | 1.9816    | 1.9816    | 6.0000e-<br>005 | 1.6000e-<br>004 | 2.0306 |

## 3.6 Paving - 2024

|          | ROG            | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O    | CO2e   |
|----------|----------------|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|--------|--------|
| Category |                |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |        |        |
| Off-Road |                |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 5.8870    | 5.8870    | 1.8700e-<br>003 | 0.0000 | 5.9337 |
| Paving   | 11<br>11<br>11 |     |    |     |                  |                 |               |                   | <br>             |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000 | 0.0000 |
| Total    |                |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 5.8870    | 5.8870    | 1.8700e-<br>003 | 0.0000 | 5.9337 |

CalEEMod Version: CalEEMod.2020.4.0 Page 18 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.6 Paving - 2024 <u>Unmitigated Construction Off-Site</u>

|          | ROG  | NOx | CO          | SO2 | Fugitive<br>PM10    | Exhaust<br>PM10     | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e   |
|----------|------|-----|-------------|-----|---------------------|---------------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|--------|
| Category |      |     |             |     | ton                 | s/yr                |               |                   |                  |                |          |           | МТ        | /yr             |                 |        |
| Hauling  |      |     |             |     |                     |                     |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Vendor   | <br> |     | i<br>i<br>i |     | <br> <br> <br> <br> | <br> <br> <br> <br> |               | <br>              |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Worker   | <br> |     | 1<br>1<br>1 |     | <br> <br> <br> <br> | <br> <br> <br> <br> |               | 1<br>1<br>1<br>1  |                  |                | 0.0000   | 0.5417    | 0.5417    | 1.0000e-<br>005 | 1.0000e-<br>005 | 0.5460 |
| Total    |      |     |             |     |                     |                     |               |                   |                  |                | 0.0000   | 0.5417    | 0.5417    | 1.0000e-<br>005 | 1.0000e-<br>005 | 0.5460 |

|          | ROG | NOx | CO          | SO2 | Fugitive<br>PM10     | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5    | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O    | CO2e   |
|----------|-----|-----|-------------|-----|----------------------|-----------------|---------------|-------------------|---------------------|----------------|----------|-----------|-----------|-----------------|--------|--------|
| Category |     |     |             |     | ton                  | s/yr            |               |                   |                     |                |          |           | MT        | /yr             |        |        |
| Cirriodd |     |     |             |     |                      |                 |               | !<br>!            |                     |                | 0.0000   | 5.8870    | 5.8870    | 1.8700e-<br>003 | 0.0000 | 5.9337 |
| Paving   | ,,  |     | 1<br>1<br>1 |     | 1<br> <br> <br> <br> |                 |               | 1                 | <br> <br> <br> <br> |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000 | 0.0000 |
| Total    |     |     |             |     |                      |                 |               |                   |                     |                | 0.0000   | 5.8870    | 5.8870    | 1.8700e-<br>003 | 0.0000 | 5.9337 |

CalEEMod Version: CalEEMod.2020.4.0 Page 19 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

3.6 Paving - 2024

<u>Mitigated Construction Off-Site</u>

|          | ROG                  | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e   |
|----------|----------------------|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|--------|
| Category |                      |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |                 |        |
| Hauling  |                      |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Vendor   | II<br>II<br>II<br>II |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Worker   | ri<br>               |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.5417    | 0.5417    | 1.0000e-<br>005 | 1.0000e-<br>005 | 0.5460 |
| Total    |                      |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.5417    | 0.5417    | 1.0000e-<br>005 | 1.0000e-<br>005 | 0.5460 |

# 3.7 Architectural Coating - 2024 <u>Unmitigated Construction On-Site</u>

|                 | ROG | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O    | CO2e   |
|-----------------|-----|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|--------|--------|
| Category        |     |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |        |        |
| Archit. Coating |     |     |    |     |                  |                 |               | !<br>!            |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000 | 0.0000 |
| Off-Road        | ,,  |     |    |     |                  |                 |               | 1                 |                  |                | 0.0000   | 1.2766    | 1.2766    | 7.0000e-<br>005 | 0.0000 | 1.2784 |
| Total           |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 1.2766    | 1.2766    | 7.0000e-<br>005 | 0.0000 | 1.2784 |

CalEEMod Version: CalEEMod.2020.4.0 Page 20 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 3.7 Architectural Coating - 2024 <u>Unmitigated Construction Off-Site</u>

|          | ROG | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e   |
|----------|-----|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|--------|
| Category |     |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |                 |        |
| Hauling  |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Vendor   |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Worker   |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.2500    | 0.2500    | 1.0000e-<br>005 | 1.0000e-<br>005 | 0.2520 |
| Total    |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.2500    | 0.2500    | 1.0000e-<br>005 | 1.0000e-<br>005 | 0.2520 |

|                 | ROG                  | NOx  | CO | SO2 | Fugitive<br>PM10    | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5    | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O    | CO2e   |
|-----------------|----------------------|------|----|-----|---------------------|-----------------|---------------|-------------------|---------------------|----------------|----------|-----------|-----------|-----------------|--------|--------|
| Category        |                      |      |    |     | ton                 | s/yr            |               |                   |                     |                |          |           | MT        | /yr             |        |        |
| Archit. Coating |                      |      |    |     |                     |                 |               |                   |                     |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000 | 0.0000 |
| Off-Road        | 11<br>11<br>11<br>11 | <br> |    |     | <br> <br> <br> <br> |                 |               |                   | <br> <br> <br> <br> |                | 0.0000   | 1.2766    | 1.2766    | 7.0000e-<br>005 | 0.0000 | 1.2784 |
| Total           |                      |      |    |     |                     |                 |               |                   |                     |                | 0.0000   | 1.2766    | 1.2766    | 7.0000e-<br>005 | 0.0000 | 1.2784 |

CalEEMod Version: CalEEMod.2020.4.0 Page 21 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

## 3.7 Architectural Coating - 2024

**Mitigated Construction Off-Site** 

|          | ROG | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e   |
|----------|-----|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|--------|
| Category |     |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |                 |        |
| Hauling  |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Vendor   |     |     |    |     |                  | <br>            |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Worker   |     |     |    |     |                  | <br>            |               |                   |                  |                | 0.0000   | 0.2500    | 0.2500    | 1.0000e-<br>005 | 1.0000e-<br>005 | 0.2520 |
| Total    |     |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 0.2500    | 0.2500    | 1.0000e-<br>005 | 1.0000e-<br>005 | 0.2520 |

## 4.0 Operational Detail - Mobile

## **4.1 Mitigation Measures Mobile**

CalEEMod Version: CalEEMod.2020.4.0 Page 22 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|             | ROG         | NOx | CO | SO2  | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2      | Total CO2      | CH4    | N2O    | CO2e           |
|-------------|-------------|-----|----|------|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|----------------|----------------|--------|--------|----------------|
| Category    |             |     |    |      | ton              | s/yr            |               |                   |                  |                |          |                | MT             | /yr    |        |                |
| Mitigated   | i<br>i      |     |    | <br> |                  |                 |               |                   |                  |                | 0.0000   | 1,504.866<br>1 | 1,504.866<br>1 | 0.1993 | 0.1150 | 1,544.110<br>4 |
| Unmitigated | !<br>!<br>! |     |    | <br> |                  |                 |               | i<br>i            |                  |                | 0.0000   | 1,504.866<br>1 | 1,504.866<br>1 | 0.1993 | 0.1150 | 1,544.110<br>4 |

## **4.2 Trip Summary Information**

|                                   | Aver     | age Daily Trip Ra | ite      | Unmitigated | Mitigated  |
|-----------------------------------|----------|-------------------|----------|-------------|------------|
| Land Use                          | Weekday  | Saturday          | Sunday   | Annual VMT  | Annual VMT |
| Automobile Care Center            | 32.97    | 32.97             | 16.51    | 41,017      | 41,017     |
| Convenience Market with Gas Pumps | 6,978.56 | 6,978.56          | 6978.56  | 4,165,323   | 4,165,323  |
| Other Asphalt Surfaces            | 0.00     | 0.00              | 0.00     |             |            |
| Parking Lot                       | 0.00     | 0.00              | 0.00     |             |            |
| Other Non-Asphalt Surfaces        | 0.00     | 0.00              | 0.00     |             |            |
| Total                             | 7,011.53 | 7,011.53          | 6,995.07 | 4,206,340   | 4,206,340  |

## 4.3 Trip Type Information

|                             |            | Miles      |             |            | Trip %     |             |         | Trip Purpos | e %     |
|-----------------------------|------------|------------|-------------|------------|------------|-------------|---------|-------------|---------|
| Land Use                    | H-W or C-W | H-S or C-C | H-O or C-NW | H-W or C-W | H-S or C-C | H-O or C-NW | Primary | Diverted    | Pass-by |
| Automobile Care Center      | 16.60      | 8.40       | 6.90        | 33.00      | 48.00      | 19.00       | 21      | 51          | 28      |
| Convenience Market with Gas | 16.60      | 8.40       | 6.90        | 0.80       | 80.20      | 19.00       | 14      | 21          | 65      |
| Other Asphalt Surfaces      | 16.60      | 8.40       | 6.90        | 0.00       | 0.00       | 0.00        | 0       | 0           | 0       |
| Parking Lot                 | 16.60      | 8.40       | 6.90        | 0.00       | 0.00       | 0.00        | 0       | 0           | 0       |
| Other Non-Asphalt Surfaces  | 16.60      | 8.40       | 6.90        | 0.00       | 0.00       | 0.00        | 0       | 0           | 0       |

#### 4.4 Fleet Mix

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

| Land Use                             | LDA      | LDT1     | LDT2     | MDV      | LHD1     | LHD2     | MHD      | HHD      | OBUS     | UBUS     | MCY      | SBUS     | МН       |
|--------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Automobile Care Center               | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |
| Convenience Market with Gas<br>Pumps | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |
| Other Asphalt Surfaces               | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |
| Parking Lot                          | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |
| Other Non-Asphalt Surfaces           | 0.543401 | 0.061496 | 0.184986 | 0.128935 | 0.023820 | 0.006437 | 0.011961 | 0.008652 | 0.000812 | 0.000508 | 0.024540 | 0.000745 | 0.003706 |

## 5.0 Energy Detail

Historical Energy Use: N

## **5.1 Mitigation Measures Energy**

|                            | ROG  | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e    |
|----------------------------|------|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|---------|
| Category                   |      |     |    |     | ton              | s/yr            |               |                   |                  |                |          |           | MT        | /yr             |                 |         |
| Electricity<br>Mitigated   |      |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 27.0867   | 27.0867   | 2.2900e-<br>003 | 2.8000e-<br>004 | 27.2264 |
| Electricity<br>Unmitigated | <br> |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 27.0867   | 27.0867   | 2.2900e-<br>003 | 2.8000e-<br>004 | 27.2264 |
| NaturalGas<br>Mitigated    | <br> |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 3.7106    | 3.7106    | 7.0000e-<br>005 | 7.0000e-<br>005 | 3.7327  |
| NaturalGas<br>Unmitigated  |      |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 3.7106    | 3.7106    | 7.0000e-<br>005 | 7.0000e-<br>005 | 3.7327  |

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 5.2 Energy by Land Use - NaturalGas <u>Unmitigated</u>

|   | NaturalGa<br>s Use | ROG | NOx     | CO               | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e   |
|---|--------------------|-----|---------|------------------|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|--------|
| Land Use                                | kBTU/yr            |     | tons/yr |                  |     |                  |                 |               |                   |                  |                |          |           | МТ        | ⁻/yr            |                 |        |
| Automobile Care<br>Center               | 44938.7            |     |         |                  |     |                  |                 |               |                   |                  |                | 0.0000   | 2.3981    | 2.3981    | 5.0000e-<br>005 | 4.0000e-<br>005 | 2.4124 |
| Convenience<br>Market with Gas<br>Pumps | 24596              |     |         | r                |     |                  |                 |               |                   | r                |                | 0.0000   | 1.3125    | 1.3125    | 3.0000e-<br>005 | 2.0000e-<br>005 | 1.3203 |
| Other Asphalt<br>Surfaces               | 0                  |     |         |                  |     |                  |                 |               |                   |                  |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Other Non-<br>Asphalt Surfaces          | 0                  |     |         | ,<br>!<br>!<br>! |     |                  |                 |               |                   | ,<br>!<br>!<br>! |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Parking Lot                             | 0                  |     |         | ,                |     |                  |                 |               |                   | ,                |                | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Total                                   |                    |     |         |                  |     |                  |                 |               |                   |                  |                | 0.0000   | 3.7106    | 3.7106    | 8.0000e-<br>005 | 6.0000e-<br>005 | 3.7327 |

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

## **5.2 Energy by Land Use - NaturalGas**

## **Mitigated**

|   | NaturalGa<br>s Use | ROG    | NOx                 | СО          | SO2  | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total       | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4             | N2O             | CO2e   |
|---|--------------------|--------|---------------------|-------------|------|------------------|-----------------|---------------------|-------------------|------------------|----------------|----------|-----------|-----------|-----------------|-----------------|--------|
| Land Use                                | kBTU/yr            |        | tons/yr             |             |      |                  |                 |                     |                   |                  |                |          |           | МТ        | /yr             |                 |        |
| Automobile Care<br>Center               | 44938.7            |        |                     |             |      |                  |                 |                     |                   |                  |                | 0.0000   | 2.3981    | 2.3981    | 5.0000e-<br>005 | 4.0000e-<br>005 | 2.4124 |
| Convenience<br>Market with Gas<br>Pumps | 24596              |        | r                   | 7           | <br> |                  | r               | r                   | r                 |                  |                | 0.0000   | 1.3125    | 1.3125    | 3.0000e-<br>005 | 2.0000e-<br>005 | 1.3203 |
| Other Asphalt<br>Surfaces               | 0                  | 1      |                     |             |      |                  |                 |                     |                   |                  | 1              | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Other Non-<br>Asphalt Surfaces          | 0                  | 1<br>1 | <br> <br> <br> <br> |             |      |                  | <br>            | <br> <br> <br> <br> |                   |                  | i<br>i         | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Parking Lot                             | 0                  | 1<br>1 | <br> <br> <br> <br> | i<br>i<br>i |      |                  |                 | <br> <br> <br> <br> |                   |                  | i<br>i         | 0.0000   | 0.0000    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |
| Total                                   |                    |        |                     |             |      |                  |                 |                     |                   |                  |                | 0.0000   | 3.7106    | 3.7106    | 8.0000e-<br>005 | 6.0000e-<br>005 | 3.7327 |

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 5.3 Energy by Land Use - Electricity <u>Unmitigated</u>

|   | Electricity<br>Use | Total CO2 | CH4             | N2O             | CO2e    |
|---|--------------------|-----------|-----------------|-----------------|---------|
| Land Use                                | kWh/yr             |           | MT              | -/yr            |         |
| Automobile Care<br>Center               | 13788.8            | 2.4454    | 2.1000e-<br>004 | 3.0000e-<br>005 | 2.4580  |
| Convenience<br>Market with Gas<br>Pumps | 135725             | 24.0703   | 2.0300e-<br>003 | 2.5000e-<br>004 | 24.1944 |
| Other Asphalt<br>Surfaces               | 0                  | 0.0000    | 0.0000          | 0.0000          | 0.0000  |
| Other Non-<br>Asphalt Surfaces          | 0                  | 0.0000    | 0.0000          | 0.0000          | 0.0000  |
| Parking Lot                             | 3220               | 0.5711    | 5.0000e-<br>005 | 1.0000e-<br>005 | 0.5740  |
| Total                                   |                    | 27.0867   | 2.2900e-<br>003 | 2.9000e-<br>004 | 27.2264 |

CalEEMod Version: CalEEMod.2020.4.0 Page 27 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

# 5.3 Energy by Land Use - Electricity Mitigated

|   | Electricity<br>Use | Total CO2 | CH4             | N2O             | CO2e    |
|---|--------------------|-----------|-----------------|-----------------|---------|
| Land Use                                | kWh/yr             |           | MT              | /yr             |         |
| Automobile Care<br>Center               | 13788.8            | 2.4454    | 2.1000e-<br>004 | 3.0000e-<br>005 | 2.4580  |
| Convenience<br>Market with Gas<br>Pumps | 135725             | 24.0703   | 2.0300e-<br>003 | 2.5000e-<br>004 | 24.1944 |
| Other Asphalt<br>Surfaces               | 0                  | 0.0000    | 0.0000          | 0.0000          | 0.0000  |
| Other Non-<br>Asphalt Surfaces          | 0                  | 0.0000    | 0.0000          | 0.0000          | 0.0000  |
| Parking Lot                             | 3220               | 0.5711    | 5.0000e-<br>005 | 1.0000e-<br>005 | 0.5740  |
| Total                                   |                    | 27.0867   | 2.2900e-<br>003 | 2.9000e-<br>004 | 27.2264 |

## 6.0 Area Detail

## **6.1 Mitigation Measures Area**

CalEEMod Version: CalEEMod.2020.4.0 Page 28 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|             | ROG      | NOx | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2       | Total CO2       | CH4             | N2O    | CO2e            |
|-------------|----------|-----|----|-----|------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------------|-----------------|-----------------|--------|-----------------|
| Category    |          |     |    |     | ton              | s/yr            |               |                   |                  |                |          |                 | MT              | /yr             |        |                 |
| Mitigated   |          |     |    |     |                  |                 |               |                   |                  |                | 0.0000   | 2.3200e-<br>003 | 2.3200e-<br>003 | 1.0000e-<br>005 | 0.0000 | 2.4700e-<br>003 |
| Unmitigated | <br><br> | 1   |    |     |                  |                 | 1             |                   |                  |                | 0.0000   | 2.3200e-<br>003 | 2.3200e-<br>003 | 1.0000e-<br>005 | 0.0000 | 2.4700e-<br>003 |

# 6.2 Area by SubCategory

#### **Unmitigated**

|                          | ROG | NOx     | СО | SO2                 | Fugitive<br>PM10    | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5 | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2       | Total CO2       | CH4             | N2O    | CO2e            |
|--------------------------|-----|---------|----|---------------------|---------------------|-----------------|---------------|-------------------|------------------|----------------|----------|-----------------|-----------------|-----------------|--------|-----------------|
| SubCategory              |     | tons/yr |    |                     |                     |                 |               |                   |                  |                |          |                 | МТ              | /yr             |        |                 |
| Architectural<br>Coating |     |         |    |                     |                     |                 |               |                   |                  |                | 0.0000   | 0.0000          | 0.0000          | 0.0000          | 0.0000 | 0.0000          |
| Products                 |     |         |    | <br> <br> <br> <br> |                     |                 |               |                   |                  |                | 0.0000   | 0.0000          | 0.0000          | 0.0000          | 0.0000 | 0.0000          |
| Landscaping              |     |         |    | <br> <br> <br> <br> | <br> <br> <br> <br> |                 |               | 1<br>1<br>1<br>1  |                  |                | 0.0000   | 2.3200e-<br>003 | 2.3200e-<br>003 | 1.0000e-<br>005 | 0.0000 | 2.4700e-<br>003 |
| Total                    |     |         |    |                     |                     |                 |               |                   |                  |                | 0.0000   | 2.3200e-<br>003 | 2.3200e-<br>003 | 1.0000e-<br>005 | 0.0000 | 2.4700e-<br>003 |

CalEEMod Version: CalEEMod.2020.4.0 Page 29 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

## 6.2 Area by SubCategory

#### **Mitigated**

|                          | ROG    | NOx     | CO | SO2 | Fugitive<br>PM10 | Exhaust<br>PM10 | PM10<br>Total | Fugitive<br>PM2.5   | Exhaust<br>PM2.5 | PM2.5<br>Total | Bio- CO2 | NBio- CO2       | Total CO2       | CH4             | N2O    | CO2e            |
|--------------------------|--------|---------|----|-----|------------------|-----------------|---------------|---------------------|------------------|----------------|----------|-----------------|-----------------|-----------------|--------|-----------------|
| SubCategory              |        | tons/yr |    |     |                  |                 |               |                     |                  |                |          |                 | MT              | /yr             |        |                 |
| Architectural<br>Coating |        |         |    |     |                  |                 |               |                     |                  |                | 0.0000   | 0.0000          | 0.0000          | 0.0000          | 0.0000 | 0.0000          |
| Consumer<br>Products     | 1      |         |    |     | <br>             |                 |               | <br>                |                  |                | 0.0000   | 0.0000          | 0.0000          | 0.0000          | 0.0000 | 0.0000          |
| Landscaping              | 1<br>1 |         |    |     | <br>             |                 |               | <br> <br> <br> <br> |                  |                | 0.0000   | 2.3200e-<br>003 | 2.3200e-<br>003 | 1.0000e-<br>005 | 0.0000 | 2.4700e-<br>003 |
| Total                    |        |         |    |     |                  |                 |               |                     |                  |                | 0.0000   | 2.3200e-<br>003 | 2.3200e-<br>003 | 1.0000e-<br>005 | 0.0000 | 2.4700e-<br>003 |

## 7.0 Water Detail

# 7.1 Mitigation Measures Water

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

|             | Total CO2 | CH4    | N2O             | CO2e   |
|-------------|-----------|--------|-----------------|--------|
| Category    |           | МТ     | -/yr            |        |
|             |           | 0.0315 | 7.7000e-<br>004 | 4.6949 |
| Unmitigated |           | 0.0315 | 7.7000e-<br>004 | 4.6949 |

# 7.2 Water by Land Use <u>Unmitigated</u>

|   | Indoor/Out<br>door Use | Total CO2 | CH4             | N2O             | CO2e   |  |  |
|---|------------------------|-----------|-----------------|-----------------|--------|--|--|
| Land Use                                | Mgal                   |           | MT/yr           |                 |        |  |  |
|   | 0.130773 /<br>0.080151 |           | 4.3000e-<br>003 | 1.1000e-<br>004 | 0.6403 |  |  |
| Convenience<br>Market with Gas<br>Pumps | 0.828131 /<br>0.507564 |           | 0.0272          | 6.7000e-<br>004 | 4.0546 |  |  |
| Other Asphalt<br>Surfaces               | 0/0                    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |  |  |
| Other Non-<br>Asphalt Surfaces          | 0/0                    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |  |  |
| Parking Lot                             | 0/0                    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |  |  |
| Total                                   |                        | 3.6765    | 0.0315          | 7.8000e-<br>004 | 4.6949 |  |  |

CalEEMod Version: CalEEMod.2020.4.0 Page 31 of 34 Date: 11/30/2022 10:54 AM

#### Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

## 7.2 Water by Land Use

#### **Mitigated**

|   | Indoor/Out<br>door Use | Total CO2 | CH4             | N2O             | CO2e   |  |
|---|------------------------|-----------|-----------------|-----------------|--------|--|
| Land Use                                | Mgal                   | MT/yr     |                 |                 |        |  |
| Automobile Care<br>Center               | 0.130773 /<br>0.080151 | 0.5014    | 4.3000e-<br>003 | 1.1000e-<br>004 | 0.6403 |  |
| Convenience<br>Market with Gas<br>Pumps | 0.828131 /<br>0.507564 | 3.1751    | 0.0272          | 6.7000e-<br>004 | 4.0546 |  |
| Other Asphalt<br>Surfaces               | 0/0                    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |  |
| Other Non-<br>Asphalt Surfaces          | 0/0                    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |  |
| Parking Lot                             | 0/0                    | 0.0000    | 0.0000          | 0.0000          | 0.0000 |  |
| Total                                   |                        | 3.6765    | 0.0315          | 7.8000e-<br>004 | 4.6949 |  |

## 8.0 Waste Detail

## 8.1 Mitigation Measures Waste

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

## Category/Year

|             | Total CO2 | CH4    | N2O    | CO2e    |  |  |  |
|-------------|-----------|--------|--------|---------|--|--|--|
|             | MT/yr     |        |        |         |  |  |  |
|             | , 7.000 i | 0.4668 | 0.0000 | 19.5679 |  |  |  |
| Unmitigated | i 7.0004  | 0.4668 | 0.0000 | 19.5679 |  |  |  |

# 8.2 Waste by Land Use <u>Unmitigated</u>

|   | Waste<br>Disposed | Total CO2 | CH4    | N2O    | CO2e    |  |  |  |
|---|-------------------|-----------|--------|--------|---------|--|--|--|
| Land Use                                | tons              |           | MT/yr  |        |         |  |  |  |
| Automobile Care<br>Center               | 5.31              | 1.0779    | 0.0637 | 0.0000 | 2.6704  |  |  |  |
| Convenience<br>Market with Gas<br>Pumps | 33.6              | 6.8205    | 0.4031 | 0.0000 | 16.8975 |  |  |  |
| Other Asphalt<br>Surfaces               | 0                 | 0.0000    | 0.0000 | 0.0000 | 0.0000  |  |  |  |
| Other Non-<br>Asphalt Surfaces          | 0                 | 0.0000    | 0.0000 | 0.0000 | 0.0000  |  |  |  |
| Parking Lot                             | 0                 | 0.0000    | 0.0000 | 0.0000 | 0.0000  |  |  |  |
| Total                                   |                   | 7.8984    | 0.4668 | 0.0000 | 19.5679 |  |  |  |

Date: 11/30/2022 10:54 AM

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

#### 8.2 Waste by Land Use

#### **Mitigated**

|   | Waste<br>Disposed | Total CO2 | CH4    | N2O    | CO2e    |  |  |  |
|---|-------------------|-----------|--------|--------|---------|--|--|--|
| Land Use                                | tons              |           | MT/yr  |        |         |  |  |  |
| Automobile Care<br>Center               | 5.31              | 1.0779    | 0.0637 | 0.0000 | 2.6704  |  |  |  |
| Convenience<br>Market with Gas<br>Pumps | 33.6              | 6.8205    | 0.4031 | 0.0000 | 16.8975 |  |  |  |
| Other Asphalt<br>Surfaces               | 0                 | 0.0000    | 0.0000 | 0.0000 | 0.0000  |  |  |  |
| Other Non-<br>Asphalt Surfaces          | 0                 | 0.0000    | 0.0000 | 0.0000 | 0.0000  |  |  |  |
| Parking Lot                             | 0                 | 0.0000    | 0.0000 | 0.0000 | 0.0000  |  |  |  |
| Total                                   |                   | 7.8984    | 0.4668 | 0.0000 | 19.5679 |  |  |  |

# 9.0 Operational Offroad

| Equipment Type | Number | Hours/Day | Days/Year | Horse Power | Load Factor | Fuel Type |
|----------------|--------|-----------|-----------|-------------|-------------|-----------|

## 10.0 Stationary Equipment

## **Fire Pumps and Emergency Generators**

| Equipment Type | Number | Hours/Day | Hours/Year | Horse Power | Load Factor | Fuel Type |
|----------------|--------|-----------|------------|-------------|-------------|-----------|

## **Boilers**

| Equipment Type | Number | Heat Input/Day | Heat Input/Year | Boiler Rating | Fuel Type |
|----------------|--------|----------------|-----------------|---------------|-----------|

CalEEMod Version: CalEEMod.2020.4.0 Page 34 of 34 Date: 11/30/2022 10:54 AM

Harikrishna Gas and Carwash - South Coast Air Basin, Annual

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

## **User Defined Equipment**

Equipment Type Number

## 11.0 Vegetation